

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332024-830

Luminaire Tested: **S123DIP-S1000D805U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332024-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1000D805U830-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6909.6 lumens
Efficiency: N/A
Efficacy: 127.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332024-830

CATALOG NUMBER: S123DIP-S1000D805U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

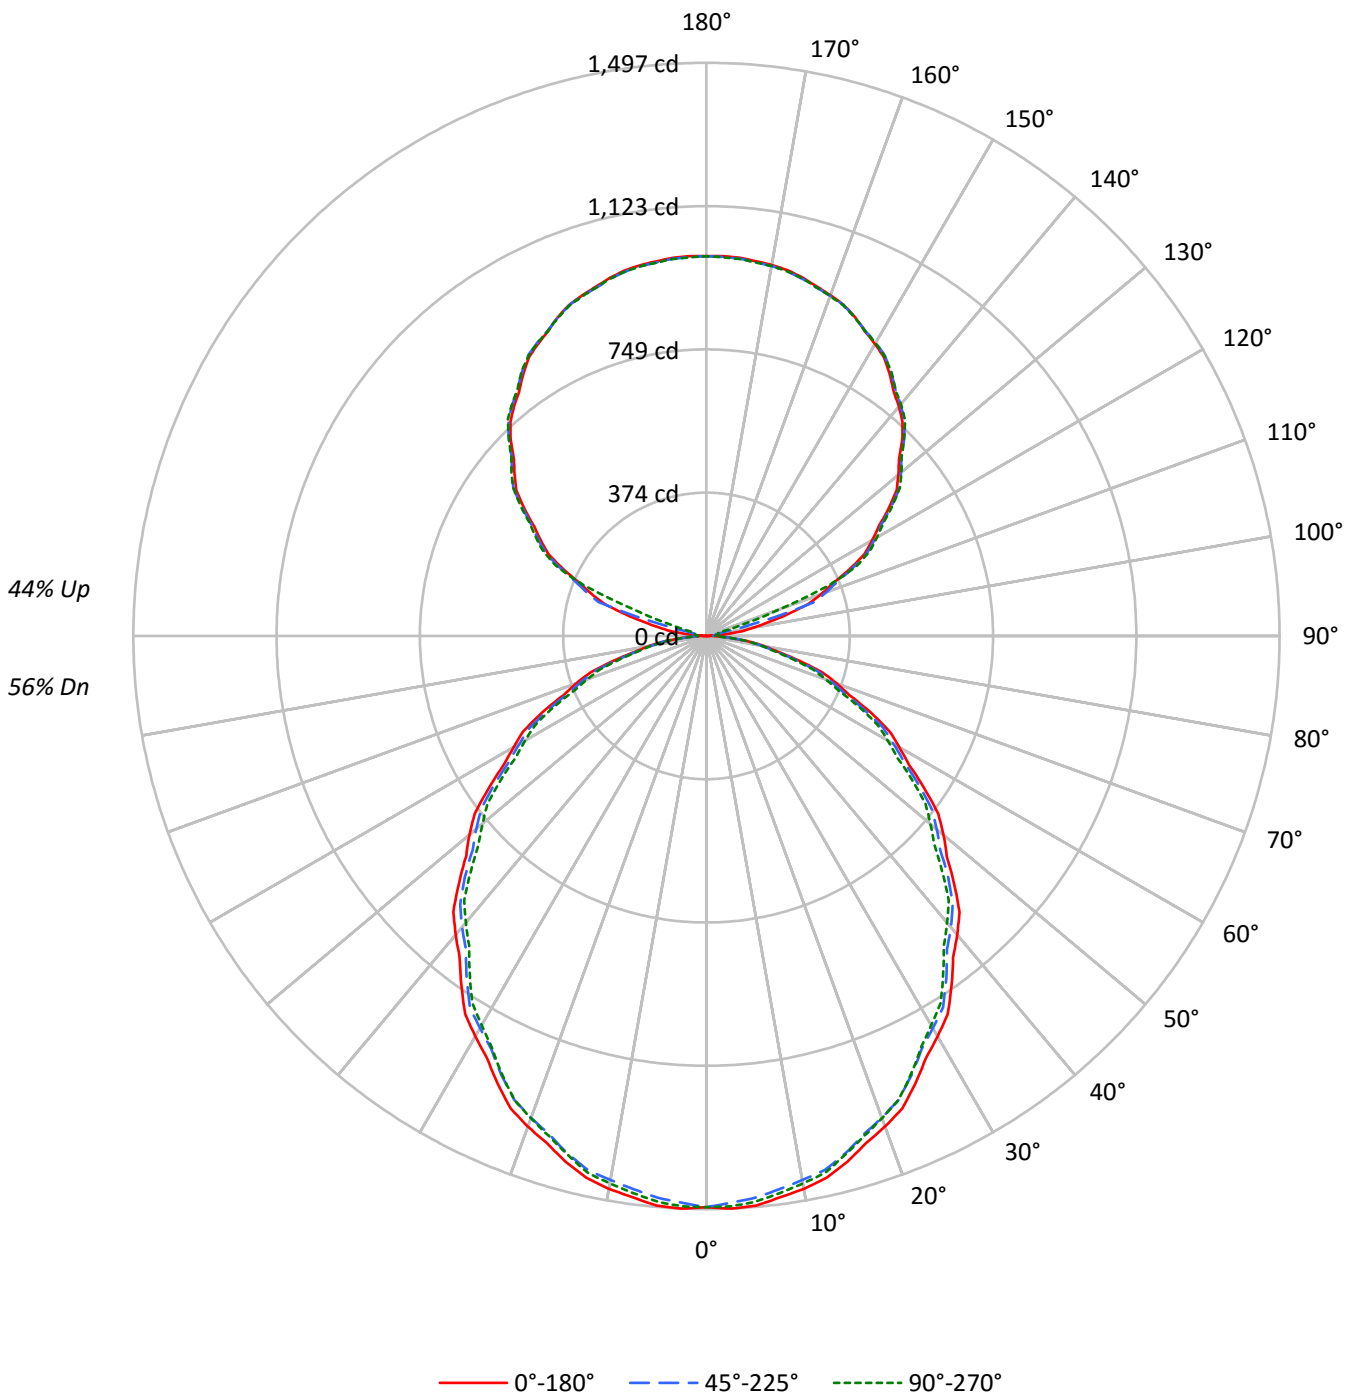



TEST NUMBER: P332024-830

CATALOG NUMBER: S123DIP-S1000D805U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56
1	99	95	91	87	92	88	85	82	76	74	71	65	63	61	55	53	52	47
2	90	83	76	71	84	77	72	67	67	62	59	57	54	51	48	46	44	39
3	82	73	65	59	76	68	61	56	59	54	49	50	46	43	42	40	37	33
4	75	64	56	50	70	60	53	47	52	47	42	45	41	37	38	35	32	29
5	69	57	49	43	64	54	46	41	47	41	36	40	36	32	34	31	28	25
6	64	51	43	37	59	48	41	35	42	36	32	36	32	28	31	27	25	22
7	59	46	38	33	55	44	36	31	38	32	28	33	28	25	28	25	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	16
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16060	16060	16060
5°	16134	15913	16024
10°	16027	15774	15872
15°	15840	15597	15624
20°	15621	15341	15356
25°	15327	15037	15007
30°	15003	14701	14588
35°	14666	14345	14160
40°	14313	13952	13735
45°	13922	13592	13259
50°	13534	13147	12782
55°	13024	12688	12301
60°	12510	12152	11765
65°	12055	11566	11207
70°	11383	10902	10414
75°	10405	10031	9603
80°	9385	8988	8901
85°	8238	7929	7595



TEST NUMBER: P332024-830

CATALOG NUMBER: S123DIP-S1000D805U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.5	2.0
10°-20°	396.8	5.7
20°-30°	586.2	8.5
30°-40°	684.7	9.9
40°-50°	688.4	10.0
50°-60°	604.7	8.8
60°-70°	450.5	6.5
70°-80°	256.7	3.7
80°-90°	76.4	1.1
90°-100°	36.1	0.5
100°-110°	171.9	2.5
110°-120°	412.8	6.0
120°-130°	525.7	7.6
130°-140°	561.7	8.1
140°-150°	525.2	7.6
150°-160°	423.7	6.1
160°-170°	273.4	4.0
170°-180°	94.2	1.4
0°-30°	1123.5	16.3
0°-40°	1808.2	26.2
0°-60°	3101.3	44.9
0°-90°	3884.9	56.2
90°-120°	620.7	9.0
90°-150°	2233.3	32.3
90°-180°	3025.0	43.8
0°-180°	6909.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1492	1492	1492	1492	1492	
5°	1493	1486	1473	1485	1483	141
15°	1421	1416	1400	1409	1402	401
25°	1290	1282	1266	1267	1264	594
35°	1116	1108	1092	1084	1078	698
45°	915	909	893	878	871	706
55°	694	692	676	662	656	621
65°	473	467	454	444	440	467
75°	250	245	241	235	231	267
85°	67	64	64	62	62	73
90°	1	8	18	21	22	6
95°	45	17	23	28	28	56
105°	220	224	161	38	32	233
115°	412	416	423	430	433	406
125°	581	586	590	591	592	518
135°	723	727	730	732	730	556
145°	834	839	841	842	842	522
155°	919	918	918	921	917	423
165°	969	967	966	971	967	274
175°	992	988	989	993	988	94
180°	992	992	992	992	992	



TEST NUMBER: P332024-830

CATALOG NUMBER: S123DIP-S1000D805U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0
2.5°	1497.0	1496.2	1495.2	1494.3	1493.5	1491.7	1489.2	1486.7	1484.2	1481.7	1483.9
5°	1493.2	1491.8	1490.3	1488.9	1487.5	1485.3	1482.1	1478.9	1475.8	1472.7	1475.6
7.5°	1478.6	1477.2	1475.7	1474.3	1472.9	1470.6	1467.4	1464.1	1460.8	1457.5	1460.1
10°	1466.3	1464.9	1463.4	1462.0	1460.6	1458.0	1454.3	1450.6	1446.9	1443.2	1445.8
12.5°	1449.8	1448.7	1447.5	1446.2	1445.1	1442.7	1439.3	1435.8	1432.3	1428.8	1430.7
15°	1421.4	1420.2	1419.1	1418.0	1416.8	1414.4	1410.7	1407.0	1403.3	1399.6	1401.8
17.5°	1388.3	1386.8	1385.3	1383.8	1382.3	1379.8	1376.0	1372.3	1368.7	1364.9	1366.5
20°	1363.7	1362.0	1360.3	1358.5	1356.8	1354.1	1350.4	1346.7	1343.0	1339.3	1340.4
22.5°	1336.0	1334.3	1332.6	1330.8	1329.1	1326.4	1322.7	1319.0	1315.3	1311.5	1312.5
25°	1290.5	1288.8	1287.1	1285.4	1283.6	1281.0	1277.2	1273.6	1269.9	1266.1	1266.4
27.5°	1242.1	1240.4	1238.7	1237.1	1235.4	1232.6	1228.6	1224.6	1220.6	1216.6	1216.8
30°	1207.1	1205.7	1204.3	1202.9	1201.5	1198.7	1194.8	1190.7	1186.8	1182.8	1182.8
32.5°	1172.2	1170.4	1168.5	1166.6	1164.7	1162.2	1159.1	1156.1	1153.0	1149.9	1148.3
35°	1116.1	1114.4	1112.7	1111.0	1109.2	1106.5	1102.8	1099.1	1095.4	1091.7	1090.0
37.5°	1058.6	1056.4	1054.2	1052.1	1049.9	1047.0	1043.2	1039.4	1035.7	1031.9	1029.8
40°	1018.6	1016.8	1015.1	1013.4	1011.7	1008.9	1004.8	1000.9	996.9	992.9	990.6
42.5°	978.5	976.6	974.7	972.7	970.8	967.8	963.8	959.9	955.8	951.9	949.6
45°	914.6	913.5	912.4	911.3	910.1	907.7	904.0	900.2	896.5	892.9	889.5
47.5°	851.3	849.6	848.0	846.3	844.7	842.1	838.7	835.2	831.7	828.2	824.8
50°	808.2	806.7	805.3	803.9	802.5	799.9	796.2	792.5	788.8	785.1	781.9
52.5°	763.0	762.0	761.1	760.2	759.1	756.7	752.8	748.9	744.9	740.9	738.3
55°	694.0	693.7	693.4	693.1	692.9	690.9	687.2	683.4	679.8	676.1	672.9
57.5°	628.3	627.4	626.4	625.5	624.4	622.5	619.5	616.5	613.6	610.7	607.8
60°	581.1	580.8	580.5	580.2	579.9	578.2	574.7	571.3	567.9	564.5	561.8
62.5°	539.0	538.3	537.5	536.8	536.1	534.0	530.6	527.2	523.8	520.3	517.7
65°	473.3	471.9	470.5	469.1	467.7	465.5	462.7	459.9	456.9	454.1	451.9
67.5°	403.9	402.6	401.3	400.1	398.8	397.1	394.9	392.8	390.6	388.4	386.4
70°	361.7	360.1	358.4	356.7	355.0	353.2	351.5	349.8	348.1	346.4	344.4
72.5°	317.6	316.4	315.1	313.9	312.6	311.0	309.1	307.2	305.2	303.2	301.5
75°	250.2	249.0	247.9	246.8	245.6	244.6	243.7	242.9	242.0	241.2	239.8
77.5°	190.4	189.7	189.1	188.5	187.8	187.0	186.1	185.0	184.0	182.9	182.0
80°	151.4	150.5	149.7	148.8	148.0	147.2	146.7	146.1	145.5	145.0	144.7
82.5°	113.4	113.2	113.1	112.9	112.7	112.5	112.4	112.4	112.3	112.2	111.6
85°	66.7	66.2	65.6	65.0	64.5	64.2	64.2	64.2	64.2	64.2	63.5
87.5°	26.9	26.5	26.1	25.7	25.4	25.4	25.5	25.7	25.9	26.1	26.0
90°	0.8	2.4	4.1	5.7	7.3	9.1	11.3	13.4	15.6	17.7	18.4
92.5°	13.7	13.3	12.8	12.3	11.9	12.4	14.0	15.6	17.2	18.9	19.9
95°	45.0	38.3	31.5	24.8	18.1	15.6	17.4	19.2	21.0	22.8	24.0
97.5°	90.3	87.4	84.4	81.3	78.3	70.9	59.1	47.3	35.5	23.8	25.1
100°	124.5	127.8	131.1	134.3	137.6	126.5	100.9	75.4	49.9	24.3	25.6
102.5°	163.4	165.8	168.1	170.5	172.9	160.1	132.2	104.2	76.3	48.4	44.4
105°	219.6	221.4	223.2	225.0	226.8	220.4	205.6	190.9	176.1	161.4	132.4
107.5°	278.8	280.3	281.7	283.1	284.6	286.4	288.8	291.2	293.4	295.8	274.6
110°	318.3	319.6	320.9	322.3	323.6	325.1	327.0	328.8	330.5	332.3	327.0



TEST NUMBER: P332024-830

CATALOG NUMBER: S123DIP-S1000D805U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	356.1	357.2	358.4	359.6	360.8	362.2	364.1	365.9	367.7	369.5	369.6
115°	411.9	412.9	413.9	414.9	415.8	417.1	418.6	420.0	421.5	423.0	424.6
117.5°	466.0	467.2	468.4	469.7	470.8	471.8	472.6	473.3	474.1	474.9	476.2
120°	499.6	501.1	502.6	504.0	505.5	506.5	507.0	507.5	507.9	508.4	509.7
122.5°	533.8	535.0	536.2	537.4	538.7	539.5	540.2	540.8	541.4	542.1	543.0
125°	580.7	581.9	583.2	584.6	585.9	586.9	587.6	588.1	588.8	589.5	589.8
127.5°	626.0	627.4	628.7	630.0	631.3	632.4	633.1	634.0	634.7	635.5	636.0
130°	654.3	655.6	657.0	658.3	659.6	660.5	661.2	661.9	662.5	663.2	663.8
132.5°	681.5	682.8	684.1	685.4	686.7	687.6	688.2	688.6	689.2	689.8	690.4
135°	722.8	723.9	724.8	725.9	726.8	727.6	728.3	729.0	729.6	730.3	730.8
137.5°	758.3	759.5	760.7	762.0	763.2	764.0	764.4	764.8	765.1	765.4	766.3
140°	781.8	782.8	783.8	784.8	785.8	786.5	787.0	787.5	788.0	788.4	789.1
142.5°	803.6	804.6	805.6	806.6	807.6	808.3	808.8	809.3	809.7	810.3	810.8
145°	834.2	835.3	836.4	837.5	838.8	839.4	839.8	840.1	840.5	840.7	841.1
147.5°	862.9	863.7	864.4	865.2	865.9	866.5	866.8	867.0	867.4	867.7	868.1
150°	880.5	881.1	881.6	882.0	882.5	883.0	883.3	883.6	883.9	884.3	884.6
152.5°	896.5	896.7	896.9	897.2	897.4	897.6	897.8	898.0	898.2	898.4	899.0
155°	918.9	918.6	918.2	917.9	917.6	917.5	917.7	917.8	917.9	918.1	919.0
157.5°	936.2	936.2	936.2	936.1	936.1	936.0	935.9	935.8	935.6	935.4	936.4
160°	946.9	946.7	946.6	946.4	946.2	946.0	945.9	945.7	945.6	945.4	946.4
162.5°	956.9	956.5	956.0	955.6	955.2	954.9	954.7	954.6	954.4	954.2	955.4
165°	969.0	968.5	968.0	967.5	967.0	966.7	966.6	966.4	966.2	966.0	967.3
167.5°	978.5	977.8	977.1	976.5	975.8	975.4	975.4	975.4	975.4	975.4	976.8
170°	983.7	983.1	982.4	981.8	981.1	980.8	980.8	980.8	980.8	980.8	982.1
172.5°	987.2	986.5	985.7	984.9	984.1	983.8	983.9	984.0	984.2	984.3	985.6
175°	991.8	991.0	990.2	989.4	988.5	988.3	988.4	988.5	988.7	988.9	990.0
177.5°	993.0	992.4	991.7	991.1	990.4	990.1	990.2	990.4	990.5	990.6	991.7
180°	991.8	991.8	991.8	991.8	991.8	991.8	991.8	991.8	991.8	991.8	991.8



TEST NUMBER: P332024-830

CATALOG NUMBER: S123DIP-S1000D805U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0	1492.0
2.5°	1486.2	1488.6	1490.8	1491.9	1491.6	1491.4	1491.1	1490.9
5°	1478.4	1481.2	1484.1	1485.3	1484.7	1484.1	1483.6	1483.0
7.5°	1462.7	1465.3	1467.8	1469.0	1468.6	1468.3	1467.9	1467.5
10°	1448.3	1450.9	1453.5	1454.4	1453.9	1453.3	1452.7	1452.2
12.5°	1432.6	1434.5	1436.3	1437.1	1436.8	1436.4	1436.1	1435.8
15°	1404.1	1406.4	1408.7	1409.0	1407.3	1405.5	1403.8	1402.1
17.5°	1368.1	1369.7	1371.3	1371.8	1371.2	1370.6	1369.9	1369.3
20°	1341.5	1342.7	1343.9	1344.0	1343.1	1342.3	1341.4	1340.6
22.5°	1313.4	1314.3	1315.2	1315.1	1314.1	1313.0	1311.9	1310.8
25°	1266.7	1267.1	1267.3	1267.1	1266.1	1265.3	1264.4	1263.6
27.5°	1217.1	1217.3	1217.6	1217.1	1216.1	1214.9	1213.9	1212.8
30°	1182.8	1182.8	1182.8	1181.8	1179.8	1177.8	1175.8	1173.7
32.5°	1146.7	1145.2	1143.6	1142.2	1141.1	1140.0	1139.0	1137.8
35°	1088.3	1086.6	1084.9	1083.3	1081.9	1080.4	1079.0	1077.6
37.5°	1027.8	1025.8	1023.7	1022.2	1021.3	1020.4	1019.5	1018.6
40°	988.4	986.1	983.8	982.0	980.9	979.8	978.6	977.5
42.5°	947.3	945.0	942.7	941.0	939.9	938.8	937.6	936.5
45°	886.0	882.6	879.2	876.8	875.3	873.9	872.5	871.0
47.5°	821.4	818.1	814.7	812.5	811.2	809.9	808.7	807.4
50°	778.8	775.7	772.5	770.2	768.5	766.7	765.0	763.3
52.5°	735.6	732.9	730.3	728.0	726.3	724.6	722.9	721.2
55°	669.8	666.7	663.5	661.2	659.8	658.4	657.0	655.5
57.5°	605.0	602.3	599.5	597.2	595.6	593.9	592.3	590.6
60°	559.3	556.8	554.2	552.2	550.7	549.3	547.9	546.5
62.5°	515.2	512.6	510.0	508.3	507.3	506.3	505.4	504.4
65°	449.6	447.2	445.0	443.5	442.6	441.8	440.8	440.0
67.5°	384.5	382.5	380.5	378.9	377.7	376.5	375.2	374.1
70°	342.3	340.4	338.4	336.7	335.3	333.8	332.4	330.9
72.5°	299.7	297.9	296.1	294.9	294.2	293.4	292.8	292.0
75°	238.4	236.9	235.4	234.3	233.5	232.6	231.8	230.9
77.5°	181.0	180.0	179.1	178.6	178.6	178.6	178.6	178.6
80°	144.4	144.1	143.8	143.6	143.6	143.6	143.6	143.6
82.5°	111.1	110.6	110.1	109.7	109.4	109.2	109.1	108.8
85°	63.0	62.4	61.8	61.5	61.5	61.5	61.5	61.5
87.5°	25.9	25.8	25.7	25.7	25.7	25.8	25.9	26.0
90°	19.0	19.6	20.3	20.8	21.1	21.5	21.8	22.1
92.5°	20.9	22.0	23.1	23.7	23.8	24.0	24.2	24.5
95°	25.2	26.3	27.4	28.0	28.0	28.0	28.0	28.0
97.5°	26.4	27.6	28.9	29.7	29.9	30.1	30.2	30.3
100°	27.0	28.3	29.6	30.3	30.4	30.6	30.8	30.9
102.5°	40.3	36.3	32.2	30.3	30.6	30.9	31.2	31.6
105°	103.4	74.5	45.4	31.1	31.5	31.8	32.1	32.4
107.5°	253.3	232.1	210.8	189.2	167.4	145.5	123.7	101.8
110°	321.5	316.1	310.8	296.3	272.9	249.5	226.0	202.6



TEST NUMBER: P332024-830

CATALOG NUMBER: S123DIP-S1000D805U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	369.7	369.8	369.9	367.4	362.5	357.5	352.6	347.7
115°	426.2	427.9	429.5	430.6	431.3	432.0	432.6	433.3
117.5°	477.5	478.8	480.0	480.8	481.0	481.1	481.2	481.4
120°	511.0	512.4	513.7	514.3	514.3	514.3	514.3	514.3
122.5°	543.8	544.8	545.7	546.2	546.4	546.5	546.7	546.8
125°	590.1	590.5	590.8	591.2	591.4	591.8	592.1	592.5
127.5°	636.5	637.1	637.5	637.6	637.3	637.1	636.7	636.4
130°	664.5	665.2	665.8	666.0	665.6	665.3	665.0	664.7
132.5°	691.0	691.6	692.3	692.4	692.0	691.5	691.1	690.6
135°	731.2	731.7	732.2	732.2	731.7	731.2	730.8	730.3
137.5°	767.0	767.8	768.6	768.8	768.5	768.2	767.9	767.5
140°	789.8	790.4	791.1	791.3	790.9	790.6	790.2	789.9
142.5°	811.3	811.8	812.4	812.4	811.9	811.4	811.1	810.6
145°	841.4	841.8	842.1	842.3	842.3	842.3	842.3	842.3
147.5°	868.4	868.7	869.0	868.8	868.1	867.3	866.6	865.8
150°	884.9	885.2	885.5	885.5	885.0	884.5	884.0	883.5
152.5°	899.6	900.1	900.8	900.7	899.9	899.2	898.4	897.7
155°	919.8	920.6	921.4	921.3	920.4	919.4	918.4	917.4
157.5°	937.4	938.3	939.3	939.1	937.9	936.6	935.4	934.1
160°	947.3	948.4	949.3	949.2	948.1	947.0	945.8	944.7
162.5°	956.5	957.6	958.7	958.8	957.7	956.7	955.7	954.7
165°	968.7	970.0	971.3	971.4	970.3	969.0	967.9	966.8
167.5°	978.1	979.4	980.7	980.7	979.4	978.1	976.8	975.4
170°	983.4	984.7	986.0	986.0	984.7	983.4	982.1	980.8
172.5°	986.9	988.3	989.6	989.5	988.1	986.7	985.1	983.7
175°	991.2	992.3	993.4	993.3	992.1	990.8	989.5	988.2
177.5°	992.8	993.8	994.9	994.8	993.4	992.1	990.8	989.5
180°	991.8	991.8	991.8	991.8	991.8	991.8	991.8	991.8

(END OF REPORT)