

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332078-830

Luminaire Tested: **S123DIP-S1165D1025U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332078-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1165D1025U830-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1025 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8348.8 lumens
Efficiency: N/A
Efficacy: 125.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332078-830

CATALOG NUMBER: S123DIP-S1165D1025U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

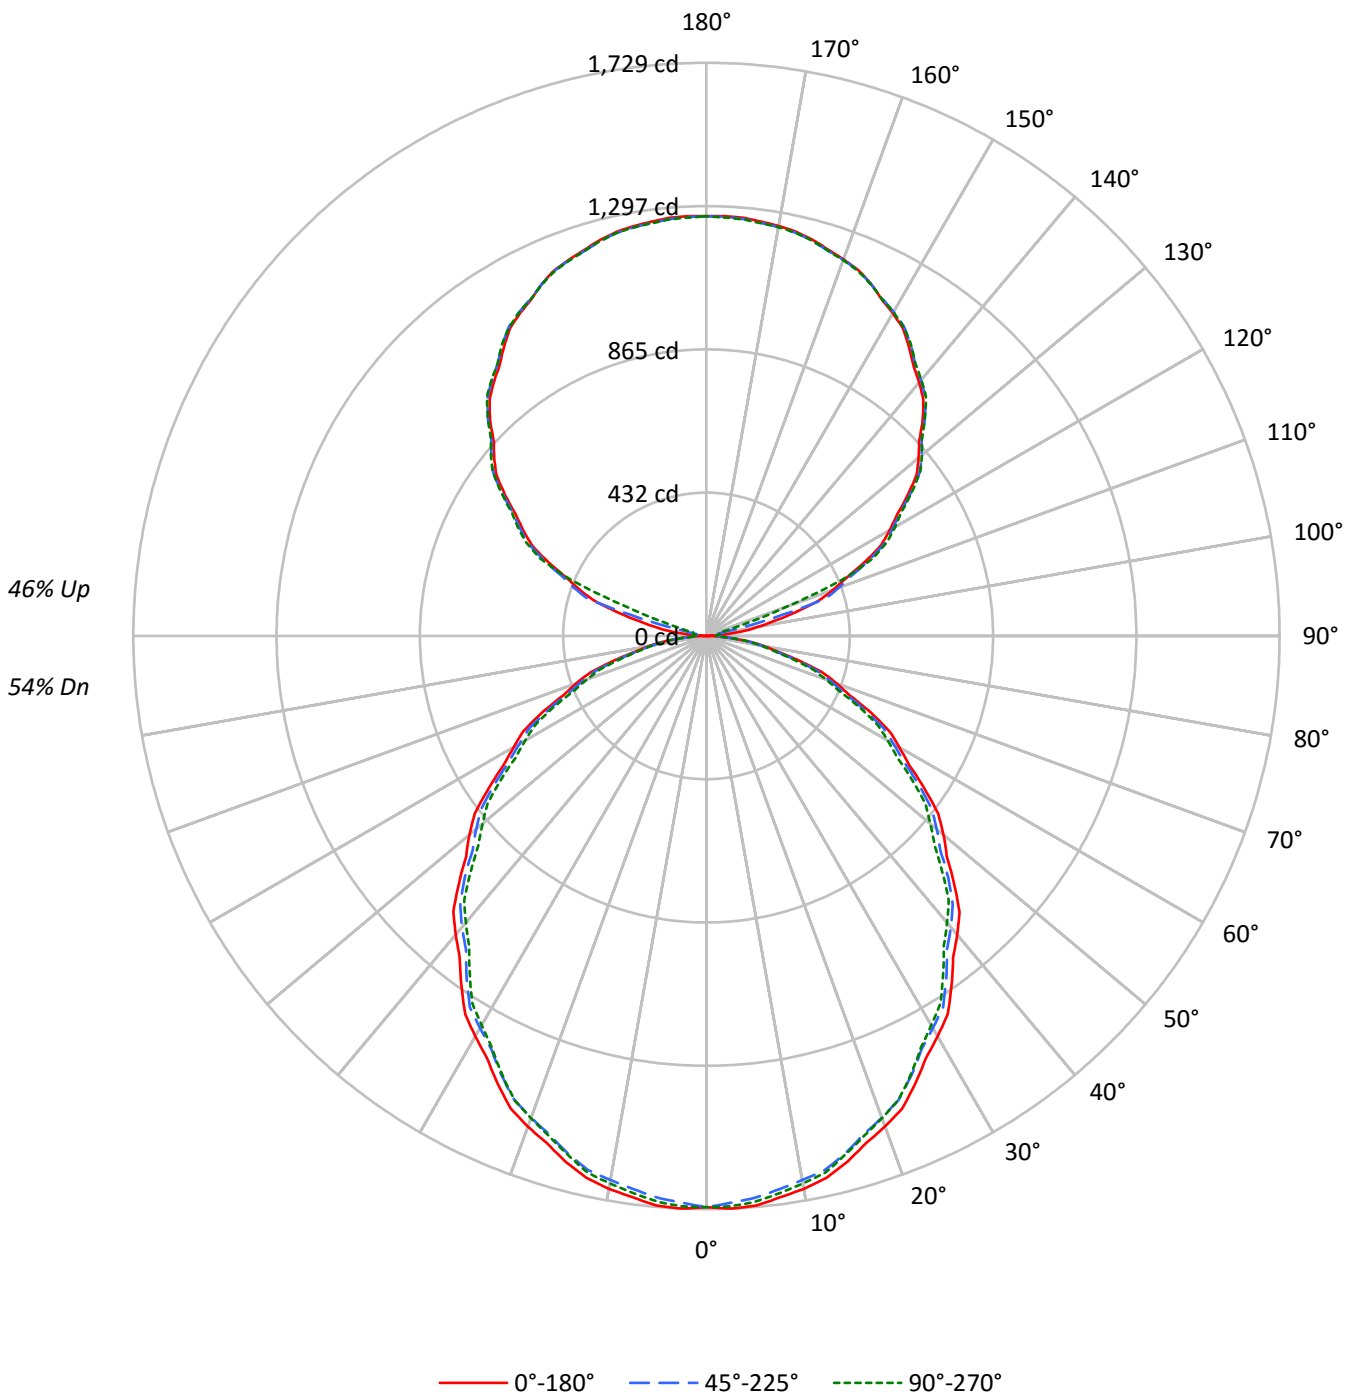



TEST NUMBER: P332078-830

CATALOG NUMBER: S123DIP-S1165D1025U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60	54
1	99	94	90	87	91	87	84	81	75	72	70	63	61	60	53	51	50	45
2	90	82	76	71	83	76	71	66	66	61	58	55	53	50	46	44	42	38
3	82	72	65	59	76	67	61	55	58	53	49	49	45	42	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	44	39	36	37	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	30	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	21
7	59	46	38	32	54	43	36	31	38	32	28	32	28	24	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	22	19	17
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18547	18547	18547
5°	18634	18377	18506
10°	18510	18218	18332
15°	18293	18013	18046
20°	18040	17718	17734
25°	17701	17368	17332
30°	17329	16978	16850
35°	16938	16567	16353
40°	16530	16114	15864
45°	16081	15696	15314
50°	15630	15183	14763
55°	15041	14653	14208
60°	14449	14034	13586
65°	13924	13359	12944
70°	13149	12589	12032
75°	12015	11582	11088
80°	10835	10377	10290
85°	9510	9152	8793



TEST NUMBER: P332078-830

CATALOG NUMBER: S123DIP-S1165D1025U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	162.3	1.9
10°-20°	458.3	5.5
20°-30°	677.0	8.1
30°-40°	790.8	9.5
40°-50°	795.1	9.5
50°-60°	698.4	8.4
60°-70°	520.3	6.2
70°-80°	296.4	3.6
80°-90°	88.6	1.1
90°-100°	46.0	0.6
100°-110°	219.4	2.6
110°-120°	527.0	6.3
120°-130°	671.1	8.0
130°-140°	717.1	8.6
140°-150°	670.6	8.0
150°-160°	540.9	6.5
160°-170°	349.1	4.2
170°-180°	120.3	1.4
0°-30°	1297.6	15.5
0°-40°	2088.4	25.0
0°-60°	3581.8	42.9
0°-90°	4487.2	53.7
90°-120°	792.5	9.5
90°-150°	2851.3	34.2
90°-180°	3862.0	46.3
0°-180°	8348.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1723	1723	1723	1723	1723	
5°	1725	1717	1701	1715	1713	163
15°	1642	1635	1616	1627	1619	463
25°	1490	1481	1462	1464	1459	686
35°	1289	1280	1261	1252	1244	806
45°	1056	1050	1031	1014	1006	815
55°	802	799	781	765	757	718
65°	547	539	524	513	508	539
75°	289	283	278	271	267	309
85°	77	74	74	71	71	85
90°	1	10	23	26	28	7
95°	57	22	29	35	36	71
105°	280	285	206	49	41	297
115°	526	532	540	549	553	519
125°	741	749	753	754	756	662
135°	923	928	932	935	932	710
145°	1065	1071	1074	1075	1075	666
155°	1173	1171	1172	1176	1171	540
165°	1237	1234	1233	1240	1234	349
175°	1266	1262	1262	1268	1262	120
180°	1266	1266	1266	1266	1266	



TEST NUMBER: P332078-830

CATALOG NUMBER: S123DIP-S1165D1025U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1
2.5°	1729.0	1728.0	1726.9	1725.9	1724.8	1722.8	1720.0	1717.0	1714.1	1711.2	1713.8
5°	1724.6	1723.0	1721.3	1719.7	1718.0	1715.3	1711.8	1708.1	1704.5	1700.8	1704.1
7.5°	1707.7	1706.0	1704.4	1702.7	1701.1	1698.4	1694.6	1690.9	1687.2	1683.4	1686.3
10°	1693.5	1691.8	1690.2	1688.5	1686.9	1683.9	1679.6	1675.4	1671.0	1666.8	1669.7
12.5°	1674.5	1673.1	1671.7	1670.4	1669.0	1666.2	1662.3	1658.2	1654.2	1650.2	1652.4
15°	1641.6	1640.3	1639.0	1637.7	1636.3	1633.5	1629.3	1624.9	1620.7	1616.4	1619.0
17.5°	1603.4	1601.7	1600.0	1598.3	1596.5	1593.6	1589.2	1585.0	1580.6	1576.4	1578.3
20°	1574.9	1572.9	1570.9	1569.0	1567.1	1563.9	1559.6	1555.4	1551.0	1546.8	1548.1
22.5°	1542.9	1541.0	1539.0	1537.0	1535.0	1531.9	1527.6	1523.3	1519.1	1514.8	1515.8
25°	1490.4	1488.5	1486.5	1484.5	1482.6	1479.4	1475.2	1470.9	1466.6	1462.4	1462.6
27.5°	1434.5	1432.6	1430.7	1428.7	1426.8	1423.6	1419.0	1414.4	1409.8	1405.1	1405.4
30°	1394.2	1392.5	1390.9	1389.2	1387.6	1384.5	1379.9	1375.3	1370.6	1366.0	1366.0
32.5°	1353.9	1351.7	1349.5	1347.4	1345.2	1342.3	1338.8	1335.2	1331.6	1328.1	1326.3
35°	1289.0	1287.0	1285.1	1283.1	1281.1	1278.0	1273.7	1269.4	1265.1	1260.8	1258.9
37.5°	1222.6	1220.1	1217.6	1215.1	1212.6	1209.2	1204.9	1200.5	1196.2	1191.8	1189.4
40°	1176.4	1174.4	1172.4	1170.4	1168.5	1165.2	1160.6	1155.9	1151.3	1146.8	1144.2
42.5°	1130.1	1127.9	1125.7	1123.4	1121.2	1117.8	1113.1	1108.5	1103.9	1099.4	1096.7
45°	1056.4	1055.1	1053.8	1052.4	1051.1	1048.3	1044.1	1039.7	1035.5	1031.1	1027.3
47.5°	983.2	981.3	979.4	977.4	975.5	972.6	968.6	964.5	960.5	956.5	952.6
50°	933.4	931.8	930.1	928.5	926.8	923.9	919.5	915.3	911.0	906.7	903.1
52.5°	881.3	880.1	879.0	877.9	876.8	873.9	869.4	864.9	860.4	855.7	852.6
55°	801.5	801.3	800.9	800.6	800.2	798.0	793.6	789.4	785.0	780.8	777.2
57.5°	725.7	724.5	723.4	722.4	721.2	719.0	715.5	712.1	708.7	705.2	702.0
60°	671.2	670.8	670.5	670.1	669.9	667.7	663.7	659.8	655.8	651.9	648.9
62.5°	622.5	621.7	620.9	620.0	619.2	616.7	612.7	608.8	604.9	601.0	597.9
65°	546.7	545.1	543.4	541.8	540.1	537.6	534.3	531.0	527.7	524.5	521.9
67.5°	466.4	465.0	463.5	462.0	460.6	458.6	456.1	453.6	451.1	448.7	446.3
70°	417.8	415.8	413.9	411.9	409.9	407.9	406.0	404.0	402.0	400.0	397.8
72.5°	366.8	365.4	363.9	362.5	361.1	359.2	356.9	354.7	352.5	350.2	348.2
75°	288.9	287.6	286.3	284.9	283.6	282.5	281.5	280.5	279.6	278.5	276.9
77.5°	219.9	219.1	218.4	217.7	217.0	216.0	214.8	213.7	212.4	211.3	210.2
80°	174.8	173.8	172.9	171.8	170.9	170.0	169.4	168.7	168.1	167.4	167.1
82.5°	131.0	130.7	130.5	130.4	130.2	130.0	129.9	129.8	129.6	129.5	128.9
85°	77.0	76.3	75.7	75.0	74.4	74.1	74.1	74.1	74.1	74.1	73.4
87.5°	31.0	30.6	30.3	29.9	29.5	29.5	29.8	30.1	30.3	30.6	30.5
90°	0.9	3.0	5.1	7.3	9.3	11.7	14.4	17.2	19.9	22.6	23.4
92.5°	17.5	16.9	16.3	15.7	15.2	15.9	17.9	20.0	22.1	24.1	25.4
95°	57.4	48.8	40.2	31.7	23.1	20.0	22.2	24.6	26.9	29.1	30.6
97.5°	115.4	111.5	107.6	103.8	99.9	90.5	75.5	60.4	45.3	30.3	32.0
100°	159.0	163.2	167.4	171.5	175.7	161.5	128.8	96.2	63.6	31.0	32.7
102.5°	208.7	211.7	214.7	217.7	220.7	204.4	168.8	133.2	97.6	61.9	56.7
105°	280.3	282.7	284.9	287.3	289.5	281.3	262.5	243.6	224.9	206.0	169.0
107.5°	356.0	357.9	359.7	361.6	363.4	365.8	368.7	371.7	374.7	377.7	350.5
110°	406.4	408.1	409.7	411.4	413.1	415.1	417.4	419.7	422.0	424.3	417.4



TEST NUMBER: P332078-830

CATALOG NUMBER: S123DIP-S1165D1025U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	454.6	456.1	457.6	459.1	460.6	462.5	464.9	467.1	469.4	471.7	471.8
115°	525.9	527.2	528.4	529.7	530.9	532.5	534.3	536.2	538.1	540.0	542.2
117.5°	594.9	596.5	598.0	599.6	601.2	602.4	603.3	604.4	605.3	606.2	607.9
120°	637.8	639.7	641.6	643.5	645.4	646.7	647.2	647.9	648.6	649.1	650.8
122.5°	681.6	683.1	684.6	686.2	687.7	688.9	689.7	690.5	691.3	692.0	693.2
125°	741.3	743.0	744.7	746.4	748.0	749.3	750.2	750.9	751.8	752.6	753.1
127.5°	799.3	801.0	802.7	804.3	806.0	807.3	808.3	809.4	810.3	811.3	812.0
130°	835.5	837.1	838.8	840.5	842.2	843.4	844.2	845.1	845.8	846.7	847.5
132.5°	870.1	871.8	873.4	875.1	876.8	877.9	878.5	879.2	880.0	880.6	881.5
135°	922.9	924.2	925.4	926.7	927.9	929.0	929.8	930.7	931.5	932.4	932.9
137.5°	968.1	969.7	971.3	972.9	974.4	975.4	975.9	976.4	976.9	977.3	978.3
140°	998.2	999.5	1000.7	1001.9	1003.2	1004.2	1004.8	1005.4	1006.1	1006.6	1007.5
142.5°	1026.1	1027.3	1028.5	1029.8	1031.0	1032.0	1032.6	1033.2	1033.9	1034.5	1035.2
145°	1065.0	1066.5	1067.9	1069.4	1070.8	1071.8	1072.2	1072.6	1073.0	1073.5	1073.8
147.5°	1101.6	1102.7	1103.6	1104.6	1105.5	1106.2	1106.6	1107.0	1107.5	1107.9	1108.3
150°	1124.3	1124.9	1125.5	1126.1	1126.7	1127.3	1127.7	1128.1	1128.5	1129.0	1129.4
152.5°	1144.5	1144.9	1145.2	1145.5	1145.8	1146.0	1146.2	1146.5	1146.8	1147.0	1147.7
155°	1173.2	1172.7	1172.3	1172.0	1171.5	1171.4	1171.6	1171.8	1172.1	1172.2	1173.3
157.5°	1195.3	1195.3	1195.3	1195.2	1195.2	1195.0	1194.9	1194.7	1194.5	1194.2	1195.5
160°	1208.9	1208.7	1208.5	1208.3	1208.1	1207.9	1207.7	1207.5	1207.2	1207.0	1208.3
162.5°	1221.7	1221.2	1220.6	1220.1	1219.6	1219.2	1219.0	1218.7	1218.5	1218.3	1219.7
165°	1237.2	1236.5	1235.9	1235.3	1234.6	1234.3	1234.0	1233.8	1233.6	1233.4	1235.0
167.5°	1249.2	1248.4	1247.5	1246.7	1245.9	1245.4	1245.4	1245.4	1245.4	1245.4	1247.1
170°	1255.9	1255.1	1254.3	1253.5	1252.6	1252.2	1252.2	1252.2	1252.2	1252.2	1253.9
172.5°	1260.5	1259.5	1258.5	1257.4	1256.5	1256.0	1256.2	1256.4	1256.5	1256.7	1258.4
175°	1266.3	1265.3	1264.2	1263.2	1262.2	1261.7	1261.9	1262.2	1262.3	1262.5	1264.0
177.5°	1267.8	1267.0	1266.1	1265.3	1264.5	1264.1	1264.3	1264.5	1264.6	1264.8	1266.1
180°	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3



TEST NUMBER: P332078-830

CATALOG NUMBER: S123DIP-S1165D1025U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1	1723.1
2.5°	1716.5	1719.1	1721.7	1723.0	1722.7	1722.4	1722.1	1721.9
5°	1707.4	1710.7	1714.0	1715.3	1714.7	1714.0	1713.4	1712.7
7.5°	1689.3	1692.2	1695.3	1696.5	1696.1	1695.7	1695.4	1695.0
10°	1672.7	1675.7	1678.7	1679.8	1679.1	1678.5	1677.8	1677.2
12.5°	1654.5	1656.7	1658.9	1659.8	1659.3	1659.0	1658.6	1658.2
15°	1621.6	1624.3	1626.9	1627.3	1625.3	1623.3	1621.4	1619.4
17.5°	1580.1	1582.0	1583.8	1584.3	1583.7	1582.9	1582.2	1581.5
20°	1549.4	1550.8	1552.1	1552.2	1551.2	1550.2	1549.3	1548.2
22.5°	1516.9	1518.0	1519.0	1518.9	1517.7	1516.4	1515.1	1513.9
25°	1463.0	1463.3	1463.7	1463.3	1462.4	1461.3	1460.4	1459.3
27.5°	1405.7	1405.9	1406.2	1405.7	1404.5	1403.2	1401.9	1400.7
30°	1366.0	1366.0	1366.0	1364.9	1362.5	1360.3	1357.9	1355.7
32.5°	1324.4	1322.6	1320.7	1319.2	1318.0	1316.6	1315.4	1314.2
35°	1256.9	1254.9	1252.9	1251.1	1249.4	1247.8	1246.1	1244.5
37.5°	1187.0	1184.7	1182.3	1180.6	1179.5	1178.5	1177.4	1176.4
40°	1141.5	1138.9	1136.2	1134.3	1132.9	1131.6	1130.3	1129.0
42.5°	1094.1	1091.5	1088.8	1086.8	1085.5	1084.2	1082.9	1081.6
45°	1023.3	1019.4	1015.4	1012.6	1011.0	1009.3	1007.7	1006.0
47.5°	948.8	944.9	940.9	938.3	936.9	935.4	934.0	932.6
50°	899.5	895.9	892.2	889.5	887.5	885.5	883.5	881.6
52.5°	849.6	846.5	843.4	840.8	838.9	836.9	834.9	832.9
55°	773.5	770.0	766.3	763.6	762.0	760.3	758.7	757.1
57.5°	698.8	695.6	692.3	689.8	687.9	686.0	684.0	682.1
60°	646.0	643.0	640.1	637.7	636.1	634.4	632.8	631.1
62.5°	595.0	592.0	589.1	587.0	585.9	584.8	583.7	582.6
65°	519.2	516.6	514.0	512.2	511.1	510.2	509.2	508.2
67.5°	444.0	441.7	439.4	437.5	436.2	434.8	433.4	432.1
70°	395.4	393.1	390.8	388.8	387.2	385.5	383.9	382.3
72.5°	346.2	344.1	342.0	340.6	339.8	338.9	338.1	337.2
75°	275.2	273.6	271.9	270.6	269.7	268.6	267.7	266.6
77.5°	209.1	207.9	206.8	206.2	206.2	206.2	206.2	206.2
80°	166.7	166.5	166.1	166.0	166.0	166.0	166.0	166.0
82.5°	128.3	127.7	127.1	126.7	126.4	126.2	125.9	125.6
85°	72.8	72.1	71.4	71.2	71.2	71.2	71.2	71.2
87.5°	30.4	30.3	30.2	30.2	30.3	30.3	30.4	30.5
90°	24.2	25.1	25.9	26.6	27.0	27.4	27.8	28.2
92.5°	26.8	28.1	29.4	30.3	30.4	30.7	31.0	31.2
95°	32.0	33.6	35.1	35.7	35.7	35.7	35.7	35.7
97.5°	33.6	35.3	36.9	37.9	38.2	38.4	38.5	38.7
100°	34.4	36.1	37.7	38.6	38.9	39.1	39.3	39.5
102.5°	51.6	46.4	41.2	38.7	39.1	39.5	39.9	40.2
105°	132.1	95.0	58.1	39.7	40.2	40.5	41.0	41.4
107.5°	323.4	296.2	269.1	241.6	213.7	185.8	157.9	130.0
110°	410.5	403.6	396.7	378.3	348.4	318.5	288.6	258.7



TEST NUMBER: P332078-830

CATALOG NUMBER: S123DIP-S1165D1025U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	471.9	472.1	472.2	469.1	462.8	456.5	450.2	443.8
115°	544.2	546.3	548.4	549.9	550.6	551.5	552.3	553.2
117.5°	609.6	611.2	612.9	613.9	614.1	614.2	614.3	614.5
120°	652.5	654.1	655.8	656.7	656.7	656.7	656.7	656.7
122.5°	694.4	695.6	696.7	697.4	697.6	697.8	697.9	698.0
125°	753.5	753.8	754.3	754.7	755.2	755.5	756.0	756.4
127.5°	812.7	813.3	814.0	814.2	813.7	813.3	812.8	812.5
130°	848.4	849.2	850.1	850.3	849.9	849.4	849.0	848.6
132.5°	882.2	883.1	883.9	884.0	883.4	882.9	882.3	881.7
135°	933.6	934.2	934.8	934.8	934.2	933.6	932.9	932.4
137.5°	979.3	980.3	981.3	981.6	981.2	980.8	980.3	980.0
140°	1008.3	1009.2	1010.0	1010.2	1009.7	1009.4	1009.0	1008.5
142.5°	1035.9	1036.5	1037.2	1037.2	1036.6	1036.0	1035.5	1034.9
145°	1074.3	1074.7	1075.2	1075.3	1075.3	1075.3	1075.3	1075.3
147.5°	1108.7	1109.1	1109.6	1109.3	1108.3	1107.4	1106.4	1105.4
150°	1129.8	1130.2	1130.7	1130.5	1129.9	1129.3	1128.6	1128.0
152.5°	1148.5	1149.2	1150.0	1149.9	1149.0	1148.0	1147.1	1146.0
155°	1174.3	1175.4	1176.4	1176.3	1175.1	1173.8	1172.5	1171.3
157.5°	1196.7	1198.0	1199.3	1199.1	1197.4	1195.8	1194.2	1192.6
160°	1209.6	1210.8	1212.0	1211.9	1210.5	1209.0	1207.6	1206.1
162.5°	1221.2	1222.6	1224.0	1224.1	1222.8	1221.4	1220.2	1218.9
165°	1236.7	1238.4	1240.1	1240.2	1238.7	1237.3	1235.8	1234.4
167.5°	1248.8	1250.5	1252.1	1252.1	1250.5	1248.8	1247.1	1245.4
170°	1255.6	1257.3	1258.9	1258.9	1257.3	1255.6	1253.9	1252.2
172.5°	1260.1	1261.7	1263.4	1263.3	1261.5	1259.6	1257.8	1255.9
175°	1265.5	1267.0	1268.4	1268.3	1266.6	1265.0	1263.3	1261.6
177.5°	1267.4	1268.9	1270.2	1270.0	1268.3	1266.7	1265.0	1263.3
180°	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3

(END OF REPORT)