

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331938-830

Luminaire Tested: **S123DIP-S560D1025U830-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331938-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S560D1025U830-4F0-1E-UDD-A1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5570.8 lumens  
Efficiency: N/A  
Efficacy: 125.2 lumens/watt  
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

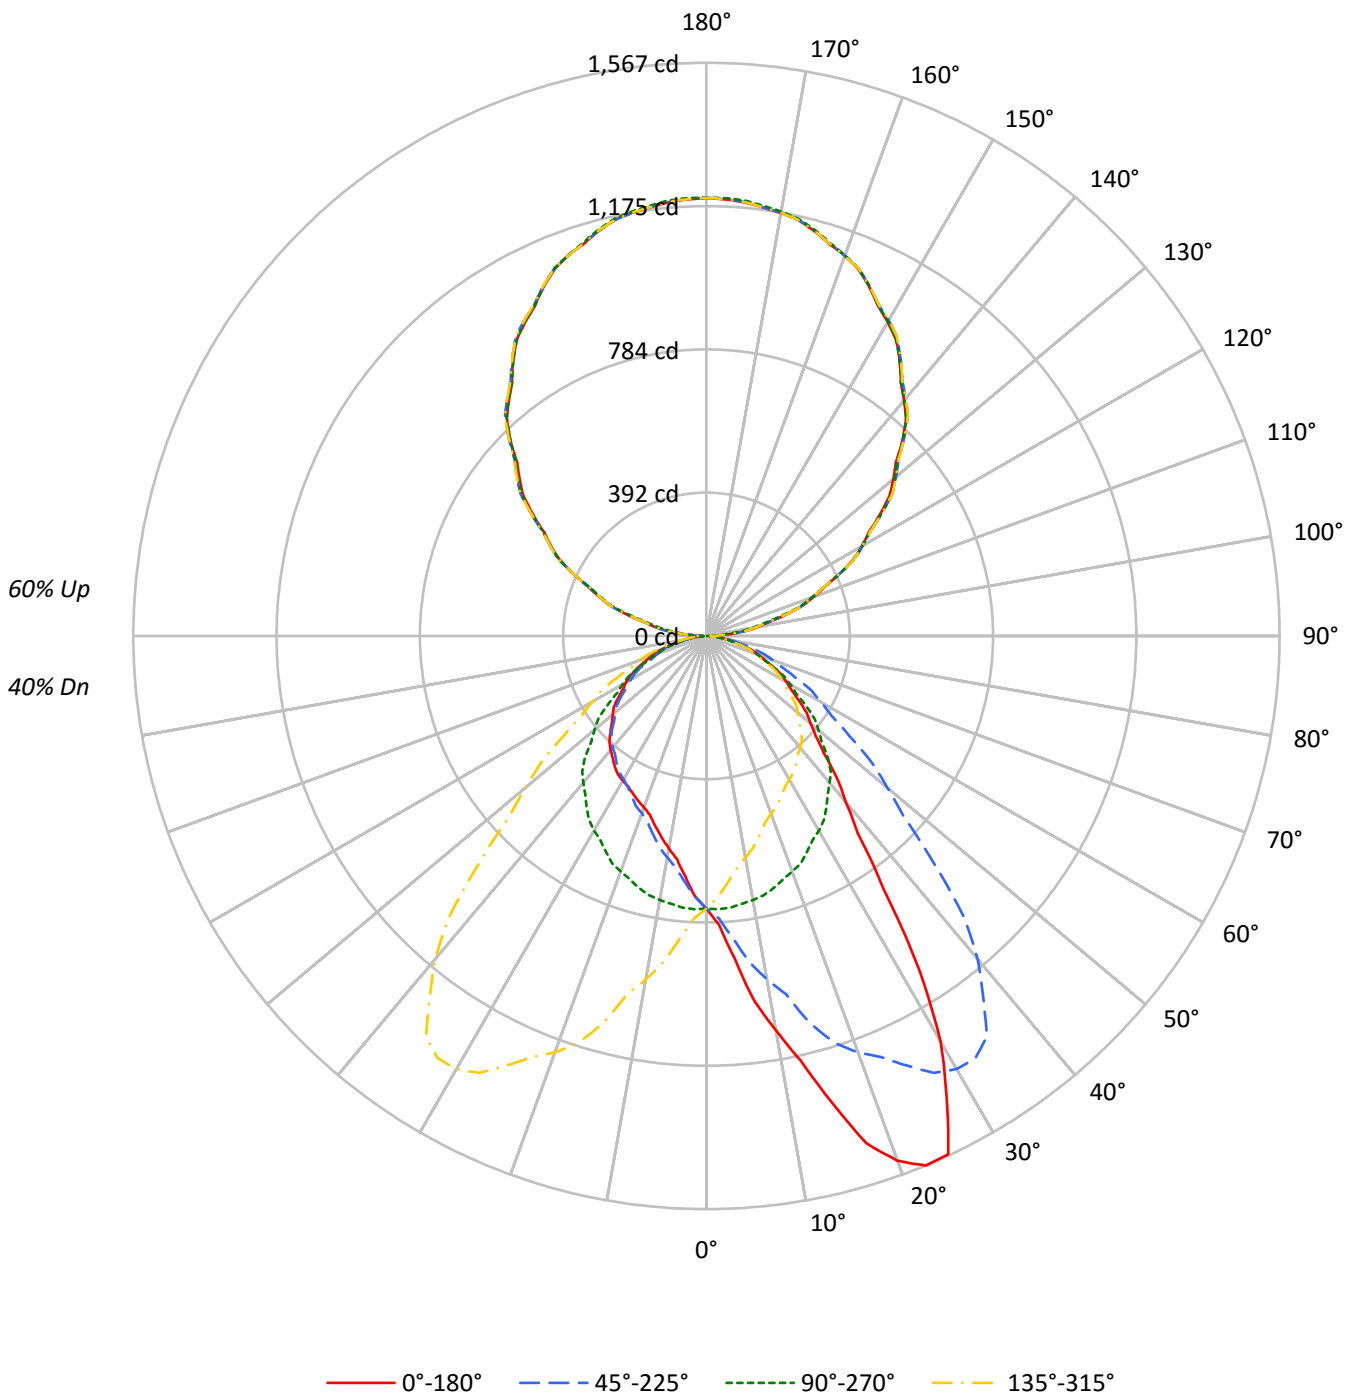



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	40			40
1	96	92	88	85	87	84	80	78	69	66	64	55	53	52	42	41	40	34			34
2	87	80	74	69	79	73	68	64	60	57	54	48	46	44	37	36	34	29			29
3	80	71	64	58	72	65	59	54	53	49	45	43	40	37	33	31	29	25			25
4	73	63	55	49	66	57	51	46	47	43	39	38	35	32	30	27	25	22			22
5	67	56	48	42	61	51	44	39	43	37	33	34	31	28	27	24	22	19			19
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	24	22	20	17			17
7	57	45	37	32	52	42	35	30	35	29	26	28	24	21	22	20	17	15			15
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	20	18	16	13			13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12			12
10	46	34	27	22	42	32	25	21	27	22	18	22	18	15	17	15	13	11			11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	8020	8020	8020	8020
5°	9564	8055	7138	8055
10°	11970	8014	6446	8014
15°	14683	7949	6002	7949
20°	17491	7848	5715	7848
25°	18573	7726	5651	7726
30°	15919	7636	5680	7636
35°	11071	7510	5740	7510
40°	8338	7360	5722	7360
45°	6925	7138	5649	7138
50°	6203	6687	5598	6687
55°	5799	6199	5527	6199
60°	5440	5690	5470	5690
65°	5112	5186	5295	5186
70°	4793	4614	5042	4614
75°	4292	4038	4625	4038
80°	3756	3310	3986	3310
85°	2939	2408	2680	2408



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	73.4	1.3
10°-20°	235.3	4.2
20°-30°	395.0	7.1
30°-40°	447.2	8.0
40°-50°	401.1	7.2
50°-60°	323.7	5.8
60°-70°	225.5	4.0
70°-80°	118.5	2.1
80°-90°	32.5	0.6
90°-100°	78.0	1.4
100°-110°	233.5	4.2
110°-120°	397.2	7.1
120°-130°	522.5	9.4
130°-140°	587.2	10.5
140°-150°	577.2	10.4
150°-160°	486.0	8.7
160°-170°	323.5	5.8
170°-180°	113.3	2.0
0°-30°	703.7	12.6
0°-40°	1151.0	20.7
0°-60°	1875.7	33.7
0°-90°	2252.4	40.4
90°-120°	708.8	12.7
90°-150°	2395.7	43.0
90°-180°	3318.0	59.6
0°-180°	5570.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	745	745	745	745	745	
5°	885	746	661	746	885	92
15°	1318	713	539	713	1318	380
25°	1564	650	476	650	1564	686
35°	842	572	437	572	842	547
45°	455	469	371	469	455	360
55°	309	330	294	330	309	277
65°	201	204	208	204	201	200
75°	103	97	111	97	103	110
85°	24	20	22	20	24	29
90°	28	1	28	1	28	15
95°	73	56	73	56	73	75
105°	224	212	224	212	224	238
115°	401	400	401	400	401	397
125°	579	585	579	585	579	517
135°	758	759	758	759	758	583
145°	921	921	921	921	921	575
155°	1053	1055	1053	1055	1053	485
165°	1145	1149	1145	1149	1145	323
175°	1190	1195	1190	1195	1190	113
180°	1198	1198	1198	1198	1198	



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1
2.5°	790.7	790.1	788.7	789.9	787.5	784.4	784.1	781.2	772.8	772.2	770.0
5°	885.1	882.2	881.9	881.6	876.5	869.6	856.6	855.5	838.2	829.5	819.1
7.5°	1007.5	1009.0	1003.7	999.1	983.6	973.5	959.5	941.7	920.4	898.8	884.4
10°	1095.2	1107.1	1092.3	1082.2	1072.9	1055.2	1034.6	1009.0	983.4	953.4	930.7
12.5°	1189.4	1195.2	1192.3	1182.7	1168.2	1141.2	1104.8	1076.6	1052.9	1003.1	982.9
15°	1317.6	1339.6	1325.6	1293.1	1293.8	1268.2	1220.5	1168.2	1140.4	1096.6	1037.1
17.5°	1454.2	1457.0	1451.0	1423.9	1405.8	1370.6	1326.6	1276.5	1220.1	1167.3	1104.1
20°	1527.0	1524.8	1512.2	1498.1	1467.1	1439.6	1391.6	1335.7	1263.5	1211.4	1142.6
22.5°	1567.4	1563.8	1557.8	1546.1	1520.2	1490.7	1447.7	1386.5	1317.8	1246.1	1166.5
25°	1563.8	1568.5	1569.2	1565.9	1557.0	1539.3	1505.3	1456.6	1388.0	1296.0	1213.0
27.5°	1422.3	1428.9	1448.2	1465.4	1484.5	1503.9	1501.4	1477.2	1426.4	1346.9	1245.4
30°	1280.8	1266.3	1302.1	1347.2	1377.9	1432.0	1462.4	1464.1	1435.7	1367.4	1268.5
32.5°	1084.4	1100.3	1116.1	1171.6	1238.7	1299.5	1359.8	1408.4	1414.0	1368.6	1282.0
35°	842.5	862.4	891.3	920.2	992.4	1054.4	1160.6	1253.0	1326.6	1336.3	1283.3
37.5°	678.9	688.8	707.0	735.9	783.2	856.9	939.0	1055.7	1162.4	1241.8	1245.3
40°	593.4	596.3	616.9	638.9	677.2	737.8	811.9	915.1	1042.9	1153.8	1200.0
42.5°	529.3	535.7	544.4	565.6	596.1	641.7	710.5	795.9	912.9	1040.5	1130.9
45°	454.9	462.0	467.5	481.5	503.2	533.9	581.9	659.9	749.0	880.8	1002.5
47.5°	405.6	406.1	410.2	420.8	435.5	458.6	492.6	542.6	624.5	731.3	856.3
50°	370.4	376.2	377.6	385.9	397.5	414.4	442.6	485.1	552.3	646.2	761.0
52.5°	345.5	347.2	351.3	357.3	367.4	380.6	405.0	438.4	491.1	571.1	676.7
55°	309.0	309.0	313.0	317.6	323.5	335.4	351.6	376.2	416.2	478.3	565.7
57.5°	275.2	277.0	279.8	281.3	286.2	294.1	307.6	326.3	356.2	404.0	473.4
60°	252.7	255.9	255.6	258.4	262.8	268.9	280.5	295.7	322.3	360.6	419.1
62.5°	233.1	232.8	232.8	236.2	240.5	246.4	253.9	267.0	289.7	323.7	373.4
65°	200.7	200.0	202.6	204.7	206.1	210.5	216.2	227.8	243.0	268.2	306.8
67.5°	172.0	169.8	171.3	172.0	174.5	177.9	183.2	190.4	202.5	222.7	251.8
70°	152.3	150.5	150.1	150.9	153.1	155.6	159.6	166.5	177.6	193.9	215.2
72.5°	132.1	130.9	130.8	132.4	133.5	135.1	137.9	144.2	153.1	165.2	185.1
75°	103.2	103.2	103.2	103.6	104.7	106.1	108.3	111.5	118.4	127.1	140.4
77.5°	77.4	77.3	76.9	76.8	78.4	79.1	79.6	82.6	86.4	92.3	102.0
80°	60.6	58.8	59.6	60.6	61.4	61.7	62.8	63.5	66.8	70.0	76.9
82.5°	45.1	43.5	43.6	45.3	45.5	45.8	46.9	48.0	49.2	52.1	55.8
85°	23.8	23.8	24.2	24.2	24.5	24.2	25.3	25.6	25.6	27.4	29.6
87.5°	14.3	13.7	13.9	14.0	13.7	13.9	13.9	14.1	14.2	14.3	14.0
90°	28.2	27.8	27.4	27.0	26.6	25.9	25.1	24.2	23.4	22.6	19.9
92.5°	38.0	38.3	38.5	38.7	39.0	38.8	38.2	37.5	36.8	36.1	34.6
95°	73.4	73.4	73.4	73.4	73.4	73.0	72.1	71.3	70.5	69.7	68.0
97.5°	112.9	113.0	113.1	113.2	113.2	112.8	111.9	110.8	109.9	109.0	107.7
100°	143.0	142.6	142.1	141.8	141.4	140.8	140.2	139.6	138.9	138.3	137.2
102.5°	173.9	174.0	174.0	174.1	174.2	173.9	173.3	172.7	172.0	171.4	170.0
105°	223.9	223.5	223.1	222.6	222.3	222.1	222.1	222.1	222.1	222.1	220.2
107.5°	276.1	276.3	276.5	276.8	277.0	276.8	276.2	275.5	274.8	274.2	273.4
110°	311.4	311.9	312.3	312.6	313.1	312.9	312.1	311.2	310.4	309.5	309.2



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	349.0	349.1	349.2	349.3	349.4	348.9	347.9	346.9	345.9	344.9	344.9
115°	400.8	401.1	401.2	401.4	401.6	401.6	401.4	401.2	401.1	400.8	401.2
117.5°	453.3	453.9	454.5	455.1	455.6	456.0	456.0	456.0	456.1	456.1	456.7
120°	490.2	490.6	491.1	491.4	491.8	492.2	492.4	492.6	492.8	493.0	494.1
122.5°	525.6	526.1	526.7	527.4	527.9	528.5	529.0	529.5	530.1	530.7	531.2
125°	578.6	579.5	580.3	581.2	581.9	582.8	583.6	584.5	585.3	586.2	586.5
127.5°	631.5	632.4	633.4	634.4	635.4	636.4	637.6	638.8	639.9	641.1	641.6
130°	666.1	667.6	669.0	670.5	671.9	673.2	673.9	674.8	675.6	676.5	677.1
132.5°	702.3	703.4	704.6	705.7	706.8	707.8	708.9	709.8	710.9	711.8	712.3
135°	758.4	758.7	759.1	759.6	760.0	760.6	761.5	762.3	763.2	763.9	764.2
137.5°	807.9	808.6	809.4	810.2	811.0	811.8	812.8	813.6	814.5	815.3	814.8
140°	840.2	841.7	843.1	844.6	846.0	846.9	847.1	847.3	847.5	847.7	847.5
142.5°	873.3	874.4	875.5	876.7	877.8	878.4	878.7	878.9	879.1	879.3	878.9
145°	921.1	921.9	922.7	923.6	924.4	924.9	925.2	925.4	925.6	925.8	925.2
147.5°	963.7	964.9	966.1	967.4	968.7	969.3	969.3	969.3	969.3	969.3	968.7
150°	990.7	991.9	993.3	994.5	995.7	996.4	996.4	996.4	996.4	996.4	996.0
152.5°	1017.1	1018.1	1019.3	1020.3	1021.4	1021.8	1021.4	1021.2	1020.8	1020.5	1020.2
155°	1052.8	1054.2	1055.7	1057.2	1058.7	1058.9	1058.2	1057.3	1056.5	1055.6	1055.5
157.5°	1085.3	1086.6	1087.7	1088.9	1090.1	1090.2	1089.3	1088.4	1087.6	1086.7	1086.6
160°	1106.5	1107.3	1108.1	1109.0	1109.7	1109.7	1108.6	1107.6	1106.5	1105.5	1105.5
162.5°	1122.3	1123.6	1124.9	1126.2	1127.6	1127.8	1126.7	1125.7	1124.6	1123.6	1123.4
165°	1145.0	1146.5	1147.9	1149.4	1150.8	1150.9	1149.7	1148.5	1147.2	1145.9	1145.9
167.5°	1164.4	1165.7	1167.0	1168.3	1169.6	1169.6	1168.3	1167.0	1165.7	1164.4	1164.2
170°	1174.2	1175.6	1177.1	1178.6	1180.1	1180.1	1178.6	1177.1	1175.6	1174.2	1174.2
172.5°	1181.7	1183.2	1184.7	1186.1	1187.6	1187.6	1186.4	1185.1	1183.7	1182.4	1182.4
175°	1190.1	1191.7	1193.1	1194.6	1196.0	1196.2	1194.9	1193.6	1192.4	1191.1	1191.1
177.5°	1194.7	1195.9	1197.0	1198.3	1199.4	1199.5	1198.4	1197.5	1196.5	1195.4	1195.4
180°	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1
2.5°	768.2	765.9	763.6	759.5	756.0	751.1	749.7	748.0	742.8	738.1	734.7
5°	815.1	806.4	793.8	782.2	772.9	760.3	753.0	745.5	734.6	724.9	716.9
7.5°	864.2	847.2	827.6	806.3	786.6	767.4	752.1	738.4	723.2	708.8	697.7
10°	903.2	878.6	851.2	821.6	796.4	771.8	751.2	733.2	713.7	696.7	682.6
12.5°	947.6	911.3	873.5	837.4	807.6	773.5	748.7	725.7	703.6	683.2	667.3
15°	1000.3	954.1	909.4	859.9	814.4	771.8	742.2	713.3	687.7	666.8	646.5
17.5°	1048.2	995.9	936.9	876.8	821.9	771.4	729.9	697.3	665.2	639.6	619.4
20°	1075.3	1015.8	949.0	886.6	826.0	769.6	724.2	685.1	650.5	623.4	600.7
22.5°	1098.8	1029.1	960.0	893.2	825.7	765.0	713.5	673.4	635.7	609.3	585.1
25°	1123.0	1039.6	970.3	892.0	816.5	753.8	696.0	650.5	612.9	581.9	557.0
27.5°	1143.9	1039.0	956.7	872.4	802.3	739.3	677.7	628.9	589.0	555.3	530.0
30°	1157.7	1040.4	942.5	859.1	788.4	723.4	663.5	614.4	572.5	538.2	514.4
32.5°	1166.4	1039.5	929.5	840.7	766.5	709.0	648.2	597.4	554.3	520.7	497.7
35°	1171.4	1033.1	907.2	802.5	731.0	675.0	624.2	571.5	526.3	494.9	468.9
37.5°	1161.3	1019.8	881.2	765.6	687.4	632.4	589.5	544.6	501.4	466.8	444.4
40°	1145.4	1011.2	860.9	739.7	657.3	604.3	567.9	523.8	481.2	448.4	427.4
42.5°	1115.1	993.5	838.8	710.8	626.1	573.1	539.5	502.8	462.4	431.6	410.7
45°	1041.1	955.2	805.4	667.5	580.1	525.3	495.7	468.9	432.4	402.5	384.5
47.5°	938.4	897.5	757.1	621.8	532.1	479.3	448.5	427.0	400.3	376.2	358.8
50°	867.1	850.2	724.5	590.6	499.9	448.4	418.8	399.3	380.1	355.9	340.1
52.5°	784.8	795.2	686.4	558.3	467.3	416.6	388.7	373.2	355.9	336.0	322.2
55°	668.9	706.8	620.6	504.0	418.8	370.4	344.0	330.3	320.2	305.4	293.5
57.5°	560.4	608.6	549.3	448.0	371.0	329.3	304.1	289.1	282.6	274.8	265.5
60°	496.0	543.7	498.5	410.5	338.9	299.3	276.9	264.3	257.8	252.3	244.4
62.5°	438.6	486.7	448.8	372.3	307.5	270.7	251.2	238.8	233.8	230.9	224.1
65°	359.6	401.1	375.8	313.0	262.4	230.0	212.3	203.6	198.9	197.8	193.5
67.5°	292.7	324.2	305.9	259.6	219.8	191.7	176.7	169.4	165.8	165.4	162.1
70°	248.7	278.3	264.3	222.3	188.0	166.1	153.1	146.6	144.4	144.0	142.2
72.5°	214.6	235.3	224.1	189.2	162.7	142.7	133.1	126.3	123.9	124.4	123.2
75°	158.8	174.4	167.9	143.6	122.3	109.3	101.4	97.1	94.9	96.0	94.5
77.5°	114.3	124.1	118.3	101.5	88.4	79.0	73.1	70.5	68.5	68.4	67.8
80°	86.2	92.1	88.8	78.7	67.9	59.9	55.2	53.4	52.3	52.0	51.7
82.5°	61.5	66.4	62.5	55.6	48.3	43.5	40.8	38.5	37.6	37.8	37.5
85°	31.0	32.9	31.4	27.1	24.2	22.1	20.5	19.5	18.8	19.1	18.4
87.5°	14.1	13.9	12.4	10.8	9.8	8.6	8.1	7.2	7.0	7.4	7.5
90°	17.2	14.4	11.7	9.3	7.3	5.1	3.0	0.9	3.0	5.1	7.3
92.5°	33.0	31.5	30.0	28.5	27.1	25.6	24.2	22.8	24.2	25.6	27.1
95°	66.3	64.6	63.0	61.4	59.9	58.4	56.9	55.5	56.9	58.4	59.9
97.5°	106.5	105.3	104.1	102.9	101.9	100.8	99.7	98.6	99.7	100.8	101.9
100°	136.2	135.2	134.1	133.0	131.7	130.4	129.2	128.0	129.2	130.4	131.7
102.5°	168.6	167.3	165.9	164.9	164.1	163.3	162.6	161.8	162.6	163.3	164.1
105°	218.3	216.4	214.5	213.4	212.9	212.5	212.1	211.7	212.1	212.5	212.9
107.5°	272.7	271.9	271.2	270.7	270.4	270.1	269.9	269.7	269.9	270.1	270.4
110°	308.7	308.3	307.8	307.5	307.0	306.6	306.2	305.8	306.2	306.6	307.0





TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	344.8	344.7	344.6	344.4	344.1	343.9	343.7	343.4	343.7	343.9	344.1
115°	401.6	402.1	402.5	402.4	401.7	401.1	400.5	399.8	400.5	401.1	401.7
117.5°	457.2	457.8	458.3	458.4	458.0	457.5	457.1	456.7	457.1	457.5	458.0
120°	495.1	496.2	497.2	497.1	495.9	494.6	493.3	492.1	493.3	494.6	495.9
122.5°	531.7	532.3	532.8	532.6	531.7	530.7	529.9	529.0	529.9	530.7	531.7
125°	587.0	587.4	587.9	587.7	587.1	586.4	585.9	585.2	585.9	586.4	587.1
127.5°	642.1	642.4	642.9	642.5	641.1	639.8	638.5	637.2	638.5	639.8	641.1
130°	677.7	678.3	679.0	678.4	676.7	675.1	673.4	671.8	673.4	675.1	676.7
132.5°	712.8	713.2	713.7	713.1	711.4	709.7	708.0	706.4	708.0	709.7	711.4
135°	764.4	764.6	764.8	764.3	763.0	761.8	760.5	759.3	760.5	761.8	763.0
137.5°	814.3	813.7	813.1	812.4	811.3	810.3	809.3	808.2	809.3	810.3	811.3
140°	847.3	847.1	846.9	846.2	845.2	844.1	843.1	842.1	843.1	844.1	845.2
142.5°	878.5	878.2	877.8	877.1	876.1	875.1	873.9	872.9	873.9	875.1	876.1
145°	924.5	923.9	923.3	922.7	922.4	921.9	921.5	921.1	921.5	921.9	922.4
147.5°	968.1	967.5	967.0	966.3	965.5	964.8	964.0	963.3	964.0	964.8	965.5
150°	995.5	995.1	994.7	994.3	993.8	993.4	993.1	992.6	993.1	993.4	993.8
152.5°	1019.9	1019.7	1019.5	1019.0	1018.4	1017.9	1017.3	1016.7	1017.3	1017.9	1018.4
155°	1055.2	1055.0	1054.8	1054.7	1054.7	1054.7	1054.7	1054.7	1054.7	1054.7	1054.7
157.5°	1086.4	1086.2	1086.0	1086.1	1086.3	1086.6	1086.8	1087.0	1086.8	1086.6	1086.3
160°	1105.5	1105.5	1105.5	1105.7	1106.2	1106.5	1106.9	1107.4	1106.9	1106.5	1106.2
162.5°	1123.2	1123.0	1122.9	1123.1	1123.7	1124.3	1124.8	1125.5	1124.8	1124.3	1123.7
165°	1145.9	1145.9	1145.9	1146.3	1146.9	1147.5	1148.1	1148.8	1148.1	1147.5	1146.9
167.5°	1164.0	1163.9	1163.8	1164.0	1164.9	1165.7	1166.6	1167.4	1166.6	1165.7	1164.9
170°	1174.2	1174.2	1174.2	1174.6	1175.4	1176.3	1177.1	1178.0	1177.1	1176.3	1175.4
172.5°	1182.4	1182.4	1182.4	1182.9	1183.7	1184.6	1185.4	1186.2	1185.4	1184.6	1183.7
175°	1191.1	1191.1	1191.1	1191.6	1192.4	1193.2	1194.0	1194.9	1194.0	1193.2	1192.4
177.5°	1195.4	1195.4	1195.4	1195.8	1196.5	1197.1	1197.8	1198.4	1197.8	1197.1	1196.5
180°	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1
2.5°	732.6	730.7	727.7	723.4	719.9	714.4	714.4	715.3	715.3	715.0	714.4
5°	710.4	705.0	698.5	691.0	683.0	675.0	673.6	670.7	668.5	667.1	665.3
7.5°	686.9	677.4	667.9	657.3	647.6	639.6	634.0	629.4	626.4	623.3	620.9
10°	671.1	659.1	648.0	636.8	624.5	614.7	608.6	604.3	601.1	598.1	596.7
12.5°	652.3	638.7	626.3	615.7	602.3	592.2	586.4	584.4	580.5	574.5	571.3
15°	624.9	612.3	597.5	581.2	574.7	562.4	555.5	552.3	550.2	545.4	544.0
17.5°	601.4	584.8	568.3	556.1	544.0	534.1	530.3	526.2	523.4	519.5	518.4
20°	582.7	567.9	552.7	539.7	527.1	516.2	512.9	510.1	507.2	505.4	504.0
22.5°	563.5	548.7	536.2	524.1	510.6	503.5	499.9	496.8	494.7	493.5	492.1
25°	536.8	523.8	509.7	498.9	488.0	483.3	481.2	479.4	478.0	476.2	475.8
27.5°	512.8	498.7	487.3	477.1	469.4	465.4	463.4	462.5	462.8	463.4	463.8
30°	494.9	481.9	472.5	463.8	456.7	453.1	452.7	452.7	454.1	454.5	455.2
32.5°	478.4	467.8	458.4	450.0	444.5	442.1	443.5	443.5	444.6	445.5	446.9
35°	454.5	445.1	437.9	430.6	425.9	427.1	427.7	428.5	430.3	432.4	433.9
37.5°	431.6	423.5	415.9	410.3	408.1	410.1	411.8	413.3	415.5	417.1	418.5
40°	415.1	409.0	401.8	396.7	397.5	398.5	400.0	401.8	403.6	404.6	406.1
42.5°	399.8	393.4	388.0	383.7	384.7	386.2	387.0	388.0	390.0	392.0	392.9
45°	376.5	371.5	366.4	363.9	364.6	365.3	366.1	367.1	368.9	370.4	370.7
47.5°	350.3	346.8	343.4	340.9	342.0	341.8	342.7	345.1	345.6	346.5	348.5
50°	333.6	330.3	326.3	325.6	325.6	325.6	325.9	328.9	328.9	330.3	331.8
52.5°	315.1	313.0	310.5	309.2	308.6	308.6	310.1	311.5	312.1	314.1	315.6
55°	287.7	285.5	283.4	282.3	281.5	282.3	285.2	285.9	287.7	288.8	289.8
57.5°	259.2	257.5	255.8	255.2	255.1	256.0	257.6	259.8	260.2	263.5	265.1
60°	240.4	237.9	236.5	236.5	235.7	238.9	238.3	241.9	242.6	244.8	247.3
62.5°	221.0	217.6	217.1	217.1	218.1	219.0	220.1	221.7	223.6	226.3	228.2
65°	189.9	188.0	190.6	190.2	189.5	191.7	191.7	193.5	195.7	198.2	202.2
67.5°	160.3	159.4	159.7	159.7	160.7	161.9	163.0	164.6	167.1	169.8	172.4
70°	140.4	141.5	139.7	141.2	142.2	142.6	143.3	145.4	148.4	150.1	153.1
72.5°	121.1	121.0	121.2	121.8	122.9	123.6	124.2	126.7	129.9	131.4	133.7
75°	93.1	92.7	93.9	93.9	95.7	96.4	97.1	98.2	101.0	103.2	105.1
77.5°	68.1	68.4	68.2	69.5	69.0	69.1	71.4	72.4	72.7	77.0	77.9
80°	51.3	52.0	52.3	52.7	53.1	52.3	54.9	56.0	56.0	58.4	60.3
82.5°	36.9	37.2	38.2	38.5	38.6	39.3	39.6	40.3	41.2	42.3	44.7
85°	18.4	19.5	19.9	19.5	19.9	19.1	20.2	20.5	20.9	20.9	20.9
87.5°	7.6	8.4	8.7	9.5	9.7	10.6	10.7	10.4	10.5	11.5	10.5
90°	9.3	11.7	14.4	17.2	19.9	22.6	23.4	24.2	25.1	25.9	26.6
92.5°	28.5	30.0	31.5	33.0	34.6	36.1	36.8	37.5	38.2	38.8	39.0
95°	61.4	63.0	64.6	66.3	68.0	69.7	70.5	71.3	72.1	73.0	73.4
97.5°	102.9	104.1	105.3	106.5	107.7	109.0	109.9	110.8	111.9	112.8	113.2
100°	133.0	134.1	135.2	136.2	137.2	138.3	138.9	139.6	140.2	140.8	141.4
102.5°	164.9	165.9	167.3	168.6	170.0	171.4	172.0	172.7	173.3	173.9	174.2
105°	213.4	214.5	216.4	218.3	220.2	222.1	222.1	222.1	222.1	222.1	222.3
107.5°	270.7	271.2	271.9	272.7	273.4	274.2	274.8	275.5	276.2	276.8	277.0
110°	307.5	307.8	308.3	308.7	309.2	309.5	310.4	311.2	312.1	312.9	313.1



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	344.4	344.6	344.7	344.8	344.9	344.9	345.9	346.9	347.9	348.9	349.4
115°	402.4	402.5	402.1	401.6	401.2	400.8	401.1	401.2	401.4	401.6	401.6
117.5°	458.4	458.3	457.8	457.2	456.7	456.1	456.1	456.0	456.0	456.0	455.6
120°	497.1	497.2	496.2	495.1	494.1	493.0	492.8	492.6	492.4	492.2	491.8
122.5°	532.6	532.8	532.3	531.7	531.2	530.7	530.1	529.5	529.0	528.5	527.9
125°	587.7	587.9	587.4	587.0	586.5	586.2	585.3	584.5	583.6	582.8	581.9
127.5°	642.5	642.9	642.4	642.1	641.6	641.1	639.9	638.8	637.6	636.4	635.4
130°	678.4	679.0	678.3	677.7	677.1	676.5	675.6	674.8	673.9	673.2	671.9
132.5°	713.1	713.7	713.2	712.8	712.3	711.8	710.9	709.8	708.9	707.8	706.8
135°	764.3	764.8	764.6	764.4	764.2	763.9	763.2	762.3	761.5	760.6	760.0
137.5°	812.4	813.1	813.7	814.3	814.8	815.3	814.5	813.6	812.8	811.8	811.0
140°	846.2	846.9	847.1	847.3	847.5	847.7	847.5	847.3	847.1	846.9	846.0
142.5°	877.1	877.8	878.2	878.5	878.9	879.3	879.1	878.9	878.7	878.4	877.8
145°	922.7	923.3	923.9	924.5	925.2	925.8	925.6	925.4	925.2	924.9	924.4
147.5°	966.3	967.0	967.5	968.1	968.7	969.3	969.3	969.3	969.3	969.3	968.7
150°	994.3	994.7	995.1	995.5	996.0	996.4	996.4	996.4	996.4	996.4	995.7
152.5°	1019.0	1019.5	1019.7	1019.9	1020.2	1020.5	1020.8	1021.2	1021.4	1021.8	1021.4
155°	1054.7	1054.8	1055.0	1055.2	1055.5	1055.6	1056.5	1057.3	1058.2	1058.9	1058.7
157.5°	1086.1	1086.0	1086.2	1086.4	1086.6	1086.7	1087.6	1088.4	1089.3	1090.2	1090.1
160°	1105.7	1105.5	1105.5	1105.5	1105.5	1105.5	1106.5	1107.6	1108.6	1109.7	1109.7
162.5°	1123.1	1122.9	1123.0	1123.2	1123.4	1123.6	1124.6	1125.7	1126.7	1127.8	1127.6
165°	1146.3	1145.9	1145.9	1145.9	1145.9	1145.9	1147.2	1148.5	1149.7	1150.9	1150.8
167.5°	1164.0	1163.8	1163.9	1164.0	1164.2	1164.4	1165.7	1167.0	1168.3	1169.6	1169.6
170°	1174.6	1174.2	1174.2	1174.2	1174.2	1174.2	1175.6	1177.1	1178.6	1180.1	1180.1
172.5°	1182.9	1182.4	1182.4	1182.4	1182.4	1182.4	1183.7	1185.1	1186.4	1187.6	1187.6
175°	1191.6	1191.1	1191.1	1191.1	1191.1	1191.1	1192.4	1193.6	1194.9	1196.2	1196.0
177.5°	1195.8	1195.4	1195.4	1195.4	1195.4	1195.4	1196.5	1197.5	1198.4	1199.5	1199.4
180°	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1
2.5°	712.5	712.2	714.2	712.8	714.2	712.2	712.5	714.4	715.0	715.3	715.3
5°	663.2	664.2	660.6	660.6	660.6	664.2	663.2	665.3	667.1	668.5	670.7
7.5°	619.3	617.6	617.8	615.9	617.8	617.6	619.3	620.9	623.3	626.4	629.4
10°	592.4	590.2	589.5	589.8	589.5	590.2	592.4	596.7	598.1	601.1	604.3
12.5°	570.1	569.7	565.0	565.1	565.0	569.7	570.1	571.3	574.5	580.5	584.4
15°	544.0	537.2	536.4	538.6	536.4	537.2	544.0	544.0	545.4	550.2	552.3
17.5°	517.8	514.2	514.4	513.3	514.4	514.2	517.8	518.4	519.5	523.4	526.2
20°	504.0	501.8	501.4	498.9	501.4	501.8	504.0	504.0	505.4	507.2	510.1
22.5°	491.3	490.5	490.7	488.0	490.7	490.5	491.3	492.1	493.5	494.7	496.8
25°	475.4	477.2	475.8	475.8	475.8	477.2	475.4	475.8	476.2	478.0	479.4
27.5°	464.8	464.7	463.9	463.9	463.9	464.7	464.8	463.8	463.4	462.8	462.5
30°	456.7	456.3	457.0	457.0	457.0	456.3	456.7	455.2	454.5	454.1	452.7
32.5°	448.6	449.0	449.2	449.5	449.2	449.0	448.6	446.9	445.5	444.6	443.5
35°	436.1	436.4	437.5	436.8	437.5	436.4	436.1	433.9	432.4	430.3	428.5
37.5°	419.1	420.8	420.5	421.0	420.5	420.8	419.1	418.5	417.1	415.5	413.3
40°	406.5	407.6	407.2	407.2	407.2	407.6	406.5	406.1	404.6	403.6	401.8
42.5°	393.5	394.3	393.3	392.8	393.3	394.3	393.5	392.9	392.0	390.0	388.0
45°	372.2	371.5	372.6	371.1	372.6	371.5	372.2	370.7	370.4	368.9	367.1
47.5°	348.4	349.1	349.4	350.4	349.4	349.1	348.4	348.5	346.5	345.6	345.1
50°	332.4	334.6	334.6	334.3	334.6	334.6	332.4	331.8	330.3	328.9	328.9
52.5°	316.9	317.9	319.3	319.2	319.3	317.9	316.9	315.6	314.1	312.1	311.5
55°	292.8	293.5	294.2	294.5	294.2	293.5	292.8	289.8	288.8	287.7	285.9
57.5°	267.8	267.5	269.2	269.8	269.2	267.5	267.8	265.1	263.5	260.2	259.8
60°	250.2	250.2	253.1	254.1	253.1	250.2	250.2	247.3	244.8	242.6	241.9
62.5°	231.4	232.5	235.4	233.9	235.4	232.5	231.4	228.2	226.3	223.6	221.7
65°	204.0	206.9	206.5	207.9	206.5	206.9	204.0	202.2	198.2	195.7	193.5
67.5°	175.3	177.1	179.7	179.9	179.7	177.1	175.3	172.4	169.8	167.1	164.6
70°	156.0	157.8	159.2	160.2	159.2	157.8	156.0	153.1	150.1	148.4	145.4
72.5°	137.1	138.1	141.6	140.1	141.6	138.1	137.1	133.7	131.4	129.9	126.7
75°	107.5	110.1	112.3	111.2	112.3	110.1	107.5	105.1	103.2	101.0	98.2
77.5°	79.6	82.1	83.1	82.2	83.1	82.1	79.6	77.9	77.0	72.7	72.4
80°	62.8	62.5	64.7	64.3	64.7	62.5	62.8	60.3	58.4	56.0	56.0
82.5°	46.1	45.7	46.8	46.9	46.8	45.7	46.1	44.7	42.3	41.2	40.3
85°	22.3	23.5	22.1	21.7	22.1	23.5	22.3	20.9	20.9	20.9	20.5
87.5°	10.6	10.7	10.5	10.3	10.5	10.7	10.6	10.5	11.5	10.5	10.4
90°	27.0	27.4	27.8	28.2	27.8	27.4	27.0	26.6	25.9	25.1	24.2
92.5°	38.7	38.5	38.3	38.0	38.3	38.5	38.7	39.0	38.8	38.2	37.5
95°	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.4	73.0	72.1	71.3
97.5°	113.2	113.1	113.0	112.9	113.0	113.1	113.2	113.2	112.8	111.9	110.8
100°	141.8	142.1	142.6	143.0	142.6	142.1	141.8	141.4	140.8	140.2	139.6
102.5°	174.1	174.0	174.0	173.9	174.0	174.0	174.1	174.2	173.9	173.3	172.7
105°	222.6	223.1	223.5	223.9	223.5	223.1	222.6	222.3	222.1	222.1	222.1
107.5°	276.8	276.5	276.3	276.1	276.3	276.5	276.8	277.0	276.8	276.2	275.5
110°	312.6	312.3	311.9	311.4	311.9	312.3	312.6	313.1	312.9	312.1	311.2



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	349.3	349.2	349.1	349.0	349.1	349.2	349.3	349.4	348.9	347.9	346.9
115°	401.4	401.2	401.1	400.8	401.1	401.2	401.4	401.6	401.6	401.4	401.2
117.5°	455.1	454.5	453.9	453.3	453.9	454.5	455.1	455.6	456.0	456.0	456.0
120°	491.4	491.1	490.6	490.2	490.6	491.1	491.4	491.8	492.2	492.4	492.6
122.5°	527.4	526.7	526.1	525.6	526.1	526.7	527.4	527.9	528.5	529.0	529.5
125°	581.2	580.3	579.5	578.6	579.5	580.3	581.2	581.9	582.8	583.6	584.5
127.5°	634.4	633.4	632.4	631.5	632.4	633.4	634.4	635.4	636.4	637.6	638.8
130°	670.5	669.0	667.6	666.1	667.6	669.0	670.5	671.9	673.2	673.9	674.8
132.5°	705.7	704.6	703.4	702.3	703.4	704.6	705.7	706.8	707.8	708.9	709.8
135°	759.6	759.1	758.7	758.4	758.7	759.1	759.6	760.0	760.6	761.5	762.3
137.5°	810.2	809.4	808.6	807.9	808.6	809.4	810.2	811.0	811.8	812.8	813.6
140°	844.6	843.1	841.7	840.2	841.7	843.1	844.6	846.0	846.9	847.1	847.3
142.5°	876.7	875.5	874.4	873.3	874.4	875.5	876.7	877.8	878.4	878.7	878.9
145°	923.6	922.7	921.9	921.1	921.9	922.7	923.6	924.4	924.9	925.2	925.4
147.5°	967.4	966.1	964.9	963.7	964.9	966.1	967.4	968.7	969.3	969.3	969.3
150°	994.5	993.3	991.9	990.7	991.9	993.3	994.5	995.7	996.4	996.4	996.4
152.5°	1020.3	1019.3	1018.1	1017.1	1018.1	1019.3	1020.3	1021.4	1021.8	1021.4	1021.2
155°	1057.2	1055.7	1054.2	1052.8	1054.2	1055.7	1057.2	1058.7	1058.9	1058.2	1057.3
157.5°	1088.9	1087.7	1086.6	1085.3	1086.6	1087.7	1088.9	1090.1	1090.2	1089.3	1088.4
160°	1109.0	1108.1	1107.3	1106.5	1107.3	1108.1	1109.0	1109.7	1109.7	1108.6	1107.6
162.5°	1126.2	1124.9	1123.6	1122.3	1123.6	1124.9	1126.2	1127.6	1127.8	1126.7	1125.7
165°	1149.4	1147.9	1146.5	1145.0	1146.5	1147.9	1149.4	1150.8	1150.9	1149.7	1148.5
167.5°	1168.3	1167.0	1165.7	1164.4	1165.7	1167.0	1168.3	1169.6	1169.6	1168.3	1167.0
170°	1178.6	1177.1	1175.6	1174.2	1175.6	1177.1	1178.6	1180.1	1180.1	1178.6	1177.1
172.5°	1186.1	1184.7	1183.2	1181.7	1183.2	1184.7	1186.1	1187.6	1187.6	1186.4	1185.1
175°	1194.6	1193.1	1191.7	1190.1	1191.7	1193.1	1194.6	1196.0	1196.2	1194.9	1193.6
177.5°	1198.3	1197.0	1195.9	1194.7	1195.9	1197.0	1198.3	1199.4	1199.5	1198.4	1197.5
180°	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1
2.5°	714.4	714.4	719.9	723.4	727.7	730.7	732.6	734.7	738.1	742.8	748.0
5°	673.6	675.0	683.0	691.0	698.5	705.0	710.4	716.9	724.9	734.6	745.5
7.5°	634.0	639.6	647.6	657.3	667.9	677.4	686.9	697.7	708.8	723.2	738.4
10°	608.6	614.7	624.5	636.8	648.0	659.1	671.1	682.6	696.7	713.7	733.2
12.5°	586.4	592.2	602.3	615.7	626.3	638.7	652.3	667.3	683.2	703.6	725.7
15°	555.5	562.4	574.7	581.2	597.5	612.3	624.9	646.5	666.8	687.7	713.3
17.5°	530.3	534.1	544.0	556.1	568.3	584.8	601.4	619.4	639.6	665.2	697.3
20°	512.9	516.2	527.1	539.7	552.7	567.9	582.7	600.7	623.4	650.5	685.1
22.5°	499.9	503.5	510.6	524.1	536.2	548.7	563.5	585.1	609.3	635.7	673.4
25°	481.2	483.3	488.0	498.9	509.7	523.8	536.8	557.0	581.9	612.9	650.5
27.5°	463.4	465.4	469.4	477.1	487.3	498.7	512.8	530.0	555.3	589.0	628.9
30°	452.7	453.1	456.7	463.8	472.5	481.9	494.9	514.4	538.2	572.5	614.4
32.5°	443.5	442.1	444.5	450.0	458.4	467.8	478.4	497.7	520.7	554.3	597.4
35°	427.7	427.1	425.9	430.6	437.9	445.1	454.5	468.9	494.9	526.3	571.5
37.5°	411.8	410.1	408.1	410.3	415.9	423.5	431.6	444.4	466.8	501.4	544.6
40°	400.0	398.5	397.5	396.7	401.8	409.0	415.1	427.4	448.4	481.2	523.8
42.5°	387.0	386.2	384.7	383.7	388.0	393.4	399.8	410.7	431.6	462.4	502.8
45°	366.1	365.3	364.6	363.9	366.4	371.5	376.5	384.5	402.5	432.4	468.9
47.5°	342.7	341.8	342.0	340.9	343.4	346.8	350.3	358.8	376.2	400.3	427.0
50°	325.9	325.6	325.6	325.6	326.3	330.3	333.6	340.1	355.9	380.1	399.3
52.5°	310.1	308.6	308.6	309.2	310.5	313.0	315.1	322.2	336.0	355.9	373.2
55°	285.2	282.3	281.5	282.3	283.4	285.5	287.7	293.5	305.4	320.2	330.3
57.5°	257.6	256.0	255.1	255.2	255.8	257.5	259.2	265.5	274.8	282.6	289.1
60°	238.3	238.9	235.7	236.5	236.5	237.9	240.4	244.4	252.3	257.8	264.3
62.5°	220.1	219.0	218.1	217.1	217.1	217.6	221.0	224.1	230.9	233.8	238.8
65°	191.7	191.7	189.5	190.2	190.6	188.0	189.9	193.5	197.8	198.9	203.6
67.5°	163.0	161.9	160.7	159.7	159.7	159.4	160.3	162.1	165.4	165.8	169.4
70°	143.3	142.6	142.2	141.2	139.7	141.5	140.4	142.2	144.0	144.4	146.6
72.5°	124.2	123.6	122.9	121.8	121.2	121.0	121.1	123.2	124.4	123.9	126.3
75°	97.1	96.4	95.7	93.9	93.9	92.7	93.1	94.5	96.0	94.9	97.1
77.5°	71.4	69.1	69.0	69.5	68.2	68.4	68.1	67.8	68.4	68.5	70.5
80°	54.9	52.3	53.1	52.7	52.3	52.0	51.3	51.7	52.0	52.3	53.4
82.5°	39.6	39.3	38.6	38.5	38.2	37.2	36.9	37.5	37.8	37.6	38.5
85°	20.2	19.1	19.9	19.5	19.9	19.5	18.4	18.4	19.1	18.8	19.5
87.5°	10.7	10.6	9.7	9.5	8.7	8.4	7.6	7.5	7.4	7.0	7.2
90°	23.4	22.6	19.9	17.2	14.4	11.7	9.3	7.3	5.1	3.0	0.9
92.5°	36.8	36.1	34.6	33.0	31.5	30.0	28.5	27.1	25.6	24.2	22.8
95°	70.5	69.7	68.0	66.3	64.6	63.0	61.4	59.9	58.4	56.9	55.5
97.5°	109.9	109.0	107.7	106.5	105.3	104.1	102.9	101.9	100.8	99.7	98.6
100°	138.9	138.3	137.2	136.2	135.2	134.1	133.0	131.7	130.4	129.2	128.0
102.5°	172.0	171.4	170.0	168.6	167.3	165.9	164.9	164.1	163.3	162.6	161.8
105°	222.1	222.1	220.2	218.3	216.4	214.5	213.4	212.9	212.5	212.1	211.7
107.5°	274.8	274.2	273.4	272.7	271.9	271.2	270.7	270.4	270.1	269.9	269.7
110°	310.4	309.5	309.2	308.7	308.3	307.8	307.5	307.0	306.6	306.2	305.8



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	345.9	344.9	344.9	344.8	344.7	344.6	344.4	344.1	343.9	343.7	343.4
115°	401.1	400.8	401.2	401.6	402.1	402.5	402.4	401.7	401.1	400.5	399.8
117.5°	456.1	456.1	456.7	457.2	457.8	458.3	458.4	458.0	457.5	457.1	456.7
120°	492.8	493.0	494.1	495.1	496.2	497.2	497.1	495.9	494.6	493.3	492.1
122.5°	530.1	530.7	531.2	531.7	532.3	532.8	532.6	531.7	530.7	529.9	529.0
125°	585.3	586.2	586.5	587.0	587.4	587.9	587.7	587.1	586.4	585.9	585.2
127.5°	639.9	641.1	641.6	642.1	642.4	642.9	642.5	641.1	639.8	638.5	637.2
130°	675.6	676.5	677.1	677.7	678.3	679.0	678.4	676.7	675.1	673.4	671.8
132.5°	710.9	711.8	712.3	712.8	713.2	713.7	713.1	711.4	709.7	708.0	706.4
135°	763.2	763.9	764.2	764.4	764.6	764.8	764.3	763.0	761.8	760.5	759.3
137.5°	814.5	815.3	814.8	814.3	813.7	813.1	812.4	811.3	810.3	809.3	808.2
140°	847.5	847.7	847.5	847.3	847.1	846.9	846.2	845.2	844.1	843.1	842.1
142.5°	879.1	879.3	878.9	878.5	878.2	877.8	877.1	876.1	875.1	873.9	872.9
145°	925.6	925.8	925.2	924.5	923.9	923.3	922.7	922.4	921.9	921.5	921.1
147.5°	969.3	969.3	968.7	968.1	967.5	967.0	966.3	965.5	964.8	964.0	963.3
150°	996.4	996.4	996.0	995.5	995.1	994.7	994.3	993.8	993.4	993.1	992.6
152.5°	1020.8	1020.5	1020.2	1019.9	1019.7	1019.5	1019.0	1018.4	1017.9	1017.3	1016.7
155°	1056.5	1055.6	1055.5	1055.2	1055.0	1054.8	1054.7	1054.7	1054.7	1054.7	1054.7
157.5°	1087.6	1086.7	1086.6	1086.4	1086.2	1086.0	1086.1	1086.3	1086.6	1086.8	1087.0
160°	1106.5	1105.5	1105.5	1105.5	1105.5	1105.5	1105.7	1106.2	1106.5	1106.9	1107.4
162.5°	1124.6	1123.6	1123.4	1123.2	1123.0	1122.9	1123.1	1123.7	1124.3	1124.8	1125.5
165°	1147.2	1145.9	1145.9	1145.9	1145.9	1145.9	1146.3	1146.9	1147.5	1148.1	1148.8
167.5°	1165.7	1164.4	1164.2	1164.0	1163.9	1163.8	1164.0	1164.9	1165.7	1166.6	1167.4
170°	1175.6	1174.2	1174.2	1174.2	1174.2	1174.2	1174.6	1175.4	1176.3	1177.1	1178.0
172.5°	1183.7	1182.4	1182.4	1182.4	1182.4	1182.4	1182.9	1183.7	1184.6	1185.4	1186.2
175°	1192.4	1191.1	1191.1	1191.1	1191.1	1191.1	1191.6	1192.4	1193.2	1194.0	1194.9
177.5°	1196.5	1195.4	1195.4	1195.4	1195.4	1195.4	1195.8	1196.5	1197.1	1197.8	1198.4
180°	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1	745.1
2.5°	749.7	751.1	756.0	759.5	763.6	765.9	768.2	770.0	772.2	772.8	781.2
5°	753.0	760.3	772.9	782.2	793.8	806.4	815.1	819.1	829.5	838.2	855.5
7.5°	752.1	767.4	786.6	806.3	827.6	847.2	864.2	884.4	898.8	920.4	941.7
10°	751.2	771.8	796.4	821.6	851.2	878.6	903.2	930.7	953.4	983.4	1009.0
12.5°	748.7	773.5	807.6	837.4	873.5	911.3	947.6	982.9	1003.1	1052.9	1076.6
15°	742.2	771.8	814.4	859.9	909.4	954.1	1000.3	1037.1	1096.6	1140.4	1168.2
17.5°	729.9	771.4	821.9	876.8	936.9	995.9	1048.2	1104.1	1167.3	1220.1	1276.5
20°	724.2	769.6	826.0	886.6	949.0	1015.8	1075.3	1142.6	1211.4	1263.5	1335.7
22.5°	713.5	765.0	825.7	893.2	960.0	1029.1	1098.8	1166.5	1246.1	1317.8	1386.5
25°	696.0	753.8	816.5	892.0	970.3	1039.6	1123.0	1213.0	1296.0	1388.0	1456.6
27.5°	677.7	739.3	802.3	872.4	956.7	1039.0	1143.9	1245.4	1346.9	1426.4	1477.2
30°	663.5	723.4	788.4	859.1	942.5	1040.4	1157.7	1268.5	1367.4	1435.7	1464.1
32.5°	648.2	709.0	766.5	840.7	929.5	1039.5	1166.4	1282.0	1368.6	1414.0	1408.4
35°	624.2	675.0	731.0	802.5	907.2	1033.1	1171.4	1283.3	1336.3	1326.6	1253.0
37.5°	589.5	632.4	687.4	765.6	881.2	1019.8	1161.3	1245.3	1241.8	1162.4	1055.7
40°	567.9	604.3	657.3	739.7	860.9	1011.2	1145.4	1200.0	1153.8	1042.9	915.1
42.5°	539.5	573.1	626.1	710.8	838.8	993.5	1115.1	1130.9	1040.5	912.9	795.9
45°	495.7	525.3	580.1	667.5	805.4	955.2	1041.1	1002.5	880.8	749.0	659.9
47.5°	448.5	479.3	532.1	621.8	757.1	897.5	938.4	856.3	731.3	624.5	542.6
50°	418.8	448.4	499.9	590.6	724.5	850.2	867.1	761.0	646.2	552.3	485.1
52.5°	388.7	416.6	467.3	558.3	686.4	795.2	784.8	676.7	571.1	491.1	438.4
55°	344.0	370.4	418.8	504.0	620.6	706.8	668.9	565.7	478.3	416.2	376.2
57.5°	304.1	329.3	371.0	448.0	549.3	608.6	560.4	473.4	404.0	356.2	326.3
60°	276.9	299.3	338.9	410.5	498.5	543.7	496.0	419.1	360.6	322.3	295.7
62.5°	251.2	270.7	307.5	372.3	448.8	486.7	438.6	373.4	323.7	289.7	267.0
65°	212.3	230.0	262.4	313.0	375.8	401.1	359.6	306.8	268.2	243.0	227.8
67.5°	176.7	191.7	219.8	259.6	305.9	324.2	292.7	251.8	222.7	202.5	190.4
70°	153.1	166.1	188.0	222.3	264.3	278.3	248.7	215.2	193.9	177.6	166.5
72.5°	133.1	142.7	162.7	189.2	224.1	235.3	214.6	185.1	165.2	153.1	144.2
75°	101.4	109.3	122.3	143.6	167.9	174.4	158.8	140.4	127.1	118.4	111.5
77.5°	73.1	79.0	88.4	101.5	118.3	124.1	114.3	102.0	92.3	86.4	82.6
80°	55.2	59.9	67.9	78.7	88.8	92.1	86.2	76.9	70.0	66.8	63.5
82.5°	40.8	43.5	48.3	55.6	62.5	66.4	61.5	55.8	52.1	49.2	48.0
85°	20.5	22.1	24.2	27.1	31.4	32.9	31.0	29.6	27.4	25.6	25.6
87.5°	8.1	8.6	9.8	10.8	12.4	13.9	14.1	14.0	14.3	14.2	14.1
90°	3.0	5.1	7.3	9.3	11.7	14.4	17.2	19.9	22.6	23.4	24.2
92.5°	24.2	25.6	27.1	28.5	30.0	31.5	33.0	34.6	36.1	36.8	37.5
95°	56.9	58.4	59.9	61.4	63.0	64.6	66.3	68.0	69.7	70.5	71.3
97.5°	99.7	100.8	101.9	102.9	104.1	105.3	106.5	107.7	109.0	109.9	110.8
100°	129.2	130.4	131.7	133.0	134.1	135.2	136.2	137.2	138.3	138.9	139.6
102.5°	162.6	163.3	164.1	164.9	165.9	167.3	168.6	170.0	171.4	172.0	172.7
105°	212.1	212.5	212.9	213.4	214.5	216.4	218.3	220.2	222.1	222.1	222.1
107.5°	269.9	270.1	270.4	270.7	271.2	271.9	272.7	273.4	274.2	274.8	275.5
110°	306.2	306.6	307.0	307.5	307.8	308.3	308.7	309.2	309.5	310.4	311.2





TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	343.7	343.9	344.1	344.4	344.6	344.7	344.8	344.9	344.9	345.9	346.9
115°	400.5	401.1	401.7	402.4	402.5	402.1	401.6	401.2	400.8	401.1	401.2
117.5°	457.1	457.5	458.0	458.4	458.3	457.8	457.2	456.7	456.1	456.1	456.0
120°	493.3	494.6	495.9	497.1	497.2	496.2	495.1	494.1	493.0	492.8	492.6
122.5°	529.9	530.7	531.7	532.6	532.8	532.3	531.7	531.2	530.7	530.1	529.5
125°	585.9	586.4	587.1	587.7	587.9	587.4	587.0	586.5	586.2	585.3	584.5
127.5°	638.5	639.8	641.1	642.5	642.9	642.4	642.1	641.6	641.1	639.9	638.8
130°	673.4	675.1	676.7	678.4	679.0	678.3	677.7	677.1	676.5	675.6	674.8
132.5°	708.0	709.7	711.4	713.1	713.7	713.2	712.8	712.3	711.8	710.9	709.8
135°	760.5	761.8	763.0	764.3	764.8	764.6	764.4	764.2	763.9	763.2	762.3
137.5°	809.3	810.3	811.3	812.4	813.1	813.7	814.3	814.8	815.3	814.5	813.6
140°	843.1	844.1	845.2	846.2	846.9	847.1	847.3	847.5	847.7	847.5	847.3
142.5°	873.9	875.1	876.1	877.1	877.8	878.2	878.5	878.9	879.3	879.1	878.9
145°	921.5	921.9	922.4	922.7	923.3	923.9	924.5	925.2	925.8	925.6	925.4
147.5°	964.0	964.8	965.5	966.3	967.0	967.5	968.1	968.7	969.3	969.3	969.3
150°	993.1	993.4	993.8	994.3	994.7	995.1	995.5	996.0	996.4	996.4	996.4
152.5°	1017.3	1017.9	1018.4	1019.0	1019.5	1019.7	1019.9	1020.2	1020.5	1020.8	1021.2
155°	1054.7	1054.7	1054.7	1054.7	1054.8	1055.0	1055.2	1055.5	1055.6	1056.5	1057.3
157.5°	1086.8	1086.6	1086.3	1086.1	1086.0	1086.2	1086.4	1086.6	1086.7	1087.6	1088.4
160°	1106.9	1106.5	1106.2	1105.7	1105.5	1105.5	1105.5	1105.5	1105.5	1106.5	1107.6
162.5°	1124.8	1124.3	1123.7	1123.1	1122.9	1123.0	1123.2	1123.4	1123.6	1124.6	1125.7
165°	1148.1	1147.5	1146.9	1146.3	1145.9	1145.9	1145.9	1145.9	1145.9	1147.2	1148.5
167.5°	1166.6	1165.7	1164.9	1164.0	1163.8	1163.9	1164.0	1164.2	1164.4	1165.7	1167.0
170°	1177.1	1176.3	1175.4	1174.6	1174.2	1174.2	1174.2	1174.2	1174.2	1175.6	1177.1
172.5°	1185.4	1184.6	1183.7	1182.9	1182.4	1182.4	1182.4	1182.4	1182.4	1183.7	1185.1
175°	1194.0	1193.2	1192.4	1191.6	1191.1	1191.1	1191.1	1191.1	1191.1	1192.4	1193.6
177.5°	1197.8	1197.1	1196.5	1195.8	1195.4	1195.4	1195.4	1195.4	1195.4	1196.5	1197.5
180°	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	745.1	745.1	745.1	745.1	745.1	745.1	745.1
2.5°	784.1	784.4	787.5	789.9	788.7	790.1	790.7
5°	856.6	869.6	876.5	881.6	881.9	882.2	885.1
7.5°	959.5	973.5	983.6	999.1	1003.7	1009.0	1007.5
10°	1034.6	1055.2	1072.9	1082.2	1092.3	1107.1	1095.2
12.5°	1104.8	1141.2	1168.2	1182.7	1192.3	1195.2	1189.4
15°	1220.5	1268.2	1293.8	1293.1	1325.6	1339.6	1317.6
17.5°	1326.6	1370.6	1405.8	1423.9	1451.0	1457.0	1454.2
20°	1391.6	1439.6	1467.1	1498.1	1512.2	1524.8	1527.0
22.5°	1447.7	1490.7	1520.2	1546.1	1557.8	1563.8	1567.4
25°	1505.3	1539.3	1557.0	1565.9	1569.2	1568.5	1563.8
27.5°	1501.4	1503.9	1484.5	1465.4	1448.2	1428.9	1422.3
30°	1462.4	1432.0	1377.9	1347.2	1302.1	1266.3	1280.8
32.5°	1359.8	1299.5	1238.7	1171.6	1116.1	1100.3	1084.4
35°	1160.6	1054.4	992.4	920.2	891.3	862.4	842.5
37.5°	939.0	856.9	783.2	735.9	707.0	688.8	678.9
40°	811.9	737.8	677.2	638.9	616.9	596.3	593.4
42.5°	710.5	641.7	596.1	565.6	544.4	535.7	529.3
45°	581.9	533.9	503.2	481.5	467.5	462.0	454.9
47.5°	492.6	458.6	435.5	420.8	410.2	406.1	405.6
50°	442.6	414.4	397.5	385.9	377.6	376.2	370.4
52.5°	405.0	380.6	367.4	357.3	351.3	347.2	345.5
55°	351.6	335.4	323.5	317.6	313.0	309.0	309.0
57.5°	307.6	294.1	286.2	281.3	279.8	277.0	275.2
60°	280.5	268.9	262.8	258.4	255.6	255.9	252.7
62.5°	253.9	246.4	240.5	236.2	232.8	232.8	233.1
65°	216.2	210.5	206.1	204.7	202.6	200.0	200.7
67.5°	183.2	177.9	174.5	172.0	171.3	169.8	172.0
70°	159.6	155.6	153.1	150.9	150.1	150.5	152.3
72.5°	137.9	135.1	133.5	132.4	130.8	130.9	132.1
75°	108.3	106.1	104.7	103.6	103.2	103.2	103.2
77.5°	79.6	79.1	78.4	76.8	76.9	77.3	77.4
80°	62.8	61.7	61.4	60.6	59.6	58.8	60.6
82.5°	46.9	45.8	45.5	45.3	43.6	43.5	45.1
85°	25.3	24.2	24.5	24.2	24.2	23.8	23.8
87.5°	13.9	13.9	13.7	14.0	13.9	13.7	14.3
90°	25.1	25.9	26.6	27.0	27.4	27.8	28.2
92.5°	38.2	38.8	39.0	38.7	38.5	38.3	38.0
95°	72.1	73.0	73.4	73.4	73.4	73.4	73.4
97.5°	111.9	112.8	113.2	113.2	113.1	113.0	112.9
100°	140.2	140.8	141.4	141.8	142.1	142.6	143.0
102.5°	173.3	173.9	174.2	174.1	174.0	174.0	173.9
105°	222.1	222.1	222.3	222.6	223.1	223.5	223.9
107.5°	276.2	276.8	277.0	276.8	276.5	276.3	276.1
110°	312.1	312.9	313.1	312.6	312.3	311.9	311.4



TEST NUMBER: P331938-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	347.9	348.9	349.4	349.3	349.2	349.1	349.0
115°	401.4	401.6	401.6	401.4	401.2	401.1	400.8
117.5°	456.0	456.0	455.6	455.1	454.5	453.9	453.3
120°	492.4	492.2	491.8	491.4	491.1	490.6	490.2
122.5°	529.0	528.5	527.9	527.4	526.7	526.1	525.6
125°	583.6	582.8	581.9	581.2	580.3	579.5	578.6
127.5°	637.6	636.4	635.4	634.4	633.4	632.4	631.5
130°	673.9	673.2	671.9	670.5	669.0	667.6	666.1
132.5°	708.9	707.8	706.8	705.7	704.6	703.4	702.3
135°	761.5	760.6	760.0	759.6	759.1	758.7	758.4
137.5°	812.8	811.8	811.0	810.2	809.4	808.6	807.9
140°	847.1	846.9	846.0	844.6	843.1	841.7	840.2
142.5°	878.7	878.4	877.8	876.7	875.5	874.4	873.3
145°	925.2	924.9	924.4	923.6	922.7	921.9	921.1
147.5°	969.3	969.3	968.7	967.4	966.1	964.9	963.7
150°	996.4	996.4	995.7	994.5	993.3	991.9	990.7
152.5°	1021.4	1021.8	1021.4	1020.3	1019.3	1018.1	1017.1
155°	1058.2	1058.9	1058.7	1057.2	1055.7	1054.2	1052.8
157.5°	1089.3	1090.2	1090.1	1088.9	1087.7	1086.6	1085.3
160°	1108.6	1109.7	1109.7	1109.0	1108.1	1107.3	1106.5
162.5°	1126.7	1127.8	1127.6	1126.2	1124.9	1123.6	1122.3
165°	1149.7	1150.9	1150.8	1149.4	1147.9	1146.5	1145.0
167.5°	1168.3	1169.6	1169.6	1168.3	1167.0	1165.7	1164.4
170°	1178.6	1180.1	1180.1	1178.6	1177.1	1175.6	1174.2
172.5°	1186.4	1187.6	1187.6	1186.1	1184.7	1183.2	1181.7
175°	1194.9	1196.2	1196.0	1194.6	1193.1	1191.7	1190.1
177.5°	1198.4	1199.5	1199.4	1198.3	1197.0	1195.9	1194.7
180°	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7	1197.7

(END OF REPORT)