

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331945-830

Luminaire Tested: **S123DIP-S560D1025U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331945-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S560D1025U830-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5685.2 lumens  
Efficiency: N/A  
Efficacy: 127.8 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331945-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

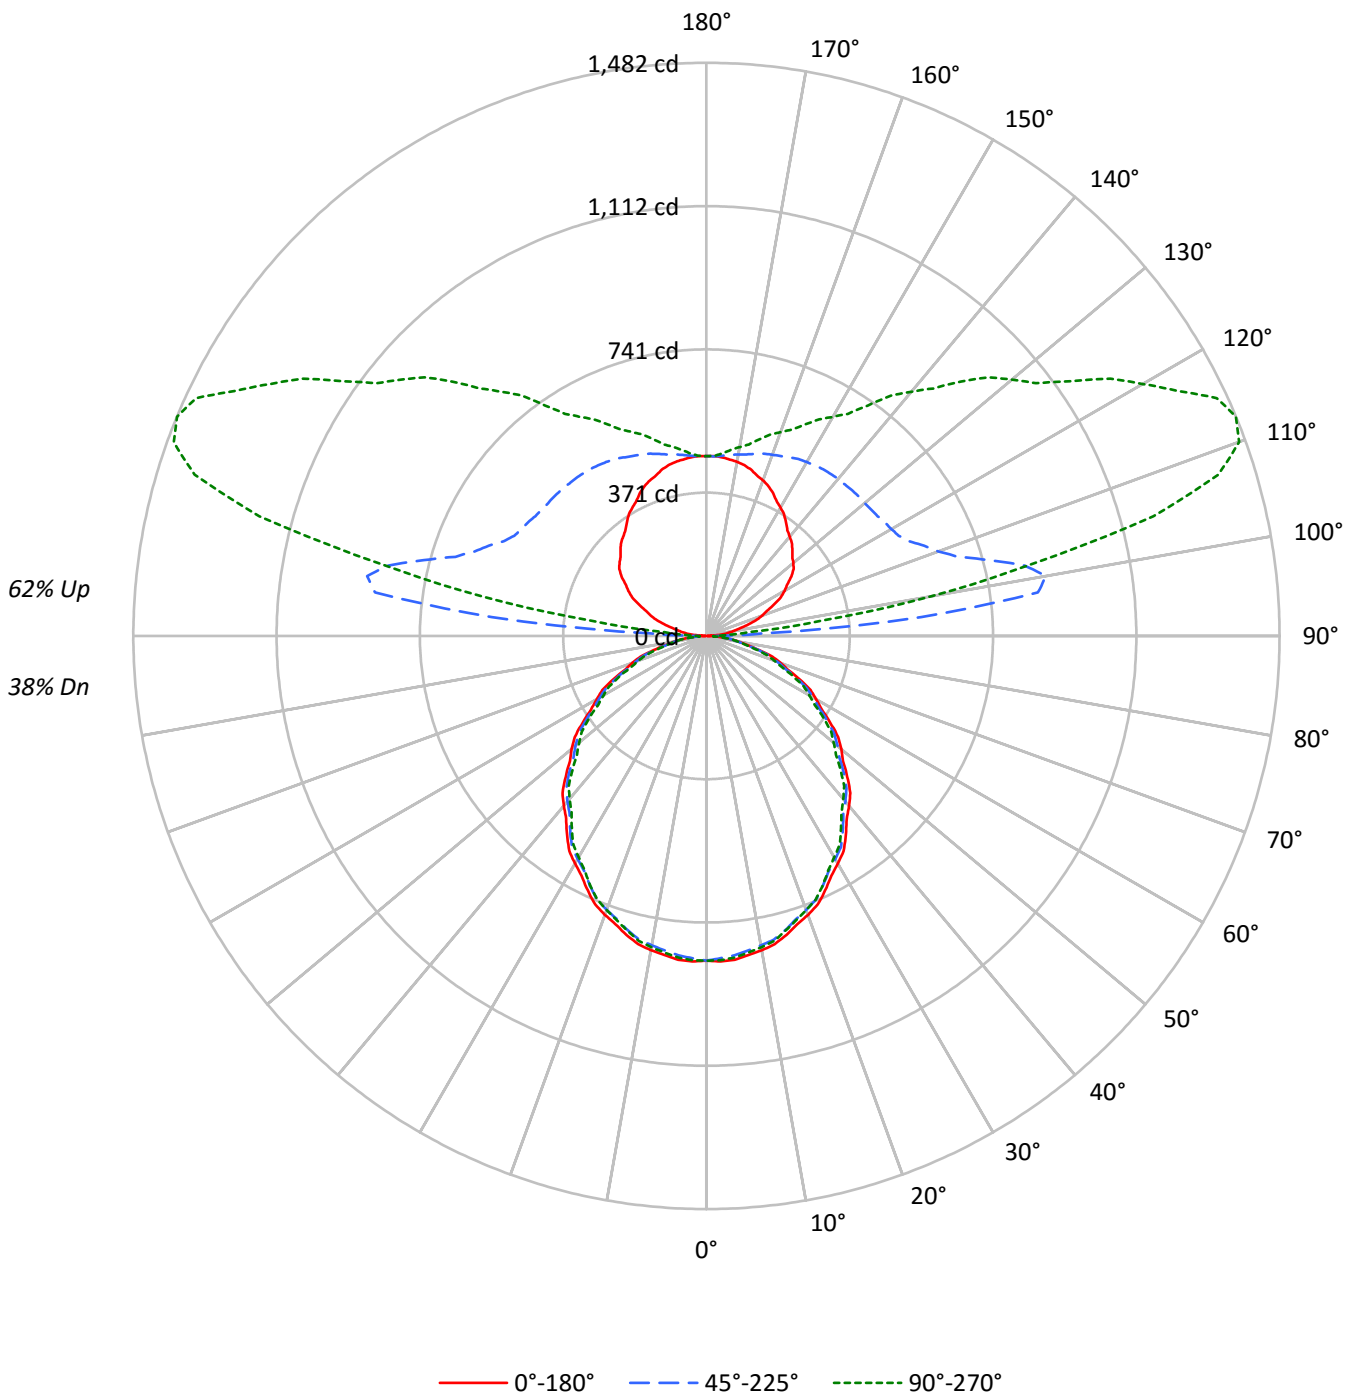



TEST NUMBER: P331945-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	104	104	104	104	95	95	95	95	77	77	77		61	61	61		46	46	46	38
1	95	91	87	84	86	83	79	76	67	65	63		53	52	50		40	39	38	32
2	87	79	73	68	78	72	67	63	59	55	52		47	44	42		35	34	32	27
3	79	70	62	57	71	63	57	52	52	47	44		41	38	35		31	29	27	23
4	72	62	54	48	65	56	49	44	46	41	37		37	33	30		28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32		33	29	26		25	23	20	17
6	61	49	41	35	55	45	38	33	37	32	28		30	26	23		23	20	18	15
7	56	44	36	31	51	40	34	29	33	28	24		27	23	20		21	18	16	13
8	52	40	32	27	47	37	30	25	30	25	22		25	21	18		19	16	14	12
9	48	36	29	24	44	34	27	23	28	23	19		23	19	16		18	15	13	11
10	45	33	26	22	41	31	24	20	26	21	17		21	17	14		16	14	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9038	9038	9038
5°	9081	8956	9018
10°	9021	8878	8933
15°	8914	8778	8795
20°	8791	8635	8643
25°	8626	8464	8445
30°	8444	8274	8211
35°	8253	8073	7970
40°	8056	7852	7731
45°	7837	7649	7462
50°	7618	7400	7194
55°	7330	7141	6923
60°	7042	6837	6622
65°	6788	6510	6306
70°	6408	6134	5860
75°	5856	5644	5407
80°	5281	5058	5015
85°	4631	4458	4286



TEST NUMBER: P331945-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	79.1	1.4
10°-20°	223.3	3.9
20°-30°	329.9	5.8
30°-40°	385.4	6.8
40°-50°	387.4	6.8
50°-60°	340.3	6.0
60°-70°	253.5	4.5
70°-80°	144.5	2.5
80°-90°	45.1	0.8
90°-100°	258.6	4.5
100°-110°	732.4	12.9
110°-120°	720.5	12.7
120°-130°	574.7	10.1
130°-140°	453.1	8.0
140°-150°	338.2	5.9
150°-160°	235.7	4.1
160°-170°	138.5	2.4
170°-180°	45.1	0.8
0°-30°	632.3	11.1
0°-40°	1017.7	17.9
0°-60°	1745.5	30.7
0°-90°	2188.6	38.5
90°-120°	1711.5	30.1
90°-150°	3077.4	54.1
90°-180°	3497.0	61.5
0°-180°	5685.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	840	840	840	840	840	
5°	840	837	829	836	835	80
15°	800	797	788	793	789	225
25°	726	722	713	713	711	334
35°	628	624	614	610	606	393
45°	515	512	502	494	490	397
55°	391	389	380	373	369	350
65°	266	263	256	250	248	263
75°	141	138	136	132	130	151
85°	38	36	36	35	35	41
90°	2	11	24	26	27	4
95°	32	104	558	163	109	35
105°	109	161	756	1323	1197	116
115°	193	240	579	1269	1456	191
125°	268	317	540	978	1148	238
135°	314	375	532	806	930	243
145°	358	411	526	661	727	225
155°	407	439	509	579	603	187
165°	445	458	487	517	526	125
175°	464	464	468	474	473	44
180°	465	465	465	465	465	



TEST NUMBER: P331945-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7
2.5°	842.5	842.1	841.6	841.0	840.6	839.5	838.1	836.7	835.4	834.0	835.2
5°	840.4	839.6	838.8	838.0	837.2	835.9	834.2	832.4	830.7	828.9	830.5
7.5°	832.2	831.4	830.6	829.8	829.0	827.6	825.9	824.0	822.2	820.4	821.8
10°	825.3	824.4	823.7	822.8	822.1	820.6	818.5	816.4	814.4	812.3	813.7
12.5°	816.1	815.3	814.6	814.0	813.3	812.0	810.0	808.0	806.2	804.2	805.2
15°	799.9	799.4	798.7	798.1	797.4	796.1	794.0	791.9	789.8	787.7	789.0
17.5°	781.4	780.5	779.7	778.8	778.0	776.6	774.5	772.4	770.3	768.2	769.1
20°	767.5	766.6	765.5	764.6	763.6	762.1	760.1	758.0	755.8	753.8	754.4
22.5°	751.9	750.9	750.0	749.0	748.0	746.5	744.4	742.3	740.3	738.2	738.7
25°	726.3	725.4	724.4	723.5	722.5	721.0	718.9	716.8	714.7	712.7	712.8
27.5°	699.1	698.1	697.2	696.3	695.3	693.7	691.4	689.3	687.0	684.8	684.9
30°	679.4	678.6	677.8	677.0	676.2	674.7	672.4	670.1	668.0	665.7	665.7
32.5°	659.8	658.7	657.6	656.6	655.5	654.1	652.4	650.6	648.9	647.2	646.3
35°	628.1	627.2	626.2	625.3	624.3	622.7	620.7	618.6	616.5	614.4	613.5
37.5°	595.8	594.6	593.3	592.1	590.9	589.3	587.1	585.0	582.9	580.8	579.7
40°	573.3	572.3	571.4	570.4	569.4	567.8	565.5	563.4	561.1	558.8	557.5
42.5°	550.7	549.7	548.6	547.4	546.4	544.7	542.4	540.3	538.0	535.7	534.4
45°	514.8	514.2	513.5	512.8	512.2	510.9	508.8	506.7	504.6	502.5	500.6
47.5°	479.1	478.2	477.3	476.4	475.4	473.9	472.0	470.0	468.1	466.1	464.2
50°	454.9	454.0	453.3	452.4	451.7	450.3	448.1	446.0	443.9	441.9	440.1
52.5°	429.4	428.9	428.4	427.8	427.3	425.8	423.7	421.5	419.2	417.1	415.6
55°	390.6	390.4	390.3	390.1	389.9	388.8	386.7	384.7	382.6	380.5	378.7
57.5°	353.6	353.1	352.5	352.0	351.5	350.3	348.6	347.0	345.3	343.7	342.1
60°	327.1	326.9	326.8	326.6	326.4	325.4	323.5	321.5	319.6	317.6	316.2
62.5°	303.4	302.9	302.6	302.2	301.7	300.6	298.6	296.7	294.7	292.8	291.4
65°	266.5	265.6	264.9	264.0	263.3	262.0	260.4	258.8	257.2	255.6	254.3
67.5°	227.2	226.6	225.8	225.2	224.4	223.5	222.3	221.0	219.8	218.7	217.5
70°	203.6	202.6	201.7	200.8	199.7	198.8	197.8	196.9	195.9	194.9	193.8
72.5°	178.8	178.0	177.4	176.6	176.0	175.0	174.0	172.9	171.7	170.7	169.7
75°	140.8	140.2	139.5	138.8	138.3	137.7	137.1	136.7	136.2	135.7	135.0
77.5°	107.2	106.8	106.4	106.1	105.8	105.3	104.7	104.2	103.5	102.9	102.5
80°	85.2	84.7	84.3	83.8	83.2	82.8	82.6	82.2	81.9	81.6	81.4
82.5°	63.8	63.7	63.6	63.5	63.4	63.3	63.3	63.2	63.2	63.2	62.8
85°	37.5	37.2	36.9	36.6	36.3	36.1	36.1	36.1	36.1	36.1	35.8
87.5°	15.4	15.4	15.4	15.6	15.6	15.6	16.1	16.5	17.0	17.4	17.1
90°	1.9	3.8	5.7	8.5	10.4	12.3	15.1	17.9	20.7	23.6	22.6
92.5°	11.7	17.3	25.3	32.5	40.4	54.4	79.0	119.5	159.2	144.7	109.1
95°	32.0	34.8	45.1	61.2	85.6	122.3	202.3	342.4	496.7	557.9	452.5
97.5°	54.6	55.5	63.6	77.5	101.6	141.3	217.7	375.8	633.0	864.6	925.0
100°	69.7	70.6	77.2	90.3	112.9	149.6	215.5	354.7	602.1	891.0	1076.3
102.5°	85.4	87.1	92.9	105.4	125.7	159.4	218.5	336.6	556.9	842.1	1083.8
105°	109.1	112.0	117.6	128.9	146.8	176.0	226.8	323.7	501.4	756.4	1026.4
107.5°	134.3	137.1	142.6	153.7	170.5	197.6	242.1	322.7	466.1	680.8	926.0
110°	152.4	155.2	159.9	170.3	186.2	212.6	255.0	326.5	452.5	637.9	862.7



TEST NUMBER: P331945-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	169.0	171.8	176.5	186.8	202.8	228.5	267.8	334.0	445.0	609.3	807.8
115°	192.8	196.6	202.3	211.7	227.7	253.1	288.8	346.2	442.1	578.6	741.4
117.5°	216.8	221.1	225.8	234.4	252.3	275.9	311.2	362.4	443.8	560.5	701.3
120°	233.3	236.1	240.8	250.2	268.2	291.6	325.6	374.5	446.9	552.2	680.2
122.5°	247.6	250.4	255.1	265.3	282.5	307.5	340.5	385.8	452.1	547.0	662.9
125°	268.2	270.0	275.7	286.0	303.9	329.3	362.2	403.6	460.1	540.1	640.7
127.5°	283.8	286.5	293.5	304.1	323.9	349.2	381.1	418.3	469.1	536.7	621.1
130°	293.5	296.3	304.8	316.1	335.8	361.3	392.3	428.1	475.1	534.4	610.6
132.5°	301.0	304.6	313.9	327.4	347.1	371.8	402.1	437.2	479.7	533.7	600.8
135°	314.2	318.0	328.4	342.4	362.2	387.6	416.8	448.7	486.4	532.5	588.1
137.5°	326.7	330.6	340.7	355.8	375.4	398.9	427.0	457.4	490.9	530.5	576.9
140°	335.0	339.6	349.0	364.1	383.0	406.4	433.8	461.9	493.9	529.7	570.1
142.5°	343.9	347.9	358.1	371.6	390.4	412.5	439.0	466.5	496.2	528.2	564.1
145°	358.4	361.3	369.8	383.9	399.8	421.5	445.9	471.4	497.7	525.9	556.0
147.5°	373.2	374.8	383.1	395.3	410.8	429.2	451.6	474.4	497.7	522.4	548.1
150°	383.0	383.9	391.3	403.6	416.8	433.8	455.3	475.1	497.7	519.3	542.8
152.5°	392.7	392.9	400.4	411.1	422.8	439.0	457.6	476.6	495.4	515.6	536.9
155°	407.4	407.4	413.0	422.4	432.8	445.9	461.9	477.0	492.9	509.0	527.8
157.5°	419.1	419.8	424.3	432.6	441.4	451.6	464.4	478.0	489.8	503.1	517.6
160°	428.1	428.1	431.9	439.3	445.9	455.3	466.7	478.0	488.3	498.6	510.9
162.5°	434.9	434.9	437.9	443.8	449.7	457.6	467.4	477.2	485.3	494.1	504.1
165°	445.0	444.0	445.9	450.6	454.4	461.0	468.5	475.1	480.8	487.4	494.8
167.5°	452.7	451.6	452.5	456.1	458.7	462.9	468.3	473.6	476.3	480.6	486.1
170°	457.2	455.3	456.3	459.1	461.0	462.9	467.6	471.4	473.3	476.1	480.8
172.5°	460.2	459.1	459.3	461.4	462.5	463.6	467.6	470.6	471.0	472.3	475.5
175°	463.8	462.9	461.9	463.8	463.8	464.8	466.7	468.5	467.6	467.6	469.5
177.5°	465.5	464.8	464.0	464.8	464.8	464.8	465.5	467.0	465.5	464.8	465.5
180°	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8



TEST NUMBER: P331945-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	839.7	839.7	839.7	839.7	839.7	839.7	839.7	839.7
2.5°	836.5	837.7	839.1	839.6	839.5	839.3	839.2	839.1
5°	832.1	833.7	835.3	835.9	835.6	835.3	835.0	834.6
7.5°	823.2	824.6	826.1	826.7	826.5	826.3	826.1	826.0
10°	815.1	816.6	818.0	818.6	818.3	817.9	817.7	817.3
12.5°	806.3	807.4	808.4	808.8	808.6	808.4	808.2	808.0
15°	790.3	791.5	792.9	793.0	792.0	791.1	790.1	789.2
17.5°	770.1	770.9	771.8	772.0	771.8	771.4	771.0	770.6
20°	755.1	755.7	756.3	756.4	755.9	755.4	755.0	754.5
22.5°	739.2	739.7	740.3	740.2	739.6	739.0	738.4	737.7
25°	712.9	713.1	713.2	713.1	712.7	712.2	711.6	711.1
27.5°	685.0	685.1	685.2	685.0	684.4	683.8	683.2	682.6
30°	665.7	665.7	665.7	665.2	664.0	662.9	661.8	660.6
32.5°	645.5	644.5	643.6	642.8	642.2	641.7	641.0	640.5
35°	612.5	611.5	610.6	609.7	608.9	608.1	607.3	606.5
37.5°	578.4	577.3	576.2	575.3	574.9	574.3	573.8	573.3
40°	556.3	555.0	553.7	552.7	552.0	551.5	550.8	550.2
42.5°	533.2	531.9	530.6	529.6	529.0	528.4	527.7	527.1
45°	498.7	496.7	494.8	493.4	492.7	491.8	491.1	490.2
47.5°	462.3	460.4	458.5	457.2	456.6	455.8	455.2	454.4
50°	438.4	436.6	434.8	433.5	432.4	431.5	430.6	429.6
52.5°	414.1	412.6	411.0	409.7	408.8	407.8	406.9	406.0
55°	376.9	375.2	373.4	372.1	371.4	370.5	369.8	368.9
57.5°	340.5	338.9	337.4	336.1	335.2	334.3	333.4	332.4
60°	314.8	313.4	311.9	310.8	310.0	309.2	308.4	307.6
62.5°	289.9	288.5	287.1	286.1	285.5	285.0	284.5	283.9
65°	253.0	251.8	250.4	249.6	249.1	248.6	248.2	247.6
67.5°	216.4	215.3	214.1	213.2	212.5	211.9	211.2	210.6
70°	192.7	191.6	190.5	189.5	188.7	187.8	187.1	186.2
72.5°	168.7	167.7	166.7	166.0	165.6	165.1	164.8	164.3
75°	134.1	133.4	132.5	131.9	131.4	130.9	130.4	130.0
77.5°	101.9	101.3	100.8	100.5	100.5	100.5	100.5	100.5
80°	81.2	81.1	81.0	80.9	80.9	80.9	80.9	80.9
82.5°	62.5	62.2	61.9	61.7	61.6	61.5	61.4	61.3
85°	35.4	35.2	34.8	34.7	34.7	34.7	34.7	34.7
87.5°	17.2	17.2	17.2	17.6	17.4	17.6	17.8	17.6
90°	23.6	24.5	25.4	27.2	26.3	27.2	28.2	27.2
92.5°	79.2	62.9	55.5	50.6	48.9	46.1	47.0	45.3
95°	338.7	229.6	179.7	145.8	128.0	119.5	112.9	109.1
97.5°	844.3	676.3	554.9	442.3	373.0	330.6	305.2	297.1
100°	1109.3	1033.0	922.9	789.4	694.4	625.7	589.0	589.9
102.5°	1197.3	1194.9	1130.7	1046.0	972.0	917.7	887.0	865.3
105°	1223.0	1317.2	1335.0	1310.6	1267.2	1231.5	1201.5	1196.7
107.5°	1149.0	1301.7	1384.1	1417.7	1418.4	1406.4	1396.2	1387.5
110°	1078.2	1251.3	1369.8	1435.7	1462.1	1469.6	1467.7	1465.8





TEST NUMBER: P331945-830

CATALOG NUMBER: S123DIP-S560D1025U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1008.1	1185.1	1317.9	1402.6	1450.8	1474.0	1481.2	1481.6
115°	915.4	1079.1	1217.4	1319.9	1390.5	1431.9	1450.8	1455.5
117.5°	848.3	989.6	1113.7	1217.8	1291.4	1338.8	1365.9	1372.2
120°	812.8	939.9	1052.8	1147.8	1222.1	1274.8	1297.4	1303.1
122.5°	785.0	900.0	1004.7	1092.9	1159.0	1206.4	1231.1	1238.3
125°	748.0	850.6	940.8	1016.1	1076.3	1117.7	1141.2	1147.8
127.5°	715.6	807.0	888.5	957.0	1010.6	1046.0	1067.2	1073.3
130°	695.3	780.0	856.1	920.1	970.0	1003.9	1023.6	1031.1
132.5°	676.5	754.3	825.3	886.3	933.1	967.0	984.5	989.8
135°	651.0	717.8	779.0	832.6	878.7	906.9	923.9	930.5
137.5°	627.9	682.7	735.4	781.8	820.6	849.2	863.5	867.8
140°	614.3	662.3	707.5	748.0	783.7	810.0	825.1	824.2
142.5°	601.5	642.8	681.9	717.1	747.6	770.9	784.5	783.5
145°	586.2	617.2	647.2	674.6	698.0	717.8	725.4	727.3
147.5°	573.5	598.1	622.5	641.9	659.7	673.1	680.2	681.0
150°	564.5	586.2	605.9	623.8	637.9	648.2	653.8	653.8
152.5°	556.2	574.9	592.4	607.2	618.3	627.9	631.3	631.3
155°	543.8	558.8	573.0	584.3	592.8	600.2	602.1	603.0
157.5°	530.7	543.2	554.1	563.0	570.3	576.0	577.5	577.3
160°	523.1	533.5	542.8	549.4	556.0	561.7	561.7	560.7
162.5°	514.1	522.9	531.6	537.4	541.8	546.6	546.6	545.6
165°	502.4	508.0	514.6	519.3	523.1	526.9	525.9	525.9
167.5°	492.2	496.5	500.3	503.7	505.4	508.0	507.1	507.1
170°	485.5	488.3	492.0	493.9	494.8	496.7	495.8	495.8
172.5°	479.5	481.5	484.6	485.7	485.9	487.8	486.1	485.3
175°	471.4	472.3	474.2	474.2	474.2	475.1	474.2	473.3
177.5°	466.3	467.0	467.8	467.8	467.0	467.8	466.3	466.3
180°	464.8	464.8	464.8	464.8	464.8	464.8	464.8	464.8

(END OF REPORT)