

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332339-830

Luminaire Tested: **S123RDIP-S1000D585U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332339-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D585U830-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 585 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5781.9 lumens
Efficiency: N/A
Efficacy: 118.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332339-830

CATALOG NUMBER: S123RDIP-S1000D585U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

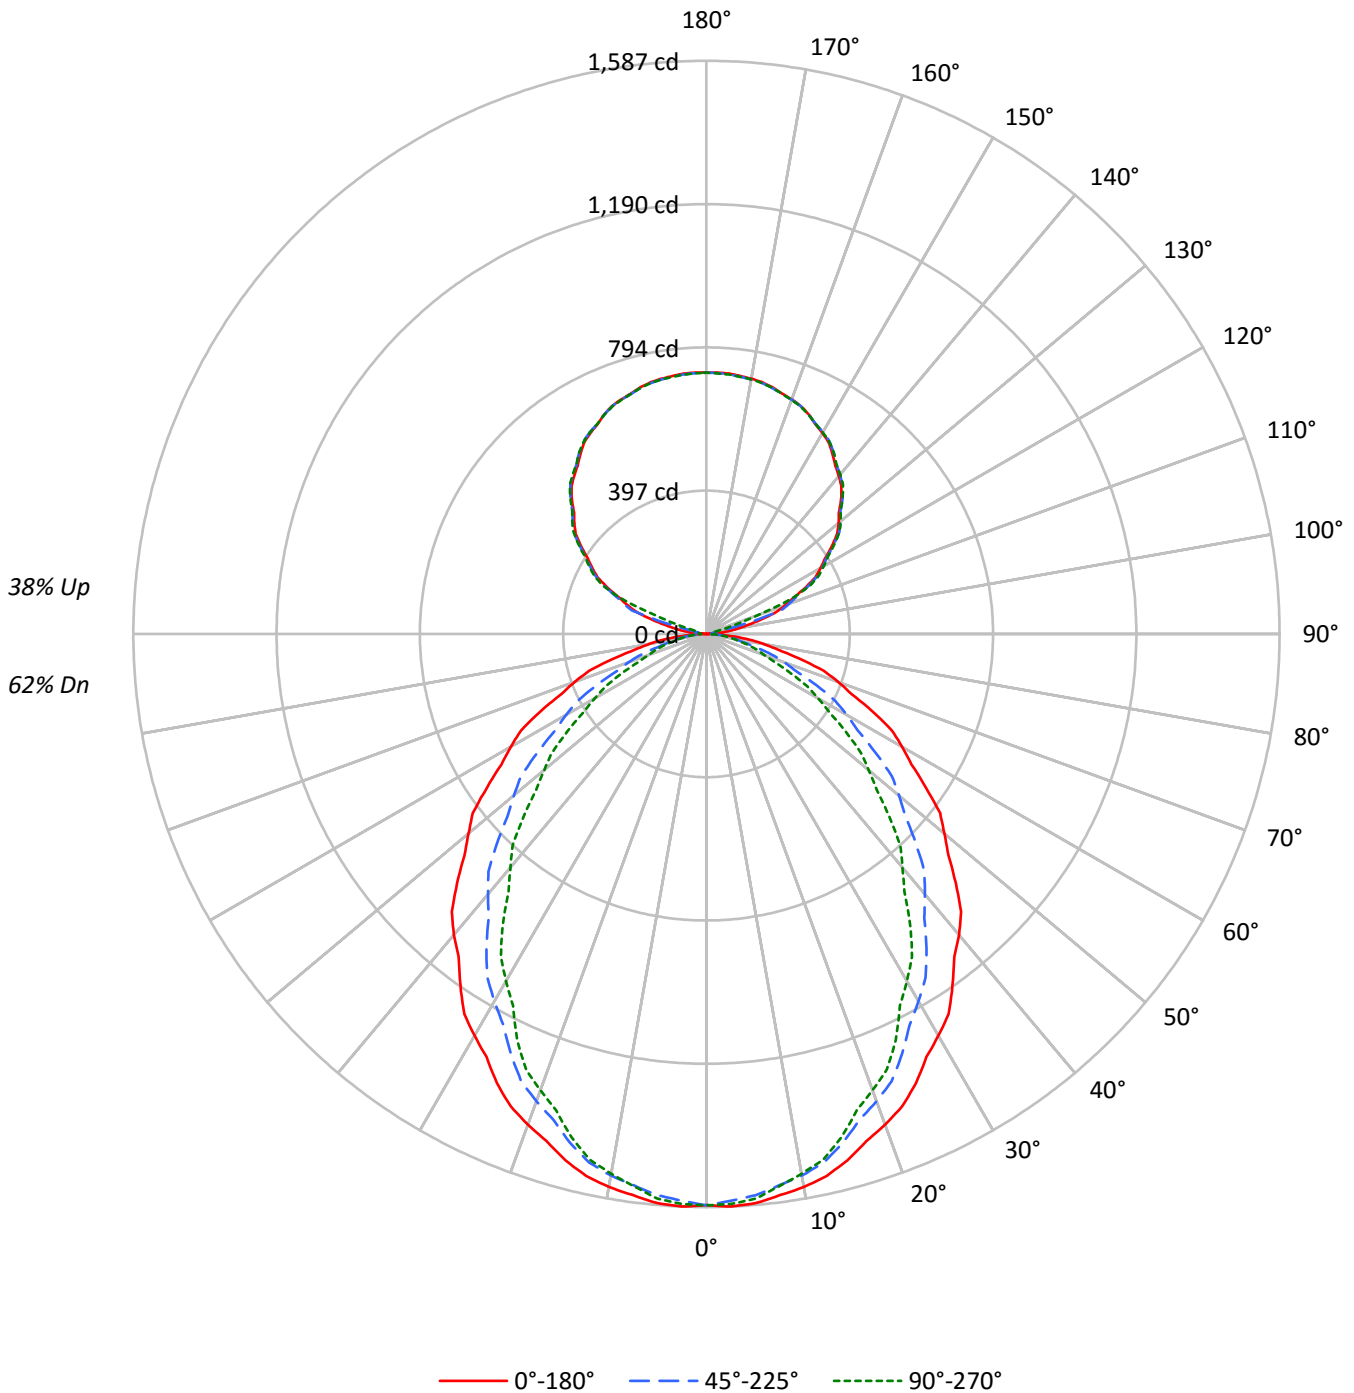



TEST NUMBER: P332339-830

CATALOG NUMBER: S123RDIP-S1000D585U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67
1	101	97	93	89	94	91	87	84	80	77	75	69	67	66	60	59	57
2	92	85	79	74	86	80	74	70	70	66	63	61	58	56	53	51	49
3	84	75	68	62	79	71	64	59	62	57	53	55	51	47	47	45	42
4	77	67	59	53	72	63	56	50	56	50	46	49	45	41	43	39	37
5	71	60	51	45	67	56	49	44	50	44	40	44	39	36	39	35	32
6	66	54	46	40	61	51	43	38	45	39	35	40	35	32	35	31	28
7	61	49	41	35	57	46	39	34	41	35	31	37	32	28	32	28	25
8	57	44	37	31	53	42	35	30	38	32	28	34	29	25	30	26	23
9	53	41	33	28	50	39	32	27	35	29	25	31	26	23	27	24	21
10	49	37	30	25	46	36	29	24	32	26	23	29	24	21	26	22	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17026	17026	17026
5°	17091	16855	16953
10°	16994	16644	16587
15°	16811	16254	16082
20°	16561	15767	15400
25°	16302	15221	14733
30°	15960	14589	13793
35°	15609	13958	12929
40°	15286	13212	11861
45°	14862	12478	10898
50°	14393	11643	9818
55°	13915	10689	8811
60°	13476	9666	7705
65°	12905	8560	6599
70°	12192	7188	5331
75°	11154	5656	5016
80°	9937	5009	4612
85°	8398	4434	4125



TEST NUMBER: P332339-830

CATALOG NUMBER: S123RDIP-S1000D585U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.5	2.6
10°-20°	413.3	7.1
20°-30°	595.1	10.3
30°-40°	670.3	11.6
40°-50°	641.3	11.1
50°-60°	525.1	9.1
60°-70°	354.3	6.1
70°-80°	178.2	3.1
80°-90°	49.2	0.9
90°-100°	26.3	0.5
100°-110°	125.4	2.2
110°-120°	301.2	5.2
120°-130°	383.5	6.6
130°-140°	409.8	7.1
140°-150°	383.2	6.6
150°-160°	309.1	5.3
160°-170°	199.5	3.5
170°-180°	68.7	1.2
0°-30°	1156.9	20.0
0°-40°	1827.2	31.6
0°-60°	2993.6	51.8
0°-90°	3575.3	61.8
90°-120°	452.8	7.8
90°-150°	1629.3	28.2
90°-180°	2207.0	38.2
0°-180°	5781.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1582	1582	1582	1582	1582	
5°	1582	1575	1560	1571	1569	150
15°	1509	1493	1459	1452	1443	425
25°	1373	1339	1282	1255	1240	631
35°	1188	1140	1062	1009	984	743
45°	976	916	820	749	716	753
55°	742	676	570	498	470	665
65°	507	435	336	276	259	501
75°	268	206	136	124	121	286
85°	68	41	36	34	33	76
90°	1	6	13	15	16	5
95°	33	12	17	20	20	41
105°	160	163	118	28	24	170
115°	300	304	309	314	316	297
125°	424	428	430	431	432	378
135°	527	531	533	534	533	406
145°	608	612	613	614	614	381
155°	670	669	670	672	669	309
165°	707	705	705	709	705	200
175°	724	721	721	725	721	69
180°	724	724	724	724	724	



TEST NUMBER: P332339-830

CATALOG NUMBER: S123RDIP-S1000D585U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8
2.5°	1586.9	1585.9	1585.1	1584.1	1583.2	1581.4	1578.7	1575.9	1573.2	1570.5	1572.9
5°	1581.8	1580.3	1578.9	1577.4	1576.0	1573.6	1570.2	1566.8	1563.4	1559.9	1562.5
7.5°	1567.1	1565.6	1564.1	1562.5	1560.9	1557.9	1553.5	1549.1	1544.6	1540.2	1541.6
10°	1554.8	1552.8	1550.8	1548.8	1546.8	1543.2	1538.1	1533.0	1527.9	1522.8	1523.1
12.5°	1537.4	1535.1	1533.0	1530.7	1528.4	1524.2	1518.0	1511.6	1505.4	1499.1	1498.9
15°	1508.6	1505.5	1502.3	1499.2	1496.1	1490.5	1482.5	1474.5	1466.6	1458.6	1457.2
17.5°	1472.4	1468.8	1465.2	1461.5	1457.8	1451.0	1440.8	1430.7	1420.5	1410.3	1407.3
20°	1445.8	1441.2	1436.6	1432.1	1427.5	1419.8	1409.0	1398.2	1387.3	1376.5	1372.8
22.5°	1416.0	1410.8	1405.5	1400.2	1395.1	1386.7	1375.1	1363.6	1352.1	1340.6	1336.0
25°	1372.6	1365.6	1358.4	1351.2	1344.2	1334.0	1320.9	1307.8	1294.7	1281.6	1275.5
27.5°	1320.0	1312.2	1304.3	1296.5	1288.5	1277.3	1262.7	1248.1	1233.5	1219.0	1210.6
30°	1284.1	1275.5	1267.1	1258.5	1249.9	1237.7	1221.7	1205.7	1189.8	1173.8	1164.1
32.5°	1248.2	1238.5	1228.8	1219.1	1209.5	1196.2	1179.3	1162.4	1145.5	1128.6	1118.0
35°	1187.9	1177.6	1167.3	1157.2	1146.9	1132.8	1115.2	1097.5	1079.9	1062.2	1049.9
37.5°	1126.8	1115.4	1104.0	1092.6	1081.2	1066.1	1047.3	1028.3	1009.5	990.6	976.7
40°	1087.9	1075.3	1062.7	1050.2	1037.6	1021.2	1001.1	980.8	960.5	940.3	925.5
42.5°	1043.7	1031.1	1018.6	1006.1	993.5	976.9	955.9	935.0	914.1	893.2	876.9
45°	976.3	963.4	950.6	937.7	924.9	907.6	885.6	863.7	841.7	819.7	803.5
47.5°	908.8	894.7	880.6	866.5	852.4	834.4	812.5	790.5	768.5	746.6	729.0
50°	859.5	846.1	832.7	819.4	805.9	787.7	764.6	741.5	718.4	695.3	677.6
52.5°	815.4	800.9	786.3	771.8	757.2	738.5	715.7	692.8	670.0	647.1	628.7
55°	741.5	727.5	713.5	699.6	685.6	666.5	642.2	618.0	593.8	569.6	553.1
57.5°	673.3	658.0	642.8	627.5	612.4	592.6	568.2	543.8	519.5	495.2	479.6
60°	626.0	610.4	594.7	579.0	563.3	543.7	520.0	496.3	472.7	449.0	433.6
62.5°	578.8	563.2	547.4	531.8	516.1	496.4	472.8	449.1	425.5	401.8	387.3
65°	506.7	491.1	475.3	459.7	444.0	425.1	402.8	380.6	358.4	336.1	322.2
67.5°	434.6	418.8	402.9	387.1	371.3	352.6	331.3	310.0	288.7	267.3	256.9
70°	387.4	372.0	356.7	341.2	325.8	308.2	288.2	268.2	248.3	228.4	218.4
72.5°	340.2	325.1	309.9	294.7	279.6	262.9	244.8	226.7	208.5	190.4	182.2
75°	268.2	254.4	240.7	227.1	213.4	198.7	183.0	167.3	151.7	136.0	133.1
77.5°	202.5	190.0	177.7	165.3	153.0	141.7	131.6	121.5	111.4	101.3	99.8
80°	160.3	148.6	137.0	125.3	113.6	104.8	98.8	92.7	86.8	80.8	79.9
82.5°	120.4	110.3	100.2	90.0	79.9	73.5	70.7	68.0	65.1	62.3	61.5
85°	68.0	61.7	55.4	49.2	42.9	39.3	38.5	37.6	36.8	35.9	35.3
87.5°	24.7	22.4	20.2	17.9	15.6	14.7	15.0	15.3	15.6	15.9	15.8
90°	0.6	1.7	2.9	4.1	5.3	6.7	8.2	9.8	11.3	12.9	13.4
92.5°	10.0	9.7	9.3	9.0	8.7	9.0	10.3	11.4	12.6	13.8	14.5
95°	32.8	27.9	23.0	18.1	13.2	11.4	12.7	14.0	15.4	16.7	17.5
97.5°	65.9	63.7	61.5	59.3	57.1	51.7	43.1	34.5	25.9	17.3	18.3
100°	90.9	93.2	95.7	98.0	100.4	92.3	73.6	55.0	36.4	17.7	18.7
102.5°	119.2	120.9	122.7	124.4	126.1	116.8	96.4	76.1	55.7	35.3	32.4
105°	160.2	161.6	162.9	164.1	165.4	160.7	150.0	139.2	128.5	117.7	96.6
107.5°	203.4	204.4	205.6	206.6	207.6	209.0	210.7	212.4	214.1	215.7	200.3
110°	232.2	233.2	234.1	235.1	236.0	237.2	238.5	239.8	241.1	242.4	238.5



TEST NUMBER: P332339-830

CATALOG NUMBER: S123RDIP-S1000D585U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	259.8	260.6	261.5	262.3	263.2	264.3	265.6	266.9	268.2	269.6	269.7
115°	300.5	301.2	301.9	302.7	303.4	304.3	305.4	306.4	307.5	308.6	309.8
117.5°	340.0	340.8	341.8	342.6	343.5	344.2	344.8	345.3	345.9	346.4	347.4
120°	364.5	365.5	366.6	367.7	368.8	369.5	369.9	370.2	370.6	370.9	371.9
122.5°	389.5	390.3	391.2	392.1	392.9	393.6	394.1	394.5	395.0	395.5	396.2
125°	423.6	424.6	425.6	426.5	427.4	428.2	428.7	429.1	429.6	430.1	430.3
127.5°	456.8	457.7	458.6	459.6	460.5	461.3	461.8	462.5	463.1	463.6	464.0
130°	477.4	478.3	479.3	480.2	481.2	481.9	482.4	482.9	483.3	483.8	484.3
132.5°	497.2	498.1	499.1	500.0	501.0	501.6	502.0	502.4	502.8	503.2	503.7
135°	527.4	528.1	528.8	529.5	530.3	530.8	531.3	531.8	532.3	532.7	533.1
137.5°	553.2	554.1	555.0	555.9	556.8	557.4	557.6	557.9	558.2	558.5	559.0
140°	570.3	571.1	571.8	572.5	573.3	573.8	574.1	574.5	574.9	575.2	575.7
142.5°	586.3	587.0	587.8	588.4	589.2	589.7	590.0	590.4	590.8	591.2	591.5
145°	608.5	609.4	610.2	611.1	611.9	612.5	612.7	612.9	613.1	613.4	613.6
147.5°	629.5	630.1	630.7	631.1	631.7	632.1	632.4	632.5	632.8	633.1	633.3
150°	642.4	642.8	643.1	643.5	643.9	644.1	644.4	644.6	644.9	645.1	645.4
152.5°	654.0	654.2	654.3	654.5	654.7	654.9	655.0	655.2	655.3	655.4	655.8
155°	670.3	670.1	669.9	669.7	669.4	669.4	669.5	669.6	669.7	669.9	670.4
157.5°	683.1	683.1	683.0	683.0	683.0	682.9	682.8	682.7	682.5	682.4	683.2
160°	690.8	690.7	690.6	690.4	690.3	690.2	690.0	689.9	689.8	689.8	690.4
162.5°	698.1	697.8	697.5	697.2	696.8	696.6	696.5	696.4	696.3	696.2	697.0
165°	706.9	706.5	706.2	705.9	705.5	705.2	705.1	705.0	704.9	704.7	705.8
167.5°	713.8	713.3	712.8	712.4	711.9	711.6	711.6	711.6	711.6	711.6	712.7
170°	717.7	717.2	716.7	716.2	715.8	715.5	715.5	715.5	715.5	715.5	716.5
172.5°	720.3	719.7	719.1	718.5	717.9	717.7	717.8	717.9	718.0	718.1	719.1
175°	723.6	723.0	722.4	721.8	721.2	721.0	721.0	721.2	721.3	721.4	722.3
177.5°	724.4	724.0	723.5	723.0	722.6	722.4	722.5	722.6	722.6	722.7	723.5
180°	723.6	723.6	723.6	723.6	723.6	723.6	723.6	723.6	723.6	723.6	723.6



TEST NUMBER: P332339-830

CATALOG NUMBER: S123RDIP-S1000D585U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8
2.5°	1575.5	1578.0	1580.5	1581.5	1581.0	1580.6	1580.2	1579.7
5°	1565.1	1567.6	1570.2	1571.2	1570.7	1570.1	1569.5	1569.0
7.5°	1543.0	1544.5	1545.9	1546.1	1545.1	1544.2	1543.2	1542.2
10°	1523.3	1523.6	1523.9	1523.3	1521.8	1520.4	1519.0	1517.6
12.5°	1498.7	1498.6	1498.5	1497.5	1495.9	1494.2	1492.6	1490.9
15°	1455.8	1454.3	1452.9	1451.1	1449.2	1447.2	1445.2	1443.2
17.5°	1404.3	1401.3	1398.3	1395.2	1392.3	1389.3	1386.4	1383.4
20°	1369.0	1365.4	1361.7	1358.1	1354.7	1351.2	1347.8	1344.4
22.5°	1331.3	1326.7	1322.1	1318.1	1315.0	1311.8	1308.6	1305.4
25°	1269.6	1263.6	1257.6	1253.0	1249.9	1246.8	1243.7	1240.5
27.5°	1202.3	1194.0	1185.6	1179.1	1174.3	1169.5	1164.7	1160.0
30°	1154.4	1144.7	1135.0	1127.9	1123.3	1118.8	1114.2	1109.7
32.5°	1107.4	1096.8	1086.2	1078.6	1073.7	1068.9	1064.1	1059.3
35°	1037.6	1025.4	1013.1	1004.5	999.4	994.2	989.1	983.9
37.5°	962.8	948.9	935.0	924.8	918.5	912.2	905.9	899.6
40°	910.7	895.9	881.0	870.3	863.7	857.2	850.6	844.1
42.5°	860.7	844.5	828.3	817.3	811.4	805.6	799.7	793.8
45°	787.2	771.0	754.7	743.2	736.3	729.5	722.6	715.9
47.5°	711.2	693.6	675.9	664.0	657.9	651.9	645.7	639.6
50°	660.0	642.2	624.6	612.5	606.0	599.4	592.9	586.3
52.5°	610.4	592.0	573.6	561.5	555.6	549.8	543.9	538.0
55°	536.5	520.0	503.4	492.3	486.6	480.9	475.2	469.5
57.5°	463.9	448.3	432.7	422.4	417.6	412.7	407.9	403.0
60°	418.2	402.8	387.4	377.3	372.5	367.6	362.8	357.9
62.5°	372.8	358.4	343.8	334.0	329.0	324.0	318.9	313.8
65°	308.2	294.2	280.2	271.6	268.5	265.4	262.3	259.1
67.5°	246.5	236.0	225.6	218.7	215.4	212.0	208.6	205.3
70°	208.4	198.4	188.4	181.9	178.7	175.6	172.5	169.4
72.5°	174.1	165.9	157.8	153.1	151.7	150.4	149.1	147.8
75°	130.3	127.4	124.6	122.9	122.3	121.7	121.1	120.6
77.5°	98.3	96.7	95.2	94.2	93.6	93.0	92.5	91.9
80°	79.1	78.2	77.4	76.7	76.2	75.6	74.9	74.4
82.5°	60.6	59.8	58.9	58.4	58.3	58.2	58.1	58.0
85°	34.8	34.2	33.6	33.4	33.4	33.4	33.4	33.4
87.5°	15.6	15.6	15.4	15.3	15.1	14.9	14.7	14.5
90°	13.9	14.3	14.8	15.2	15.5	15.6	15.9	16.1
92.5°	15.3	16.0	16.8	17.2	17.4	17.5	17.7	17.8
95°	18.4	19.1	20.0	20.5	20.5	20.5	20.5	20.5
97.5°	19.2	20.2	21.1	21.7	21.8	21.9	22.1	22.1
100°	19.6	20.6	21.6	22.1	22.2	22.3	22.4	22.6
102.5°	29.4	26.5	23.6	22.1	22.3	22.6	22.8	23.0
105°	75.4	54.3	33.2	22.7	22.9	23.2	23.4	23.7
107.5°	184.7	169.3	153.7	138.1	122.1	106.1	90.2	74.3
110°	234.6	230.6	226.7	216.1	199.1	182.0	164.9	147.8



TEST NUMBER: P332339-830

CATALOG NUMBER: S123RDIP-S1000D585U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	269.7	269.8	269.8	268.1	264.5	260.8	257.2	253.6
115°	310.9	312.2	313.4	314.1	314.6	315.2	315.7	316.1
117.5°	348.4	349.3	350.2	350.8	350.9	351.0	351.1	351.2
120°	372.9	373.8	374.8	375.2	375.2	375.2	375.2	375.2
122.5°	396.8	397.5	398.1	398.5	398.6	398.7	398.8	398.9
125°	430.6	430.7	431.0	431.3	431.5	431.8	432.0	432.3
127.5°	464.4	464.8	465.1	465.2	465.0	464.8	464.5	464.3
130°	484.7	485.2	485.7	485.9	485.6	485.4	485.1	484.9
132.5°	504.2	504.6	505.1	505.2	504.8	504.4	504.2	503.8
135°	533.5	533.9	534.1	534.1	533.9	533.5	533.1	532.7
137.5°	559.6	560.2	560.7	560.9	560.6	560.4	560.2	560.0
140°	576.2	576.6	577.1	577.2	577.0	576.7	576.6	576.3
142.5°	591.9	592.3	592.7	592.7	592.4	592.0	591.6	591.4
145°	613.9	614.1	614.3	614.4	614.4	614.4	614.4	614.4
147.5°	633.6	633.8	634.0	633.9	633.3	632.7	632.3	631.7
150°	645.5	645.8	646.0	646.0	645.6	645.3	644.9	644.6
152.5°	656.3	656.7	657.1	657.0	656.6	656.0	655.4	654.9
155°	671.0	671.7	672.2	672.1	671.5	670.7	670.1	669.3
157.5°	683.8	684.6	685.3	685.1	684.2	683.3	682.4	681.5
160°	691.2	691.8	692.6	692.5	691.7	690.9	690.0	689.2
162.5°	697.8	698.6	699.5	699.5	698.7	698.0	697.2	696.5
165°	706.7	707.7	708.6	708.7	707.8	707.0	706.2	705.3
167.5°	713.6	714.5	715.5	715.5	714.5	713.6	712.7	711.6
170°	717.5	718.4	719.3	719.3	718.4	717.5	716.5	715.5
172.5°	720.0	721.0	721.9	721.9	720.9	719.8	718.7	717.7
175°	723.1	724.0	724.8	724.7	723.8	722.8	721.9	720.9
177.5°	724.2	725.0	725.8	725.7	724.7	723.8	722.8	721.9
180°	723.6	723.6	723.6	723.6	723.6	723.6	723.6	723.6

(END OF REPORT)