

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332346-830

Luminaire Tested: **S123RDIP-S1000D805U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332346-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D805U830-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 805 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6175.2 lumens
Efficiency: N/A
Efficacy: 113.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332346-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

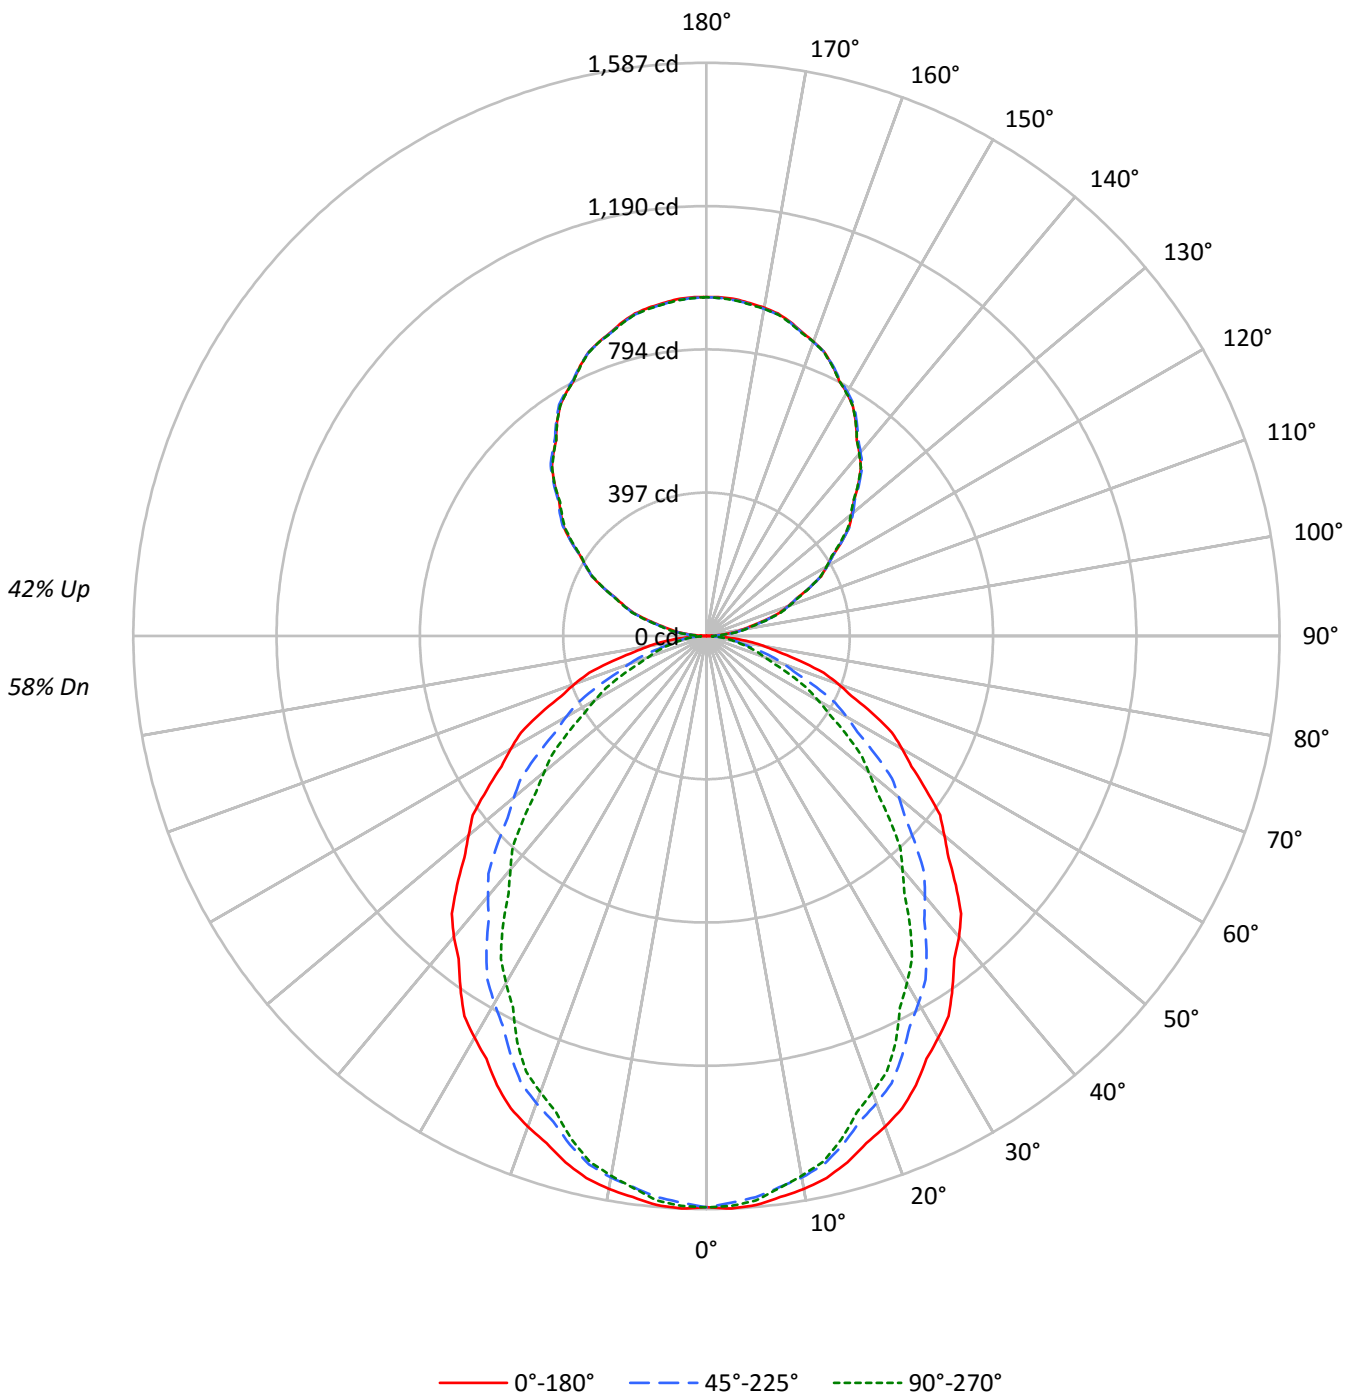



TEST NUMBER: P332346-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63	58
1	100	96	92	88	93	89	86	83	78	75	73	67	65	63	57	55	54	50
2	91	84	78	73	85	79	73	69	68	64	61	59	56	53	50	48	46	42
3	84	74	67	61	78	69	63	58	61	56	52	52	49	46	45	42	40	36
4	77	66	58	52	71	62	55	49	54	49	44	47	43	39	40	37	35	31
5	70	59	51	45	66	55	48	43	49	43	39	42	38	34	36	33	30	27
6	65	53	45	39	61	50	43	37	44	38	34	38	34	30	33	30	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	27	24	22
8	56	44	36	31	52	41	34	29	37	31	27	32	28	24	28	24	22	19
9	52	40	33	27	49	38	31	26	34	28	24	30	25	22	26	22	20	18
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17026	17026	17026
5°	17091	16855	16953
10°	16994	16644	16587
15°	16811	16254	16082
20°	16561	15767	15400
25°	16302	15221	14733
30°	15960	14589	13793
35°	15609	13958	12929
40°	15286	13212	11861
45°	14862	12478	10898
50°	14393	11643	9818
55°	13915	10689	8811
60°	13476	9666	7705
65°	12905	8560	6599
70°	12192	7188	5331
75°	11154	5656	5016
80°	9937	5009	4612
85°	8398	4434	4125



TEST NUMBER: P332346-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.5	2.4
10°-20°	413.3	6.7
20°-30°	595.1	9.6
30°-40°	670.3	10.9
40°-50°	641.3	10.4
50°-60°	525.1	8.5
60°-70°	354.3	5.7
70°-80°	178.2	2.9
80°-90°	49.9	0.8
90°-100°	61.1	1.0
100°-110°	182.9	3.0
110°-120°	311.1	5.0
120°-130°	409.2	6.6
130°-140°	460.0	7.4
140°-150°	452.1	7.3
150°-160°	380.6	6.2
160°-170°	253.4	4.1
170°-180°	88.7	1.4
0°-30°	1156.9	18.7
0°-40°	1827.2	29.6
0°-60°	2993.6	48.5
0°-90°	3576.1	57.9
90°-120°	555.1	9.0
90°-150°	1876.4	30.4
90°-180°	2599.0	42.1
0°-180°	6175.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1582	1582	1582	1582	1582	
5°	1582	1575	1560	1571	1569	150
15°	1509	1493	1459	1452	1443	425
25°	1373	1339	1282	1255	1240	631
35°	1188	1140	1062	1009	984	743
45°	976	916	820	749	716	753
55°	742	676	570	498	470	665
65°	507	435	336	276	259	501
75°	268	206	136	124	121	286
85°	68	41	36	34	33	76
90°	1	8	18	21	22	6
95°	44	49	55	57	58	49
105°	166	168	174	174	175	178
115°	313	315	314	315	314	310
125°	458	460	459	456	453	409
135°	595	599	598	596	594	458
145°	721	723	725	724	721	450
155°	826	826	827	829	825	380
165°	900	898	898	901	897	254
175°	936	933	933	937	932	89
180°	938	938	938	938	938	



TEST NUMBER: P332346-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8
2.5°	1586.9	1585.9	1585.1	1584.1	1583.2	1581.4	1578.7	1575.9	1573.2	1570.5	1572.9
5°	1581.8	1580.3	1578.9	1577.4	1576.0	1573.6	1570.2	1566.8	1563.4	1559.9	1562.5
7.5°	1567.1	1565.6	1564.1	1562.5	1560.9	1557.9	1553.5	1549.1	1544.6	1540.2	1541.6
10°	1554.8	1552.8	1550.8	1548.8	1546.8	1543.2	1538.1	1533.0	1527.9	1522.8	1523.1
12.5°	1537.4	1535.1	1533.0	1530.7	1528.4	1524.2	1518.0	1511.6	1505.4	1499.1	1498.9
15°	1508.6	1505.5	1502.3	1499.2	1496.1	1490.5	1482.5	1474.5	1466.6	1458.6	1457.2
17.5°	1472.4	1468.8	1465.2	1461.5	1457.8	1451.0	1440.8	1430.7	1420.5	1410.3	1407.3
20°	1445.8	1441.2	1436.6	1432.1	1427.5	1419.8	1409.0	1398.2	1387.3	1376.5	1372.8
22.5°	1416.0	1410.8	1405.5	1400.2	1395.1	1386.7	1375.1	1363.6	1352.1	1340.6	1336.0
25°	1372.6	1365.6	1358.4	1351.2	1344.2	1334.0	1320.9	1307.8	1294.7	1281.6	1275.5
27.5°	1320.0	1312.2	1304.3	1296.5	1288.5	1277.3	1262.7	1248.1	1233.5	1219.0	1210.6
30°	1284.1	1275.5	1267.1	1258.5	1249.9	1237.7	1221.7	1205.7	1189.8	1173.8	1164.1
32.5°	1248.2	1238.5	1228.8	1219.1	1209.5	1196.2	1179.3	1162.4	1145.5	1128.6	1118.0
35°	1187.9	1177.6	1167.3	1157.2	1146.9	1132.8	1115.2	1097.5	1079.9	1062.2	1049.9
37.5°	1126.8	1115.4	1104.0	1092.6	1081.2	1066.1	1047.3	1028.3	1009.5	990.6	976.7
40°	1087.9	1075.3	1062.7	1050.2	1037.6	1021.2	1001.1	980.8	960.5	940.3	925.5
42.5°	1043.7	1031.1	1018.6	1006.1	993.5	976.9	955.9	935.0	914.1	893.2	876.9
45°	976.3	963.4	950.6	937.7	924.9	907.6	885.6	863.7	841.7	819.7	803.5
47.5°	908.8	894.7	880.6	866.5	852.4	834.4	812.5	790.5	768.5	746.6	729.0
50°	859.5	846.1	832.7	819.4	805.9	787.7	764.6	741.5	718.4	695.3	677.6
52.5°	815.4	800.9	786.3	771.8	757.2	738.5	715.7	692.8	670.0	647.1	628.7
55°	741.5	727.5	713.5	699.6	685.6	666.5	642.2	618.0	593.8	569.6	553.1
57.5°	673.3	658.0	642.8	627.5	612.4	592.6	568.2	543.8	519.5	495.2	479.6
60°	626.0	610.4	594.7	579.0	563.3	543.7	520.0	496.3	472.7	449.0	433.6
62.5°	578.8	563.2	547.4	531.8	516.1	496.4	472.8	449.1	425.5	401.8	387.3
65°	506.7	491.1	475.3	459.7	444.0	425.1	402.8	380.6	358.4	336.1	322.2
67.5°	434.6	418.8	402.9	387.1	371.3	352.6	331.3	310.0	288.7	267.3	256.9
70°	387.4	372.0	356.7	341.2	325.8	308.2	288.2	268.2	248.3	228.4	218.4
72.5°	340.2	325.1	309.9	294.7	279.6	262.9	244.8	226.7	208.5	190.4	182.2
75°	268.2	254.4	240.7	227.1	213.4	198.7	183.0	167.3	151.7	136.0	133.1
77.5°	202.5	190.0	177.7	165.3	153.0	141.7	131.6	121.5	111.4	101.3	99.8
80°	160.3	148.6	137.0	125.3	113.6	104.8	98.8	92.7	86.8	80.8	79.9
82.5°	120.4	110.3	100.2	90.0	79.9	73.5	70.7	68.0	65.1	62.3	61.5
85°	68.0	61.7	55.4	49.2	42.9	39.3	38.5	37.6	36.8	35.9	35.3
87.5°	24.8	22.6	20.5	18.2	16.0	15.2	15.6	16.0	16.5	16.9	16.8
90°	0.8	2.4	4.1	5.7	7.3	9.1	11.3	13.4	15.6	17.7	18.4
92.5°	17.8	18.9	20.1	21.2	22.2	23.5	24.7	25.9	27.1	28.3	28.8
95°	43.5	44.6	45.8	46.9	48.1	49.3	50.6	51.9	53.3	54.6	55.2
97.5°	77.2	78.0	78.9	79.7	80.7	81.5	82.5	83.4	84.4	85.3	86.1
100°	100.2	101.2	102.2	103.2	104.2	105.1	105.8	106.7	107.5	108.3	108.9
102.5°	126.8	127.3	127.9	128.6	129.1	130.0	131.0	132.1	133.2	134.3	134.8
105°	165.8	166.2	166.5	166.8	167.1	168.1	169.5	171.0	172.5	173.9	173.9
107.5°	211.2	211.4	211.6	211.8	212.0	212.4	213.0	213.6	214.1	214.7	215.3
110°	239.5	239.8	240.2	240.4	240.8	241.1	241.5	241.8	242.1	242.4	243.1



TEST NUMBER: P332346-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	269.0	269.2	269.4	269.6	269.8	269.8	269.9	270.0	270.1	270.1	271.0
115°	313.2	313.7	314.1	314.6	315.2	315.3	314.9	314.6	314.2	314.0	314.1
117.5°	357.7	358.1	358.4	358.6	359.0	358.9	358.5	358.1	357.7	357.2	357.2
120°	385.4	386.3	387.4	388.3	389.4	389.5	388.6	387.8	387.0	386.2	386.0
122.5°	414.3	415.0	415.8	416.4	417.2	417.4	416.9	416.5	416.0	415.7	415.2
125°	458.4	458.8	459.3	459.9	460.3	460.4	460.1	459.8	459.4	459.1	458.5
127.5°	499.1	500.1	501.1	502.2	503.2	503.6	503.2	502.8	502.5	502.1	501.2
130°	526.1	527.4	528.8	530.1	531.4	531.8	531.3	530.8	530.4	529.8	529.1
132.5°	553.3	554.6	555.9	557.2	558.6	559.0	558.6	558.3	557.9	557.5	556.8
135°	594.7	595.7	596.6	597.7	598.6	599.1	598.9	598.7	598.5	598.4	597.8
137.5°	633.0	633.9	634.6	635.5	636.3	636.9	637.3	637.7	638.2	638.6	637.9
140°	659.5	660.3	661.2	662.0	662.8	663.3	663.5	663.6	663.8	663.9	663.8
142.5°	683.7	684.6	685.3	686.2	687.0	687.6	687.9	688.2	688.4	688.7	688.5
145°	721.4	721.8	722.1	722.5	722.7	723.1	723.7	724.2	724.6	725.1	725.0
147.5°	754.5	755.1	755.6	756.2	756.9	757.3	757.8	758.3	758.7	759.2	759.2
150°	777.4	777.8	778.1	778.4	778.7	779.1	779.4	779.8	780.0	780.4	780.4
152.5°	796.4	796.7	797.2	797.7	798.1	798.5	798.7	798.9	799.1	799.3	799.6
155°	826.0	826.0	826.0	826.0	826.0	826.1	826.3	826.5	826.7	826.8	827.5
157.5°	851.4	851.2	851.0	850.8	850.6	850.6	850.7	850.9	851.0	851.1	851.9
160°	867.3	867.0	866.7	866.4	866.0	865.9	865.9	865.9	865.9	865.9	866.7
162.5°	881.5	881.1	880.6	880.1	879.7	879.5	879.7	879.8	879.9	880.1	880.8
165°	899.8	899.3	898.8	898.3	897.8	897.6	897.6	897.6	897.6	897.6	898.5
167.5°	914.4	913.7	913.0	912.4	911.7	911.5	911.6	911.7	911.9	912.0	913.0
170°	922.7	922.0	921.3	920.7	920.0	919.6	919.6	919.6	919.6	919.6	920.9
172.5°	929.1	928.5	927.8	927.2	926.5	926.1	926.1	926.1	926.1	926.1	927.2
175°	935.9	935.2	934.6	934.0	933.3	932.9	932.9	932.9	932.9	932.9	934.0
177.5°	938.7	938.2	937.6	937.1	936.6	936.3	936.3	936.3	936.3	936.3	937.1
180°	938.1	938.1	938.1	938.1	938.1	938.1	938.1	938.1	938.1	938.1	938.1



TEST NUMBER: P332346-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8
2.5°	1575.5	1578.0	1580.5	1581.5	1581.0	1580.6	1580.2	1579.7
5°	1565.1	1567.6	1570.2	1571.2	1570.7	1570.1	1569.5	1569.0
7.5°	1543.0	1544.5	1545.9	1546.1	1545.1	1544.2	1543.2	1542.2
10°	1523.3	1523.6	1523.9	1523.3	1521.8	1520.4	1519.0	1517.6
12.5°	1498.7	1498.6	1498.5	1497.5	1495.9	1494.2	1492.6	1490.9
15°	1455.8	1454.3	1452.9	1451.1	1449.2	1447.2	1445.2	1443.2
17.5°	1404.3	1401.3	1398.3	1395.2	1392.3	1389.3	1386.4	1383.4
20°	1369.0	1365.4	1361.7	1358.1	1354.7	1351.2	1347.8	1344.4
22.5°	1331.3	1326.7	1322.1	1318.1	1315.0	1311.8	1308.6	1305.4
25°	1269.6	1263.6	1257.6	1253.0	1249.9	1246.8	1243.7	1240.5
27.5°	1202.3	1194.0	1185.6	1179.1	1174.3	1169.5	1164.7	1160.0
30°	1154.4	1144.7	1135.0	1127.9	1123.3	1118.8	1114.2	1109.7
32.5°	1107.4	1096.8	1086.2	1078.6	1073.7	1068.9	1064.1	1059.3
35°	1037.6	1025.4	1013.1	1004.5	999.4	994.2	989.1	983.9
37.5°	962.8	948.9	935.0	924.8	918.5	912.2	905.9	899.6
40°	910.7	895.9	881.0	870.3	863.7	857.2	850.6	844.1
42.5°	860.7	844.5	828.3	817.3	811.4	805.6	799.7	793.8
45°	787.2	771.0	754.7	743.2	736.3	729.5	722.6	715.9
47.5°	711.2	693.6	675.9	664.0	657.9	651.9	645.7	639.6
50°	660.0	642.2	624.6	612.5	606.0	599.4	592.9	586.3
52.5°	610.4	592.0	573.6	561.5	555.6	549.8	543.9	538.0
55°	536.5	520.0	503.4	492.3	486.6	480.9	475.2	469.5
57.5°	463.9	448.3	432.7	422.4	417.6	412.7	407.9	403.0
60°	418.2	402.8	387.4	377.3	372.5	367.6	362.8	357.9
62.5°	372.8	358.4	343.8	334.0	329.0	324.0	318.9	313.8
65°	308.2	294.2	280.2	271.6	268.5	265.4	262.3	259.1
67.5°	246.5	236.0	225.6	218.7	215.4	212.0	208.6	205.3
70°	208.4	198.4	188.4	181.9	178.7	175.6	172.5	169.4
72.5°	174.1	165.9	157.8	153.1	151.7	150.4	149.1	147.8
75°	130.3	127.4	124.6	122.9	122.3	121.7	121.1	120.6
77.5°	98.3	96.7	95.2	94.2	93.6	93.0	92.5	91.9
80°	79.1	78.2	77.4	76.7	76.2	75.6	74.9	74.4
82.5°	60.6	59.8	58.9	58.4	58.3	58.2	58.1	58.0
85°	34.8	34.2	33.6	33.4	33.4	33.4	33.4	33.4
87.5°	16.7	16.6	16.5	16.4	16.2	16.0	15.8	15.7
90°	19.0	19.6	20.3	20.8	21.1	21.5	21.8	22.1
92.5°	29.3	29.9	30.3	30.5	30.3	30.2	30.0	29.8
95°	55.8	56.5	57.1	57.5	57.5	57.5	57.5	57.5
97.5°	86.8	87.6	88.3	88.7	88.6	88.6	88.5	88.4
100°	109.3	109.8	110.3	110.7	111.0	111.3	111.7	112.0
102.5°	135.3	135.7	136.2	136.5	136.4	136.3	136.3	136.2
105°	173.9	173.9	173.9	174.1	174.4	174.7	175.0	175.4
107.5°	215.7	216.3	216.9	217.0	216.8	216.6	216.4	216.2
110°	243.7	244.4	245.1	245.2	244.9	244.6	244.2	243.9



TEST NUMBER: P332346-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	271.7	272.5	273.3	273.6	273.6	273.5	273.4	273.4
115°	314.2	314.4	314.6	314.6	314.4	314.2	314.1	314.0
117.5°	357.2	357.1	357.1	356.8	356.5	356.0	355.5	355.1
120°	385.8	385.7	385.5	385.2	384.9	384.6	384.3	383.9
122.5°	414.8	414.3	414.0	413.5	413.0	412.6	412.1	411.6
125°	457.8	457.1	456.5	455.8	455.2	454.5	453.8	453.2
127.5°	500.3	499.4	498.5	497.7	496.9	496.2	495.4	494.6
130°	528.6	527.9	527.3	526.3	525.2	524.1	522.9	521.7
132.5°	556.0	555.2	554.4	553.6	552.7	551.8	550.9	550.1
135°	597.1	596.4	595.8	595.3	594.9	594.7	594.3	594.0
137.5°	637.3	636.6	635.8	635.2	634.6	634.0	633.4	632.7
140°	663.6	663.5	663.3	662.7	661.5	660.3	659.2	658.1
142.5°	688.4	688.2	688.1	687.6	686.6	685.8	684.9	684.0
145°	724.8	724.6	724.4	724.1	723.4	722.7	722.1	721.4
147.5°	759.2	759.2	759.2	758.7	757.7	756.7	755.7	754.8
150°	780.4	780.4	780.4	780.0	778.9	778.0	776.9	776.0
152.5°	799.7	800.0	800.3	800.0	799.2	798.3	797.5	796.6
155°	828.1	828.8	829.4	829.2	828.0	826.9	825.8	824.6
157.5°	852.5	853.2	853.8	853.8	852.9	852.0	851.0	850.1
160°	867.5	868.4	869.1	869.2	868.6	867.9	867.2	866.6
162.5°	881.7	882.5	883.4	883.2	882.1	881.1	880.1	879.0
165°	899.6	900.5	901.5	901.4	900.3	899.1	898.0	896.8
167.5°	914.1	915.0	916.1	916.1	915.0	914.1	913.0	912.0
170°	922.0	923.1	924.3	924.3	923.1	922.0	920.9	919.6
172.5°	928.2	929.3	930.2	930.2	929.0	927.8	926.7	925.6
175°	934.9	935.9	936.9	936.8	935.7	934.5	933.3	932.2
177.5°	937.9	938.7	939.4	939.4	938.5	937.5	936.7	935.8
180°	938.1	938.1	938.1	938.1	938.1	938.1	938.1	938.1

(END OF REPORT)