

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332347-830

Luminaire Tested: **S123RDIP-S1000D805U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332347-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S1000D805U830-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6314.9 lumens  
Efficiency: N/A  
Efficacy: 116.1 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 54.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332347-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

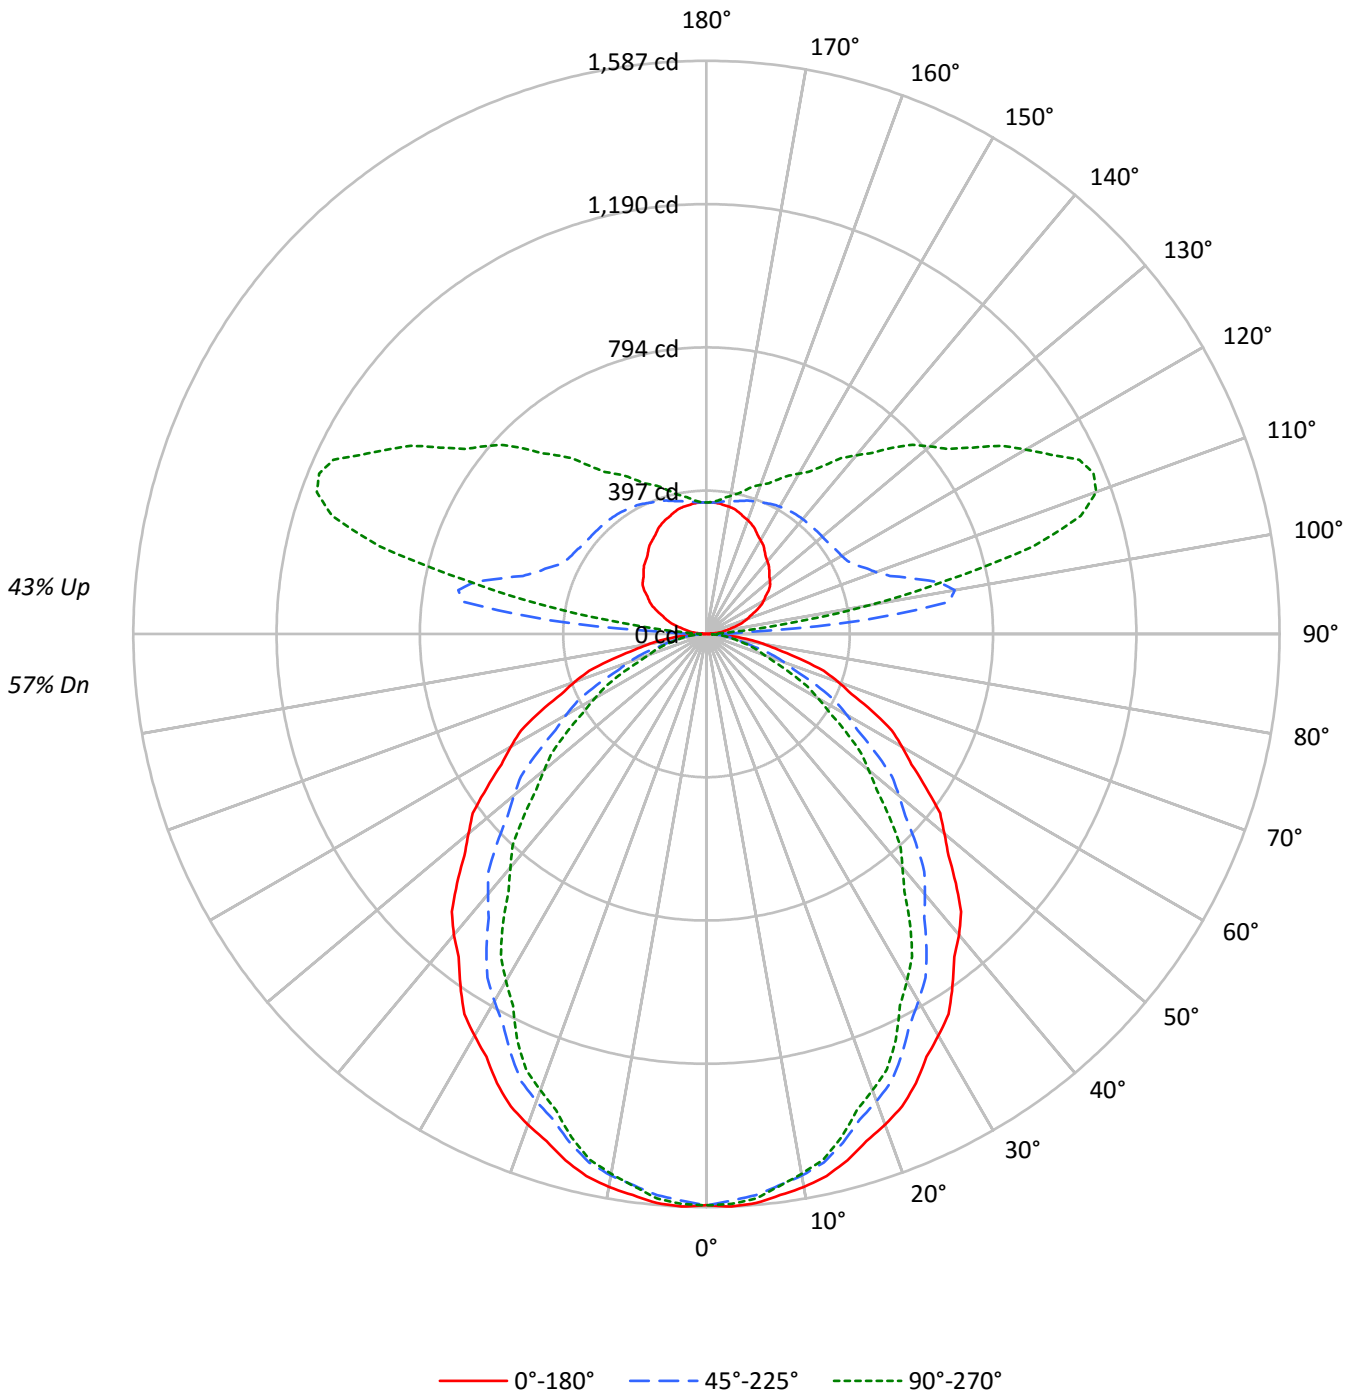



TEST NUMBER: P332347-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	57
1	100	95	92	88	93	89	86	83	77	74	72	66	64	62	56	54	53	48
2	91	84	78	73	84	78	73	68	68	64	60	58	55	53	49	47	45	41
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	41	39	35
4	76	66	58	52	71	62	55	49	54	48	44	46	42	39	40	36	34	31
5	70	59	51	45	65	55	48	43	48	43	38	42	37	34	36	32	30	27
6	65	53	45	39	60	50	42	37	44	38	33	38	33	30	33	29	26	24
7	60	48	40	34	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	34	29	36	31	26	32	27	24	27	24	21	19
9	52	40	32	27	48	38	31	26	33	28	24	29	25	22	25	22	19	17
10	49	37	29	25	45	35	28	24	31	25	22	27	23	20	24	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	17026	17026	17026
5°	17091	16855	16953
10°	16994	16644	16587
15°	16811	16254	16082
20°	16561	15767	15400
25°	16302	15221	14733
30°	15960	14589	13793
35°	15609	13958	12929
40°	15286	13212	11861
45°	14862	12478	10898
50°	14393	11643	9818
55°	13915	10689	8811
60°	13476	9666	7705
65°	12905	8560	6599
70°	12192	7188	5331
75°	11154	5656	5016
80°	9937	5009	4612
85°	8398	4434	4125



TEST NUMBER: P332347-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	148.5	2.4
10°-20°	413.3	6.5
20°-30°	595.1	9.4
30°-40°	670.3	10.6
40°-50°	641.3	10.2
50°-60°	525.1	8.3
60°-70°	354.3	5.6
70°-80°	178.2	2.8
80°-90°	50.0	0.8
90°-100°	202.6	3.2
100°-110°	573.6	9.1
110°-120°	564.3	8.9
120°-130°	450.1	7.1
130°-140°	354.9	5.6
140°-150°	264.9	4.2
150°-160°	184.6	2.9
160°-170°	108.5	1.7
170°-180°	35.3	0.6
0°-30°	1156.9	18.3
0°-40°	1827.2	28.9
0°-60°	2993.6	47.4
0°-90°	3576.1	56.6
90°-120°	1340.5	21.2
90°-150°	2410.4	38.2
90°-180°	2739.0	43.4
0°-180°	6314.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1582	1582	1582	1582	1582	
5°	1582	1575	1560	1571	1569	150
15°	1509	1493	1459	1452	1443	425
25°	1373	1339	1282	1255	1240	631
35°	1188	1140	1062	1009	984	743
45°	976	916	820	749	716	753
55°	742	676	570	498	470	665
65°	507	435	336	276	259	501
75°	268	206	136	124	121	286
85°	68	41	36	34	33	76
90°	2	9	18	21	21	5
95°	25	81	437	127	86	27
105°	86	126	592	1036	937	91
115°	151	188	453	994	1140	150
125°	210	248	423	766	899	186
135°	246	294	417	631	729	190
145°	281	322	412	518	570	176
155°	319	344	399	453	472	147
165°	349	358	382	405	412	98
175°	363	364	366	371	371	34
180°	364	364	364	364	364	



TEST NUMBER: P332347-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8
2.5°	1586.9	1585.9	1585.1	1584.1	1583.2	1581.4	1578.7	1575.9	1573.2	1570.5	1572.9
5°	1581.8	1580.3	1578.9	1577.4	1576.0	1573.6	1570.2	1566.8	1563.4	1559.9	1562.5
7.5°	1567.1	1565.6	1564.1	1562.5	1560.9	1557.9	1553.5	1549.1	1544.6	1540.2	1541.6
10°	1554.8	1552.8	1550.8	1548.8	1546.8	1543.2	1538.1	1533.0	1527.9	1522.8	1523.1
12.5°	1537.4	1535.1	1533.0	1530.7	1528.4	1524.2	1518.0	1511.6	1505.4	1499.1	1498.9
15°	1508.6	1505.5	1502.3	1499.2	1496.1	1490.5	1482.5	1474.5	1466.6	1458.6	1457.2
17.5°	1472.4	1468.8	1465.2	1461.5	1457.8	1451.0	1440.8	1430.7	1420.5	1410.3	1407.3
20°	1445.8	1441.2	1436.6	1432.1	1427.5	1419.8	1409.0	1398.2	1387.3	1376.5	1372.8
22.5°	1416.0	1410.8	1405.5	1400.2	1395.1	1386.7	1375.1	1363.6	1352.1	1340.6	1336.0
25°	1372.6	1365.6	1358.4	1351.2	1344.2	1334.0	1320.9	1307.8	1294.7	1281.6	1275.5
27.5°	1320.0	1312.2	1304.3	1296.5	1288.5	1277.3	1262.7	1248.1	1233.5	1219.0	1210.6
30°	1284.1	1275.5	1267.1	1258.5	1249.9	1237.7	1221.7	1205.7	1189.8	1173.8	1164.1
32.5°	1248.2	1238.5	1228.8	1219.1	1209.5	1196.2	1179.3	1162.4	1145.5	1128.6	1118.0
35°	1187.9	1177.6	1167.3	1157.2	1146.9	1132.8	1115.2	1097.5	1079.9	1062.2	1049.9
37.5°	1126.8	1115.4	1104.0	1092.6	1081.2	1066.1	1047.3	1028.3	1009.5	990.6	976.7
40°	1087.9	1075.3	1062.7	1050.2	1037.6	1021.2	1001.1	980.8	960.5	940.3	925.5
42.5°	1043.7	1031.1	1018.6	1006.1	993.5	976.9	955.9	935.0	914.1	893.2	876.9
45°	976.3	963.4	950.6	937.7	924.9	907.6	885.6	863.7	841.7	819.7	803.5
47.5°	908.8	894.7	880.6	866.5	852.4	834.4	812.5	790.5	768.5	746.6	729.0
50°	859.5	846.1	832.7	819.4	805.9	787.7	764.6	741.5	718.4	695.3	677.6
52.5°	815.4	800.9	786.3	771.8	757.2	738.5	715.7	692.8	670.0	647.1	628.7
55°	741.5	727.5	713.5	699.6	685.6	666.5	642.2	618.0	593.8	569.6	553.1
57.5°	673.3	658.0	642.8	627.5	612.4	592.6	568.2	543.8	519.5	495.2	479.6
60°	626.0	610.4	594.7	579.0	563.3	543.7	520.0	496.3	472.7	449.0	433.6
62.5°	578.8	563.2	547.4	531.8	516.1	496.4	472.8	449.1	425.5	401.8	387.3
65°	506.7	491.1	475.3	459.7	444.0	425.1	402.8	380.6	358.4	336.1	322.2
67.5°	434.6	418.8	402.9	387.1	371.3	352.6	331.3	310.0	288.7	267.3	256.9
70°	387.4	372.0	356.7	341.2	325.8	308.2	288.2	268.2	248.3	228.4	218.4
72.5°	340.2	325.1	309.9	294.7	279.6	262.9	244.8	226.7	208.5	190.4	182.2
75°	268.2	254.4	240.7	227.1	213.4	198.7	183.0	167.3	151.7	136.0	133.1
77.5°	202.5	190.0	177.7	165.3	153.0	141.7	131.6	121.5	111.4	101.3	99.8
80°	160.3	148.6	137.0	125.3	113.6	104.8	98.8	92.7	86.8	80.8	79.9
82.5°	120.4	110.3	100.2	90.0	79.9	73.5	70.7	68.0	65.1	62.3	61.5
85°	68.0	61.7	55.4	49.2	42.9	39.3	38.5	37.6	36.8	35.9	35.3
87.5°	24.9	22.7	20.5	18.5	16.2	15.3	15.7	16.1	16.6	17.1	16.7
90°	1.5	2.9	4.4	6.6	8.1	9.6	11.8	14.0	16.2	18.4	17.7
92.5°	9.1	13.6	19.8	25.5	31.7	42.6	61.9	93.6	124.7	113.3	85.5
95°	25.1	27.2	35.3	47.9	67.0	95.8	158.4	268.2	389.1	437.0	354.5
97.5°	42.7	43.5	49.9	60.7	79.6	110.7	170.5	294.4	495.8	677.2	724.5
100°	54.6	55.2	60.4	70.8	88.4	117.2	168.7	277.8	471.6	697.9	843.0
102.5°	66.9	68.2	72.8	82.6	98.5	124.8	171.1	263.6	436.2	659.5	848.9
105°	85.5	87.7	92.1	100.9	115.0	137.8	177.6	253.4	392.8	592.5	804.0
107.5°	105.2	107.4	111.7	120.4	133.6	154.8	189.6	252.8	365.0	533.2	725.3
110°	119.4	121.6	125.3	133.4	145.9	166.5	199.7	255.7	354.5	499.6	675.7



TEST NUMBER: P332347-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	132.3	134.6	138.3	146.4	158.9	178.9	209.7	261.6	348.6	477.2	632.7
115°	151.1	154.0	158.4	165.8	178.3	198.2	226.2	271.2	346.4	453.2	580.7
117.5°	169.8	173.1	176.8	183.6	197.7	216.0	243.7	283.9	347.7	439.0	549.3
120°	182.8	184.9	188.6	196.0	210.0	228.5	255.0	293.3	350.1	432.5	532.8
122.5°	194.0	196.1	199.8	207.8	221.2	240.8	266.7	302.1	354.1	428.5	519.2
125°	210.0	211.5	215.9	224.0	238.0	257.9	283.7	316.1	360.3	423.0	501.8
127.5°	222.3	224.4	229.9	238.2	253.6	273.5	298.4	327.6	367.4	420.4	486.5
130°	229.9	232.1	238.7	247.6	263.1	283.0	307.3	335.3	372.1	418.6	478.2
132.5°	235.8	238.7	245.8	256.5	271.9	291.2	314.9	342.3	375.7	417.9	470.6
135°	246.1	249.1	257.2	268.2	283.7	303.6	326.4	351.5	381.0	417.1	460.5
137.5°	255.8	258.9	266.9	278.7	294.0	312.5	334.4	358.3	384.6	415.5	451.9
140°	262.3	266.0	273.4	285.2	299.9	318.3	339.7	361.8	386.9	414.9	446.6
142.5°	269.4	272.5	280.5	291.1	305.9	323.0	343.8	365.3	388.6	413.7	441.9
145°	280.8	283.0	289.6	300.7	313.2	330.2	349.3	369.2	389.8	411.9	435.5
147.5°	292.3	293.6	300.1	309.6	321.7	336.2	353.7	371.6	389.8	409.2	429.3
150°	299.9	300.7	306.5	316.1	326.4	339.7	356.7	372.1	389.8	406.8	425.2
152.5°	307.6	307.7	313.6	322.1	331.1	343.8	358.4	373.3	388.0	403.8	420.5
155°	319.1	319.1	323.5	330.8	338.9	349.3	361.8	373.6	386.2	398.7	413.4
157.5°	328.2	328.8	332.3	338.8	345.7	353.7	363.7	374.4	383.6	394.1	405.5
160°	335.3	335.3	338.3	344.1	349.3	356.7	365.5	374.4	382.5	390.6	400.1
162.5°	340.6	340.6	343.0	347.7	352.2	358.4	366.1	373.7	380.1	387.0	394.8
165°	348.6	347.8	349.3	353.0	355.9	361.1	366.9	372.1	376.5	381.7	387.6
167.5°	354.6	353.7	354.5	357.2	359.3	362.6	366.8	371.0	373.1	376.5	380.7
170°	358.2	356.7	357.4	359.6	361.1	362.6	366.3	369.2	370.7	372.9	376.5
172.5°	360.5	359.6	359.8	361.4	362.2	363.2	366.3	368.6	368.9	369.9	372.4
175°	363.3	362.6	361.8	363.3	363.3	364.0	365.5	366.9	366.3	366.3	367.7
177.5°	364.6	364.0	363.4	364.0	364.0	364.0	364.6	365.8	364.6	364.0	364.6
180°	364.0	364.0	364.0	364.0	364.0	364.0	364.0	364.0	364.0	364.0	364.0



TEST NUMBER: P332347-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8	1581.8
2.5°	1575.5	1578.0	1580.5	1581.5	1581.0	1580.6	1580.2	1579.7
5°	1565.1	1567.6	1570.2	1571.2	1570.7	1570.1	1569.5	1569.0
7.5°	1543.0	1544.5	1545.9	1546.1	1545.1	1544.2	1543.2	1542.2
10°	1523.3	1523.6	1523.9	1523.3	1521.8	1520.4	1519.0	1517.6
12.5°	1498.7	1498.6	1498.5	1497.5	1495.9	1494.2	1492.6	1490.9
15°	1455.8	1454.3	1452.9	1451.1	1449.2	1447.2	1445.2	1443.2
17.5°	1404.3	1401.3	1398.3	1395.2	1392.3	1389.3	1386.4	1383.4
20°	1369.0	1365.4	1361.7	1358.1	1354.7	1351.2	1347.8	1344.4
22.5°	1331.3	1326.7	1322.1	1318.1	1315.0	1311.8	1308.6	1305.4
25°	1269.6	1263.6	1257.6	1253.0	1249.9	1246.8	1243.7	1240.5
27.5°	1202.3	1194.0	1185.6	1179.1	1174.3	1169.5	1164.7	1160.0
30°	1154.4	1144.7	1135.0	1127.9	1123.3	1118.8	1114.2	1109.7
32.5°	1107.4	1096.8	1086.2	1078.6	1073.7	1068.9	1064.1	1059.3
35°	1037.6	1025.4	1013.1	1004.5	999.4	994.2	989.1	983.9
37.5°	962.8	948.9	935.0	924.8	918.5	912.2	905.9	899.6
40°	910.7	895.9	881.0	870.3	863.7	857.2	850.6	844.1
42.5°	860.7	844.5	828.3	817.3	811.4	805.6	799.7	793.8
45°	787.2	771.0	754.7	743.2	736.3	729.5	722.6	715.9
47.5°	711.2	693.6	675.9	664.0	657.9	651.9	645.7	639.6
50°	660.0	642.2	624.6	612.5	606.0	599.4	592.9	586.3
52.5°	610.4	592.0	573.6	561.5	555.6	549.8	543.9	538.0
55°	536.5	520.0	503.4	492.3	486.6	480.9	475.2	469.5
57.5°	463.9	448.3	432.7	422.4	417.6	412.7	407.9	403.0
60°	418.2	402.8	387.4	377.3	372.5	367.6	362.8	357.9
62.5°	372.8	358.4	343.8	334.0	329.0	324.0	318.9	313.8
65°	308.2	294.2	280.2	271.6	268.5	265.4	262.3	259.1
67.5°	246.5	236.0	225.6	218.7	215.4	212.0	208.6	205.3
70°	208.4	198.4	188.4	181.9	178.7	175.6	172.5	169.4
72.5°	174.1	165.9	157.8	153.1	151.7	150.4	149.1	147.8
75°	130.3	127.4	124.6	122.9	122.3	121.7	121.1	120.6
77.5°	98.3	96.7	95.2	94.2	93.6	93.0	92.5	91.9
80°	79.1	78.2	77.4	76.7	76.2	75.6	74.9	74.4
82.5°	60.6	59.8	58.9	58.4	58.3	58.2	58.1	58.0
85°	34.8	34.2	33.6	33.4	33.4	33.4	33.4	33.4
87.5°	16.6	16.5	16.4	16.5	16.1	16.0	15.9	15.6
90°	18.4	19.1	19.9	21.4	20.6	21.4	22.1	21.4
92.5°	62.0	49.2	43.5	39.7	38.4	36.1	36.9	35.5
95°	265.3	179.8	140.7	114.2	100.2	93.6	88.4	85.5
97.5°	661.3	529.7	434.6	346.5	292.1	258.9	239.0	232.7
100°	868.8	809.1	722.9	618.2	543.8	490.0	461.3	462.0
102.5°	937.7	935.9	885.6	819.3	761.4	718.8	694.7	677.8
105°	958.0	1031.6	1045.7	1026.5	992.6	964.6	941.0	937.4
107.5°	899.9	1019.5	1084.1	1110.3	1111.0	1101.5	1093.5	1086.8
110°	844.5	980.1	1072.9	1124.5	1145.1	1151.0	1149.5	1148.1





TEST NUMBER: P332347-830

CATALOG NUMBER: S123RDIP-S1000D805U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	789.7	928.2	1032.3	1098.5	1136.3	1154.6	1160.2	1160.5
115°	717.0	845.2	953.6	1033.9	1089.1	1121.5	1136.3	1140.0
117.5°	664.4	775.1	872.3	953.9	1011.4	1048.6	1069.8	1074.9
120°	636.7	736.1	824.6	899.0	957.2	998.5	1016.2	1020.6
122.5°	614.9	704.9	786.8	856.0	907.7	944.8	964.3	969.9
125°	585.8	666.2	736.9	795.9	843.0	875.4	893.8	899.0
127.5°	560.5	632.1	696.0	749.6	791.5	819.3	835.9	840.7
130°	544.6	610.9	670.6	720.7	759.8	786.3	801.7	807.7
132.5°	529.8	590.9	646.4	694.2	730.8	757.4	771.1	775.2
135°	509.9	562.2	610.1	652.1	688.2	710.4	723.6	728.8
137.5°	491.8	534.7	576.0	612.4	642.7	665.2	676.4	679.8
140°	481.2	518.8	554.1	585.8	613.9	634.4	646.3	645.5
142.5°	471.2	503.4	534.1	561.7	585.5	603.8	614.4	613.7
145°	459.1	483.4	507.0	528.4	546.8	562.2	568.2	569.6
147.5°	449.2	468.5	487.6	502.8	516.7	527.2	532.8	533.4
150°	442.1	459.1	474.6	488.5	499.6	507.7	512.2	512.2
152.5°	435.6	450.3	463.9	475.6	484.3	491.8	494.5	494.5
155°	425.9	437.7	448.7	457.6	464.2	470.1	471.6	472.3
157.5°	415.6	425.5	434.0	440.9	446.7	451.1	452.3	452.1
160°	409.7	417.8	425.2	430.4	435.5	439.9	439.9	439.2
162.5°	402.7	409.5	416.3	420.9	424.3	428.1	428.1	427.4
165°	393.5	397.9	403.1	406.8	409.7	412.6	411.9	411.9
167.5°	385.5	388.9	391.9	394.5	395.9	397.9	397.2	397.2
170°	380.2	382.5	385.4	386.9	387.6	389.1	388.3	388.3
172.5°	375.5	377.1	379.5	380.4	380.5	382.0	380.7	380.1
175°	369.2	369.9	371.4	371.4	371.4	372.1	371.4	370.7
177.5°	365.2	365.8	366.4	366.4	365.8	366.4	365.2	365.2
180°	364.0	364.0	364.0	364.0	364.0	364.0	364.0	364.0

(END OF REPORT)