

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P832170

Luminaire Tested: S123RDIP-S560D1025U830-4F0-1E-UDD-G

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P832170
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-5)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIP-S560D1025U830-4F0-1E-UDD-G
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1025 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6145.2 lumens
Efficiency: N/A
Efficacy: 135.1 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 45.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

Luminous Intensity Polar Plot

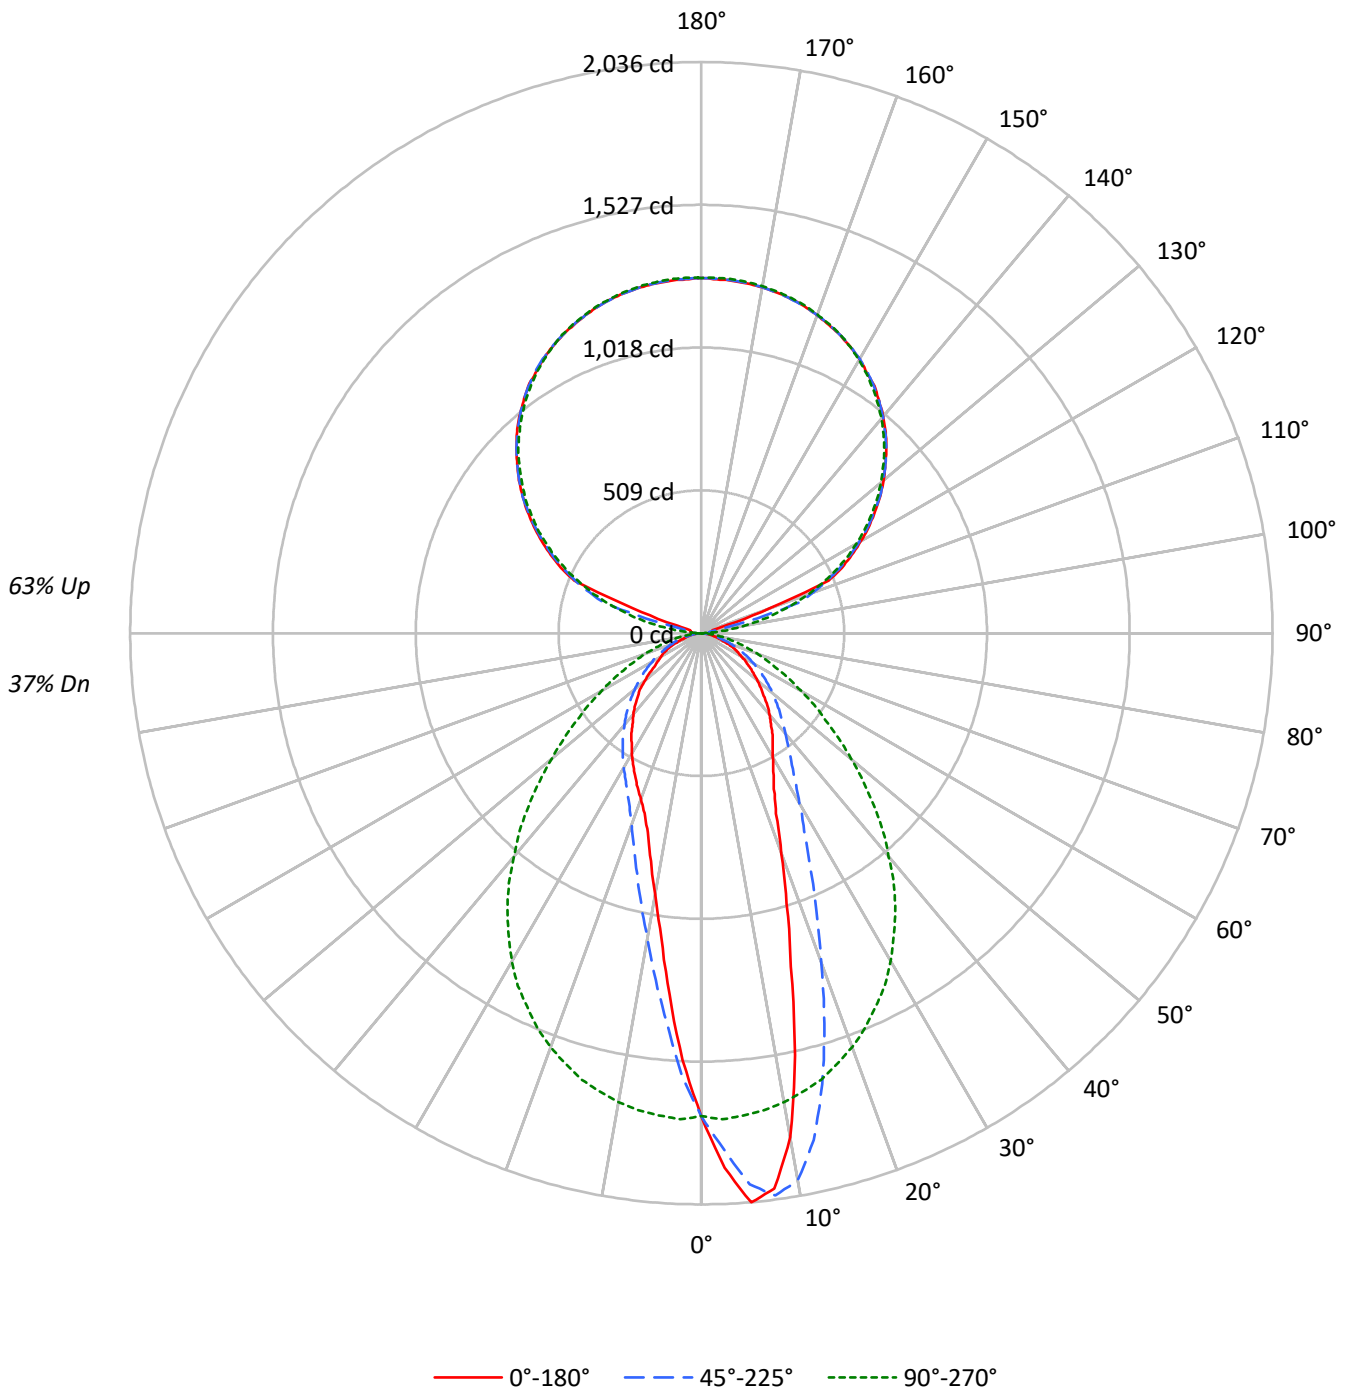



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	44	44	44	37				
1	95	91	88	85	86	83	80	77	68	66	64	53	52	51	40	39	39	32				
2	87	81	75	70	79	73	69	64	60	57	54	48	45	43	36	35	33	28				
3	80	71	65	59	73	65	59	55	53	49	46	43	40	37	33	31	29	25				
4	74	64	56	51	67	58	52	47	48	43	40	38	35	33	30	27	26	22				
5	68	57	49	44	61	52	46	41	43	38	35	35	31	29	27	25	23	20				
6	63	51	44	38	57	47	41	36	39	34	31	32	28	26	25	22	21	18				
7	58	47	39	34	53	43	36	32	36	31	27	29	26	23	23	21	19	16				
8	54	42	35	30	49	39	33	28	33	28	24	27	23	21	21	19	17	15				
9	50	39	32	27	46	36	30	25	30	25	22	25	21	19	20	17	16	13				
10	47	36	29	24	43	33	27	23	28	23	20	23	20	17	19	16	14	12				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	18529	18529	18529	18529	18529
5°	22001	21300	18646	15073	13994
10°	19934	21635	18553	12077	10361
15°	13724	18550	18357	9871	8195
20°	9548	14282	17988	8323	7204
25°	7276	10885	17453	7398	6639
30°	6334	8702	16782	6868	6150
35°	5815	7340	15831	6423	5704
40°	5306	6555	14588	5984	5296
45°	4792	5995	13247	5571	4888
50°	4349	5531	11665	5164	4384
55°	3933	5080	10145	4769	3761
60°	3524	4620	8813	4331	3556
65°	3252	4098	7585	3892	3362
70°	2644	3544	6618	3522	2732
75°	2321	2820	5606	2920	2408
80°	2101	2386	4593	2448	2275
85°	1914	2087	3483	2223	2087

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 13977 cd/sqm



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	156.9	2.6
10°-20°	363.1	5.9
20°-30°	416.6	6.8
30°-40°	410.6	6.7
40°-50°	362.1	5.9
50°-60°	278.6	4.5
60°-70°	183.1	3.0
70°-80°	88.9	1.4
80°-90°	25.0	0.4
90°-100°	44.6	0.7
100°-110°	215.8	3.5
110°-120°	529.0	8.6
120°-130°	671.6	10.9
130°-140°	717.5	11.7
140°-150°	670.9	10.9
150°-160°	541.2	8.8
160°-170°	349.2	5.7
170°-180°	120.4	2.0
0°-30°	936.6	15.2
0°-40°	1347.2	21.9
0°-60°	1987.8	32.3
0°-90°	2284.9	37.2
90°-120°	789.5	12.8
90°-150°	2849.5	46.4
90°-180°	3860.0	62.8
0°-180°	6145.2	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	1721	1721	1721	1721	1721	
5°	2036	1971	1726	1395	1295	186
15°	1232	1665	1647	886	735	348
25°	613	916	1470	623	559	289
35°	442	559	1205	489	434	276
45°	315	394	870	366	321	244
55°	210	271	541	254	200	188
65°	128	161	298	153	132	125
75°	56	68	135	70	58	60
85°	16	17	28	18	17	17
90°	28	23	1	23	28	13
95°	36	29	57	29	36	30
105°	41	206	280	206	41	86
115°	553	540	526	540	553	520
125°	756	753	741	753	756	676
135°	932	932	923	932	932	719
145°	1075	1073	1065	1073	1075	671
155°	1171	1172	1173	1172	1171	540
165°	1234	1233	1237	1233	1234	349
175°	1262	1262	1266	1262	1262	120
180°	1266	1266	1266	1266	1266	



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4
2.5°	1907.8	1901.8	1895.8	1894.0	1892.2	1886.6	1880.9	1868.2	1855.5	1842.5	1829.4
5°	2036.2	2036.9	2037.6	2035.9	2034.1	2026.7	2019.3	2003.7	1988.2	1971.3	1954.3
7.5°	1996.7	2008.0	2019.3	2021.4	2023.5	2029.2	2034.8	2031.3	2027.7	2021.4	2015.0
10°	1823.8	1823.1	1822.4	1835.1	1847.8	1885.5	1923.3	1942.7	1962.1	1979.4	1996.7
12.5°	1541.4	1542.5	1543.6	1585.2	1626.9	1662.5	1698.1	1747.5	1796.9	1850.2	1903.5
15°	1231.6	1248.9	1266.2	1303.2	1340.3	1393.9	1447.6	1513.9	1580.3	1664.6	1749.0
17.5°	1011.4	1018.8	1026.2	1061.9	1097.5	1148.3	1199.1	1274.3	1349.5	1458.2	1566.9
20°	833.5	840.2	847.0	872.7	898.5	947.2	995.9	1067.5	1139.1	1246.8	1354.4
22.5°	695.9	709.0	722.0	739.3	756.6	791.9	827.2	900.2	973.3	1071.4	1169.5
25°	612.6	618.6	624.6	639.4	654.3	688.1	722.0	770.4	818.7	916.5	1014.2
27.5°	556.2	557.9	559.7	570.6	581.6	603.5	625.3	670.1	715.0	795.4	875.9
30°	509.6	512.8	515.9	524.4	532.9	548.8	564.6	596.4	628.2	700.1	772.1
32.5°	473.6	475.4	477.1	484.2	491.2	502.9	514.5	539.6	564.6	619.7	674.7
35°	442.5	442.9	443.2	448.5	453.8	465.1	476.4	497.2	518.1	558.6	599.2
37.5°	407.2	409.7	412.2	416.1	419.9	429.8	439.7	456.6	473.6	507.1	540.6
40°	377.6	379.7	381.8	386.4	391.0	398.8	406.5	422.1	437.6	466.5	495.5
42.5°	348.0	349.4	350.8	355.4	360.0	369.5	379.0	391.4	403.7	427.7	451.7
45°	314.8	318.3	321.8	326.8	331.7	339.8	348.0	360.7	373.4	393.8	414.3
47.5°	287.3	289.0	290.8	295.0	299.3	309.1	319.0	330.3	341.6	360.7	379.7
50°	259.7	260.4	261.1	265.0	268.9	277.7	286.6	299.6	312.7	330.3	348.0
52.5°	233.6	235.4	237.1	241.0	244.9	250.9	256.9	270.3	283.7	301.0	318.3
55°	209.6	210.7	211.7	214.6	217.4	224.4	231.5	243.1	254.8	270.7	286.6
57.5°	187.0	188.4	189.9	192.0	194.1	200.4	206.8	217.0	227.3	243.1	259.0
60°	163.7	165.5	167.3	169.7	172.2	177.2	182.1	191.3	200.4	214.6	228.7
62.5°	146.8	147.2	147.5	149.6	151.7	155.3	158.8	166.2	173.6	187.7	201.9
65°	127.7	128.8	129.9	130.9	132.0	134.8	137.6	144.0	150.3	160.9	171.5
67.5°	108.0	109.0	110.1	111.9	113.6	116.1	118.6	122.8	127.0	136.9	146.8
70°	84.0	84.0	84.0	86.8	89.6	93.9	98.1	101.3	104.5	112.6	120.7
72.5°	68.5	68.8	69.2	69.5	69.9	72.3	74.8	80.1	85.4	90.3	95.3
75°	55.8	56.1	56.5	56.8	57.2	57.9	58.6	60.3	62.1	67.8	73.4
77.5°	44.5	44.8	45.2	45.5	45.9	46.6	47.3	48.0	48.7	50.8	52.9
80°	33.9	34.2	34.6	34.9	35.3	35.6	36.0	36.7	37.4	38.5	39.5
82.5°	24.7	24.7	24.7	24.7	24.7	25.4	26.1	26.1	26.1	26.8	27.5
85°	15.5	15.5	15.5	15.9	16.2	16.2	16.2	16.6	16.9	16.9	16.9
87.5°	7.1	6.7	6.4	6.7	7.1	7.1	7.1	7.4	7.8	7.8	7.8
90°	28.2	27.8	27.4	27.0	26.6	25.9	25.1	24.3	23.4	22.6	19.9
92.5°	32.0	31.8	31.6	31.4	31.2	30.3	28.9	27.4	25.9	24.5	22.6
95°	35.8	35.8	35.8	35.8	35.8	35.0	33.6	32.1	30.6	29.2	26.9
97.5°	38.6	38.4	38.2	37.9	37.7	36.8	35.1	33.5	31.8	30.1	40.8
100°	39.5	39.3	39.1	38.9	38.7	37.7	36.1	34.4	32.7	31.0	63.7
102.5°	40.5	40.0	39.6	39.2	38.8	42.0	48.9	55.8	62.7	69.6	106.0
105°	41.4	41.0	40.6	40.1	39.7	58.0	95.0	132.0	169.0	206.0	224.9
107.5°	97.8	125.2	152.6	180.0	207.4	237.2	269.4	301.6	333.8	366.0	362.8
110°	258.7	288.6	318.5	348.4	378.3	396.7	403.6	410.5	417.4	424.3	422.0



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	490.2	490.6	491.0	491.4	491.8	491.1	489.2	487.3	485.5	483.6	481.3
115°	553.2	552.4	551.5	550.7	549.8	548.4	546.3	544.2	542.1	540.0	538.1
117.5°	604.0	603.8	603.6	603.4	603.2	602.2	600.5	598.9	597.2	595.5	594.5
120°	656.7	656.7	656.7	656.7	656.7	655.8	654.2	652.5	650.8	649.1	648.5
122.5°	708.4	708.2	708.0	707.8	707.6	707.0	705.9	704.9	703.8	702.8	701.9
125°	756.4	756.0	755.6	755.1	754.7	754.3	753.9	753.5	753.1	752.6	751.8
127.5°	803.4	803.9	804.3	804.7	805.1	805.0	804.4	803.8	803.1	802.5	801.5
130°	848.6	849.0	849.4	849.9	850.3	850.1	849.2	848.4	847.6	846.7	845.9
132.5°	890.0	890.6	891.2	891.9	892.5	892.4	891.6	890.7	889.9	889.1	888.4
135°	932.3	933.0	933.6	934.2	934.8	934.8	934.2	933.6	933.0	932.3	931.5
137.5°	972.8	973.2	973.6	974.0	974.5	974.1	973.1	972.1	971.0	970.0	969.5
140°	1008.5	1009.0	1009.4	1009.8	1010.2	1010.0	1009.2	1008.3	1007.5	1006.7	1006.0
142.5°	1041.5	1042.1	1042.7	1043.3	1044.0	1044.0	1043.3	1042.7	1042.1	1041.5	1040.8
145°	1075.3	1075.3	1075.3	1075.3	1075.3	1075.1	1074.7	1074.3	1073.9	1073.4	1073.0
147.5°	1099.8	1100.8	1101.9	1102.9	1104.0	1104.3	1103.9	1103.4	1103.0	1102.6	1102.2
150°	1128.0	1128.6	1129.3	1129.9	1130.5	1130.6	1130.2	1129.8	1129.4	1129.0	1128.5
152.5°	1150.6	1151.6	1152.7	1153.7	1154.8	1154.9	1154.0	1153.2	1152.4	1151.5	1151.3
155°	1171.3	1172.5	1173.8	1175.1	1176.3	1176.4	1175.4	1174.3	1173.3	1172.2	1172.0
157.5°	1189.2	1190.8	1192.5	1194.2	1195.9	1196.1	1194.8	1193.6	1192.3	1191.0	1191.3
160°	1206.1	1207.6	1209.0	1210.5	1212.0	1212.1	1210.8	1209.5	1208.3	1207.0	1207.2
162.5°	1222.1	1223.3	1224.6	1225.9	1227.1	1227.0	1225.5	1224.1	1222.6	1221.2	1221.4
165°	1234.3	1235.8	1237.3	1238.7	1240.2	1240.1	1238.4	1236.7	1235.1	1233.4	1233.6
167.5°	1243.7	1245.4	1247.1	1248.7	1250.4	1250.4	1248.7	1247.1	1245.4	1243.7	1243.7
170°	1252.2	1253.9	1255.5	1257.2	1258.9	1258.9	1257.2	1255.5	1253.9	1252.2	1252.2
172.5°	1256.9	1258.8	1260.7	1262.5	1264.4	1264.5	1262.9	1261.2	1259.5	1257.8	1257.6
175°	1261.6	1263.3	1265.0	1266.6	1268.3	1268.4	1266.9	1265.5	1264.0	1262.5	1262.3
177.5°	1262.5	1264.6	1266.7	1268.8	1270.9	1271.1	1269.4	1267.8	1266.1	1264.4	1264.2
180°	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3

TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4
2.5°	1827.6	1825.9	1808.9	1792.0	1775.4	1758.8	1746.5	1734.1	1713.3	1692.5	1679.4
5°	1940.9	1927.5	1900.7	1873.9	1833.6	1793.4	1759.5	1725.7	1682.6	1639.6	1603.6
7.5°	2004.1	1993.2	1960.7	1928.2	1874.9	1821.6	1768.7	1715.8	1652.3	1588.7	1534.4
10°	2005.9	2015.0	1988.2	1961.4	1901.4	1841.4	1769.4	1697.4	1612.0	1526.6	1456.4
12.5°	1943.0	1982.6	1976.9	1971.3	1910.2	1849.2	1761.7	1674.1	1569.3	1464.5	1376.6
15°	1825.5	1902.1	1924.7	1947.3	1896.8	1846.4	1746.8	1647.3	1524.2	1401.0	1300.1
17.5°	1674.1	1781.4	1841.1	1900.7	1864.0	1827.3	1718.3	1609.2	1470.5	1331.8	1222.1
20°	1494.9	1635.3	1728.8	1822.4	1808.9	1795.5	1683.0	1570.4	1420.8	1271.1	1152.2
22.5°	1317.7	1465.9	1595.1	1724.2	1738.0	1751.8	1638.1	1524.5	1360.8	1197.0	1076.0
25°	1164.9	1315.6	1469.5	1623.3	1654.4	1685.4	1577.4	1469.5	1299.7	1130.0	1009.6
27.5°	1019.2	1162.4	1331.8	1501.2	1557.7	1614.1	1515.3	1416.5	1239.7	1062.9	942.9
30°	900.2	1028.3	1201.3	1374.2	1452.9	1531.6	1440.9	1350.2	1174.8	999.4	881.9
32.5°	789.4	904.1	1077.7	1251.4	1342.8	1434.2	1355.8	1277.5	1108.8	940.1	824.0
35°	701.9	804.6	966.6	1128.6	1230.9	1333.2	1269.0	1204.8	1040.0	875.2	765.4
37.5°	626.7	712.8	864.9	1017.0	1125.7	1234.4	1180.8	1127.1	972.2	817.3	713.6
40°	564.6	633.8	775.3	916.8	1023.4	1130.0	1084.1	1038.2	899.5	760.8	663.8
42.5°	511.3	571.0	698.0	825.1	922.8	1020.6	990.2	959.9	834.2	708.6	618.6
45°	464.4	514.5	626.4	738.3	828.2	918.2	894.2	870.2	761.9	653.6	571.0
47.5°	422.8	465.8	565.7	665.6	746.4	827.2	805.0	782.7	693.1	603.5	528.3
50°	384.7	421.4	504.6	587.9	660.6	733.3	715.0	696.6	622.5	548.4	483.5
52.5°	348.7	379.0	453.8	528.6	587.2	645.8	631.7	617.6	560.4	503.2	444.3
55°	314.4	342.3	405.5	468.6	518.8	568.9	554.8	540.6	496.2	451.7	399.8
57.5°	283.4	307.7	358.9	410.1	449.9	489.8	483.1	476.4	439.4	402.3	359.6
60°	250.6	272.4	316.5	360.7	392.8	424.9	417.1	409.4	382.9	356.4	319.7
62.5°	221.3	240.7	276.0	311.3	337.4	363.5	357.8	352.2	332.1	312.0	281.6
65°	190.6	209.6	238.2	266.8	287.3	307.7	302.8	297.8	282.7	267.5	243.1
67.5°	162.7	178.6	203.3	228.0	241.7	255.5	252.7	249.9	238.2	226.6	207.5
70°	134.5	148.2	168.7	189.2	198.7	208.2	209.3	210.3	199.7	189.2	175.0
72.5°	106.2	117.2	136.2	155.3	162.7	170.1	169.7	169.4	163.0	156.7	144.0
75°	81.5	89.6	104.5	119.3	125.6	132.0	133.4	134.8	128.8	122.8	115.7
77.5°	58.6	64.2	75.5	86.8	93.9	100.9	101.6	102.3	99.5	96.7	90.0
80°	41.3	43.1	50.1	57.2	64.6	72.0	73.0	74.1	71.3	68.5	64.2
82.5°	28.6	29.6	32.1	34.6	40.6	46.6	48.0	49.4	48.0	46.6	42.0
85°	17.3	17.6	18.7	19.8	22.6	25.4	26.8	28.2	27.5	26.8	24.3
87.5°	7.8	7.8	8.1	8.5	9.2	9.9	11.6	13.4	12.4	11.3	10.2
90°	17.1	14.4	11.7	9.3	7.2	5.1	3.0	0.9	3.0	5.1	7.2
92.5°	20.7	18.8	16.9	16.6	17.9	19.1	20.4	21.6	20.4	19.1	17.9
95°	24.6	22.3	20.0	23.1	31.7	40.2	48.8	57.4	48.8	40.2	31.7
97.5°	51.4	62.1	72.8	81.0	86.9	92.7	98.6	104.4	98.6	92.7	86.9
100°	96.3	128.9	161.5	175.7	171.5	167.4	163.2	159.0	163.2	167.4	171.5
102.5°	142.4	178.8	215.1	232.0	229.2	226.5	223.8	221.1	223.8	226.5	229.2
105°	243.7	262.5	281.3	289.6	287.3	285.0	282.7	280.4	282.7	285.0	287.3
107.5°	359.7	356.6	353.4	350.9	349.0	347.2	345.3	343.4	345.3	347.2	349.0
110°	419.7	417.4	415.1	413.1	411.4	409.8	408.1	406.4	408.1	409.8	411.4



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	479.0	476.7	474.4	472.5	471.0	469.6	468.1	466.6	468.1	469.6	471.0
115°	536.3	534.4	532.5	530.9	529.7	528.4	527.2	525.9	527.2	528.4	529.7
117.5°	593.4	592.4	591.3	590.1	588.6	587.2	585.7	584.2	585.7	587.2	588.6
120°	647.9	647.3	646.6	645.4	643.5	641.6	639.7	637.9	639.7	641.6	643.5
122.5°	701.1	700.3	699.4	698.3	696.8	695.4	693.9	692.4	693.9	695.4	696.8
125°	751.0	750.1	749.3	748.0	746.4	744.7	743.0	741.3	743.0	744.7	746.4
127.5°	800.4	799.4	798.3	797.0	795.3	793.6	791.9	790.3	791.9	793.6	795.3
130°	845.0	844.2	843.4	842.1	840.4	838.8	837.1	835.4	837.1	838.8	840.4
132.5°	887.8	887.2	886.5	885.4	883.7	882.0	880.4	878.7	880.4	882.0	883.7
135°	930.7	929.8	929.0	927.9	926.7	925.4	924.2	922.9	924.2	925.4	926.7
137.5°	969.1	968.7	968.3	967.2	965.6	963.9	962.2	960.6	962.2	963.9	965.6
140°	1005.4	1004.8	1004.1	1003.2	1001.9	1000.7	999.4	998.2	999.4	1000.7	1001.9
142.5°	1040.2	1039.6	1039.0	1038.0	1036.8	1035.5	1034.2	1033.0	1034.2	1035.5	1036.8
145°	1072.6	1072.2	1071.8	1070.8	1069.4	1067.9	1066.4	1065.0	1066.4	1067.9	1069.4
147.5°	1101.8	1101.4	1100.9	1100.2	1099.2	1098.1	1097.1	1096.0	1097.1	1098.1	1099.2
150°	1128.1	1127.7	1127.3	1126.8	1126.1	1125.5	1124.9	1124.3	1124.9	1125.5	1126.1
152.5°	1151.1	1150.9	1150.7	1150.5	1150.3	1150.1	1149.9	1149.7	1149.9	1150.1	1150.3
155°	1171.8	1171.6	1171.4	1171.5	1171.9	1172.3	1172.8	1173.2	1172.8	1172.3	1171.9
157.5°	1191.5	1191.7	1191.9	1192.0	1192.0	1192.0	1192.0	1192.0	1192.0	1192.0	1192.0
160°	1207.5	1207.7	1207.9	1208.1	1208.3	1208.5	1208.7	1208.9	1208.7	1208.5	1208.3
162.5°	1221.6	1221.8	1222.0	1222.4	1223.0	1223.7	1224.3	1224.9	1224.3	1223.7	1223.0
165°	1233.8	1234.0	1234.2	1234.6	1235.3	1235.9	1236.5	1237.1	1236.5	1235.9	1235.3
167.5°	1243.7	1243.7	1243.7	1244.1	1245.0	1245.8	1246.7	1247.5	1246.7	1245.8	1245.0
170°	1252.2	1252.2	1252.2	1252.6	1253.5	1254.3	1255.1	1256.0	1255.1	1254.3	1253.5
172.5°	1257.4	1257.2	1257.0	1257.4	1258.5	1259.5	1260.6	1261.6	1260.6	1259.5	1258.5
175°	1262.1	1261.9	1261.7	1262.1	1263.2	1264.2	1265.3	1266.3	1265.3	1264.2	1263.2
177.5°	1264.0	1263.8	1263.6	1264.0	1265.1	1266.1	1267.1	1268.2	1267.1	1266.1	1265.1
180°	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4	1721.4
2.5°	1666.4	1646.3	1626.1	1611.7	1597.2	1579.2	1561.2	1560.5	1559.8	1546.4	1533.0
5°	1567.6	1532.6	1497.7	1463.5	1429.2	1395.0	1360.8	1353.0	1345.2	1333.6	1321.9
7.5°	1480.0	1424.3	1368.5	1324.8	1281.0	1246.8	1212.6	1189.3	1166.0	1148.0	1130.0
10°	1386.2	1317.0	1247.8	1194.9	1142.0	1104.9	1067.9	1041.0	1014.2	1001.5	988.8
12.5°	1288.8	1213.6	1138.4	1086.6	1034.7	990.2	945.8	921.4	897.1	879.4	861.8
15°	1199.1	1118.3	1037.5	982.5	927.4	885.8	844.1	819.8	795.4	777.8	760.1
17.5°	1112.3	1030.8	949.3	893.5	837.8	800.0	762.3	738.6	715.0	704.0	693.1
20°	1033.3	951.1	868.8	816.2	763.7	726.6	689.6	676.9	664.2	653.9	643.7
22.5°	954.9	875.9	796.8	746.4	695.9	669.1	642.3	632.0	621.8	614.0	606.3
25°	889.3	810.6	731.9	687.8	643.7	622.9	602.0	595.3	588.6	580.9	573.1
27.5°	823.0	748.1	673.3	638.0	602.7	585.8	568.9	560.4	551.9	545.6	539.2
30°	764.4	695.2	626.0	596.7	567.5	552.6	537.8	528.6	519.5	513.5	507.5
32.5°	707.9	646.5	585.1	560.0	535.0	520.5	506.1	497.2	488.4	481.4	474.3
35°	655.7	602.4	549.1	526.2	503.2	488.8	474.3	465.5	456.6	449.6	442.5
37.5°	609.8	561.5	513.1	491.6	470.1	457.4	444.6	435.5	426.3	418.9	411.5
40°	566.8	524.1	481.4	460.5	439.7	425.9	412.2	404.1	395.9	389.2	382.5
42.5°	528.6	489.5	450.3	429.8	409.4	396.3	383.2	373.7	364.2	360.3	356.4
45°	488.4	453.8	419.2	399.5	379.7	366.0	352.2	344.1	336.0	332.4	328.9
47.5°	453.1	421.0	388.9	369.5	350.1	337.7	325.4	319.0	312.7	307.7	302.8
50°	418.5	387.5	356.4	337.7	319.0	308.4	297.8	290.1	282.3	278.8	275.3
52.5°	385.4	357.1	328.9	309.8	290.8	280.6	270.3	263.6	256.9	249.5	242.1
55°	348.0	323.3	298.6	281.6	264.7	254.1	243.5	235.7	228.0	220.2	212.4
57.5°	316.9	292.6	268.2	253.0	237.9	227.6	217.4	208.9	200.4	194.1	187.7
60°	283.0	261.8	240.7	225.9	211.0	201.2	191.3	183.2	175.0	171.9	168.7
62.5°	251.3	231.5	211.7	198.7	185.6	176.1	166.6	161.3	156.0	153.9	151.7
65°	218.8	201.9	184.9	172.9	160.9	152.8	144.7	142.2	139.7	138.0	136.2
67.5°	188.4	174.0	159.5	148.9	138.3	132.7	127.0	124.2	121.4	119.3	117.2
70°	160.9	148.2	135.5	126.3	117.2	111.9	106.6	104.1	101.6	97.8	93.9
72.5°	131.3	121.4	111.5	104.5	97.4	92.8	88.2	83.3	78.3	74.8	71.3
75°	108.7	98.8	88.9	82.2	75.5	70.2	64.9	63.2	61.4	60.3	59.3
77.5°	83.3	74.8	66.3	61.1	55.8	53.3	50.8	49.8	48.7	48.3	48.0
80°	60.0	52.9	45.9	43.1	40.2	39.5	38.8	38.1	37.4	37.1	36.7
82.5°	37.4	33.9	30.3	29.6	28.9	28.6	28.2	27.9	27.5	27.2	26.8
85°	21.9	20.5	19.1	18.7	18.4	18.0	17.6	17.6	17.6	17.6	17.6
87.5°	9.2	9.2	9.2	9.2	9.2	9.2	9.2	9.2	9.2	8.8	8.5
90°	9.3	11.7	14.4	17.1	19.9	22.6	23.4	24.3	25.1	25.9	26.6
92.5°	16.6	16.9	18.8	20.7	22.6	24.5	25.9	27.4	28.9	30.3	31.2
95°	23.1	20.0	22.3	24.6	26.9	29.2	30.6	32.1	33.6	35.0	35.8
97.5°	81.0	72.8	62.1	51.4	40.8	30.1	31.8	33.5	35.1	36.8	37.7
100°	175.7	161.5	128.9	96.3	63.7	31.0	32.7	34.4	36.1	37.7	38.7
102.5°	232.0	215.1	178.8	142.4	106.0	69.6	62.7	55.8	48.9	42.0	38.8
105°	289.6	281.3	262.5	243.7	224.9	206.0	169.0	132.0	95.0	58.0	39.7
107.5°	350.9	353.4	356.6	359.7	362.8	366.0	333.8	301.6	269.4	237.2	207.4
110°	413.1	415.1	417.4	419.7	422.0	424.3	417.4	410.5	403.6	396.7	378.3



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	472.5	474.4	476.7	479.0	481.3	483.6	485.5	487.3	489.2	491.1	491.8
115°	530.9	532.5	534.4	536.3	538.1	540.0	542.1	544.2	546.3	548.4	549.8
117.5°	590.1	591.3	592.4	593.4	594.5	595.5	597.2	598.9	600.5	602.2	603.2
120°	645.4	646.6	647.3	647.9	648.5	649.1	650.8	652.5	654.2	655.8	656.7
122.5°	698.3	699.4	700.3	701.1	701.9	702.8	703.8	704.9	705.9	707.0	707.6
125°	748.0	749.3	750.1	751.0	751.8	752.6	753.1	753.5	753.9	754.3	754.7
127.5°	797.0	798.3	799.4	800.4	801.5	802.5	803.1	803.8	804.4	805.0	805.1
130°	842.1	843.4	844.2	845.0	845.9	846.7	847.6	848.4	849.2	850.1	850.3
132.5°	885.4	886.5	887.2	887.8	888.4	889.1	889.9	890.7	891.6	892.4	892.5
135°	927.9	929.0	929.8	930.7	931.5	932.3	933.0	933.6	934.2	934.8	934.8
137.5°	967.2	968.3	968.7	969.1	969.5	970.0	971.0	972.1	973.1	974.1	974.5
140°	1003.2	1004.1	1004.8	1005.4	1006.0	1006.7	1007.5	1008.3	1009.2	1010.0	1010.2
142.5°	1038.0	1039.0	1039.6	1040.2	1040.8	1041.5	1042.1	1042.7	1043.3	1044.0	1044.0
145°	1070.8	1071.8	1072.2	1072.6	1073.0	1073.4	1073.9	1074.3	1074.7	1075.1	1075.3
147.5°	1100.2	1100.9	1101.4	1101.8	1102.2	1102.6	1103.0	1103.4	1103.9	1104.3	1104.0
150°	1126.8	1127.3	1127.7	1128.1	1128.5	1129.0	1129.4	1129.8	1130.2	1130.6	1130.5
152.5°	1150.5	1150.7	1150.9	1151.1	1151.3	1151.5	1152.4	1153.2	1154.0	1154.9	1154.8
155°	1171.5	1171.4	1171.6	1171.8	1172.0	1172.2	1173.3	1174.3	1175.4	1176.4	1176.3
157.5°	1192.0	1191.9	1191.7	1191.5	1191.3	1191.0	1192.3	1193.6	1194.8	1196.1	1195.9
160°	1208.1	1207.9	1207.7	1207.5	1207.2	1207.0	1208.3	1209.5	1210.8	1212.1	1212.0
162.5°	1222.4	1222.0	1221.8	1221.6	1221.4	1221.2	1222.6	1224.1	1225.5	1227.0	1227.1
165°	1234.6	1234.2	1234.0	1233.8	1233.6	1233.4	1235.1	1236.7	1238.4	1240.1	1240.2
167.5°	1244.1	1243.7	1243.7	1243.7	1243.7	1243.7	1245.4	1247.1	1248.7	1250.4	1250.4
170°	1252.6	1252.2	1252.2	1252.2	1252.2	1252.2	1253.9	1255.5	1257.2	1258.9	1258.9
172.5°	1257.4	1257.0	1257.2	1257.4	1257.6	1257.8	1259.5	1261.2	1262.9	1264.5	1264.4
175°	1262.1	1261.7	1261.9	1262.1	1262.3	1262.5	1264.0	1265.5	1266.9	1268.4	1268.3
177.5°	1264.0	1263.6	1263.8	1264.0	1264.2	1264.4	1266.1	1267.8	1269.4	1271.1	1270.9
180°	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3	1266.3



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	1721.4	1721.4	1721.4	1721.4
2.5°	1529.5	1525.9	1524.5	1523.1
5°	1311.0	1300.1	1297.6	1295.1
7.5°	1125.4	1120.8	1105.6	1090.4
10°	974.7	960.6	954.2	947.9
12.5°	848.7	835.7	833.5	831.4
15°	751.0	741.8	738.6	735.4
17.5°	686.7	680.4	676.5	672.6
20°	639.1	634.5	631.7	628.9
22.5°	602.7	599.2	597.1	595.0
25°	567.8	562.5	560.8	559.0
27.5°	534.6	530.0	528.3	526.5
30°	503.6	499.7	497.2	494.8
32.5°	469.7	465.1	463.7	462.3
35°	439.7	436.9	435.5	434.1
37.5°	407.9	404.4	402.3	400.2
40°	380.8	379.0	378.0	376.9
42.5°	353.2	350.1	349.7	349.4
45°	325.7	322.5	321.8	321.1
47.5°	300.0	297.1	296.8	296.4
50°	271.4	267.5	264.7	261.8
52.5°	238.6	235.0	232.6	230.1
55°	208.6	204.7	202.6	200.4
57.5°	186.0	184.2	183.2	182.1
60°	167.6	166.6	165.9	165.2
62.5°	150.7	149.6	149.6	149.6
65°	135.2	134.1	133.0	132.0
67.5°	115.0	112.9	112.6	112.2
70°	90.7	87.5	87.2	86.8
72.5°	70.9	70.6	69.9	69.2
75°	58.6	57.9	57.9	57.9
77.5°	47.3	46.6	46.6	46.6
80°	36.3	36.0	36.3	36.7
82.5°	26.8	26.8	26.5	26.1
85°	17.3	16.9	16.9	16.9
87.5°	8.5	8.5	8.5	8.5
90°	27.0	27.4	27.8	28.2
92.5°	31.4	31.6	31.8	32.0
95°	35.8	35.8	35.8	35.8
97.5°	37.9	38.2	38.4	38.6
100°	38.9	39.1	39.3	39.5
102.5°	39.2	39.6	40.0	40.5
105°	40.1	40.6	41.0	41.4
107.5°	180.0	152.6	125.2	97.8
110°	348.4	318.5	288.6	258.7



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	491.4	491.0	490.6	490.2
115°	550.7	551.5	552.4	553.2
117.5°	603.4	603.6	603.8	604.0
120°	656.7	656.7	656.7	656.7
122.5°	707.8	708.0	708.2	708.4
125°	755.1	755.6	756.0	756.4
127.5°	804.7	804.3	803.9	803.4
130°	849.9	849.4	849.0	848.6
132.5°	891.9	891.2	890.6	890.0
135°	934.2	933.6	933.0	932.3
137.5°	974.0	973.6	973.2	972.8
140°	1009.8	1009.4	1009.0	1008.5
142.5°	1043.3	1042.7	1042.1	1041.5
145°	1075.3	1075.3	1075.3	1075.3
147.5°	1102.9	1101.9	1100.8	1099.8
150°	1129.9	1129.3	1128.6	1128.0
152.5°	1153.7	1152.7	1151.6	1150.6
155°	1175.1	1173.8	1172.5	1171.3
157.5°	1194.2	1192.5	1190.8	1189.2
160°	1210.5	1209.0	1207.6	1206.1
162.5°	1225.9	1224.6	1223.3	1222.1
165°	1238.7	1237.3	1235.8	1234.3
167.5°	1248.7	1247.1	1245.4	1243.7
170°	1257.2	1255.5	1253.9	1252.2
172.5°	1262.5	1260.7	1258.8	1256.9
175°	1266.6	1265.0	1263.3	1261.6
177.5°	1268.8	1266.7	1264.6	1262.5
180°	1266.3	1266.3	1266.3	1266.3



TEST NUMBER: P832170

CATALOG NUMBER: S123RDIP-S560D1025U830-4F0-1E-UDD-G

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.55	10.27	10.62	11.34	12.78	14.22	14.94	15.29	16.00	17.45
	3H	10.76	11.41	11.84	12.48	13.95	15.71	16.35	16.79	17.42	18.89
	4H	11.14	11.75	12.23	12.83	14.30	16.19	16.80	17.28	17.88	19.35
	6H	11.42	11.98	12.52	13.06	14.54	16.50	17.06	17.60	18.14	19.62
	8H	11.50	12.03	12.60	13.13	14.61	16.57	17.11	17.68	18.20	19.68
	12H	11.55	12.06	12.66	13.14	14.64	16.60	17.11	17.71	18.19	19.69
4H	2H	10.26	10.87	11.36	11.95	13.42	14.20	14.81	15.29	15.88	17.35
	3H	11.62	12.13	12.72	13.23	14.71	15.85	16.35	16.95	17.45	18.94
	4H	12.07	12.54	13.18	13.63	15.13	16.45	16.91	17.55	18.01	19.51
	6H	12.43	12.83	13.55	13.95	15.45	16.88	17.28	17.99	18.39	19.89
	8H	12.56	12.93	13.67	14.04	15.55	17.01	17.38	18.12	18.49	20.00
	12H	12.63	12.96	13.76	14.08	15.60	17.07	17.40	18.20	18.52	20.04
8H	4H	12.38	12.75	13.49	13.86	15.37	16.41	16.78	17.52	17.89	19.40
	6H	12.84	13.14	13.97	14.29	15.80	16.90	17.21	18.04	18.36	19.87
	8H	13.03	13.30	14.17	14.43	15.96	17.09	17.35	18.23	18.48	20.01
	12H	13.17	13.40	14.31	14.53	16.10	17.20	17.43	18.34	18.56	20.13
12H	4H	12.39	12.72	13.52	13.84	15.36	16.35	16.69	17.48	17.81	19.33
	6H	12.90	13.16	14.04	14.30	15.83	16.87	17.14	18.02	18.27	19.80
	8H	13.11	13.35	14.26	14.47	16.04	17.06	17.30	18.21	18.42	19.99