

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332298-830

Luminaire Tested: **S123RDIP-S560D1195U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332298-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S560D1195U830-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5877.8 lumens
Efficiency: N/A
Efficacy: 119.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332298-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

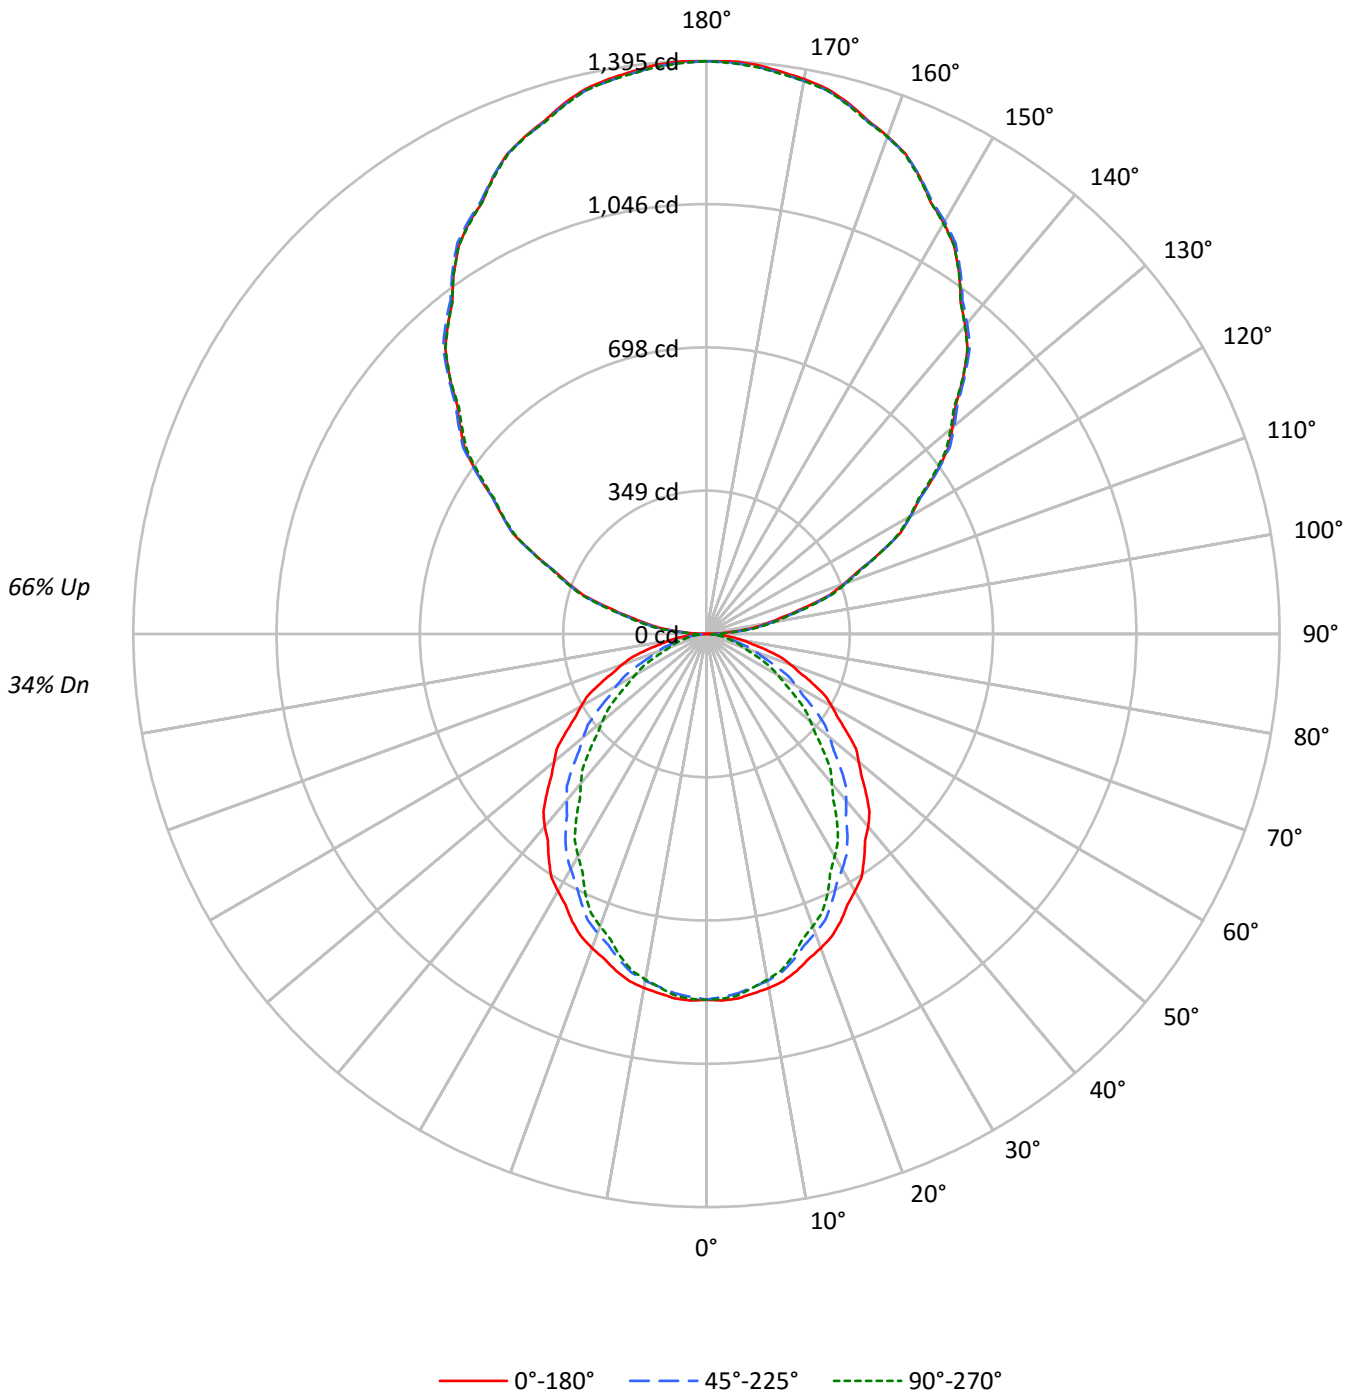



TEST NUMBER: P332298-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	75	75	75	57	57	57	42	42	42	34
1	94	90	87	83	85	82	79	76	66	63	62	51	49	48	37	36	36	29
2	86	79	73	68	78	72	67	62	58	54	51	45	43	41	33	32	30	25
3	79	70	63	57	71	63	57	52	51	47	43	40	37	34	29	28	26	21
4	72	62	54	48	65	56	50	44	45	41	37	36	32	30	26	24	23	18
5	66	55	47	41	60	50	43	38	41	36	32	32	28	26	24	22	20	16
6	61	49	41	36	55	45	38	33	37	32	28	29	25	23	22	19	17	14
7	56	44	37	31	51	41	34	29	33	28	24	26	23	20	20	17	16	13
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14	11
9	48	37	29	25	44	34	27	23	28	23	19	22	19	16	17	14	13	10
10	45	34	27	22	41	31	25	20	25	21	17	20	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9582	9582	9582
5°	9619	9487	9541
10°	9565	9368	9335
15°	9461	9149	9052
20°	9321	8874	8668
25°	9175	8567	8291
30°	8983	8211	7762
35°	8784	7857	7276
40°	8604	7436	6674
45°	8363	7024	6132
50°	8100	6553	5526
55°	7833	6016	4960
60°	7584	5440	4336
65°	7264	4819	3713
70°	6861	4047	2999
75°	6276	3182	2824
80°	5597	2820	2591
85°	4730	2495	2322



TEST NUMBER: P332298-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	83.6	1.4
10°-20°	232.6	4.0
20°-30°	334.9	5.7
30°-40°	377.3	6.4
40°-50°	360.9	6.1
50°-60°	295.6	5.0
60°-70°	199.4	3.4
70°-80°	100.3	1.7
80°-90°	30.7	0.5
90°-100°	90.8	1.5
100°-110°	271.8	4.6
110°-120°	462.3	7.9
120°-130°	608.1	10.3
130°-140°	683.5	11.6
140°-150°	671.9	11.4
150°-160°	565.6	9.6
160°-170°	376.5	6.4
170°-180°	131.8	2.2
0°-30°	651.1	11.1
0°-40°	1028.4	17.5
0°-60°	1684.8	28.7
0°-90°	2015.2	34.3
90°-120°	825.0	14.0
90°-150°	2788.5	47.4
90°-180°	3863.0	65.7
0°-180°	5877.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	890	890	890	890	890	
5°	890	886	878	884	883	84
15°	849	840	821	817	812	239
25°	772	754	721	706	698	355
35°	668	642	598	568	554	418
45°	549	516	461	422	403	424
55°	417	380	321	280	264	374
65°	285	245	189	155	146	282
75°	151	116	76	70	68	161
85°	38	23	20	19	19	43
90°	1	12	26	31	33	6
95°	65	72	81	85	85	73
105°	246	249	258	259	261	264
115°	465	468	467	468	467	460
125°	681	684	682	678	674	607
135°	884	890	889	885	883	681
145°	1072	1074	1078	1076	1072	669
155°	1228	1228	1229	1232	1225	565
165°	1337	1334	1334	1340	1333	377
175°	1391	1387	1386	1392	1385	132
180°	1394	1394	1394	1394	1394	



TEST NUMBER: P332298-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2
2.5°	893.2	892.6	892.1	891.6	891.1	890.0	888.5	886.9	885.4	883.9	885.3
5°	890.2	889.5	888.6	887.9	887.0	885.7	883.7	881.8	879.9	878.0	879.4
7.5°	882.0	881.2	880.2	879.4	878.5	876.8	874.4	871.9	869.3	866.9	867.6
10°	875.1	873.9	872.8	871.7	870.6	868.6	865.7	862.8	859.9	857.1	857.1
12.5°	865.3	864.0	862.7	861.5	860.3	857.9	854.3	850.8	847.3	843.8	843.7
15°	849.0	847.3	845.6	843.8	842.1	838.9	834.4	829.9	825.4	821.0	820.1
17.5°	828.7	826.7	824.6	822.6	820.5	816.6	810.9	805.2	799.5	793.8	792.1
20°	813.7	811.2	808.6	806.0	803.4	799.1	793.0	786.9	780.8	774.7	772.6
22.5°	796.9	794.0	791.1	788.1	785.1	780.4	773.9	767.4	761.0	754.5	751.9
25°	772.5	768.5	764.5	760.5	756.5	750.8	743.4	736.0	728.7	721.3	717.9
27.5°	742.9	738.5	734.1	729.6	725.2	718.9	710.7	702.5	694.3	686.1	681.4
30°	722.7	717.9	713.1	708.3	703.5	696.5	687.6	678.6	669.6	660.6	655.2
32.5°	702.5	697.1	691.6	686.2	680.7	673.3	663.7	654.2	644.7	635.2	629.2
35°	668.5	662.8	657.0	651.3	645.5	637.6	627.6	617.7	607.8	597.9	590.9
37.5°	634.2	627.8	621.4	614.9	608.5	600.0	589.4	578.8	568.2	557.5	549.7
40°	612.3	605.2	598.1	591.1	584.0	574.8	563.5	552.0	540.6	529.2	520.8
42.5°	587.4	580.3	573.3	566.3	559.2	549.8	538.0	526.2	514.4	502.7	493.5
45°	549.4	542.2	535.0	527.8	520.6	510.8	498.4	486.1	473.7	461.4	452.2
47.5°	511.4	503.5	495.6	487.7	479.8	469.7	457.2	444.9	432.5	420.2	410.3
50°	483.7	476.2	468.6	461.1	453.6	443.3	430.3	417.4	404.4	391.3	381.4
52.5°	458.9	450.7	442.5	434.3	426.2	415.7	402.7	389.9	377.0	364.2	353.8
55°	417.4	409.4	401.6	393.7	385.9	375.1	361.5	347.9	334.2	320.6	311.2
57.5°	378.9	370.3	361.7	353.2	344.6	333.5	319.8	306.1	292.4	278.7	269.9
60°	352.3	343.6	334.7	325.8	317.1	305.9	292.7	279.4	266.0	252.7	244.0
62.5°	325.7	317.0	308.1	299.3	290.5	279.4	266.1	252.8	239.4	226.1	218.0
65°	285.2	276.4	267.6	258.7	249.9	239.2	226.7	214.2	201.7	189.2	181.3
67.5°	244.6	235.7	226.8	217.8	209.0	198.5	186.4	174.5	162.5	150.4	144.6
70°	218.0	209.3	200.8	192.1	183.4	173.4	162.2	151.0	139.8	128.6	122.9
72.5°	191.4	182.9	174.4	165.9	157.3	148.0	137.8	127.5	117.3	107.2	102.5
75°	150.9	143.2	135.5	127.8	120.1	111.8	103.0	94.2	85.4	76.5	74.9
77.5°	114.0	107.0	100.0	93.0	86.1	79.7	74.1	68.4	62.7	57.0	56.2
80°	90.3	83.7	77.1	70.5	63.9	59.0	55.6	52.2	48.8	45.5	45.0
82.5°	67.8	62.0	56.4	50.7	45.0	41.4	39.8	38.3	36.7	35.1	34.6
85°	38.3	34.8	31.2	27.7	24.1	22.1	21.7	21.2	20.7	20.2	19.9
87.5°	14.0	13.2	12.3	11.3	10.4	10.3	10.8	11.5	12.2	12.7	12.8
90°	1.1	3.5	5.9	8.4	10.8	13.7	16.8	20.0	23.1	26.3	27.2
92.5°	26.5	28.2	29.8	31.5	33.1	34.9	36.7	38.5	40.2	42.0	42.8
95°	64.7	66.4	68.1	69.7	71.4	73.2	75.2	77.1	79.1	81.1	82.0
97.5°	114.8	116.0	117.3	118.6	119.8	121.2	122.6	124.0	125.4	126.8	127.9
100°	148.9	150.4	151.8	153.4	154.8	156.1	157.3	158.5	159.8	161.0	161.7
102.5°	188.3	189.3	190.1	191.0	191.9	193.1	194.7	196.3	197.9	199.5	200.3
105°	246.4	246.9	247.4	247.9	248.4	249.7	251.8	254.1	256.3	258.4	258.4
107.5°	313.9	314.1	314.4	314.7	315.0	315.7	316.5	317.4	318.2	319.1	319.9
110°	355.9	356.4	356.8	357.4	357.9	358.4	358.8	359.3	359.8	360.3	361.3



TEST NUMBER: P332298-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	399.7	400.0	400.3	400.6	400.9	401.1	401.1	401.2	401.3	401.4	402.7
115°	465.4	466.2	466.8	467.6	468.3	468.4	468.0	467.5	467.0	466.6	466.7
117.5°	531.6	532.1	532.5	533.0	533.5	533.5	532.8	532.2	531.6	530.9	530.8
120°	572.8	574.2	575.7	577.1	578.6	578.7	577.5	576.3	575.0	573.8	573.6
122.5°	615.7	616.7	617.8	618.9	620.0	620.2	619.5	618.9	618.3	617.6	617.0
125°	681.2	681.9	682.6	683.3	684.1	684.2	683.7	683.2	682.8	682.3	681.3
127.5°	741.6	743.2	744.7	746.3	747.8	748.4	747.8	747.2	746.8	746.2	744.9
130°	781.9	783.8	785.8	787.8	789.7	790.3	789.6	788.8	788.2	787.4	786.5
132.5°	822.2	824.2	826.1	828.0	830.0	830.8	830.2	829.6	829.1	828.6	827.4
135°	883.7	885.2	886.6	888.2	889.6	890.2	889.9	889.8	889.5	889.2	888.3
137.5°	940.8	941.9	943.1	944.3	945.6	946.5	947.2	947.7	948.4	949.0	948.0
140°	980.1	981.4	982.6	983.8	985.0	985.7	986.0	986.2	986.5	986.7	986.5
142.5°	1016.1	1017.3	1018.5	1019.7	1021.0	1021.7	1022.2	1022.7	1023.0	1023.5	1023.2
145°	1072.1	1072.6	1073.1	1073.6	1074.0	1074.7	1075.4	1076.1	1076.9	1077.6	1077.3
147.5°	1121.2	1122.1	1122.9	1123.8	1124.7	1125.5	1126.1	1126.8	1127.5	1128.2	1128.2
150°	1155.4	1155.8	1156.3	1156.8	1157.3	1157.8	1158.3	1158.8	1159.2	1159.7	1159.7
152.5°	1183.4	1184.1	1184.8	1185.4	1186.1	1186.6	1186.8	1187.2	1187.5	1187.8	1188.2
155°	1227.7	1227.7	1227.7	1227.7	1227.7	1227.8	1228.0	1228.2	1228.5	1228.7	1229.7
157.5°	1265.3	1265.0	1264.7	1264.4	1264.1	1264.0	1264.3	1264.5	1264.7	1264.9	1265.9
160°	1288.9	1288.5	1288.0	1287.5	1287.0	1286.8	1286.8	1286.8	1286.8	1286.8	1288.0
162.5°	1309.9	1309.3	1308.6	1308.0	1307.3	1307.0	1307.2	1307.4	1307.6	1307.8	1309.0
165°	1337.2	1336.4	1335.7	1334.9	1334.3	1333.9	1333.9	1333.9	1333.9	1333.9	1335.3
167.5°	1358.9	1357.8	1356.9	1355.9	1354.9	1354.5	1354.7	1354.9	1355.1	1355.3	1356.8
170°	1371.1	1370.1	1369.1	1368.2	1367.2	1366.7	1366.7	1366.7	1366.7	1366.7	1368.4
172.5°	1380.7	1379.8	1378.8	1377.8	1376.9	1376.4	1376.4	1376.4	1376.4	1376.4	1377.9
175°	1390.8	1389.9	1388.8	1387.9	1387.0	1386.4	1386.4	1386.4	1386.4	1386.4	1387.9
177.5°	1395.0	1394.2	1393.5	1392.6	1391.9	1391.5	1391.5	1391.5	1391.5	1391.5	1392.6
180°	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1



TEST NUMBER: P332298-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2
2.5°	886.7	888.2	889.6	890.1	889.9	889.6	889.4	889.1
5°	880.8	882.3	883.7	884.3	884.0	883.6	883.4	883.0
7.5°	868.5	869.2	870.1	870.2	869.6	869.1	868.6	868.0
10°	857.3	857.5	857.6	857.3	856.6	855.7	855.0	854.1
12.5°	843.6	843.5	843.4	842.8	841.9	840.9	840.1	839.1
15°	819.4	818.5	817.7	816.7	815.6	814.5	813.4	812.3
17.5°	790.4	788.7	786.9	785.3	783.6	781.9	780.2	778.6
20°	770.5	768.5	766.4	764.4	762.4	760.5	758.6	756.7
22.5°	749.3	746.7	744.1	741.9	740.1	738.3	736.5	734.7
25°	714.5	711.1	707.8	705.2	703.5	701.7	699.9	698.1
27.5°	676.7	672.0	667.3	663.6	660.9	658.3	655.5	652.8
30°	649.7	644.2	638.9	634.8	632.3	629.7	627.1	624.5
32.5°	623.3	617.3	611.3	607.0	604.4	601.6	598.9	596.3
35°	584.0	577.1	570.2	565.3	562.4	559.6	556.7	553.7
37.5°	541.9	534.0	526.2	520.6	517.0	513.4	509.8	506.2
40°	512.6	504.2	495.9	489.8	486.2	482.5	478.8	475.0
42.5°	484.5	475.3	466.2	460.0	456.7	453.4	450.1	446.8
45°	443.1	433.9	424.8	418.3	414.4	410.6	406.7	402.8
47.5°	400.3	390.4	380.4	373.7	370.3	366.8	363.4	360.0
50°	371.5	361.5	351.6	344.7	341.0	337.3	333.7	330.0
52.5°	343.6	333.2	322.8	316.0	312.7	309.4	306.1	302.8
55°	302.0	292.7	283.3	277.1	273.9	270.7	267.5	264.3
57.5°	261.1	252.3	243.6	237.8	235.1	232.3	229.6	226.9
60°	235.4	226.7	218.0	212.4	209.6	206.9	204.2	201.4
62.5°	209.8	201.7	193.5	188.0	185.2	182.3	179.5	176.6
65°	173.4	165.6	157.7	152.9	151.2	149.4	147.6	145.8
67.5°	138.7	132.8	127.0	123.1	121.2	119.3	117.4	115.6
70°	117.3	111.7	106.0	102.4	100.6	98.9	97.1	95.3
72.5°	97.9	93.4	88.8	86.1	85.4	84.6	83.9	83.1
75°	73.3	71.7	70.1	69.2	68.8	68.5	68.1	67.9
77.5°	55.3	54.5	53.5	53.0	52.7	52.3	52.0	51.7
80°	44.5	44.0	43.5	43.2	42.9	42.5	42.2	41.8
82.5°	34.1	33.6	33.2	32.9	32.8	32.8	32.7	32.6
85°	19.6	19.2	18.9	18.8	18.8	18.8	18.8	18.8
87.5°	12.9	13.0	13.0	13.0	13.0	13.0	12.9	12.9
90°	28.3	29.2	30.2	30.9	31.4	31.9	32.3	32.9
92.5°	43.6	44.4	45.1	45.4	45.1	44.9	44.5	44.2
95°	82.9	84.0	84.9	85.4	85.4	85.4	85.4	85.4
97.5°	129.0	130.2	131.3	131.8	131.7	131.6	131.5	131.4
100°	162.4	163.2	163.9	164.5	165.0	165.5	166.0	166.5
102.5°	201.0	201.7	202.5	202.7	202.6	202.6	202.5	202.4
105°	258.4	258.4	258.4	258.7	259.2	259.7	260.1	260.6
107.5°	320.7	321.5	322.3	322.4	322.2	321.9	321.6	321.3
110°	362.2	363.3	364.2	364.4	363.9	363.4	363.0	362.5



TEST NUMBER: P332298-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	403.8	405.0	406.1	406.7	406.6	406.5	406.4	406.3
115°	467.0	467.2	467.5	467.5	467.2	467.0	466.7	466.6
117.5°	530.8	530.7	530.7	530.4	529.7	529.0	528.3	527.6
120°	573.3	573.2	572.9	572.5	572.0	571.6	571.1	570.5
122.5°	616.4	615.8	615.1	614.4	613.8	613.1	612.4	611.7
125°	680.3	679.4	678.3	677.4	676.5	675.4	674.5	673.5
127.5°	743.5	742.2	740.7	739.5	738.4	737.3	736.1	735.1
130°	785.4	784.5	783.5	782.1	780.4	778.7	777.0	775.3
132.5°	826.2	825.1	823.9	822.7	821.3	820.0	818.7	817.4
135°	887.3	886.3	885.3	884.6	884.1	883.6	883.2	882.7
137.5°	947.0	945.9	944.9	944.0	943.0	942.2	941.2	940.3
140°	986.2	986.0	985.7	984.8	983.1	981.4	979.7	978.0
142.5°	1023.0	1022.8	1022.6	1021.7	1020.4	1019.1	1017.9	1016.5
145°	1077.1	1076.9	1076.7	1076.0	1075.1	1074.0	1073.1	1072.1
147.5°	1128.2	1128.2	1128.2	1127.5	1126.0	1124.5	1123.0	1121.6
150°	1159.7	1159.7	1159.7	1159.0	1157.5	1156.1	1154.6	1153.2
152.5°	1188.5	1188.9	1189.3	1188.9	1187.6	1186.4	1185.1	1183.8
155°	1230.7	1231.6	1232.7	1232.3	1230.6	1228.9	1227.2	1225.4
157.5°	1266.9	1267.9	1268.9	1268.8	1267.4	1266.0	1264.7	1263.3
160°	1289.2	1290.4	1291.7	1291.8	1290.8	1289.8	1288.8	1287.9
162.5°	1310.2	1311.5	1312.7	1312.5	1310.9	1309.4	1307.8	1306.3
165°	1336.8	1338.2	1339.7	1339.5	1337.8	1336.1	1334.5	1332.8
167.5°	1358.3	1359.8	1361.3	1361.3	1359.8	1358.3	1356.8	1355.3
170°	1370.1	1371.9	1373.6	1373.6	1371.9	1370.1	1368.4	1366.7
172.5°	1379.4	1380.9	1382.4	1382.3	1380.5	1378.8	1377.1	1375.5
175°	1389.3	1390.8	1392.2	1392.1	1390.4	1388.7	1387.0	1385.3
177.5°	1393.8	1395.0	1396.1	1396.0	1394.7	1393.3	1391.9	1390.6
180°	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1	1394.1

(END OF REPORT)