

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332299-830

Luminaire Tested: **S123RDIP-S560D1195U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332299-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S560D1195U830-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6085.3 lumens
Efficiency: N/A
Efficacy: 123.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332299-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

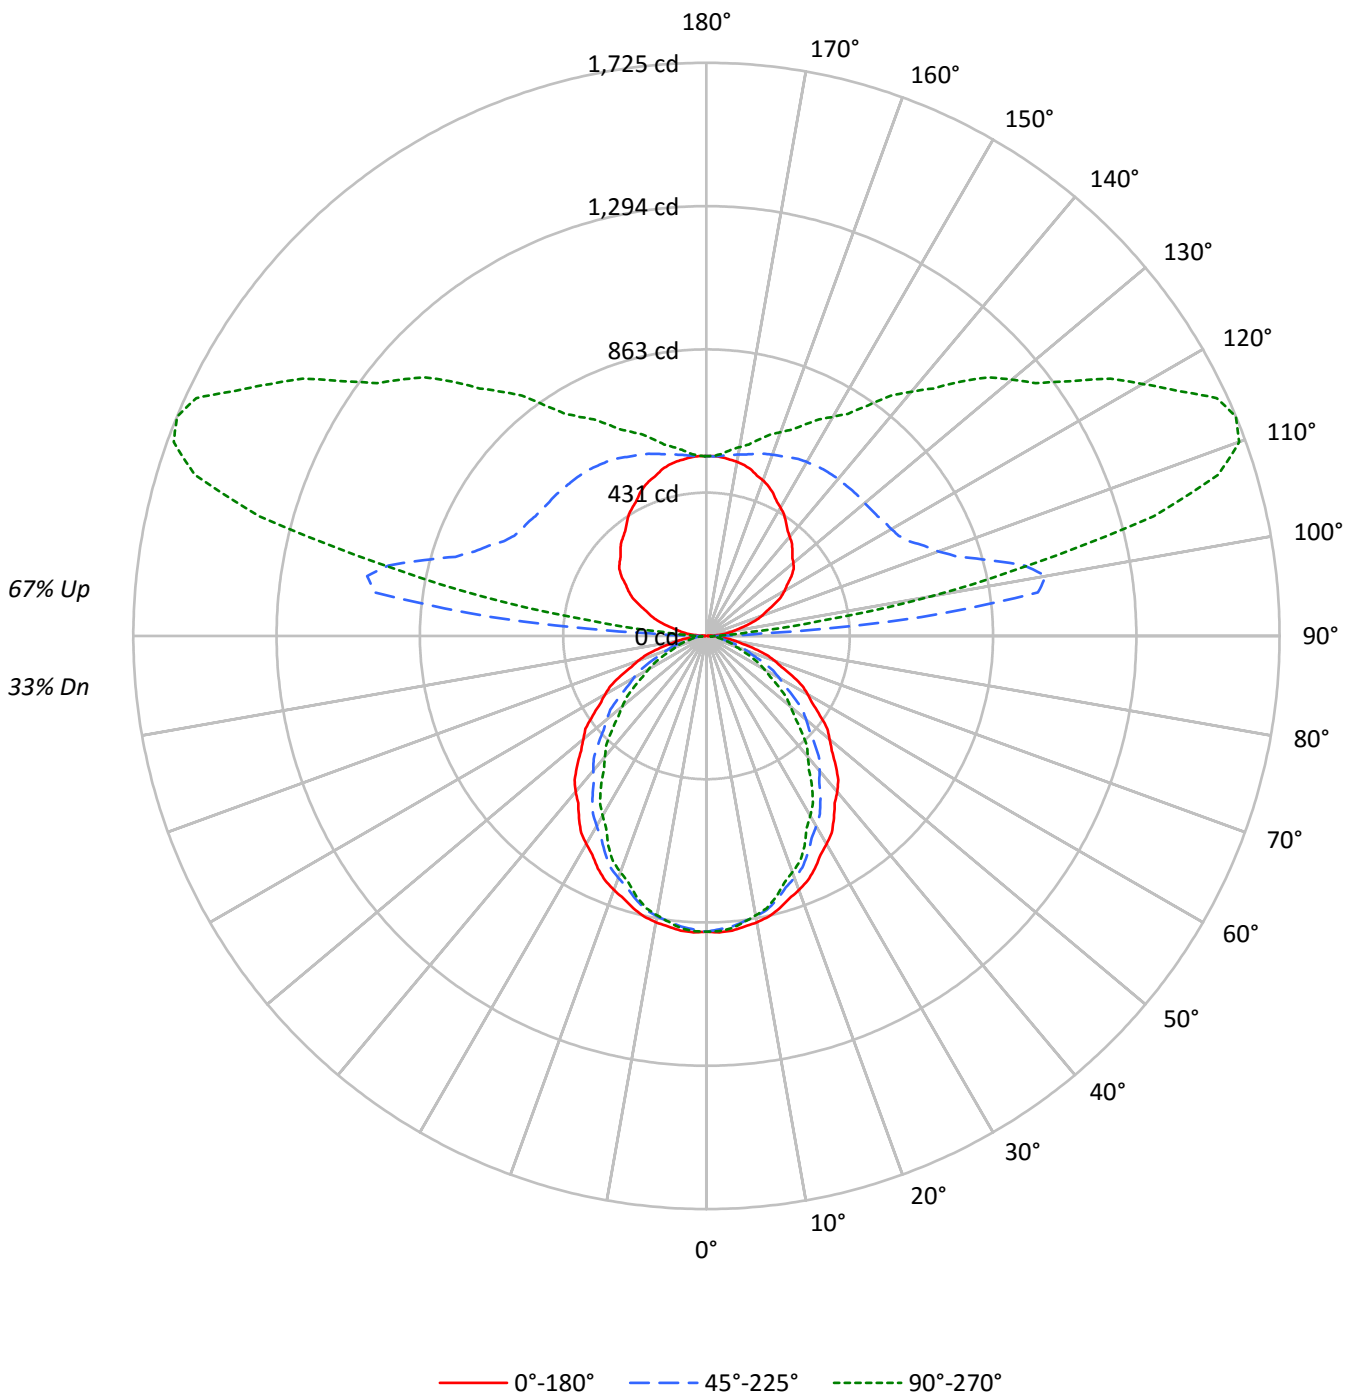



TEST NUMBER: P332299-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	36	35	35	28
2	86	79	73	68	77	71	66	62	57	54	51	44	42	40	32	31	29	24
3	78	69	62	57	70	63	57	52	51	46	43	39	36	34	29	27	25	21
4	72	61	54	48	65	56	49	44	45	40	37	35	32	29	26	24	22	18
5	66	55	47	41	59	50	43	38	40	35	32	31	28	25	23	21	19	16
6	61	49	41	36	55	45	38	33	36	31	28	28	25	22	21	19	17	14
7	56	44	37	31	50	40	34	29	33	28	24	26	22	20	19	17	15	12
8	52	40	33	28	47	37	30	25	30	25	21	24	20	18	18	15	14	11
9	48	37	29	24	44	33	27	23	27	23	19	22	18	16	16	14	12	10
10	45	33	26	22	41	31	24	20	25	20	17	20	17	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9582	9582	9582
5°	9619	9487	9541
10°	9565	9368	9335
15°	9461	9149	9052
20°	9321	8874	8668
25°	9175	8567	8291
30°	8983	8211	7762
35°	8784	7857	7276
40°	8604	7436	6674
45°	8363	7024	6132
50°	8100	6553	5526
55°	7833	6016	4960
60°	7584	5440	4336
65°	7264	4819	3713
70°	6861	4047	2999
75°	6276	3182	2824
80°	5597	2820	2591
85°	4730	2495	2322



TEST NUMBER: P332299-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	83.6	1.4
10°-20°	232.6	3.8
20°-30°	334.9	5.5
30°-40°	377.3	6.2
40°-50°	360.9	5.9
50°-60°	295.6	4.9
60°-70°	199.4	3.3
70°-80°	100.3	1.6
80°-90°	30.7	0.5
90°-100°	301.1	4.9
100°-110°	852.5	14.0
110°-120°	838.6	13.8
120°-130°	668.9	11.0
130°-140°	527.4	8.7
140°-150°	393.6	6.5
150°-160°	274.4	4.5
160°-170°	161.2	2.6
170°-180°	52.4	0.9
0°-30°	651.1	10.7
0°-40°	1028.4	16.9
0°-60°	1684.8	27.7
0°-90°	2015.3	33.1
90°-120°	1992.1	32.7
90°-150°	3582.0	58.9
90°-180°	4070.0	66.9
0°-180°	6085.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	890	890	890	890	890	
5°	890	886	878	884	883	84
15°	849	840	821	817	812	239
25°	772	754	721	706	698	355
35°	668	642	598	568	554	418
45°	549	516	461	422	403	424
55°	417	380	321	280	264	374
65°	285	245	189	155	146	282
75°	151	116	76	70	68	161
85°	38	23	20	19	19	43
90°	2	13	27	31	32	4
95°	37	121	649	190	127	40
105°	127	188	880	1540	1393	135
115°	224	280	673	1477	1694	222
125°	312	368	629	1139	1336	277
135°	366	436	620	938	1083	283
145°	417	478	612	769	846	261
155°	474	511	592	673	702	218
165°	518	533	567	602	612	146
175°	540	540	544	552	551	51
180°	541	541	541	541	541	



TEST NUMBER: P332299-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2
2.5°	893.2	892.6	892.1	891.6	891.1	890.0	888.5	886.9	885.4	883.9	885.3
5°	890.2	889.5	888.6	887.9	887.0	885.7	883.7	881.8	879.9	878.0	879.4
7.5°	882.0	881.2	880.2	879.4	878.5	876.8	874.4	871.9	869.3	866.9	867.6
10°	875.1	873.9	872.8	871.7	870.6	868.6	865.7	862.8	859.9	857.1	857.1
12.5°	865.3	864.0	862.7	861.5	860.3	857.9	854.3	850.8	847.3	843.8	843.7
15°	849.0	847.3	845.6	843.8	842.1	838.9	834.4	829.9	825.4	821.0	820.1
17.5°	828.7	826.7	824.6	822.6	820.5	816.6	810.9	805.2	799.5	793.8	792.1
20°	813.7	811.2	808.6	806.0	803.4	799.1	793.0	786.9	780.8	774.7	772.6
22.5°	796.9	794.0	791.1	788.1	785.1	780.4	773.9	767.4	761.0	754.5	751.9
25°	772.5	768.5	764.5	760.5	756.5	750.8	743.4	736.0	728.7	721.3	717.9
27.5°	742.9	738.5	734.1	729.6	725.2	718.9	710.7	702.5	694.3	686.1	681.4
30°	722.7	717.9	713.1	708.3	703.5	696.5	687.6	678.6	669.6	660.6	655.2
32.5°	702.5	697.1	691.6	686.2	680.7	673.3	663.7	654.2	644.7	635.2	629.2
35°	668.5	662.8	657.0	651.3	645.5	637.6	627.6	617.7	607.8	597.9	590.9
37.5°	634.2	627.8	621.4	614.9	608.5	600.0	589.4	578.8	568.2	557.5	549.7
40°	612.3	605.2	598.1	591.1	584.0	574.8	563.5	552.0	540.6	529.2	520.8
42.5°	587.4	580.3	573.3	566.3	559.2	549.8	538.0	526.2	514.4	502.7	493.5
45°	549.4	542.2	535.0	527.8	520.6	510.8	498.4	486.1	473.7	461.4	452.2
47.5°	511.4	503.5	495.6	487.7	479.8	469.7	457.2	444.9	432.5	420.2	410.3
50°	483.7	476.2	468.6	461.1	453.6	443.3	430.3	417.4	404.4	391.3	381.4
52.5°	458.9	450.7	442.5	434.3	426.2	415.7	402.7	389.9	377.0	364.2	353.8
55°	417.4	409.4	401.6	393.7	385.9	375.1	361.5	347.9	334.2	320.6	311.2
57.5°	378.9	370.3	361.7	353.2	344.6	333.5	319.8	306.1	292.4	278.7	269.9
60°	352.3	343.6	334.7	325.8	317.1	305.9	292.7	279.4	266.0	252.7	244.0
62.5°	325.7	317.0	308.1	299.3	290.5	279.4	266.1	252.8	239.4	226.1	218.0
65°	285.2	276.4	267.6	258.7	249.9	239.2	226.7	214.2	201.7	189.2	181.3
67.5°	244.6	235.7	226.8	217.8	209.0	198.5	186.4	174.5	162.5	150.4	144.6
70°	218.0	209.3	200.8	192.1	183.4	173.4	162.2	151.0	139.8	128.6	122.9
72.5°	191.4	182.9	174.4	165.9	157.3	148.0	137.8	127.5	117.3	107.2	102.5
75°	150.9	143.2	135.5	127.8	120.1	111.8	103.0	94.2	85.4	76.5	74.9
77.5°	114.0	107.0	100.0	93.0	86.1	79.7	74.1	68.4	62.7	57.0	56.2
80°	90.3	83.7	77.1	70.5	63.9	59.0	55.6	52.2	48.8	45.5	45.0
82.5°	67.8	62.0	56.4	50.7	45.0	41.4	39.8	38.3	36.7	35.1	34.6
85°	38.3	34.8	31.2	27.7	24.1	22.1	21.7	21.2	20.7	20.2	19.9
87.5°	14.3	13.3	12.3	11.6	10.7	10.4	11.0	11.7	12.3	13.0	12.6
90°	2.2	4.3	6.6	9.9	12.1	14.2	17.5	20.8	24.1	27.3	26.3
92.5°	13.6	20.2	29.3	37.9	47.1	63.3	92.0	139.1	185.3	168.4	127.1
95°	37.2	40.5	52.6	71.2	99.6	142.3	235.4	398.6	578.2	649.4	526.7
97.5°	63.5	64.6	74.0	90.2	118.3	164.5	253.4	437.3	736.8	1006.4	1076.7
100°	81.1	82.1	89.8	105.1	131.4	174.1	250.8	412.8	700.9	1037.1	1252.8
102.5°	99.4	101.4	108.2	122.6	146.3	185.5	254.3	391.8	648.3	980.1	1261.5
105°	127.1	130.4	136.9	150.1	170.8	204.8	263.9	376.7	583.7	880.4	1194.8
107.5°	156.4	159.7	166.0	178.9	198.4	230.0	281.9	375.6	542.5	792.4	1077.8
110°	177.4	180.7	186.2	198.2	216.8	247.5	296.8	380.0	526.7	742.4	1004.2



TEST NUMBER: P332299-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	196.7	200.0	205.5	217.4	236.1	265.9	311.7	388.8	518.0	709.2	940.3
115°	224.5	228.8	235.4	246.4	265.0	294.5	336.2	403.0	514.7	673.4	862.9
117.5°	252.3	257.3	262.8	272.9	293.7	321.1	362.2	421.8	516.7	652.4	816.2
120°	271.5	274.8	280.3	291.3	312.1	339.5	378.9	435.8	520.2	642.8	791.7
122.5°	288.2	291.5	297.0	308.8	328.8	357.9	396.4	449.0	526.3	636.7	771.6
125°	312.1	314.3	320.8	332.9	353.7	383.2	421.6	469.8	535.5	628.6	745.7
127.5°	330.3	333.6	341.7	353.9	376.9	406.5	443.5	486.9	546.0	624.6	723.0
130°	341.7	345.0	354.8	368.0	391.0	420.5	456.7	498.2	553.0	622.0	710.7
132.5°	350.4	354.6	365.3	381.1	404.1	432.8	468.1	508.8	558.3	621.1	699.4
135°	365.8	370.1	382.2	398.6	421.6	451.2	485.1	522.4	566.2	619.8	684.5
137.5°	380.2	384.8	396.6	414.2	437.0	464.3	496.9	532.4	571.5	617.4	671.5
140°	389.8	395.3	406.2	423.8	445.7	473.1	504.8	537.7	575.0	616.5	663.6
142.5°	400.4	405.0	416.8	432.5	454.5	480.1	511.0	542.9	577.6	614.8	656.6
145°	417.3	420.5	430.4	446.8	465.4	490.6	519.1	548.7	579.3	612.2	647.2
147.5°	434.3	436.3	445.9	460.1	478.2	499.5	525.7	552.1	579.3	608.0	638.0
150°	445.7	446.8	455.5	469.8	485.1	504.8	530.0	553.0	579.3	604.5	631.9
152.5°	457.1	457.3	466.1	478.5	492.1	511.0	532.6	554.8	576.6	600.1	624.9
155°	474.2	474.2	480.8	491.7	503.7	519.1	537.7	555.3	573.8	592.5	614.3
157.5°	487.8	488.6	493.9	503.5	513.8	525.7	540.5	556.3	570.1	585.7	602.5
160°	498.2	498.2	502.7	511.4	519.1	530.0	543.2	556.3	568.4	580.4	594.7
162.5°	506.1	506.1	509.6	516.7	523.5	532.6	544.0	555.4	564.9	575.1	586.7
165°	518.0	516.9	519.1	524.5	529.0	536.6	545.4	553.0	559.6	567.2	576.0
167.5°	527.0	525.7	526.7	530.9	534.0	538.8	545.2	551.3	554.3	559.4	565.7
170°	532.3	530.0	531.1	534.4	536.6	538.8	544.2	548.7	550.8	554.1	559.6
172.5°	535.7	534.4	534.6	537.1	538.4	539.7	544.2	547.8	548.2	549.7	553.5
175°	539.9	538.8	537.7	539.9	539.9	541.0	543.2	545.4	544.2	544.2	546.5
177.5°	541.9	541.0	540.1	541.0	541.0	541.0	541.9	543.6	541.9	541.0	541.9
180°	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0



TEST NUMBER: P332299-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	890.2	890.2	890.2	890.2	890.2	890.2	890.2	890.2
2.5°	886.7	888.2	889.6	890.1	889.9	889.6	889.4	889.1
5°	880.8	882.3	883.7	884.3	884.0	883.6	883.4	883.0
7.5°	868.5	869.2	870.1	870.2	869.6	869.1	868.6	868.0
10°	857.3	857.5	857.6	857.3	856.6	855.7	855.0	854.1
12.5°	843.6	843.5	843.4	842.8	841.9	840.9	840.1	839.1
15°	819.4	818.5	817.7	816.7	815.6	814.5	813.4	812.3
17.5°	790.4	788.7	786.9	785.3	783.6	781.9	780.2	778.6
20°	770.5	768.5	766.4	764.4	762.4	760.5	758.6	756.7
22.5°	749.3	746.7	744.1	741.9	740.1	738.3	736.5	734.7
25°	714.5	711.1	707.8	705.2	703.5	701.7	699.9	698.1
27.5°	676.7	672.0	667.3	663.6	660.9	658.3	655.5	652.8
30°	649.7	644.2	638.9	634.8	632.3	629.7	627.1	624.5
32.5°	623.3	617.3	611.3	607.0	604.4	601.6	598.9	596.3
35°	584.0	577.1	570.2	565.3	562.4	559.6	556.7	553.7
37.5°	541.9	534.0	526.2	520.6	517.0	513.4	509.8	506.2
40°	512.6	504.2	495.9	489.8	486.2	482.5	478.8	475.0
42.5°	484.5	475.3	466.2	460.0	456.7	453.4	450.1	446.8
45°	443.1	433.9	424.8	418.3	414.4	410.6	406.7	402.8
47.5°	400.3	390.4	380.4	373.7	370.3	366.8	363.4	360.0
50°	371.5	361.5	351.6	344.7	341.0	337.3	333.7	330.0
52.5°	343.6	333.2	322.8	316.0	312.7	309.4	306.1	302.8
55°	302.0	292.7	283.3	277.1	273.9	270.7	267.5	264.3
57.5°	261.1	252.3	243.6	237.8	235.1	232.3	229.6	226.9
60°	235.4	226.7	218.0	212.4	209.6	206.9	204.2	201.4
62.5°	209.8	201.7	193.5	188.0	185.2	182.3	179.5	176.6
65°	173.4	165.6	157.7	152.9	151.2	149.4	147.6	145.8
67.5°	138.7	132.8	127.0	123.1	121.2	119.3	117.4	115.6
70°	117.3	111.7	106.0	102.4	100.6	98.9	97.1	95.3
72.5°	97.9	93.4	88.8	86.1	85.4	84.6	83.9	83.1
75°	73.3	71.7	70.1	69.2	68.8	68.5	68.1	67.9
77.5°	55.3	54.5	53.5	53.0	52.7	52.3	52.0	51.7
80°	44.5	44.0	43.5	43.2	42.9	42.5	42.2	41.8
82.5°	34.1	33.6	33.2	32.9	32.8	32.8	32.7	32.6
85°	19.6	19.2	18.9	18.8	18.8	18.8	18.8	18.8
87.5°	12.7	12.8	12.9	13.2	12.9	13.0	13.0	12.7
90°	27.3	28.5	29.6	31.8	30.6	31.8	32.9	31.8
92.5°	92.2	73.1	64.6	58.9	56.9	53.6	54.8	52.8
95°	394.3	267.2	209.2	169.8	148.9	139.1	131.4	127.1
97.5°	982.7	787.1	645.9	514.9	434.1	384.8	355.2	345.8
100°	1291.1	1202.4	1074.3	918.8	808.1	728.2	685.5	686.6
102.5°	1393.6	1390.7	1316.1	1217.5	1131.4	1068.2	1032.5	1007.3
105°	1423.6	1533.1	1554.0	1525.5	1475.1	1433.5	1398.5	1393.0
107.5°	1337.3	1515.1	1611.1	1650.1	1651.0	1636.9	1625.1	1615.0
110°	1255.0	1456.5	1594.5	1671.1	1701.8	1710.5	1708.4	1706.2



TEST NUMBER: P332299-830

CATALOG NUMBER: S123RDIP-S560D1195U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1173.5	1379.4	1534.0	1632.6	1688.7	1715.8	1724.1	1724.6
115°	1065.5	1256.0	1417.0	1536.4	1618.5	1666.7	1688.7	1694.1
117.5°	987.3	1151.8	1296.4	1417.5	1503.2	1558.3	1589.9	1597.3
120°	946.1	1094.0	1225.4	1336.1	1422.5	1483.8	1510.1	1516.7
122.5°	913.7	1047.5	1169.3	1272.1	1349.0	1404.1	1433.0	1441.3
125°	870.6	990.0	1095.0	1182.7	1252.8	1301.0	1328.3	1336.1
127.5°	832.9	939.3	1034.2	1113.9	1176.4	1217.5	1242.3	1249.2
130°	809.3	907.9	996.6	1071.0	1129.1	1168.5	1191.5	1200.2
132.5°	787.4	878.1	960.6	1031.6	1086.1	1125.5	1145.9	1152.1
135°	757.8	835.6	906.7	969.1	1022.8	1055.6	1075.3	1083.1
137.5°	730.8	794.6	855.9	910.0	955.2	988.4	1005.0	1010.1
140°	715.1	770.9	823.5	870.6	912.2	942.9	960.4	959.3
142.5°	700.2	748.2	793.7	834.7	870.2	897.3	913.0	912.0
145°	682.2	718.4	753.5	785.1	812.6	835.6	844.3	846.5
147.5°	667.6	696.3	724.5	747.1	767.9	783.4	791.7	792.6
150°	657.0	682.2	705.2	726.0	742.4	754.5	761.1	761.1
152.5°	647.4	669.1	689.5	706.8	719.7	730.8	734.8	734.8
155°	632.9	650.4	666.9	680.0	689.9	698.7	700.9	701.9
157.5°	617.6	632.4	645.0	655.3	663.8	670.4	672.1	671.9
160°	608.9	620.9	631.9	639.5	647.2	653.7	653.7	652.7
162.5°	598.3	608.7	618.7	625.5	630.6	636.2	636.2	635.2
165°	584.8	591.4	599.0	604.5	608.9	613.2	612.2	612.2
167.5°	573.0	578.0	582.4	586.4	588.2	591.4	590.2	590.2
170°	565.1	568.4	572.7	575.0	576.0	578.2	577.1	577.1
172.5°	558.1	560.4	564.0	565.2	565.5	567.7	565.7	564.9
175°	548.7	549.7	552.0	552.0	552.0	553.0	552.0	550.8
177.5°	542.7	543.6	544.5	544.5	543.6	544.5	542.7	542.7
180°	541.0	541.0	541.0	541.0	541.0	541.0	541.0	541.0

(END OF REPORT)