

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332327-830

Luminaire Tested: **S123RDIP-S775D1195U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332327-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S775D1195U830-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1195 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7248.0 lumens  
Efficiency: N/A  
Efficacy: 127.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332327-830

CATALOG NUMBER: S123RDIP-S775D1195U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

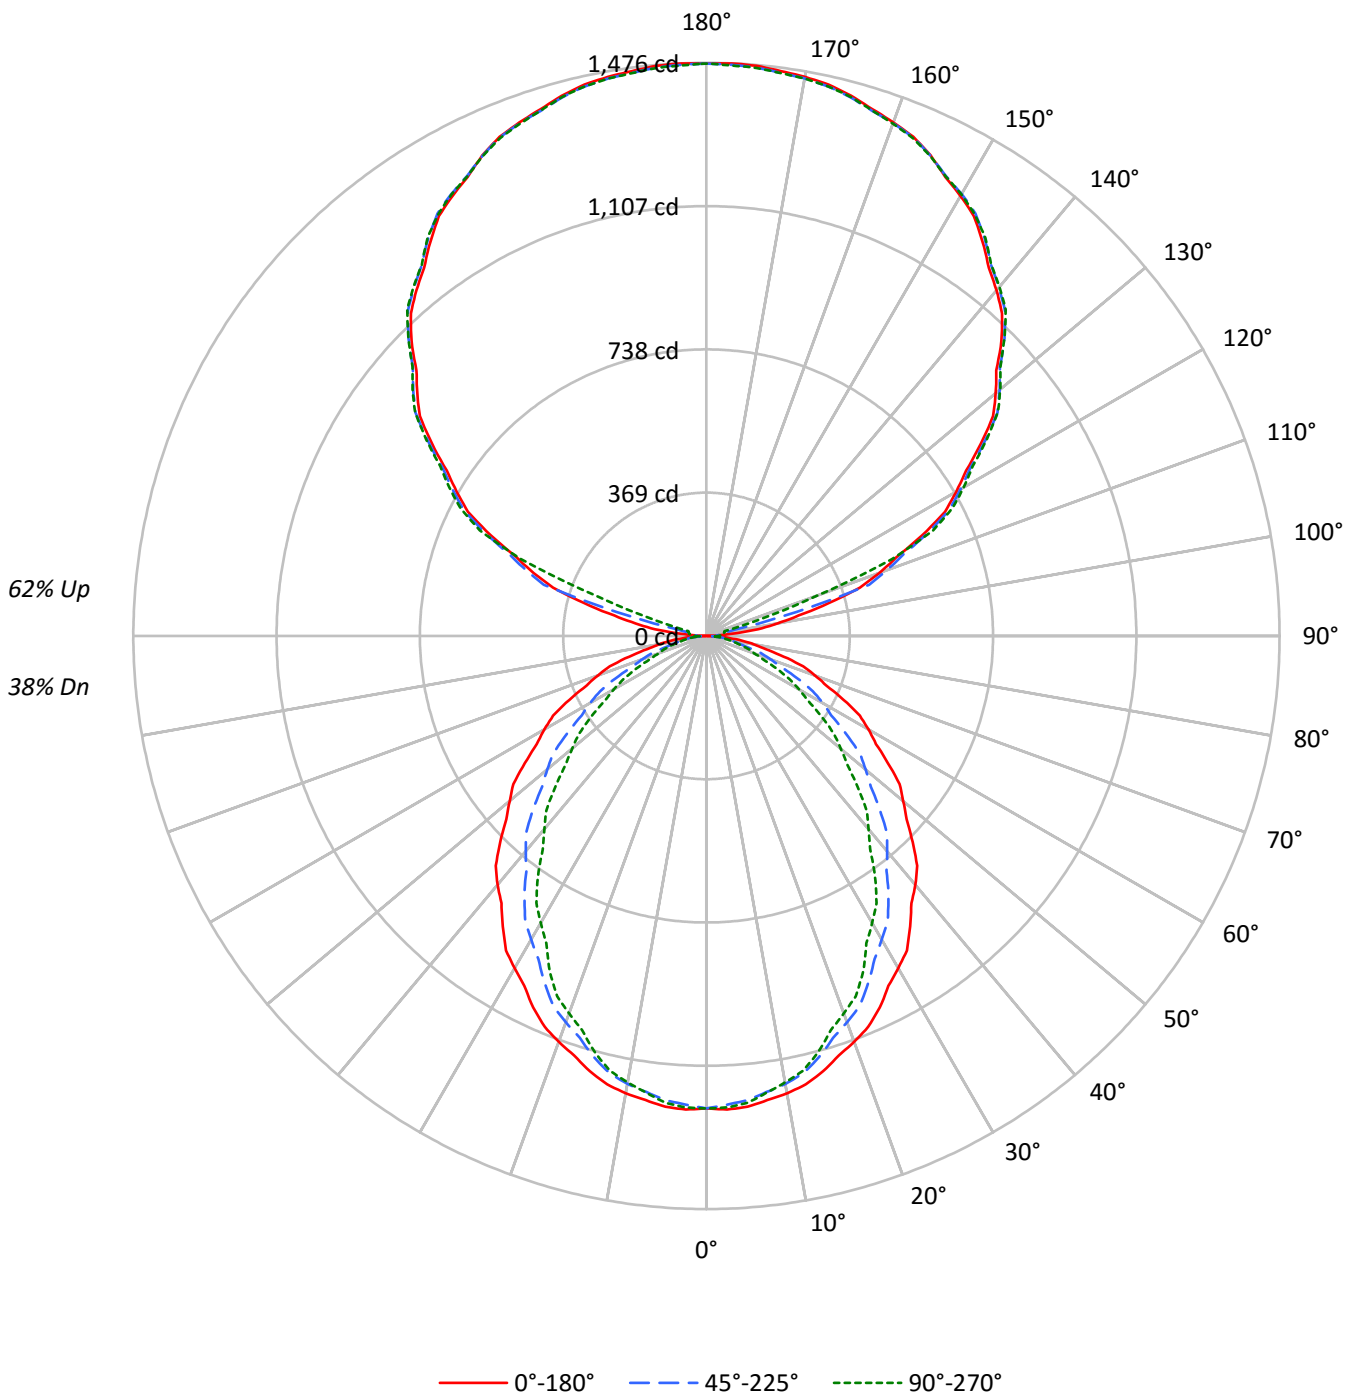



TEST NUMBER: P332327-830

CATALOG NUMBER: S123RDIP-S775D1195U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38
1	95	91	87	84	86	83	80	77	67	65	63	53	52	51	40	39	39	32
2	87	80	74	69	79	73	68	63	59	56	53	47	45	43	36	34	33	28
3	79	70	63	58	72	64	58	53	53	48	45	42	39	36	32	30	28	24
4	73	62	55	49	66	57	50	45	47	42	38	37	34	31	29	26	24	20
5	67	56	48	42	60	51	44	39	42	37	33	34	30	27	26	23	21	18
6	62	50	42	36	56	46	39	34	38	33	29	30	27	24	23	21	19	16
7	57	45	37	32	52	41	35	30	34	29	25	28	24	21	21	19	17	14
8	53	41	33	28	48	38	31	26	31	26	23	25	22	19	20	17	15	13
9	49	37	30	25	45	34	28	23	29	24	20	23	20	17	18	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	21	18	15	17	14	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13099	13099	13099
5°	13149	12967	13042
10°	13074	12804	12761
15°	12933	12504	12373
20°	12741	12129	11848
25°	12542	11709	11334
30°	12279	11225	10611
35°	12009	10738	9947
40°	11760	10165	9125
45°	11432	9601	8383
50°	11072	8957	7552
55°	10704	8223	6778
60°	10368	7436	5927
65°	9928	6584	5076
70°	9379	5530	4101
75°	8576	4350	3855
80°	7649	3856	3546
85°	6459	3409	3162



TEST NUMBER: P332327-830

CATALOG NUMBER: S123RDIP-S775D1195U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	114.3	1.6
10°-20°	317.9	4.4
20°-30°	457.8	6.3
30°-40°	515.7	7.1
40°-50°	493.3	6.8
50°-60°	404.0	5.6
60°-70°	272.6	3.8
70°-80°	137.1	1.9
80°-90°	40.4	0.6
90°-100°	53.6	0.7
100°-110°	255.4	3.5
110°-120°	613.5	8.5
120°-130°	781.2	10.8
130°-140°	834.7	11.5
140°-150°	780.5	10.8
150°-160°	629.6	8.7
160°-170°	406.3	5.6
170°-180°	140.0	1.9
0°-30°	890.0	12.3
0°-40°	1405.7	19.4
0°-60°	2303.0	31.8
0°-90°	2753.1	38.0
90°-120°	922.4	12.7
90°-150°	3318.8	45.8
90°-180°	4495.0	62.0
0°-180°	7248.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1217	1217	1217	1217	1217	
5°	1217	1212	1200	1208	1207	115
15°	1161	1149	1122	1117	1110	327
25°	1056	1030	986	966	954	485
35°	914	877	817	776	757	572
45°	751	705	631	576	551	579
55°	570	520	438	383	361	511
65°	390	334	258	212	199	386
75°	206	159	105	95	93	220
85°	52	32	28	26	26	59
90°	1	12	26	31	33	6
95°	67	25	34	41	42	83
105°	326	332	240	57	48	346
115°	612	619	629	639	644	604
125°	863	871	876	878	880	770
135°	1074	1081	1085	1088	1085	827
145°	1240	1247	1249	1252	1252	776
155°	1366	1364	1364	1369	1363	629
165°	1440	1437	1436	1443	1437	407
175°	1474	1469	1470	1476	1468	140
180°	1474	1474	1474	1474	1474	



TEST NUMBER: P332327-830

CATALOG NUMBER: S123RDIP-S775D1195U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9
2.5°	1220.8	1220.1	1219.4	1218.7	1218.0	1216.6	1214.5	1212.4	1210.3	1208.2	1210.1
5°	1216.9	1215.8	1214.7	1213.6	1212.5	1210.6	1208.0	1205.3	1202.7	1200.1	1202.0
7.5°	1205.6	1204.5	1203.2	1202.0	1200.9	1198.5	1195.1	1191.8	1188.4	1184.9	1186.0
10°	1196.2	1194.6	1193.1	1191.6	1190.0	1187.2	1183.3	1179.4	1175.4	1171.5	1171.7
12.5°	1182.7	1181.0	1179.3	1177.6	1175.9	1172.6	1167.8	1163.0	1158.1	1153.3	1153.2
15°	1160.6	1158.2	1155.7	1153.4	1150.9	1146.7	1140.6	1134.4	1128.2	1122.1	1121.1
17.5°	1132.7	1130.0	1127.2	1124.4	1121.5	1116.3	1108.4	1100.6	1092.8	1085.1	1082.7
20°	1112.3	1108.7	1105.2	1101.7	1098.3	1092.3	1083.9	1075.6	1067.3	1058.9	1056.1
22.5°	1089.4	1085.3	1081.3	1077.2	1073.2	1066.8	1057.9	1049.0	1040.2	1031.3	1027.7
25°	1056.0	1050.6	1045.0	1039.5	1034.1	1026.2	1016.2	1006.1	996.0	985.9	981.3
27.5°	1015.5	1009.5	1003.4	997.4	991.4	982.7	971.5	960.3	949.0	937.7	931.3
30°	987.9	981.3	974.8	968.2	961.6	952.2	939.9	927.6	915.3	903.1	895.6
32.5°	960.3	952.8	945.4	937.9	930.5	920.2	907.2	894.3	881.3	868.3	860.2
35°	913.9	906.0	898.1	890.2	882.3	871.6	858.0	844.3	830.8	817.2	807.8
37.5°	867.0	858.1	849.3	840.6	831.8	820.2	805.7	791.2	776.7	762.1	751.4
40°	836.9	827.3	817.6	807.9	798.3	785.7	770.2	754.6	739.0	723.4	712.0
42.5°	803.0	793.3	783.6	774.0	764.4	751.5	735.4	719.3	703.2	687.1	674.7
45°	751.0	741.2	731.3	721.4	711.5	698.2	681.3	664.4	647.5	630.7	618.1
47.5°	699.2	688.3	677.5	666.7	655.8	642.0	625.1	608.1	591.3	574.4	560.8
50°	661.2	650.9	640.6	630.3	620.0	606.0	588.2	570.4	552.7	534.9	521.3
52.5°	627.3	616.1	604.9	593.7	582.6	568.2	550.5	533.0	515.4	497.8	483.7
55°	570.4	559.7	548.9	538.2	527.4	512.7	494.1	475.5	456.9	438.2	425.5
57.5°	517.9	506.2	494.6	482.8	471.1	455.9	437.2	418.4	399.6	381.0	368.9
60°	481.6	469.6	457.5	445.4	433.4	418.2	400.0	381.8	363.6	345.4	333.6
62.5°	445.3	433.2	421.1	409.1	397.1	381.9	363.7	345.5	327.3	309.1	297.9
65°	389.8	377.8	365.7	353.6	341.6	327.0	309.9	292.8	275.7	258.5	247.8
67.5°	334.4	322.2	310.0	297.7	285.6	271.3	254.9	238.5	222.1	205.7	197.7
70°	298.0	286.3	274.4	262.5	250.7	237.0	221.7	206.4	191.1	175.7	168.0
72.5°	261.7	250.1	238.4	226.7	215.1	202.3	188.3	174.4	160.4	146.5	140.2
75°	206.2	195.8	185.2	174.7	164.2	152.9	140.8	128.8	116.7	104.6	102.5
77.5°	155.7	146.2	136.7	127.1	117.6	109.1	101.2	93.5	85.8	77.9	76.8
80°	123.4	114.3	105.4	96.4	87.4	80.6	76.0	71.4	66.8	62.2	61.5
82.5°	92.6	84.8	77.0	69.3	61.5	56.6	54.4	52.2	50.1	48.0	47.3
85°	52.3	47.5	42.7	37.8	33.0	30.3	29.6	28.9	28.3	27.6	27.2
87.5°	19.1	17.7	16.3	14.8	13.4	13.0	13.7	14.2	14.9	15.6	15.6
90°	1.1	3.5	5.9	8.4	10.8	13.7	16.8	20.0	23.1	26.3	27.2
92.5°	20.4	19.7	19.0	18.3	17.6	18.5	20.9	23.3	25.6	28.0	29.6
95°	66.8	56.8	46.8	36.9	26.9	23.3	25.9	28.6	31.3	33.9	35.6
97.5°	134.2	129.8	125.3	120.8	116.3	105.4	87.8	70.3	52.8	35.3	37.2
100°	185.0	189.9	194.8	199.6	204.5	187.9	150.1	112.1	74.1	36.1	38.1
102.5°	242.9	246.4	249.9	253.4	256.9	237.9	196.4	155.0	113.5	72.0	66.0
105°	326.3	329.0	331.7	334.3	337.1	327.4	305.5	283.6	261.7	239.8	196.7
107.5°	414.3	416.5	418.7	420.8	422.9	425.7	429.2	432.6	436.1	439.6	407.9
110°	473.1	475.0	476.9	478.9	480.9	483.1	485.9	488.5	491.2	493.9	485.9



TEST NUMBER: P332327-830

CATALOG NUMBER: S123RDIP-S775D1195U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	529.1	530.8	532.6	534.4	536.1	538.4	541.0	543.8	546.4	549.0	549.2
115°	612.2	613.6	615.0	616.5	617.9	619.8	622.0	624.2	626.4	628.6	631.0
117.5°	692.5	694.3	696.1	698.0	699.7	701.2	702.3	703.4	704.6	705.7	707.6
120°	742.4	744.6	746.9	749.0	751.2	752.7	753.4	754.1	754.9	755.5	757.5
122.5°	793.2	795.0	796.8	798.6	800.5	801.8	802.8	803.7	804.6	805.5	806.9
125°	862.9	864.9	866.8	868.7	870.7	872.1	873.1	874.1	875.1	876.0	876.6
127.5°	930.4	932.3	934.2	936.2	938.1	939.7	940.8	942.1	943.2	944.3	945.2
130°	972.4	974.4	976.3	978.3	980.1	981.7	982.6	983.6	984.6	985.5	986.6
132.5°	1012.7	1014.6	1016.6	1018.5	1020.5	1021.8	1022.7	1023.4	1024.2	1025.0	1026.0
135°	1074.2	1075.7	1077.1	1078.6	1080.1	1081.3	1082.3	1083.3	1084.2	1085.2	1085.9
137.5°	1126.8	1128.7	1130.5	1132.4	1134.3	1135.4	1136.0	1136.5	1137.0	1137.6	1138.7
140°	1161.9	1163.3	1164.8	1166.2	1167.7	1168.8	1169.5	1170.3	1171.0	1171.7	1172.7
142.5°	1194.3	1195.7	1197.2	1198.6	1200.1	1201.2	1201.9	1202.7	1203.4	1204.1	1204.9
145°	1239.6	1241.3	1243.0	1244.7	1246.4	1247.5	1248.0	1248.5	1249.0	1249.4	1249.9
147.5°	1282.3	1283.5	1284.6	1285.6	1286.8	1287.6	1288.1	1288.5	1289.0	1289.5	1290.1
150°	1308.6	1309.3	1310.0	1310.8	1311.5	1312.1	1312.6	1313.1	1313.6	1314.1	1314.6
152.5°	1332.3	1332.6	1332.9	1333.2	1333.6	1333.9	1334.2	1334.5	1334.8	1335.1	1336.0
155°	1365.6	1365.1	1364.5	1364.0	1363.6	1363.5	1363.7	1364.0	1364.2	1364.4	1365.6
157.5°	1391.4	1391.3	1391.3	1391.2	1391.2	1391.0	1390.8	1390.5	1390.3	1390.1	1391.6
160°	1407.1	1406.9	1406.7	1406.5	1406.2	1405.9	1405.7	1405.4	1405.2	1405.0	1406.5
162.5°	1422.0	1421.4	1420.8	1420.1	1419.5	1419.1	1418.8	1418.6	1418.3	1418.1	1419.8
165°	1440.0	1439.3	1438.5	1437.8	1437.1	1436.6	1436.3	1436.1	1435.9	1435.6	1437.6
167.5°	1454.1	1453.0	1452.1	1451.1	1450.1	1449.6	1449.6	1449.6	1449.6	1449.6	1451.6
170°	1461.9	1460.9	1460.0	1459.0	1458.0	1457.5	1457.5	1457.5	1457.5	1457.5	1459.4
172.5°	1467.2	1466.0	1464.8	1463.7	1462.4	1462.0	1462.2	1462.4	1462.5	1462.7	1464.7
175°	1473.9	1472.7	1471.5	1470.3	1469.0	1468.6	1468.9	1469.0	1469.3	1469.5	1471.3
177.5°	1475.7	1474.7	1473.8	1472.8	1471.8	1471.4	1471.6	1471.8	1472.0	1472.2	1473.8
180°	1473.9	1473.9	1473.9	1473.9	1473.9	1473.9	1473.9	1473.9	1473.9	1473.9	1473.9



TEST NUMBER: P332327-830

CATALOG NUMBER: S123RDIP-S775D1195U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9	1216.9
2.5°	1212.0	1214.0	1215.9	1216.7	1216.4	1216.0	1215.6	1215.3
5°	1204.0	1206.0	1208.0	1208.7	1208.3	1207.9	1207.4	1207.0
7.5°	1187.1	1188.2	1189.3	1189.5	1188.7	1188.0	1187.2	1186.5
10°	1172.0	1172.1	1172.3	1172.0	1170.8	1169.7	1168.7	1167.5
12.5°	1153.0	1152.9	1152.8	1152.1	1150.8	1149.5	1148.3	1147.0
15°	1119.9	1118.8	1117.8	1116.4	1114.9	1113.3	1111.8	1110.3
17.5°	1080.3	1078.1	1075.7	1073.5	1071.1	1068.8	1066.6	1064.3
20°	1053.3	1050.4	1047.5	1044.8	1042.2	1039.5	1036.9	1034.3
22.5°	1024.3	1020.7	1017.1	1014.1	1011.6	1009.2	1006.7	1004.3
25°	976.8	972.1	967.5	964.0	961.6	959.1	956.8	954.3
27.5°	924.9	918.6	912.2	907.1	903.4	899.8	896.1	892.4
30°	888.2	880.6	873.2	867.7	864.2	860.7	857.1	853.7
32.5°	852.0	843.9	835.7	829.7	826.0	822.4	818.7	815.0
35°	798.3	788.9	779.5	772.8	768.8	764.9	760.9	757.0
37.5°	740.6	730.0	719.3	711.5	706.6	701.7	696.9	692.0
40°	700.6	689.2	677.8	669.6	664.5	659.5	654.4	649.4
42.5°	662.1	649.7	637.3	628.8	624.2	619.7	615.2	610.7
45°	605.7	593.1	580.6	571.7	566.5	561.2	556.0	550.7
47.5°	547.1	533.6	520.0	510.9	506.1	501.4	496.8	492.1
50°	507.7	494.1	480.5	471.2	466.2	461.1	456.1	451.0
52.5°	469.6	455.4	441.3	432.0	427.4	422.9	418.4	413.9
55°	412.7	400.0	387.3	378.7	374.4	369.9	365.6	361.2
57.5°	356.9	344.9	332.9	325.0	321.3	317.5	313.8	310.1
60°	321.7	309.9	298.0	290.3	286.5	282.8	279.1	275.3
62.5°	286.8	275.7	264.6	257.0	253.1	249.2	245.3	241.4
65°	237.0	226.3	215.6	209.0	206.6	204.2	201.8	199.3
67.5°	189.6	181.6	173.5	168.2	165.7	163.1	160.5	157.9
70°	160.3	152.6	145.0	140.0	137.5	135.1	132.7	130.3
72.5°	133.9	127.6	121.4	117.7	116.7	115.7	114.7	113.7
75°	100.2	98.0	95.9	94.5	94.1	93.7	93.2	92.7
77.5°	75.6	74.4	73.2	72.4	72.0	71.5	71.1	70.7
80°	60.9	60.2	59.6	59.0	58.5	58.2	57.7	57.2
82.5°	46.7	46.0	45.3	45.0	44.9	44.8	44.7	44.6
85°	26.8	26.3	25.9	25.6	25.6	25.6	25.6	25.6
87.5°	15.6	15.6	15.6	15.6	15.5	15.5	15.4	15.3
90°	28.2	29.2	30.2	30.9	31.4	31.9	32.3	32.9
92.5°	31.1	32.7	34.3	35.2	35.4	35.8	36.1	36.4
95°	37.3	39.0	40.7	41.6	41.6	41.6	41.6	41.6
97.5°	39.1	41.1	43.1	44.1	44.4	44.7	44.9	45.1
100°	40.1	41.9	43.9	45.1	45.2	45.5	45.7	46.0
102.5°	59.9	53.9	47.9	45.1	45.5	46.0	46.5	46.8
105°	153.6	110.6	67.5	46.3	46.8	47.2	47.7	48.2
107.5°	376.4	344.8	313.2	281.2	248.7	216.2	183.8	151.4
110°	477.8	469.8	461.8	440.4	405.6	370.7	335.9	301.1





TEST NUMBER: P332327-830

CATALOG NUMBER: S123RDIP-S775D1195U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	549.3	549.5	549.7	546.0	538.7	531.3	524.0	516.6
115°	633.4	635.8	638.3	640.0	640.9	642.0	642.9	643.9
117.5°	709.5	711.5	713.4	714.5	714.7	714.9	715.1	715.3
120°	759.5	761.4	763.4	764.3	764.3	764.3	764.3	764.3
122.5°	808.2	809.6	811.0	811.7	811.9	812.1	812.4	812.6
125°	877.0	877.5	878.0	878.4	878.9	879.5	880.0	880.4
127.5°	945.9	946.7	947.4	947.6	947.2	946.7	946.2	945.7
130°	987.5	988.4	989.5	989.7	989.2	988.7	988.3	987.8
132.5°	1026.9	1027.9	1028.9	1029.0	1028.3	1027.7	1027.0	1026.2
135°	1086.7	1087.4	1088.2	1088.2	1087.4	1086.7	1085.9	1085.2
137.5°	1139.9	1141.0	1142.2	1142.6	1142.1	1141.6	1141.1	1140.6
140°	1173.7	1174.6	1175.6	1175.8	1175.4	1174.9	1174.4	1173.9
142.5°	1205.7	1206.5	1207.2	1207.3	1206.6	1205.9	1205.2	1204.6
145°	1250.5	1250.9	1251.4	1251.6	1251.6	1251.6	1251.6	1251.6
147.5°	1290.5	1291.0	1291.5	1291.2	1290.1	1288.9	1287.8	1286.7
150°	1315.0	1315.5	1316.0	1315.9	1315.1	1314.5	1313.7	1313.0
152.5°	1336.8	1337.8	1338.6	1338.5	1337.4	1336.2	1335.1	1334.0
155°	1366.9	1368.1	1369.3	1369.1	1367.7	1366.3	1364.8	1363.4
157.5°	1393.0	1394.4	1395.9	1395.7	1393.8	1391.9	1390.0	1388.1
160°	1407.9	1409.3	1410.8	1410.7	1409.0	1407.3	1405.5	1403.8
162.5°	1421.4	1423.1	1424.7	1424.7	1423.2	1421.7	1420.2	1418.7
165°	1439.5	1441.4	1443.4	1443.5	1441.8	1440.1	1438.4	1436.7
167.5°	1453.5	1455.5	1457.5	1457.5	1455.5	1453.5	1451.6	1449.6
170°	1461.4	1463.4	1465.3	1465.3	1463.4	1461.4	1459.4	1457.5
172.5°	1466.7	1468.6	1470.6	1470.5	1468.3	1466.2	1464.1	1461.9
175°	1473.0	1474.7	1476.4	1476.2	1474.3	1472.3	1470.5	1468.5
177.5°	1475.3	1476.9	1478.4	1478.2	1476.3	1474.3	1472.3	1470.5
180°	1473.9	1473.9	1473.9	1473.9	1473.9	1473.9	1473.9	1473.9

(END OF REPORT)