

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332025-930

Luminaire Tested: **S123DIP-S1000D805U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332025-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1000D805U930-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 805 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5608.7 lumens  
Efficiency: N/A  
Efficacy: 103.1 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 54.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332025-930  
CATALOG NUMBER: S123DIP-S1000D805U930-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

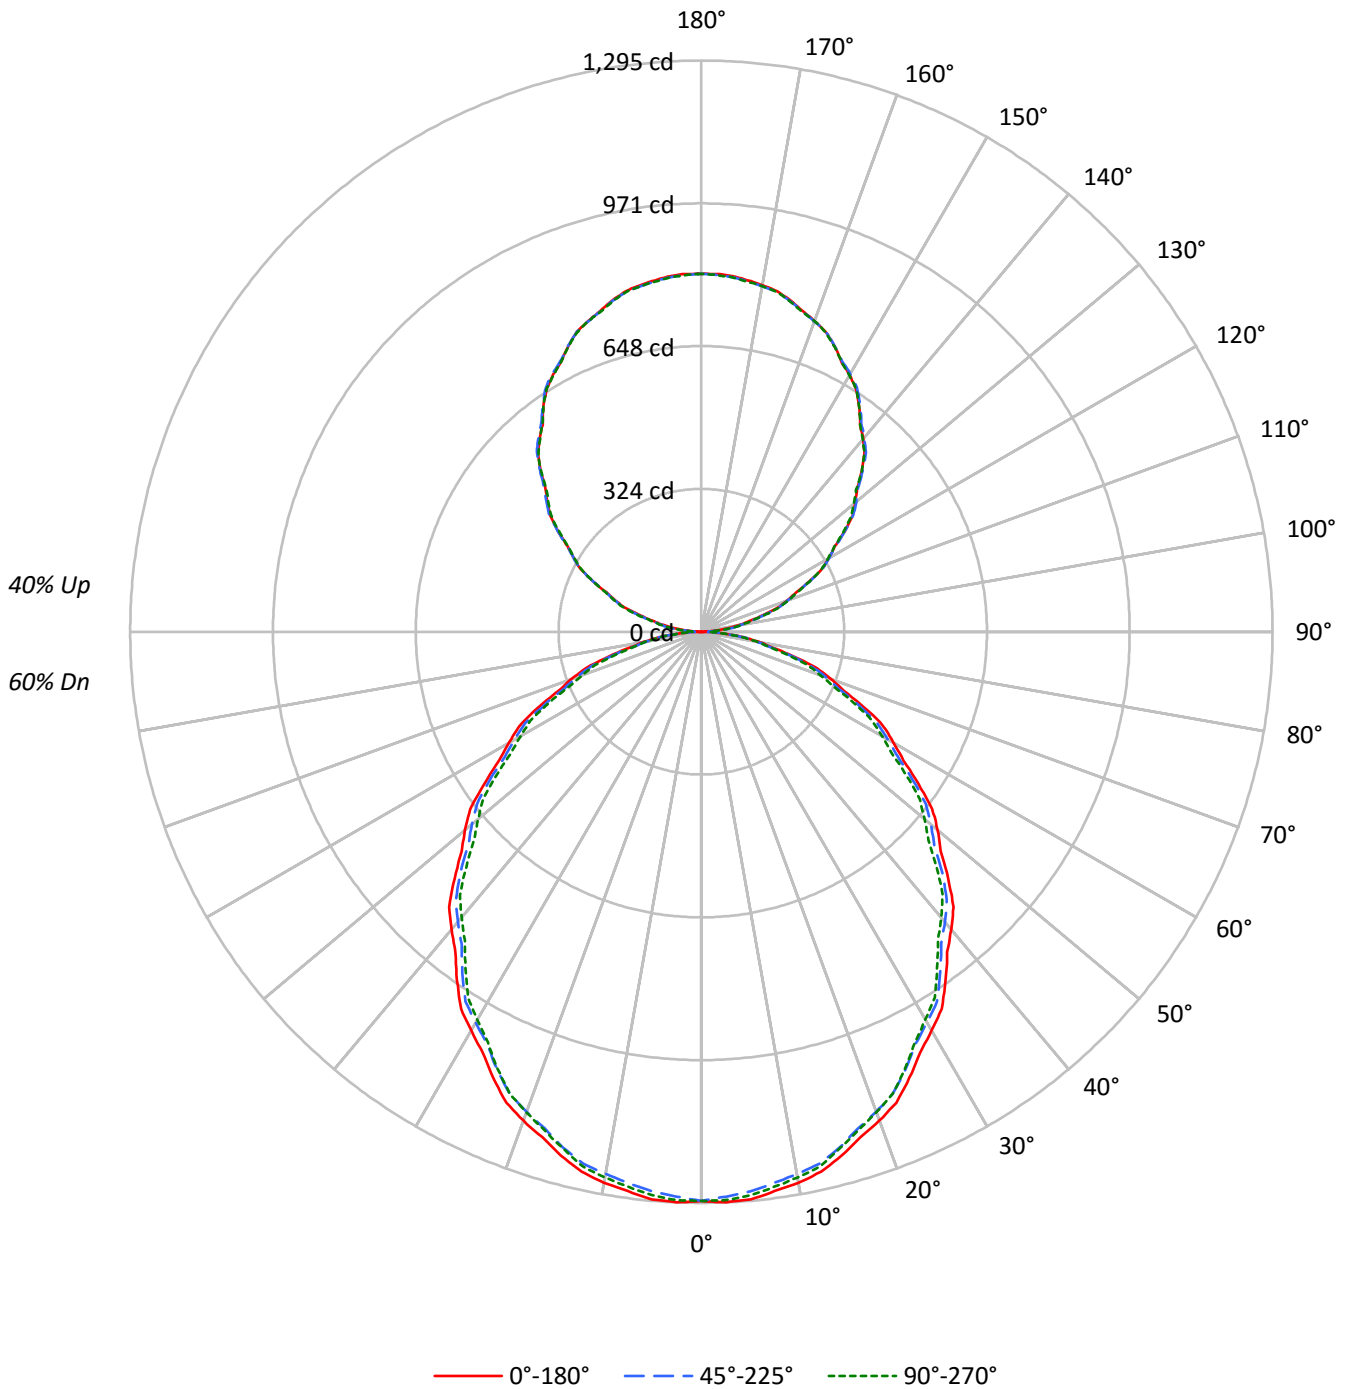



TEST NUMBER: P332025-930

CATALOG NUMBER: S123DIP-S1000D805U930-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65	60
1	100	95	92	88	93	89	86	83	78	75	73	67	65	64	58	56	55	50
2	91	83	77	72	85	78	73	68	68	64	60	59	56	53	51	48	46	42
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	39	36
4	76	65	57	51	71	61	54	48	53	48	43	47	42	38	40	37	34	31
5	70	58	50	43	65	54	47	41	48	42	37	42	37	33	36	32	29	26
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	33	29	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	30	26	30	26	23	21
8	55	43	35	29	52	40	33	28	36	30	26	31	27	23	27	24	21	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	22	19	17
10	48	36	28	24	45	34	27	23	30	25	21	27	22	19	24	20	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13891	13891	13891
5°	13956	13765	13861
10°	13864	13645	13729
15°	13701	13490	13515
20°	13512	13270	13283
25°	13258	13007	12981
30°	12978	12716	12619
35°	12686	12408	12248
40°	12381	12067	11880
45°	12044	11756	11469
50°	11707	11372	11055
55°	11265	10975	10640
60°	10820	10512	10176
65°	10427	10004	9694
70°	9847	9429	9010
75°	9000	8675	8305
80°	8114	7773	7705
85°	7126	6854	6570



TEST NUMBER: P332025-930

CATALOG NUMBER: S123DIP-S1000D805U930-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	121.6	2.2
10°-20°	343.3	6.1
20°-30°	507.0	9.0
30°-40°	592.3	10.6
40°-50°	595.5	10.6
50°-60°	523.1	9.3
60°-70°	389.7	6.9
70°-80°	222.0	4.0
80°-90°	66.1	1.2
90°-100°	52.9	0.9
100°-110°	158.2	2.8
110°-120°	269.1	4.8
120°-130°	354.0	6.3
130°-140°	397.9	7.1
140°-150°	391.1	7.0
150°-160°	329.2	5.9
160°-170°	219.2	3.9
170°-180°	76.7	1.4
0°-30°	971.9	17.3
0°-40°	1564.1	27.9
0°-60°	2682.6	47.8
0°-90°	3360.5	59.9
90°-120°	480.2	8.6
90°-150°	1623.1	28.9
90°-180°	2248.0	40.1
0°-180°	5608.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1290	1290	1290	1290	1290	
5°	1292	1286	1274	1284	1283	122
15°	1230	1224	1211	1219	1213	346
25°	1116	1109	1095	1096	1093	514
35°	965	958	944	938	932	604
45°	791	786	772	759	753	611
55°	600	598	585	573	567	538
65°	409	404	393	384	381	404
75°	216	212	209	203	200	231
85°	58	56	56	53	53	63
90°	1	7	15	18	19	5
95°	38	42	47	50	50	42
105°	143	145	150	150	152	154
115°	271	273	272	272	272	268
125°	396	398	397	395	392	353
135°	514	518	518	515	514	396
145°	624	625	627	626	624	390
155°	714	715	715	717	713	329
165°	778	776	776	780	776	219
175°	810	807	807	810	806	77
180°	812	812	812	812	812	



TEST NUMBER: P332025-930

CATALOG NUMBER: S123DIP-S1000D805U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1290.5	1290.5	1290.5	1290.5	1290.5	1290.5	1290.5	1290.5	1290.5	1290.5	1290.5
2.5°	1294.9	1294.2	1293.4	1292.6	1291.8	1290.3	1288.2	1286.0	1283.9	1281.7	1283.6
5°	1291.6	1290.4	1289.2	1287.9	1286.7	1284.7	1282.1	1279.3	1276.6	1273.9	1276.4
7.5°	1279.0	1277.7	1276.5	1275.3	1274.1	1272.0	1269.3	1266.4	1263.6	1260.8	1263.0
10°	1268.4	1267.1	1265.8	1264.6	1263.4	1261.2	1258.0	1254.7	1251.6	1248.4	1250.6
12.5°	1254.1	1253.1	1252.1	1251.0	1250.0	1248.0	1245.0	1241.9	1238.9	1235.9	1237.5
15°	1229.5	1228.5	1227.5	1226.5	1225.6	1223.4	1220.3	1217.1	1213.8	1210.6	1212.6
17.5°	1200.9	1199.5	1198.3	1197.0	1195.7	1193.5	1190.3	1187.1	1183.9	1180.6	1182.0
20°	1179.6	1178.1	1176.6	1175.1	1173.6	1171.3	1168.1	1164.9	1161.7	1158.5	1159.4
22.5°	1155.6	1154.1	1152.7	1151.1	1149.7	1147.4	1144.1	1140.9	1137.8	1134.5	1135.3
25°	1116.3	1114.8	1113.4	1111.9	1110.4	1108.1	1104.8	1101.6	1098.5	1095.2	1095.4
27.5°	1074.4	1072.9	1071.5	1070.1	1068.6	1066.2	1062.7	1059.3	1055.8	1052.4	1052.6
30°	1044.2	1042.9	1041.7	1040.5	1039.3	1036.9	1033.5	1030.0	1026.5	1023.1	1023.1
32.5°	1014.0	1012.4	1010.7	1009.1	1007.5	1005.3	1002.7	1000.0	997.4	994.7	993.3
35°	965.4	963.9	962.5	961.0	959.4	957.2	953.9	950.7	947.5	944.3	942.8
37.5°	915.7	913.8	911.9	910.0	908.2	905.6	902.4	899.1	895.9	892.6	890.8
40°	881.1	879.5	878.1	876.6	875.1	872.7	869.2	865.8	862.3	858.8	856.9
42.5°	846.4	844.7	843.1	841.4	839.8	837.1	833.7	830.3	826.8	823.4	821.4
45°	791.2	790.2	789.2	788.2	787.3	785.1	782.0	778.7	775.5	772.3	769.4
47.5°	736.4	734.9	733.5	732.1	730.7	728.4	725.5	722.4	719.4	716.4	713.5
50°	699.1	697.8	696.6	695.4	694.1	691.9	688.7	685.5	682.3	679.1	676.4
52.5°	660.0	659.2	658.4	657.5	656.6	654.5	651.2	647.8	644.3	640.9	638.6
55°	600.3	600.1	599.8	599.6	599.3	597.6	594.4	591.2	588.0	584.8	582.0
57.5°	543.5	542.7	541.8	541.0	540.1	538.4	535.9	533.3	530.8	528.2	525.8
60°	502.6	502.4	502.1	501.9	501.7	500.1	497.1	494.2	491.2	488.3	486.0
62.5°	466.3	465.6	465.0	464.3	463.7	461.9	458.9	456.0	453.1	450.0	447.8
65°	409.4	408.2	407.0	405.8	404.6	402.7	400.2	397.8	395.3	392.8	390.9
67.5°	349.4	348.2	347.2	346.1	345.0	343.5	341.6	339.7	337.9	336.0	334.3
70°	312.9	311.4	310.0	308.5	307.0	305.5	304.0	302.6	301.1	299.6	297.9
72.5°	274.8	273.7	272.6	271.5	270.4	269.0	267.3	265.7	264.0	262.3	260.8
75°	216.4	215.4	214.4	213.4	212.5	211.6	210.8	210.1	209.4	208.6	207.4
77.5°	164.7	164.1	163.5	163.1	162.5	161.8	160.9	160.0	159.1	158.2	157.4
80°	130.9	130.2	129.5	128.7	128.0	127.3	126.9	126.4	125.9	125.4	125.1
82.5°	98.1	97.9	97.8	97.7	97.5	97.3	97.3	97.2	97.1	97.0	96.5
85°	57.7	57.2	56.7	56.3	55.8	55.5	55.5	55.5	55.5	55.5	55.0
87.5°	23.2	22.9	22.6	22.3	22.0	21.9	22.1	22.3	22.4	22.6	22.5
90°	0.7	2.0	3.5	4.9	6.3	7.9	9.8	11.6	13.5	15.3	15.9
92.5°	15.4	16.4	17.4	18.3	19.2	20.3	21.4	22.4	23.4	24.5	24.9
95°	37.6	38.6	39.6	40.6	41.6	42.6	43.8	44.9	46.1	47.2	47.8
97.5°	66.8	67.5	68.2	69.0	69.8	70.5	71.3	72.2	73.0	73.8	74.4
100°	86.7	87.6	88.4	89.3	90.1	90.9	91.6	92.3	93.0	93.7	94.2
102.5°	109.7	110.1	110.6	111.2	111.7	112.4	113.3	114.3	115.2	116.2	116.6
105°	143.4	143.7	144.0	144.3	144.6	145.4	146.6	147.9	149.2	150.4	150.4
107.5°	182.7	182.9	183.0	183.2	183.4	183.7	184.3	184.7	185.2	185.7	186.2
110°	207.2	207.4	207.7	208.0	208.3	208.6	208.9	209.1	209.5	209.7	210.3



TEST NUMBER: P332025-930

CATALOG NUMBER: S123DIP-S1000D805U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	232.7	232.8	233.0	233.2	233.3	233.4	233.5	233.6	233.7	233.7	234.4
115°	270.9	271.3	271.7	272.1	272.6	272.7	272.4	272.1	271.8	271.6	271.7
117.5°	309.4	309.7	310.0	310.2	310.5	310.5	310.1	309.7	309.4	309.0	309.0
120°	333.4	334.2	335.1	335.9	336.8	336.9	336.1	335.4	334.8	334.0	333.9
122.5°	358.4	359.0	359.6	360.2	360.9	361.0	360.6	360.3	359.9	359.5	359.1
125°	396.5	396.9	397.3	397.8	398.2	398.3	397.9	397.7	397.4	397.1	396.6
127.5°	431.7	432.6	433.5	434.4	435.3	435.6	435.3	435.0	434.6	434.3	433.6
130°	455.1	456.2	457.4	458.5	459.7	460.0	459.6	459.2	458.8	458.3	457.7
132.5°	478.6	479.7	480.9	482.0	483.1	483.6	483.2	482.9	482.6	482.2	481.6
135°	514.4	515.3	516.1	517.0	517.8	518.2	518.0	517.9	517.7	517.6	517.1
137.5°	547.6	548.3	548.9	549.7	550.4	550.9	551.3	551.6	552.0	552.4	551.8
140°	570.5	571.2	571.9	572.7	573.3	573.7	573.9	574.1	574.2	574.3	574.2
142.5°	591.4	592.2	592.8	593.5	594.3	594.8	595.0	595.3	595.5	595.7	595.6
145°	624.0	624.4	624.6	624.9	625.2	625.5	626.0	626.4	626.8	627.2	627.1
147.5°	652.6	653.1	653.6	654.1	654.7	655.1	655.5	655.9	656.3	656.7	656.7
150°	672.5	672.8	673.0	673.4	673.6	673.9	674.2	674.5	674.7	675.1	675.1
152.5°	688.8	689.2	689.6	690.0	690.4	690.7	690.9	691.0	691.2	691.4	691.6
155°	714.5	714.5	714.5	714.5	714.5	714.6	714.8	714.9	715.1	715.2	715.8
157.5°	736.5	736.3	736.1	736.0	735.8	735.8	735.9	736.1	736.1	736.2	736.9
160°	750.2	750.0	749.7	749.4	749.1	749.0	749.0	749.0	749.0	749.0	749.7
162.5°	762.5	762.1	761.7	761.3	760.9	760.8	760.9	761.0	761.1	761.2	761.9
165°	778.3	777.9	777.5	777.1	776.6	776.4	776.4	776.4	776.4	776.4	777.2
167.5°	790.9	790.4	789.8	789.2	788.6	788.5	788.6	788.6	788.8	788.9	789.8
170°	798.1	797.5	797.0	796.4	795.8	795.5	795.5	795.5	795.5	795.5	796.5
172.5°	803.6	803.2	802.6	802.0	801.4	801.1	801.1	801.1	801.1	801.1	802.0
175°	809.5	808.9	808.5	807.9	807.3	807.0	807.0	807.0	807.0	807.0	807.9
177.5°	812.0	811.5	811.1	810.6	810.2	809.9	809.9	809.9	809.9	809.9	810.6
180°	811.5	811.5	811.5	811.5	811.5	811.5	811.5	811.5	811.5	811.5	811.5



TEST NUMBER: P332025-930

CATALOG NUMBER: S123DIP-S1000D805U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1290.5	1290.5	1290.5	1290.5	1290.5	1290.5	1290.5	1290.5
2.5°	1285.6	1287.6	1289.6	1290.5	1290.2	1290.0	1289.8	1289.6
5°	1278.8	1281.2	1283.8	1284.7	1284.3	1283.8	1283.3	1282.8
7.5°	1265.3	1267.5	1269.7	1270.6	1270.3	1270.1	1269.7	1269.4
10°	1252.8	1255.0	1257.3	1258.1	1257.6	1257.1	1256.6	1256.1
12.5°	1239.2	1240.8	1242.4	1243.1	1242.8	1242.5	1242.2	1241.9
15°	1214.6	1216.5	1218.5	1218.8	1217.3	1215.8	1214.3	1212.8
17.5°	1183.4	1184.8	1186.2	1186.6	1186.1	1185.5	1185.0	1184.5
20°	1160.4	1161.5	1162.5	1162.5	1161.8	1161.1	1160.3	1159.6
22.5°	1136.1	1136.9	1137.7	1137.6	1136.7	1135.7	1134.8	1133.8
25°	1095.7	1096.0	1096.3	1096.0	1095.2	1094.5	1093.7	1093.0
27.5°	1052.8	1053.0	1053.2	1052.8	1051.9	1050.9	1050.0	1049.0
30°	1023.1	1023.1	1023.1	1022.2	1020.5	1018.8	1017.1	1015.3
32.5°	991.9	990.6	989.2	988.0	987.1	986.1	985.2	984.2
35°	941.3	939.9	938.4	937.0	935.8	934.6	933.4	932.1
37.5°	889.1	887.3	885.5	884.2	883.5	882.6	881.8	881.1
40°	854.9	853.0	851.0	849.5	848.5	847.5	846.5	845.5
42.5°	819.4	817.4	815.5	814.0	813.0	812.0	811.1	810.1
45°	766.4	763.4	760.5	758.4	757.2	755.9	754.7	753.4
47.5°	710.5	707.7	704.7	702.8	701.6	700.6	699.5	698.4
50°	673.7	671.0	668.2	666.2	664.7	663.2	661.7	660.2
52.5°	636.3	634.0	631.7	629.7	628.3	626.8	625.3	623.9
55°	579.4	576.7	574.0	571.9	570.7	569.5	568.3	567.0
57.5°	523.3	521.0	518.5	516.6	515.2	513.7	512.3	510.9
60°	483.8	481.6	479.4	477.7	476.4	475.2	473.9	472.7
62.5°	445.6	443.4	441.2	439.7	438.8	438.0	437.2	436.3
65°	388.9	386.9	384.9	383.6	382.9	382.1	381.3	380.6
67.5°	332.6	330.8	329.1	327.8	326.7	325.6	324.6	323.6
70°	296.1	294.4	292.7	291.2	290.0	288.8	287.6	286.3
72.5°	259.3	257.7	256.2	255.1	254.5	253.8	253.2	252.6
75°	206.2	204.9	203.7	202.7	201.9	201.2	200.5	199.7
77.5°	156.5	155.7	154.9	154.5	154.5	154.5	154.5	154.5
80°	124.9	124.7	124.4	124.3	124.3	124.3	124.3	124.3
82.5°	96.1	95.6	95.2	94.9	94.7	94.5	94.3	94.1
85°	54.5	54.0	53.5	53.2	53.2	53.2	53.2	53.2
87.5°	22.4	22.3	22.3	22.3	22.3	22.3	22.4	22.5
90°	16.5	17.0	17.5	18.0	18.3	18.6	18.8	19.2
92.5°	25.4	25.8	26.3	26.4	26.3	26.1	25.9	25.8
95°	48.3	48.8	49.4	49.7	49.7	49.7	49.7	49.7
97.5°	75.1	75.7	76.4	76.7	76.6	76.6	76.6	76.5
100°	94.6	95.0	95.4	95.8	96.0	96.3	96.6	96.9
102.5°	117.0	117.4	117.8	118.1	118.0	117.9	117.9	117.8
105°	150.4	150.4	150.4	150.6	150.8	151.2	151.4	151.7
107.5°	186.6	187.1	187.6	187.7	187.5	187.4	187.2	187.0
110°	210.8	211.4	212.0	212.1	211.8	211.6	211.2	211.0





TEST NUMBER: P332025-930

CATALOG NUMBER: S123DIP-S1000D805U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	235.1	235.7	236.4	236.7	236.7	236.6	236.5	236.5
115°	271.8	272.0	272.1	272.1	272.0	271.8	271.7	271.6
117.5°	309.0	308.9	308.9	308.7	308.3	307.9	307.5	307.1
120°	333.7	333.6	333.5	333.2	333.0	332.6	332.4	332.1
122.5°	358.8	358.4	358.1	357.7	357.3	356.9	356.4	356.0
125°	396.0	395.4	394.8	394.3	393.7	393.1	392.6	392.0
127.5°	432.8	431.9	431.2	430.5	429.8	429.2	428.5	427.9
130°	457.2	456.6	456.1	455.3	454.3	453.3	452.3	451.3
132.5°	480.9	480.2	479.6	478.8	478.1	477.3	476.5	475.8
135°	516.5	515.9	515.4	514.9	514.6	514.4	514.0	513.8
137.5°	551.2	550.7	550.0	549.4	548.9	548.4	547.9	547.3
140°	574.1	573.9	573.7	573.2	572.2	571.2	570.2	569.2
142.5°	595.5	595.3	595.2	594.8	593.9	593.2	592.4	591.7
145°	627.0	626.8	626.6	626.3	625.7	625.2	624.6	624.0
147.5°	656.7	656.7	656.7	656.2	655.4	654.5	653.7	652.9
150°	675.1	675.1	675.1	674.7	673.8	672.9	672.1	671.2
152.5°	691.8	692.0	692.3	692.0	691.3	690.6	689.8	689.1
155°	716.3	716.9	717.5	717.2	716.2	715.3	714.3	713.3
157.5°	737.4	738.0	738.6	738.5	737.8	736.9	736.1	735.3
160°	750.4	751.1	751.8	751.9	751.3	750.7	750.2	749.6
162.5°	762.6	763.4	764.1	763.9	763.0	762.1	761.2	760.3
165°	778.1	778.9	779.8	779.8	778.8	777.7	776.7	775.8
167.5°	790.7	791.5	792.4	792.4	791.5	790.7	789.8	788.9
170°	797.5	798.5	799.5	799.5	798.5	797.5	796.5	795.5
172.5°	802.9	803.8	804.6	804.6	803.6	802.6	801.6	800.6
175°	808.7	809.5	810.4	810.3	809.3	808.4	807.3	806.3
177.5°	811.3	812.0	812.6	812.6	811.8	811.0	810.2	809.4
180°	811.5	811.5	811.5	811.5	811.5	811.5	811.5	811.5

(END OF REPORT)