

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831222

Luminaire Tested: S123DIP-S1165D1195U930-4F0-1E-UDD-G

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831222
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-5)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S1165D1195U930-4F0-1E-UDD-G
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1195 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8230.3 lumens
Efficiency: N/A
Efficacy: 112.4 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 73.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

Luminous Intensity Polar Plot

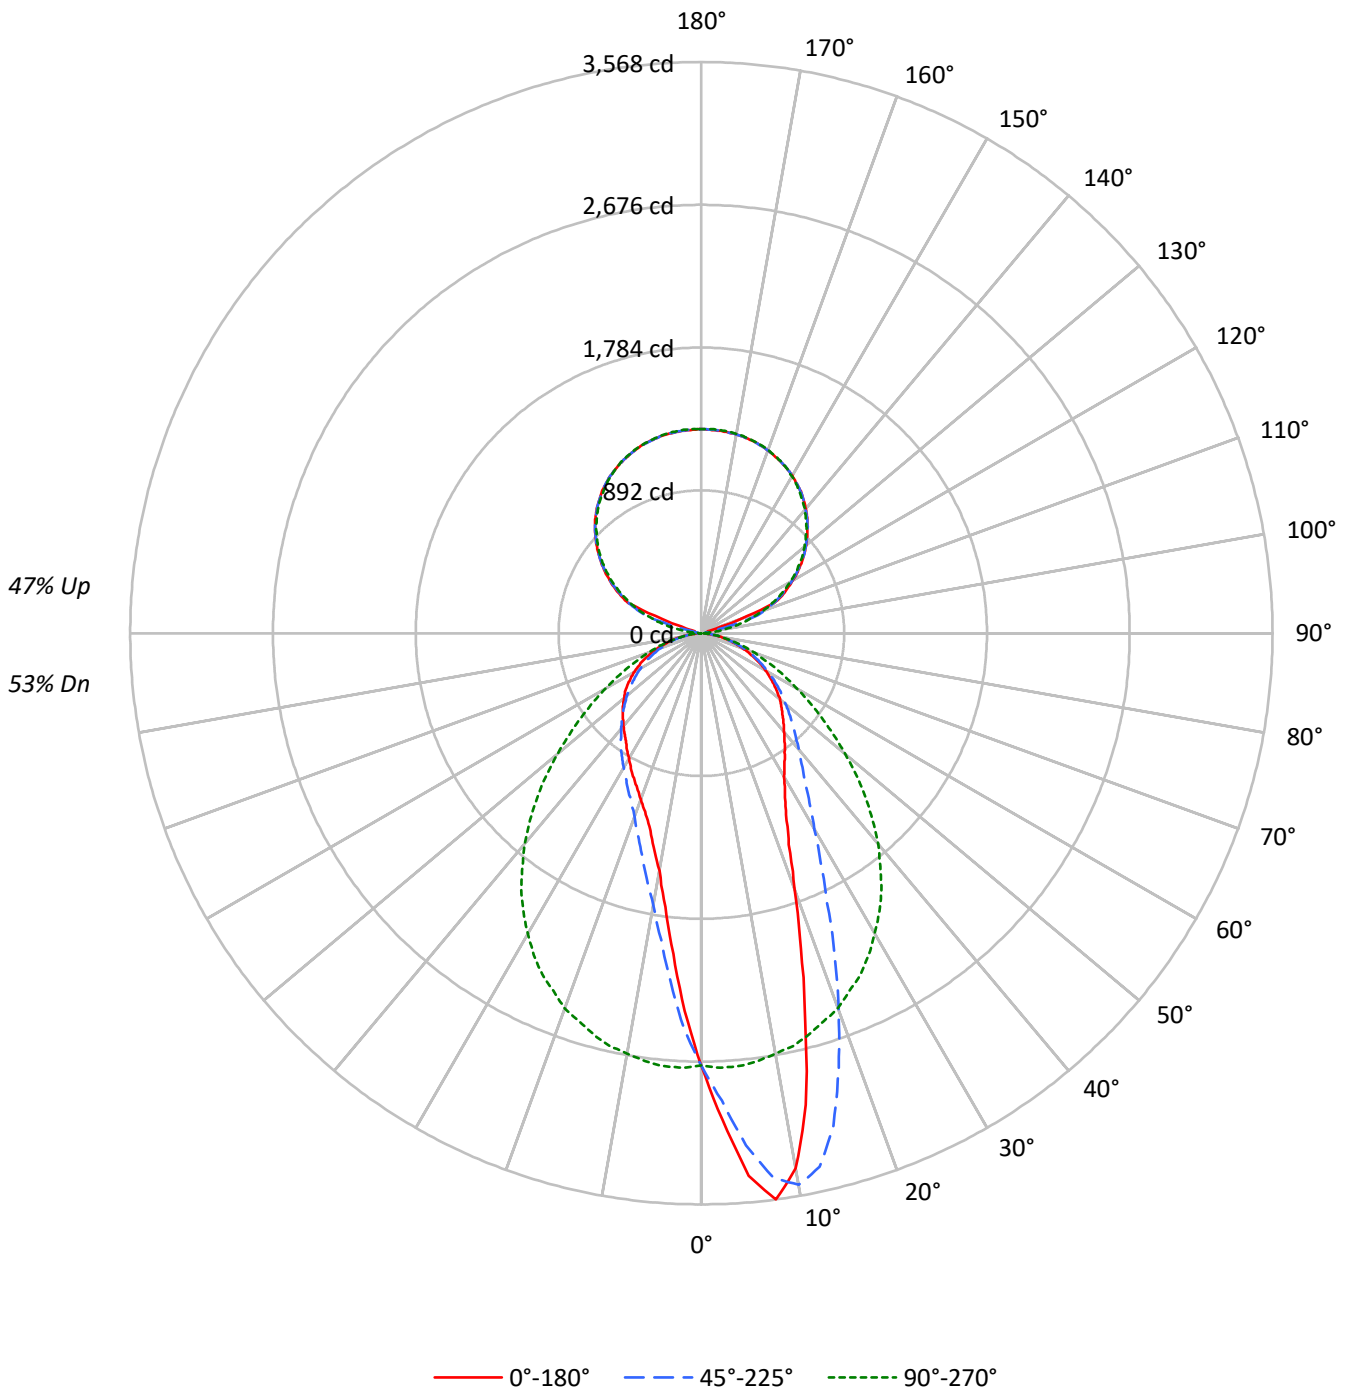



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53				
1	99	95	91	88	92	88	85	82	75	73	71	63	62	60	53	52	51	46				
2	91	83	78	73	84	78	73	68	67	63	60	56	54	51	47	45	44	39				
3	83	74	67	61	77	69	63	58	59	55	51	51	47	44	42	40	38	34				
4	76	66	58	53	71	62	55	50	53	48	44	46	42	39	38	36	33	30				
5	70	59	51	46	65	55	48	43	48	43	39	41	37	34	35	32	29	26				
6	65	53	46	40	60	50	43	38	44	38	34	38	33	30	32	29	26	24				
7	61	49	41	36	56	46	39	34	40	34	30	35	30	27	30	26	24	21				
8	56	44	37	32	52	42	35	30	37	31	27	32	28	25	27	24	22	19				
9	53	41	34	29	49	38	32	27	34	29	25	30	25	22	25	22	20	18				
10	49	38	31	26	46	36	29	25	31	26	23	28	23	20	24	21	18	16				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	29068	29068	29068	29068	29068
5°	36761	34696	29327	23634	21718
10°	37117	38241	29133	18840	16463
15°	27956	35504	28934	15954	13923
20°	19479	28730	28565	13952	12646
25°	14853	22094	27935	12836	11861
30°	12849	17554	26929	12048	11230
35°	11922	14820	25769	11477	10786
40°	11286	13294	24140	10935	10635
45°	10911	12304	22071	10511	10567
50°	10722	11521	19621	10124	10513
55°	10323	10946	17214	9758	10558
60°	9954	10331	14837	9414	10385
65°	9352	9750	12798	9049	10180
70°	8636	9010	10886	8441	9583
75°	7819	8077	9328	7844	8754
80°	6447	7067	7376	6837	7376
85°	5113	5730	5422	5805	5879

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 25199 cd/sqm



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	255.3	3.1
10°-20°	635.1	7.7
20°-30°	752.0	9.1
30°-40°	756.1	9.2
40°-50°	693.7	8.4
50°-60°	572.6	7.0
60°-70°	405.0	4.9
70°-80°	216.2	2.6
80°-90°	57.4	0.7
90°-100°	44.9	0.5
100°-110°	217.3	2.6
110°-120°	532.6	6.5
120°-130°	676.2	8.2
130°-140°	722.4	8.8
140°-150°	675.5	8.2
150°-160°	544.9	6.6
160°-170°	351.6	4.3
170°-180°	121.2	1.5
0°-30°	1642.5	20.0
0°-40°	2398.6	29.1
0°-60°	3665.0	44.5
0°-90°	4343.6	52.8
90°-120°	794.9	9.7
90°-150°	2869.0	34.9
90°-180°	3887.0	47.2
0°-180°	8230.3	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	2700	2700	2700	2700	2700	
5°	3402	3211	2714	2187	2010	324
15°	2509	3186	2596	1432	1249	693
25°	1251	1860	2352	1081	999	590
35°	907	1128	1961	873	821	570
45°	717	808	1450	690	694	555
55°	550	583	917	520	563	492
65°	367	383	502	355	400	365
75°	188	194	224	189	210	198
85°	41	46	44	47	48	46
90°	28	23	1	23	28	15
95°	36	29	58	29	36	30
105°	42	207	282	207	42	87
115°	557	544	530	544	557	524
125°	762	758	746	758	762	681
135°	939	939	929	939	939	724
145°	1083	1081	1072	1081	1083	676
155°	1179	1180	1181	1180	1179	544
165°	1243	1242	1246	1242	1243	351
175°	1270	1271	1275	1271	1270	121
180°	1275	1275	1275	1275	1275	



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5
2.5°	3043.8	3040.7	3037.6	3021.9	3006.2	2998.7	2991.2	2968.6	2946.1	2921.0	2896.0
5°	3402.2	3411.0	3419.8	3409.7	3399.7	3369.0	3338.3	3297.6	3256.8	3211.1	3165.4
7.5°	3567.6	3572.6	3577.6	3571.4	3565.1	3557.0	3548.8	3512.5	3476.1	3429.2	3382.2
10°	3395.9	3407.2	3418.5	3442.9	3467.4	3494.9	3522.5	3517.5	3512.5	3498.7	3484.9
12.5°	3018.8	3032.5	3046.3	3095.2	3144.1	3206.7	3269.4	3323.3	3377.1	3414.7	3452.3
15°	2508.7	2547.0	2585.2	2629.7	2674.2	2766.3	2858.4	2971.8	3085.2	3186.0	3286.9
17.5°	2066.4	2080.8	2095.2	2142.8	2190.4	2306.4	2422.3	2553.2	2684.2	2851.5	3018.8
20°	1700.5	1713.6	1726.8	1789.5	1852.1	1943.0	2033.8	2181.0	2328.3	2508.1	2687.9
22.5°	1428.6	1449.2	1469.9	1505.0	1540.1	1627.2	1714.3	1845.2	1976.2	2174.8	2373.4
25°	1250.6	1265.6	1280.7	1302.0	1323.3	1392.8	1462.4	1570.2	1677.9	1860.3	2042.6
27.5°	1129.1	1135.3	1141.6	1162.9	1184.2	1229.3	1274.4	1367.1	1459.9	1614.6	1769.4
30°	1033.8	1038.2	1042.6	1061.4	1080.2	1110.9	1141.6	1208.6	1275.7	1412.3	1548.9
32.5°	967.4	970.5	973.7	988.1	1002.5	1024.4	1046.4	1095.2	1144.1	1256.9	1369.7
35°	907.3	909.1	911.0	921.7	932.3	948.6	964.9	1001.9	1038.8	1127.8	1216.8
37.5°	854.6	857.1	859.6	865.9	872.2	886.6	901.0	930.4	959.9	1028.2	1096.5
40°	803.2	807.6	812.0	816.4	820.8	832.7	844.6	867.2	889.7	946.1	1002.5
42.5°	759.4	763.8	768.2	770.0	771.9	778.8	785.7	806.4	827.1	869.0	911.0
45°	716.8	718.7	720.5	722.4	724.3	729.9	735.6	753.7	771.9	808.3	844.6
47.5°	677.9	677.9	677.9	679.2	680.4	685.5	690.5	703.6	716.8	745.0	773.2
50°	640.3	640.3	640.3	638.5	636.6	639.7	642.8	652.9	662.9	688.0	713.0
52.5°	595.2	595.2	595.2	595.9	596.5	596.5	596.5	605.3	614.0	636.6	659.1
55°	550.1	552.6	555.1	553.3	551.4	552.6	553.9	559.5	565.2	583.3	601.5
57.5°	505.0	506.3	507.5	506.9	506.3	506.9	507.5	512.5	517.5	531.3	545.1
60°	462.4	462.4	462.4	461.1	459.9	461.1	462.4	464.9	467.4	479.9	492.5
62.5°	414.8	415.4	416.0	416.7	417.3	416.0	414.8	417.9	421.0	430.4	439.8
65°	367.2	367.8	368.4	370.3	372.2	370.9	369.7	372.8	375.9	382.8	389.7
67.5°	324.6	323.3	322.1	322.7	323.3	325.2	327.1	327.7	328.3	335.8	343.4
70°	274.4	275.7	276.9	276.3	275.7	276.3	276.9	278.8	280.7	286.3	292.0
72.5°	229.3	229.9	230.6	230.6	230.6	231.8	233.1	235.0	236.8	240.0	243.1
75°	188.0	188.0	188.0	189.2	190.5	191.1	191.7	191.7	191.7	194.2	196.7
77.5°	142.9	146.0	149.1	148.5	147.9	149.1	150.4	152.3	154.1	155.4	156.6
80°	104.0	104.0	104.0	104.6	105.3	107.1	109.0	110.3	111.5	114.0	116.5
82.5°	66.4	67.0	67.7	69.5	71.4	72.7	73.9	75.8	77.7	77.7	77.7
85°	41.4	40.1	38.8	40.1	41.4	42.6	43.9	44.5	45.1	46.4	47.6
87.5°	20.0	20.0	20.0	20.0	20.0	20.7	21.3	21.3	21.3	21.3	21.3
90°	28.4	28.0	27.6	27.2	26.7	26.1	25.3	24.4	23.6	22.7	20.0
92.5°	32.2	32.0	31.8	31.6	31.4	30.5	29.0	27.6	26.1	24.6	22.7
95°	36.0	36.0	36.0	36.0	36.0	35.3	33.8	32.3	30.8	29.4	27.0
97.5°	38.8	38.6	38.4	38.2	38.0	37.0	35.4	33.7	32.0	30.3	41.0
100°	39.8	39.6	39.4	39.2	38.9	38.0	36.3	34.6	32.9	31.3	64.1
102.5°	40.7	40.3	39.9	39.5	39.0	42.3	49.3	56.2	63.1	70.1	106.7
105°	41.7	41.3	40.8	40.4	40.0	58.4	95.7	132.9	170.2	207.4	226.4
107.5°	98.5	126.1	153.7	181.2	208.8	238.8	271.2	303.6	336.1	368.5	365.3
110°	260.5	290.6	320.7	350.8	380.9	399.4	406.4	413.3	420.3	427.2	424.9



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	493.5	493.9	494.3	494.8	495.2	494.4	492.6	490.7	488.8	486.9	484.6
115°	557.0	556.1	555.3	554.4	553.6	552.1	550.0	547.9	545.8	543.7	541.8
117.5°	608.1	607.9	607.7	607.5	607.3	606.3	604.6	603.0	601.3	599.6	598.5
120°	661.2	661.2	661.2	661.2	661.2	660.3	658.6	657.0	655.3	653.6	653.0
122.5°	713.3	713.0	712.8	712.6	712.4	711.8	710.7	709.7	708.6	707.6	706.7
125°	761.6	761.1	760.7	760.3	759.9	759.5	759.0	758.6	758.2	757.8	756.9
127.5°	808.9	809.3	809.8	810.2	810.6	810.5	809.9	809.2	808.6	808.0	806.9
130°	854.4	854.8	855.2	855.7	856.1	855.9	855.0	854.2	853.3	852.5	851.7
132.5°	896.1	896.7	897.3	898.0	898.6	898.5	897.7	896.8	896.0	895.1	894.5
135°	938.7	939.3	940.0	940.6	941.2	941.2	940.6	940.0	939.3	938.7	937.9
137.5°	979.4	979.8	980.3	980.7	981.1	980.8	979.7	978.7	977.6	976.6	976.2
140°	1015.4	1015.8	1016.3	1016.7	1017.1	1016.9	1016.1	1015.2	1014.4	1013.5	1012.9
142.5°	1048.6	1049.2	1049.8	1050.5	1051.1	1051.1	1050.5	1049.8	1049.2	1048.6	1047.9
145°	1082.7	1082.7	1082.7	1082.7	1082.7	1082.5	1082.0	1081.6	1081.2	1080.8	1080.4
147.5°	1107.3	1108.4	1109.4	1110.5	1111.5	1111.8	1111.4	1111.0	1110.6	1110.1	1109.7
150°	1135.7	1136.4	1137.0	1137.6	1138.2	1138.3	1137.9	1137.5	1137.1	1136.7	1136.2
152.5°	1158.5	1159.5	1160.6	1161.6	1162.7	1162.8	1161.9	1161.1	1160.2	1159.4	1159.2
155°	1179.3	1180.6	1181.8	1183.1	1184.3	1184.4	1183.4	1182.3	1181.3	1180.2	1180.0
157.5°	1197.3	1199.0	1200.7	1202.3	1204.0	1204.2	1203.0	1201.7	1200.4	1199.2	1199.4
160°	1214.3	1215.8	1217.3	1218.8	1220.2	1220.3	1219.1	1217.8	1216.5	1215.3	1215.5
162.5°	1230.4	1231.7	1233.0	1234.2	1235.5	1235.4	1233.9	1232.4	1231.0	1229.5	1229.7
165°	1242.8	1244.2	1245.7	1247.2	1248.6	1248.5	1246.9	1245.2	1243.5	1241.8	1242.0
167.5°	1252.2	1253.9	1255.6	1257.3	1259.0	1259.0	1257.3	1255.6	1253.9	1252.2	1252.2
170°	1260.8	1262.4	1264.1	1265.8	1267.5	1267.5	1265.8	1264.1	1262.4	1260.8	1260.8
172.5°	1265.5	1267.4	1269.3	1271.2	1273.1	1273.2	1271.5	1269.8	1268.1	1266.4	1266.2
175°	1270.2	1271.9	1273.6	1275.3	1277.0	1277.1	1275.6	1274.1	1272.6	1271.2	1271.0
177.5°	1271.2	1273.3	1275.4	1277.5	1279.6	1279.8	1278.1	1276.4	1274.7	1273.1	1272.9
180°	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5
2.5°	2888.4	2880.9	2853.3	2825.8	2794.4	2763.1	2739.9	2716.8	2682.3	2647.8	2619.6
5°	3130.3	3095.2	3036.9	2978.7	2899.7	2820.8	2767.5	2714.2	2642.8	2571.4	2514.4
7.5°	3322.0	3261.9	3180.4	3099.0	2995.6	2892.2	2794.4	2696.7	2587.7	2478.7	2389.7
10°	3444.2	3403.5	3309.5	3215.5	3077.0	2938.6	2802.0	2665.4	2525.0	2384.7	2266.9
12.5°	3456.1	3459.9	3373.4	3286.9	3130.3	2973.6	2807.6	2641.6	2464.9	2288.2	2151.0
15°	3351.5	3416.0	3368.4	3320.8	3162.9	3005.0	2800.7	2596.5	2392.8	2189.2	2030.7
17.5°	3157.2	3295.7	3302.6	3309.5	3151.6	2993.7	2767.5	2541.3	2310.7	2080.2	1913.5
20°	2892.2	3096.5	3166.6	3236.8	3108.4	2979.9	2736.8	2493.7	2235.6	1977.4	1802.6
22.5°	2621.5	2869.6	2998.1	3126.5	3031.3	2936.1	2677.3	2418.5	2146.0	1873.4	1696.1
25°	2313.3	2583.9	2781.3	2978.7	2920.4	2862.1	2607.1	2352.1	2062.0	1771.9	1590.8
27.5°	2044.5	2319.5	2557.6	2795.7	2783.2	2770.6	2517.5	2264.4	1967.4	1670.4	1495.6
30°	1805.1	2061.4	2327.7	2594.0	2624.7	2655.4	2411.0	2166.6	1869.0	1571.4	1402.9
32.5°	1593.3	1817.0	2102.7	2388.4	2448.6	2508.7	2288.2	2067.6	1773.2	1478.7	1316.4
35°	1419.8	1622.8	1908.5	2194.2	2269.4	2344.6	2152.9	1961.1	1674.2	1387.2	1232.4
37.5°	1266.3	1436.1	1714.9	1993.7	2085.8	2177.9	2006.2	1834.6	1565.8	1297.0	1154.7
40°	1139.1	1275.7	1531.9	1788.2	1894.7	2001.2	1859.6	1718.0	1463.0	1208.0	1077.1
42.5°	1032.6	1154.1	1386.6	1619.0	1721.2	1823.3	1703.6	1583.9	1357.1	1130.3	1010.6
45°	941.7	1038.8	1250.0	1461.1	1558.3	1655.4	1552.6	1449.9	1250.0	1050.1	938.6
47.5°	856.5	939.8	1120.3	1300.7	1387.2	1473.7	1393.5	1313.3	1144.1	974.9	874.0
50°	780.1	847.1	1005.0	1162.9	1238.1	1313.3	1242.5	1171.7	1032.6	893.5	805.8
52.5°	713.6	768.2	900.4	1032.6	1097.1	1161.6	1100.9	1040.1	929.8	819.5	743.1
55°	647.9	694.2	808.9	923.5	967.4	1011.3	964.3	917.3	828.3	739.3	674.8
57.5°	586.5	627.8	721.8	815.8	849.6	883.4	840.8	798.2	731.2	664.2	610.3
60°	526.3	560.1	638.5	716.8	737.5	758.1	723.7	689.2	642.2	595.2	547.0
62.5°	470.5	501.2	559.5	617.8	631.6	645.4	619.0	592.7	557.0	521.3	483.7
65°	412.9	436.1	483.7	531.3	540.1	548.9	525.7	502.5	475.6	448.6	421.0
67.5°	359.6	375.9	414.8	453.6	454.3	454.9	436.1	417.3	402.3	387.2	365.3
70°	307.6	323.3	349.0	374.7	375.3	375.9	360.9	345.9	334.6	323.3	307.0
72.5°	254.4	265.7	285.1	304.5	303.3	302.0	292.6	283.2	274.4	265.7	253.8
75°	206.1	215.5	228.7	241.9	238.1	234.3	229.3	224.3	216.8	209.3	201.8
77.5°	162.3	167.9	175.4	183.0	180.4	177.9	173.6	169.2	163.5	157.9	154.8
80°	119.0	121.6	126.6	131.6	130.3	129.1	124.1	119.0	117.8	116.5	112.2
82.5°	80.8	84.0	85.2	86.5	85.8	85.2	81.5	77.7	76.4	75.2	74.6
85°	48.2	48.9	49.5	50.1	48.2	46.4	45.1	43.9	43.9	43.9	43.2
87.5°	21.9	22.6	22.6	22.6	21.9	21.3	20.0	18.8	19.4	20.0	20.0
90°	17.3	14.5	11.8	9.4	7.3	5.2	3.1	0.9	3.1	5.2	7.3
92.5°	20.8	18.9	17.0	16.7	18.0	19.3	20.5	21.8	20.5	19.3	18.0
95°	24.7	22.4	20.1	23.3	31.9	40.5	49.2	57.8	49.2	40.5	31.9
97.5°	51.8	62.5	73.3	81.6	87.5	93.4	99.2	105.1	99.2	93.4	87.5
100°	96.9	129.8	162.6	176.9	172.7	168.5	164.3	160.1	164.3	168.5	172.7
102.5°	143.3	180.0	216.6	233.5	230.8	228.1	225.3	222.6	225.3	228.1	230.8
105°	245.3	264.3	283.2	291.5	289.2	286.9	284.6	282.3	284.6	286.9	289.2
107.5°	362.2	359.0	355.8	353.3	351.4	349.5	347.6	345.7	347.6	349.5	351.4
110°	422.6	420.3	417.9	415.9	414.3	412.6	410.9	409.2	410.9	412.6	414.3



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	482.2	479.9	477.6	475.7	474.2	472.8	471.3	469.8	471.3	472.8	474.2
115°	539.9	538.0	536.1	534.5	533.3	532.0	530.8	529.5	530.8	532.0	533.3
117.5°	597.5	596.4	595.4	594.1	592.6	591.2	589.7	588.2	589.7	591.2	592.6
120°	652.3	651.7	651.1	649.8	647.9	646.0	644.1	642.2	644.1	646.0	647.9
122.5°	705.9	705.0	704.2	703.0	701.6	700.1	698.6	697.2	698.6	700.1	701.6
125°	756.1	755.3	754.4	753.1	751.5	749.8	748.1	746.4	748.1	749.8	751.5
127.5°	805.9	804.8	803.8	802.4	800.7	799.0	797.4	795.7	797.4	799.0	800.7
130°	850.8	850.0	849.1	847.9	846.2	844.5	842.8	841.1	842.8	844.5	846.2
132.5°	893.9	893.2	892.6	891.4	889.8	888.1	886.4	884.7	886.4	888.1	889.8
135°	937.0	936.2	935.3	934.3	933.0	931.8	930.5	929.2	930.5	931.8	933.0
137.5°	975.7	975.3	974.9	973.8	972.2	970.5	968.8	967.1	968.8	970.5	972.2
140°	1012.3	1011.6	1011.0	1010.1	1008.8	1007.5	1006.3	1005.0	1006.3	1007.5	1008.8
142.5°	1047.3	1046.7	1046.0	1045.1	1043.8	1042.6	1041.3	1040.0	1041.3	1042.6	1043.8
145°	1079.9	1079.5	1079.1	1078.1	1076.7	1075.2	1073.7	1072.3	1073.7	1075.2	1076.7
147.5°	1109.3	1108.9	1108.5	1107.7	1106.7	1105.6	1104.6	1103.5	1104.6	1105.6	1106.7
150°	1135.8	1135.4	1135.0	1134.5	1133.8	1133.2	1132.6	1131.9	1132.6	1133.2	1133.8
152.5°	1159.0	1158.8	1158.6	1158.3	1158.1	1157.9	1157.7	1157.5	1157.7	1157.9	1158.1
155°	1179.8	1179.6	1179.4	1179.5	1179.9	1180.3	1180.8	1181.2	1180.8	1180.3	1179.9
157.5°	1199.6	1199.8	1200.0	1200.1	1200.1	1200.1	1200.1	1200.1	1200.1	1200.1	1200.1
160°	1215.7	1215.9	1216.1	1216.3	1216.5	1216.8	1217.0	1217.2	1217.0	1216.8	1216.5
162.5°	1229.9	1230.1	1230.3	1230.8	1231.4	1232.0	1232.7	1233.3	1232.7	1232.0	1231.4
165°	1242.2	1242.4	1242.6	1243.1	1243.7	1244.3	1245.0	1245.6	1245.0	1244.3	1243.7
167.5°	1252.2	1252.2	1252.2	1252.6	1253.5	1254.3	1255.2	1256.0	1255.2	1254.3	1253.5
170°	1260.8	1260.8	1260.8	1261.2	1262.0	1262.9	1263.7	1264.5	1263.7	1262.9	1262.0
172.5°	1266.0	1265.8	1265.6	1266.0	1267.1	1268.1	1269.2	1270.2	1269.2	1268.1	1267.1
175°	1270.8	1270.5	1270.3	1270.8	1271.8	1272.9	1273.9	1275.0	1273.9	1272.9	1271.8
177.5°	1272.6	1272.4	1272.2	1272.6	1273.7	1274.7	1275.8	1276.9	1275.8	1274.7	1273.7
180°	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5	2700.5
2.5°	2591.4	2567.0	2542.6	2523.8	2505.0	2473.0	2441.1	2433.6	2426.0	2415.4	2404.7
5°	2457.4	2397.2	2337.1	2283.2	2229.3	2187.3	2145.3	2117.8	2090.2	2070.1	2050.1
7.5°	2300.7	2210.5	2120.3	2056.4	1992.5	1931.7	1870.9	1851.5	1832.1	1805.7	1779.4
10°	2149.1	2049.5	1949.8	1866.5	1783.2	1723.7	1664.1	1640.3	1616.5	1583.3	1550.1
12.5°	2013.8	1904.7	1795.7	1711.8	1627.8	1570.2	1512.5	1478.1	1443.6	1424.8	1406.0
15°	1872.2	1755.6	1639.1	1561.4	1483.7	1431.7	1379.7	1349.6	1319.5	1301.4	1283.2
17.5°	1746.8	1631.6	1516.3	1441.7	1367.1	1319.5	1271.9	1245.6	1219.3	1205.5	1191.7
20°	1627.8	1515.0	1402.2	1329.6	1256.9	1218.0	1179.2	1162.3	1145.3	1134.1	1122.8
22.5°	1518.8	1407.9	1297.0	1234.9	1172.9	1141.6	1110.3	1098.4	1086.5	1077.1	1067.7
25°	1409.8	1310.8	1211.8	1159.1	1106.5	1080.8	1055.1	1043.2	1031.3	1021.9	1012.5
27.5°	1320.8	1226.2	1131.6	1086.5	1041.3	1021.3	1001.2	991.8	982.4	973.7	964.9
30°	1234.3	1149.7	1065.1	1026.3	987.5	969.3	951.1	941.7	932.3	924.2	916.0
32.5°	1154.1	1081.4	1008.8	973.0	937.3	922.3	907.3	896.0	884.7	878.4	872.2
35°	1077.7	1012.5	947.4	917.9	888.5	873.4	858.4	849.0	839.6	834.6	829.6
37.5°	1012.5	954.2	896.0	867.8	839.6	825.2	810.8	802.6	794.5	792.6	790.7
40°	946.1	896.0	845.9	818.3	790.7	778.2	765.7	760.6	755.6	754.4	753.1
42.5°	891.0	842.1	793.2	768.2	743.1	732.4	721.8	719.3	716.8	718.7	720.5
45°	827.1	786.3	745.6	722.4	699.2	690.5	681.7	679.8	677.9	681.7	685.5
47.5°	773.2	735.6	698.0	676.1	654.1	647.9	641.6	641.0	640.3	645.4	650.4
50°	718.0	681.7	645.4	627.8	610.3	604.6	599.0	600.9	602.7	610.9	619.0
52.5°	666.7	632.8	599.0	582.7	566.4	562.6	558.9	563.3	567.7	576.4	585.2
55°	610.3	579.6	548.9	536.3	523.8	520.0	516.3	525.1	533.8	542.0	550.1
57.5°	556.4	529.4	502.5	491.2	479.9	479.3	478.7	486.8	495.0	503.8	512.5
60°	498.7	476.2	453.6	444.9	436.1	437.3	438.6	448.0	457.4	464.3	471.2
62.5°	446.1	427.3	408.5	400.4	392.2	395.4	398.5	407.9	417.3	425.4	433.6
65°	393.5	377.8	362.2	356.5	350.9	355.3	359.6	367.8	375.9	381.6	387.2
67.5°	343.4	330.2	317.0	312.7	308.3	312.7	317.0	325.2	333.3	339.0	344.6
70°	290.7	280.1	269.4	266.3	263.2	268.2	273.2	280.1	287.0	292.6	298.2
72.5°	241.9	233.7	225.6	224.9	224.3	228.7	233.1	240.0	246.9	250.6	254.4
75°	194.2	189.8	185.5	184.8	184.2	188.6	193.0	196.7	200.5	203.6	206.8
77.5°	151.6	147.9	144.1	144.7	145.4	148.5	151.6	155.4	159.1	161.0	162.9
80°	107.8	106.5	105.3	106.5	107.8	110.3	112.8	115.3	117.8	119.0	120.3
82.5°	73.9	72.7	71.4	73.3	75.2	77.1	78.9	80.8	82.7	83.3	84.0
85°	42.6	44.5	46.4	46.4	46.4	47.0	47.6	48.2	48.9	48.2	47.6
87.5°	20.0	20.7	21.3	21.3	21.3	21.9	22.6	22.6	22.6	21.9	21.3
90°	9.4	11.8	14.5	17.3	20.0	22.7	23.6	24.4	25.3	26.1	26.7
92.5°	16.7	17.0	18.9	20.8	22.7	24.6	26.1	27.6	29.0	30.5	31.4
95°	23.3	20.1	22.4	24.7	27.0	29.4	30.8	32.3	33.8	35.3	36.0
97.5°	81.6	73.3	62.5	51.8	41.0	30.3	32.0	33.7	35.4	37.0	38.0
100°	176.9	162.6	129.8	96.9	64.1	31.3	32.9	34.6	36.3	38.0	38.9
102.5°	233.5	216.6	180.0	143.3	106.7	70.1	63.1	56.2	49.3	42.3	39.0
105°	291.5	283.2	264.3	245.3	226.4	207.4	170.2	132.9	95.7	58.4	40.0
107.5°	353.3	355.8	359.0	362.2	365.3	368.5	336.1	303.6	271.2	238.8	208.8
110°	415.9	417.9	420.3	422.6	424.9	427.2	420.3	413.3	406.4	399.4	380.9



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	475.7	477.6	479.9	482.2	484.6	486.9	488.8	490.7	492.6	494.4	495.2
115°	534.5	536.1	538.0	539.9	541.8	543.7	545.8	547.9	550.0	552.1	553.6
117.5°	594.1	595.4	596.4	597.5	598.5	599.6	601.3	603.0	604.6	606.3	607.3
120°	649.8	651.1	651.7	652.3	653.0	653.6	655.3	657.0	658.6	660.3	661.2
122.5°	703.0	704.2	705.0	705.9	706.7	707.6	708.6	709.7	710.7	711.8	712.4
125°	753.1	754.4	755.3	756.1	756.9	757.8	758.2	758.6	759.0	759.5	759.9
127.5°	802.4	803.8	804.8	805.9	806.9	808.0	808.6	809.2	809.9	810.5	810.6
130°	847.9	849.1	850.0	850.8	851.7	852.5	853.3	854.2	855.0	855.9	856.1
132.5°	891.4	892.6	893.2	893.9	894.5	895.1	896.0	896.8	897.7	898.5	898.6
135°	934.3	935.3	936.2	937.0	937.9	938.7	939.3	940.0	940.6	941.2	941.2
137.5°	973.8	974.9	975.3	975.7	976.2	976.6	977.6	978.7	979.7	980.8	981.1
140°	1010.1	1011.0	1011.6	1012.3	1012.9	1013.5	1014.4	1015.2	1016.1	1016.9	1017.1
142.5°	1045.1	1046.0	1046.7	1047.3	1047.9	1048.6	1049.2	1049.8	1050.5	1051.1	1051.1
145°	1078.1	1079.1	1079.5	1079.9	1080.4	1080.8	1081.2	1081.6	1082.0	1082.5	1082.7
147.5°	1107.7	1108.5	1108.9	1109.3	1109.7	1110.1	1110.6	1111.0	1111.4	1111.8	1111.5
150°	1134.5	1135.0	1135.4	1135.8	1136.2	1136.7	1137.1	1137.5	1137.9	1138.3	1138.2
152.5°	1158.3	1158.6	1158.8	1159.0	1159.2	1159.4	1160.2	1161.1	1161.9	1162.8	1162.7
155°	1179.5	1179.4	1179.6	1179.8	1180.0	1180.2	1181.3	1182.3	1183.4	1184.4	1184.3
157.5°	1200.1	1200.0	1199.8	1199.6	1199.4	1199.2	1200.4	1201.7	1203.0	1204.2	1204.0
160°	1216.3	1216.1	1215.9	1215.7	1215.5	1215.3	1216.5	1217.8	1219.1	1220.3	1220.2
162.5°	1230.8	1230.3	1230.1	1229.9	1229.7	1229.5	1231.0	1232.4	1233.9	1235.4	1235.5
165°	1243.1	1242.6	1242.4	1242.2	1242.0	1241.8	1243.5	1245.2	1246.9	1248.5	1248.6
167.5°	1252.6	1252.2	1252.2	1252.2	1252.2	1252.2	1253.9	1255.6	1257.3	1259.0	1259.0
170°	1261.2	1260.8	1260.8	1260.8	1260.8	1260.8	1262.4	1264.1	1265.8	1267.5	1267.5
172.5°	1266.0	1265.6	1265.8	1266.0	1266.2	1266.4	1268.1	1269.8	1271.5	1273.2	1273.1
175°	1270.8	1270.3	1270.5	1270.8	1271.0	1271.2	1272.6	1274.1	1275.6	1277.1	1277.0
177.5°	1272.6	1272.2	1272.4	1272.6	1272.9	1273.1	1274.7	1276.4	1278.1	1279.8	1279.6
180°	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	2700.5	2700.5	2700.5	2700.5
2.5°	2400.3	2396.0	2378.4	2360.9
5°	2035.1	2020.0	2015.0	2010.0
7.5°	1778.2	1776.9	1750.6	1724.3
10°	1552.0	1553.9	1530.1	1506.2
12.5°	1390.3	1374.7	1372.8	1370.9
15°	1268.8	1254.4	1251.9	1249.4
17.5°	1182.9	1174.2	1171.7	1169.2
20°	1117.8	1112.8	1108.4	1104.0
22.5°	1061.4	1055.1	1051.4	1047.6
25°	1006.9	1001.2	1000.0	998.7
27.5°	958.0	951.1	951.1	951.1
30°	911.6	907.3	905.4	903.5
32.5°	868.4	864.7	864.7	864.7
35°	827.7	825.8	823.3	820.8
37.5°	790.7	790.7	789.5	788.2
40°	755.0	756.9	756.9	756.9
42.5°	722.4	724.3	724.3	724.3
45°	688.6	691.7	693.0	694.2
47.5°	655.4	660.4	661.6	662.9
50°	622.8	626.6	627.2	627.8
52.5°	589.6	594.0	597.1	600.2
55°	554.5	558.9	560.8	562.6
57.5°	516.9	521.3	521.9	522.5
60°	475.6	479.9	481.2	482.4
62.5°	436.1	438.6	439.8	441.1
65°	391.0	394.7	397.2	399.7
67.5°	347.7	350.9	350.9	350.9
70°	299.5	300.7	302.6	304.5
72.5°	255.0	255.6	255.6	255.6
75°	208.0	209.3	209.9	210.5
77.5°	163.5	164.2	164.2	164.2
80°	119.7	119.0	119.0	119.0
82.5°	82.1	80.2	80.2	80.2
85°	47.0	46.4	47.0	47.6
87.5°	21.3	21.3	21.3	21.3
90°	27.2	27.6	28.0	28.4
92.5°	31.6	31.8	32.0	32.2
95°	36.0	36.0	36.0	36.0
97.5°	38.2	38.4	38.6	38.8
100°	39.2	39.4	39.6	39.8
102.5°	39.5	39.9	40.3	40.7
105°	40.4	40.8	41.3	41.7
107.5°	181.2	153.7	126.1	98.5
110°	350.8	320.7	290.6	260.5



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	494.8	494.3	493.9	493.5
115°	554.4	555.3	556.1	557.0
117.5°	607.5	607.7	607.9	608.1
120°	661.2	661.2	661.2	661.2
122.5°	712.6	712.8	713.0	713.3
125°	760.3	760.7	761.1	761.6
127.5°	810.2	809.8	809.3	808.9
130°	855.7	855.2	854.8	854.4
132.5°	898.0	897.3	896.7	896.1
135°	940.6	940.0	939.3	938.7
137.5°	980.7	980.3	979.8	979.4
140°	1016.7	1016.3	1015.8	1015.4
142.5°	1050.5	1049.8	1049.2	1048.6
145°	1082.7	1082.7	1082.7	1082.7
147.5°	1110.5	1109.4	1108.4	1107.3
150°	1137.6	1137.0	1136.4	1135.7
152.5°	1161.6	1160.6	1159.5	1158.5
155°	1183.1	1181.8	1180.6	1179.3
157.5°	1202.3	1200.7	1199.0	1197.3
160°	1218.8	1217.3	1215.8	1214.3
162.5°	1234.2	1233.0	1231.7	1230.4
165°	1247.2	1245.7	1244.2	1242.8
167.5°	1257.3	1255.6	1253.9	1252.2
170°	1265.8	1264.1	1262.4	1260.8
172.5°	1271.2	1269.3	1267.4	1265.5
175°	1275.3	1273.6	1271.9	1270.2
177.5°	1277.5	1275.4	1273.3	1271.2
180°	1275.0	1275.0	1275.0	1275.0



TEST NUMBER: P831222

CATALOG NUMBER: S123DIP-S1165D1195U930-4F0-1E-UDD-G

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.53	16.38	16.47	17.33	18.57	17.77	18.62	18.71	19.57	20.80
	3H	17.18	17.94	18.13	18.90	20.16	19.19	19.95	20.14	20.91	22.17
	4H	17.75	18.47	18.72	19.44	20.70	19.64	20.36	20.61	21.33	22.59
	6H	18.12	18.79	19.10	19.76	21.03	19.92	20.58	20.89	21.55	22.83
	8H	18.22	18.85	19.20	19.84	21.11	19.98	20.61	20.96	21.60	22.87
	12H	18.27	18.86	19.25	19.84	21.14	20.00	20.60	20.99	21.58	22.88
4H	2H	16.10	16.82	17.08	17.79	19.05	17.93	18.65	18.90	19.61	20.88
	3H	17.93	18.53	18.91	19.53	20.81	19.55	20.15	20.53	21.14	22.42
	4H	18.63	19.18	19.62	20.16	21.47	20.13	20.68	21.12	21.67	22.97
	6H	19.10	19.57	20.11	20.59	21.89	20.54	21.00	21.54	22.02	23.32
	8H	19.24	19.68	20.24	20.68	22.00	20.65	21.08	21.65	22.09	23.41
	12H	19.31	19.70	20.33	20.72	22.05	20.69	21.09	21.71	22.11	23.43
8H	4H	18.89	19.33	19.90	20.34	21.65	20.24	20.67	21.24	21.68	23.00
	6H	19.48	19.84	20.51	20.89	22.21	20.74	21.10	21.77	22.15	23.46
	8H	19.69	20.01	20.73	21.04	22.38	20.92	21.24	21.95	22.27	23.60
	12H	19.81	20.09	20.85	21.12	22.50	21.02	21.30	22.06	22.33	23.70
12H	4H	18.90	19.29	19.92	20.31	21.63	20.21	20.61	21.23	21.63	22.95
	6H	19.53	19.85	20.57	20.89	22.22	20.75	21.07	21.79	22.10	23.44
	8H	19.77	20.05	20.81	21.08	22.45	20.95	21.23	21.99	22.26	23.64