

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331907-930

Luminaire Tested: **S123DIP-S340D1195U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331907-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S340D1195U930-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1195 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5041.2 lumens
Efficiency: N/A
Efficacy: 119.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331907-930

CATALOG NUMBER: S123DIP-S340D1195U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

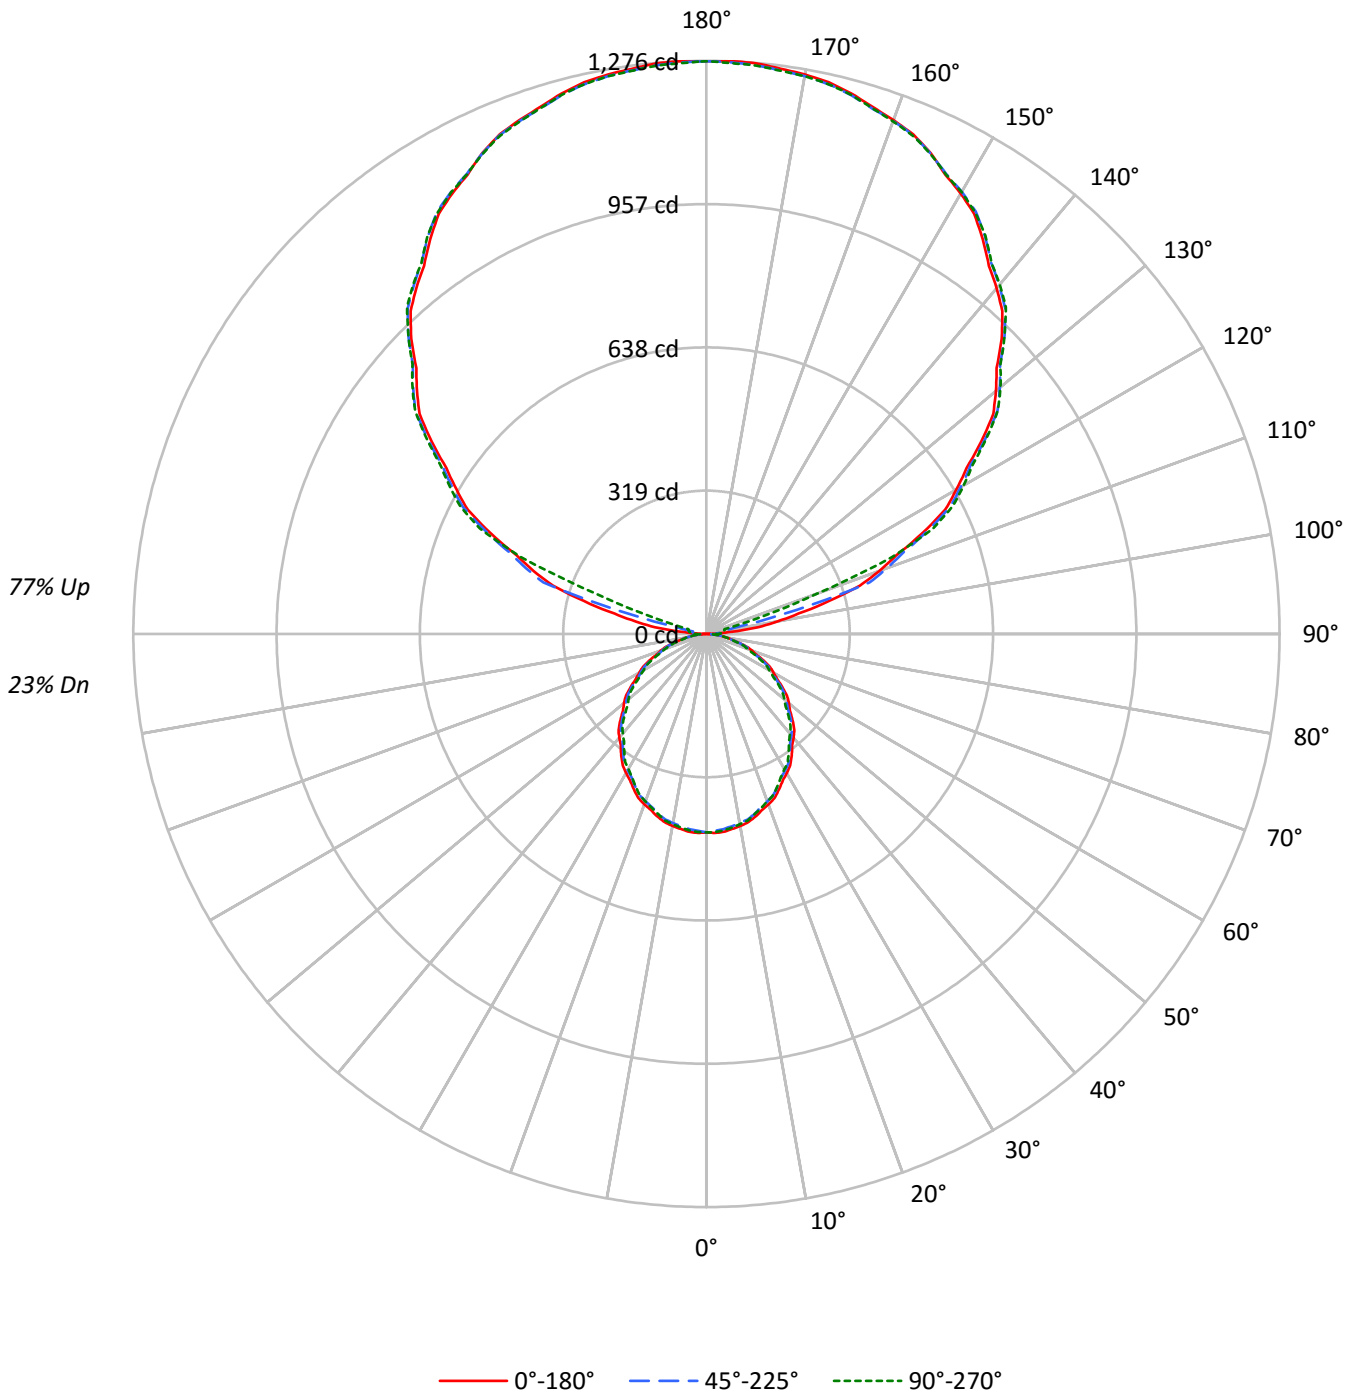



TEST NUMBER: P331907-930

CATALOG NUMBER: S123DIP-S340D1195U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	89	89	89	89	68	68	68	49	49	49	31	31	31	23
1	92	87	84	80	81	78	75	72	60	58	56	43	42	40	27	27	26	19
2	83	76	70	66	74	68	63	59	52	49	46	38	36	34	24	23	22	16
3	76	67	60	54	67	60	54	49	46	42	39	33	31	28	21	20	19	14
4	69	59	52	46	61	53	46	41	41	36	33	29	27	24	19	17	16	12
5	64	52	45	39	56	47	40	35	36	32	28	26	23	21	17	15	14	10
6	58	47	39	34	52	42	35	30	33	28	24	24	21	18	15	14	12	9
7	54	42	35	29	48	38	31	27	29	25	21	21	18	16	14	12	11	8
8	50	38	31	26	44	34	28	23	27	22	19	20	16	14	13	11	10	7
9	46	35	27	23	41	31	25	21	24	20	17	18	15	13	12	10	9	6
10	43	32	25	20	38	28	22	18	22	18	15	16	13	11	11	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4755	4755	4755
5°	4778	4712	4744
10°	4746	4671	4701
15°	4690	4619	4627
20°	4625	4543	4548
25°	4538	4454	4444
30°	4443	4354	4320
35°	4343	4248	4193
40°	4239	4131	4068
45°	4122	4025	3927
50°	4007	3893	3785
55°	3856	3757	3643
60°	3705	3597	3483
65°	3568	3423	3319
70°	3371	3229	3084
75°	3082	2969	2845
80°	2777	2665	2641
85°	2433	2347	2260



TEST NUMBER: P331907-930

CATALOG NUMBER: S123DIP-S340D1195U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.6	0.8
10°-20°	117.5	2.3
20°-30°	173.6	3.4
30°-40°	202.8	4.0
40°-50°	203.9	4.0
50°-60°	179.1	3.6
60°-70°	133.4	2.6
70°-80°	76.0	1.5
80°-90°	25.4	0.5
90°-100°	46.4	0.9
100°-110°	220.9	4.4
110°-120°	530.6	10.5
120°-130°	675.7	13.4
130°-140°	722.0	14.3
140°-150°	675.1	13.4
150°-160°	544.6	10.8
160°-170°	351.5	7.0
170°-180°	121.1	2.4
0°-30°	332.7	6.6
0°-40°	535.5	10.6
0°-60°	918.4	18.2
0°-90°	1153.2	22.9
90°-120°	797.9	15.8
90°-150°	2870.8	56.9
90°-180°	3888.0	77.1
0°-180°	5041.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	442	442	442	442	442	
5°	442	440	436	440	439	42
15°	421	419	414	417	415	119
25°	382	380	375	375	374	176
35°	330	328	323	321	319	207
45°	271	269	264	260	258	209
55°	206	205	200	196	194	184
65°	140	138	134	132	130	138
75°	74	73	71	70	68	79
85°	20	19	19	18	18	22
90°	1	11	23	26	28	4
95°	58	22	29	36	36	71
105°	282	287	207	49	42	299
115°	530	535	544	553	557	522
125°	746	754	758	760	762	666
135°	929	935	939	941	939	715
145°	1072	1079	1081	1083	1083	671
155°	1181	1179	1180	1184	1179	544
165°	1246	1243	1242	1249	1243	352
175°	1275	1270	1271	1277	1270	121
180°	1275	1275	1275	1275	1275	



TEST NUMBER: P331907-930

CATALOG NUMBER: S123DIP-S340D1195U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	441.8	441.8	441.8	441.8	441.8	441.8	441.8	441.8	441.8	441.8	441.8
2.5°	443.4	443.0	442.8	442.5	442.2	441.7	441.0	440.3	439.5	438.8	439.4
5°	442.2	441.7	441.3	440.9	440.5	439.9	438.9	438.0	437.0	436.1	436.9
7.5°	437.9	437.4	437.0	436.6	436.2	435.5	434.6	433.6	432.6	431.6	432.4
10°	434.2	433.8	433.3	432.9	432.5	431.8	430.6	429.6	428.4	427.4	428.1
12.5°	429.3	429.0	428.6	428.3	428.0	427.2	426.2	425.2	424.1	423.1	423.7
15°	420.9	420.6	420.2	419.9	419.6	418.8	417.8	416.6	415.6	414.5	415.2
17.5°	411.1	410.7	410.3	409.8	409.4	408.6	407.5	406.4	405.3	404.2	404.6
20°	403.8	403.3	402.8	402.3	401.8	401.0	399.9	398.8	397.7	396.6	397.0
22.5°	395.6	395.1	394.6	394.1	393.6	392.8	391.7	390.6	389.5	388.4	388.7
25°	382.1	381.6	381.2	380.7	380.2	379.4	378.2	377.2	376.0	375.0	375.0
27.5°	367.8	367.3	366.8	366.3	365.8	365.0	363.9	362.6	361.5	360.3	360.4
30°	357.5	357.0	356.6	356.2	355.8	355.0	353.8	352.6	351.5	350.3	350.3
32.5°	347.2	346.6	346.0	345.4	345.0	344.1	343.2	342.3	341.4	340.6	340.1
35°	330.5	330.0	329.5	329.0	328.5	327.7	326.6	325.5	324.4	323.3	322.8
37.5°	313.5	312.8	312.2	311.5	311.0	310.1	308.9	307.8	306.7	305.6	305.0
40°	301.7	301.1	300.6	300.1	299.6	298.7	297.6	296.4	295.2	294.0	293.3
42.5°	289.8	289.2	288.6	288.0	287.5	286.6	285.4	284.2	283.1	281.8	281.2
45°	270.8	270.5	270.2	269.9	269.5	268.8	267.7	266.6	265.5	264.4	263.4
47.5°	252.1	251.6	251.1	250.6	250.1	249.4	248.3	247.3	246.3	245.2	244.3
50°	239.3	238.9	238.5	238.1	237.7	236.8	235.8	234.7	233.6	232.5	231.5
52.5°	225.9	225.7	225.3	225.1	224.8	224.0	222.9	221.8	220.6	219.4	218.7
55°	205.5	205.5	205.4	205.3	205.2	204.6	203.5	202.4	201.3	200.2	199.3
57.5°	186.1	185.8	185.5	185.2	184.9	184.3	183.4	182.5	181.7	180.8	180.0
60°	172.1	172.0	171.9	171.9	171.8	171.2	170.2	169.2	168.2	167.1	166.4
62.5°	159.6	159.4	159.2	159.0	158.7	158.2	157.1	156.1	155.1	154.1	153.4
65°	140.1	139.7	139.3	138.9	138.5	137.9	137.1	136.2	135.3	134.4	133.8
67.5°	119.6	119.2	118.9	118.5	118.1	117.6	117.0	116.3	115.7	115.0	114.5
70°	107.1	106.6	106.2	105.6	105.1	104.6	104.1	103.5	103.1	102.6	102.0
72.5°	94.1	93.7	93.4	92.9	92.5	92.1	91.6	91.0	90.4	89.8	89.3
75°	74.1	73.7	73.4	73.1	72.7	72.4	72.2	71.9	71.7	71.4	71.0
77.5°	56.3	56.2	56.0	55.8	55.6	55.4	55.1	54.8	54.5	54.1	53.9
80°	44.8	44.6	44.4	44.1	43.8	43.6	43.5	43.3	43.1	43.0	42.8
82.5°	33.6	33.5	33.5	33.4	33.3	33.3	33.3	33.3	33.3	33.2	33.0
85°	19.7	19.6	19.4	19.2	19.1	19.0	19.0	19.0	19.0	19.0	18.8
87.5°	8.1	8.3	8.6	8.7	9.0	9.3	9.8	10.3	10.8	11.3	11.3
90°	1.0	3.0	5.1	7.3	9.4	11.8	14.5	17.3	20.0	22.7	23.6
92.5°	17.6	17.0	16.5	15.8	15.2	16.0	18.1	20.1	22.2	24.2	25.6
95°	57.8	49.2	40.5	31.9	23.2	20.1	22.4	24.7	27.1	29.4	30.8
97.5°	116.1	112.3	108.4	104.5	100.6	91.2	76.0	60.8	45.7	30.5	32.2
100°	160.0	164.3	168.5	172.7	176.9	162.6	129.8	96.9	64.1	31.2	32.9
102.5°	210.1	213.1	216.1	219.2	222.3	205.8	169.9	134.0	98.2	62.3	57.1
105°	282.3	284.6	286.9	289.2	291.6	283.2	264.2	245.3	226.4	207.4	170.2
107.5°	358.4	360.3	362.2	363.9	365.8	368.3	371.3	374.2	377.2	380.3	352.9
110°	409.2	410.9	412.5	414.3	416.0	417.9	420.3	422.6	424.9	427.2	420.3



TEST NUMBER: P331907-930

CATALOG NUMBER: S123DIP-S340D1195U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	457.7	459.2	460.7	462.3	463.7	465.7	468.0	470.3	472.6	474.9	475.1
115°	529.5	530.8	532.0	533.3	534.5	536.1	538.0	539.9	541.8	543.7	545.8
117.5°	599.0	600.5	602.1	603.7	605.3	606.5	607.5	608.5	609.4	610.4	612.0
120°	642.2	644.1	646.0	647.9	649.8	651.1	651.7	652.3	653.0	653.5	655.3
122.5°	686.2	687.7	689.3	690.8	692.4	693.6	694.4	695.2	695.9	696.8	698.0
125°	746.4	748.1	749.7	751.5	753.2	754.4	755.2	756.1	756.9	757.7	758.2
127.5°	804.8	806.4	808.1	809.8	811.5	812.9	813.8	814.9	815.9	816.8	817.6
130°	841.1	842.9	844.5	846.2	847.8	849.1	849.9	850.8	851.7	852.5	853.4
132.5°	876.0	877.7	879.4	881.0	882.7	883.9	884.6	885.3	885.9	886.6	887.5
135°	929.2	930.5	931.7	933.0	934.3	935.3	936.2	937.0	937.8	938.7	939.3
137.5°	974.7	976.3	977.9	979.5	981.1	982.1	982.6	983.1	983.5	984.0	985.0
140°	1005.0	1006.2	1007.5	1008.8	1010.1	1011.0	1011.6	1012.3	1012.9	1013.5	1014.4
142.5°	1033.1	1034.3	1035.6	1036.8	1038.1	1039.0	1039.7	1040.3	1041.0	1041.5	1042.3
145°	1072.3	1073.7	1075.2	1076.7	1078.2	1079.1	1079.5	1079.9	1080.4	1080.8	1081.2
147.5°	1109.2	1110.2	1111.2	1112.1	1113.0	1113.8	1114.2	1114.6	1115.0	1115.4	1115.9
150°	1132.0	1132.5	1133.2	1133.8	1134.5	1135.0	1135.4	1135.8	1136.3	1136.7	1137.1
152.5°	1152.4	1152.7	1153.0	1153.2	1153.6	1153.8	1154.1	1154.4	1154.6	1154.9	1155.6
155°	1181.2	1180.8	1180.3	1179.9	1179.5	1179.4	1179.6	1179.8	1180.1	1180.2	1181.3
157.5°	1203.5	1203.5	1203.5	1203.4	1203.4	1203.2	1203.1	1202.8	1202.6	1202.4	1203.7
160°	1217.2	1217.0	1216.8	1216.6	1216.3	1216.1	1215.9	1215.7	1215.5	1215.3	1216.6
162.5°	1230.0	1229.6	1229.0	1228.4	1227.8	1227.5	1227.3	1227.1	1226.9	1226.6	1228.1
165°	1245.6	1245.0	1244.3	1243.7	1243.1	1242.7	1242.4	1242.2	1242.0	1241.8	1243.5
167.5°	1257.8	1256.9	1256.1	1255.2	1254.3	1253.9	1253.9	1253.9	1253.9	1253.9	1255.6
170°	1264.5	1263.7	1262.9	1262.0	1261.2	1260.8	1260.8	1260.8	1260.8	1260.8	1262.4
172.5°	1269.1	1268.1	1267.1	1266.1	1265.0	1264.6	1264.8	1264.9	1265.1	1265.3	1267.0
175°	1275.0	1273.9	1272.8	1271.8	1270.7	1270.3	1270.6	1270.7	1271.0	1271.1	1272.7
177.5°	1276.5	1275.6	1274.8	1274.0	1273.1	1272.8	1272.9	1273.1	1273.3	1273.4	1274.8
180°	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0



TEST NUMBER: P331907-930

CATALOG NUMBER: S123DIP-S340D1195U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	441.8	441.8	441.8	441.8	441.8	441.8	441.8	441.8
2.5°	440.1	440.8	441.5	441.8	441.7	441.6	441.6	441.5
5°	437.8	438.6	439.5	439.9	439.7	439.5	439.3	439.1
7.5°	433.2	433.9	434.6	435.0	434.9	434.8	434.7	434.6
10°	428.9	429.7	430.4	430.7	430.6	430.4	430.2	430.1
12.5°	424.2	424.8	425.3	425.6	425.5	425.3	425.3	425.2
15°	415.8	416.5	417.2	417.3	416.7	416.2	415.7	415.2
17.5°	405.1	405.6	406.1	406.3	406.0	405.9	405.7	405.5
20°	397.3	397.6	397.9	398.0	397.7	397.5	397.2	397.0
22.5°	388.9	389.2	389.5	389.5	389.1	388.8	388.5	388.2
25°	375.1	375.2	375.3	375.2	375.0	374.7	374.5	374.2
27.5°	360.4	360.5	360.5	360.4	360.1	359.8	359.5	359.1
30°	350.3	350.3	350.3	349.9	349.4	348.8	348.2	347.6
32.5°	339.6	339.1	338.7	338.3	337.9	337.6	337.3	337.0
35°	322.3	321.8	321.2	320.8	320.4	319.9	319.5	319.1
37.5°	304.4	303.8	303.1	302.7	302.5	302.1	301.9	301.7
40°	292.7	292.0	291.3	290.8	290.5	290.2	289.8	289.5
42.5°	280.5	279.8	279.2	278.7	278.3	278.0	277.7	277.3
45°	262.4	261.4	260.3	259.7	259.2	258.8	258.4	258.0
47.5°	243.3	242.3	241.2	240.6	240.2	239.9	239.5	239.1
50°	230.6	229.7	228.8	228.0	227.6	227.1	226.6	226.0
52.5°	217.8	217.0	216.2	215.6	215.1	214.6	214.1	213.6
55°	198.4	197.4	196.5	195.8	195.4	194.9	194.5	194.1
57.5°	179.2	178.3	177.5	176.8	176.3	175.9	175.4	174.9
60°	165.7	164.9	164.1	163.5	163.1	162.7	162.2	161.8
62.5°	152.5	151.8	151.1	150.5	150.3	149.9	149.7	149.4
65°	133.1	132.5	131.8	131.3	131.1	130.8	130.5	130.3
67.5°	113.8	113.2	112.7	112.2	111.9	111.5	111.1	110.8
70°	101.4	100.8	100.2	99.7	99.3	98.9	98.4	98.0
72.5°	88.8	88.2	87.7	87.3	87.2	86.9	86.7	86.4
75°	70.6	70.1	69.7	69.4	69.1	68.9	68.6	68.4
77.5°	53.6	53.3	53.0	52.9	52.9	52.9	52.9	52.9
80°	42.7	42.6	42.6	42.6	42.6	42.6	42.6	42.6
82.5°	32.9	32.8	32.6	32.4	32.4	32.4	32.3	32.2
85°	18.7	18.5	18.3	18.3	18.3	18.3	18.3	18.3
87.5°	11.4	11.5	11.7	11.7	11.8	11.9	12.0	12.1
90°	24.4	25.3	26.1	26.7	27.1	27.6	28.0	28.5
92.5°	26.9	28.3	29.7	30.4	30.7	31.0	31.2	31.5
95°	32.3	33.8	35.2	36.0	36.0	36.0	36.0	36.0
97.5°	33.8	35.5	37.3	38.2	38.4	38.6	38.8	39.1
100°	34.7	36.3	38.0	39.0	39.1	39.4	39.5	39.8
102.5°	51.9	46.6	41.4	39.1	39.4	39.8	40.2	40.5
105°	132.9	95.6	58.4	40.0	40.4	40.8	41.3	41.7
107.5°	325.5	298.2	270.9	243.2	215.2	187.0	159.0	130.9
110°	413.3	406.3	399.4	380.9	350.8	320.7	290.6	260.5



TEST NUMBER: P331907-930

CATALOG NUMBER: S123DIP-S340D1195U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	475.2	475.3	475.5	472.3	465.9	459.6	453.2	446.9
115°	547.9	550.0	552.1	553.6	554.4	555.3	556.1	556.9
117.5°	613.8	615.5	617.1	618.1	618.2	618.4	618.6	618.7
120°	657.0	658.6	660.3	661.1	661.1	661.1	661.1	661.1
122.5°	699.1	700.3	701.5	702.1	702.3	702.5	702.7	702.9
125°	758.6	759.0	759.5	759.9	760.3	760.8	761.2	761.6
127.5°	818.2	818.9	819.5	819.7	819.3	818.9	818.5	818.0
130°	854.2	855.0	855.9	856.1	855.7	855.2	854.8	854.4
132.5°	888.3	889.2	890.0	890.1	889.5	888.9	888.4	887.7
135°	940.0	940.6	941.3	941.3	940.6	940.0	939.3	938.7
137.5°	986.0	987.0	988.0	988.3	987.9	987.5	987.1	986.6
140°	1015.2	1016.0	1016.9	1017.1	1016.7	1016.3	1015.9	1015.5
142.5°	1042.9	1043.6	1044.2	1044.3	1043.7	1043.1	1042.5	1042.0
145°	1081.7	1082.1	1082.5	1082.6	1082.6	1082.6	1082.6	1082.6
147.5°	1116.3	1116.7	1117.1	1116.9	1115.9	1114.9	1113.9	1113.0
150°	1137.5	1137.9	1138.3	1138.2	1137.6	1137.0	1136.4	1135.7
152.5°	1156.3	1157.2	1157.9	1157.8	1156.8	1155.8	1154.9	1153.9
155°	1182.3	1183.4	1184.5	1184.3	1183.1	1181.9	1180.6	1179.3
157.5°	1204.9	1206.2	1207.5	1207.3	1205.7	1204.0	1202.3	1200.7
160°	1217.8	1219.0	1220.3	1220.3	1218.8	1217.3	1215.8	1214.3
162.5°	1229.6	1230.9	1232.4	1232.4	1231.1	1229.8	1228.5	1227.2
165°	1245.2	1246.8	1248.5	1248.6	1247.2	1245.7	1244.2	1242.8
167.5°	1257.3	1259.0	1260.7	1260.7	1259.0	1257.3	1255.6	1253.9
170°	1264.1	1265.8	1267.5	1267.5	1265.8	1264.1	1262.4	1260.8
172.5°	1268.7	1270.3	1272.0	1271.9	1270.1	1268.3	1266.4	1264.5
175°	1274.1	1275.6	1277.1	1276.9	1275.3	1273.6	1271.9	1270.2
177.5°	1276.1	1277.5	1278.8	1278.6	1277.0	1275.3	1273.6	1271.9
180°	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0	1275.0

(END OF REPORT)