

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831466

Luminaire Tested: S123DIP-S560D1025U930-4F0-1E-UDD-G1

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831466
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D1025U930-4F0-1E-UDD-G1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4988.3 lumens
Efficiency: N/A
Efficacy: 109.6 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 45.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

Luminous Intensity Polar Plot

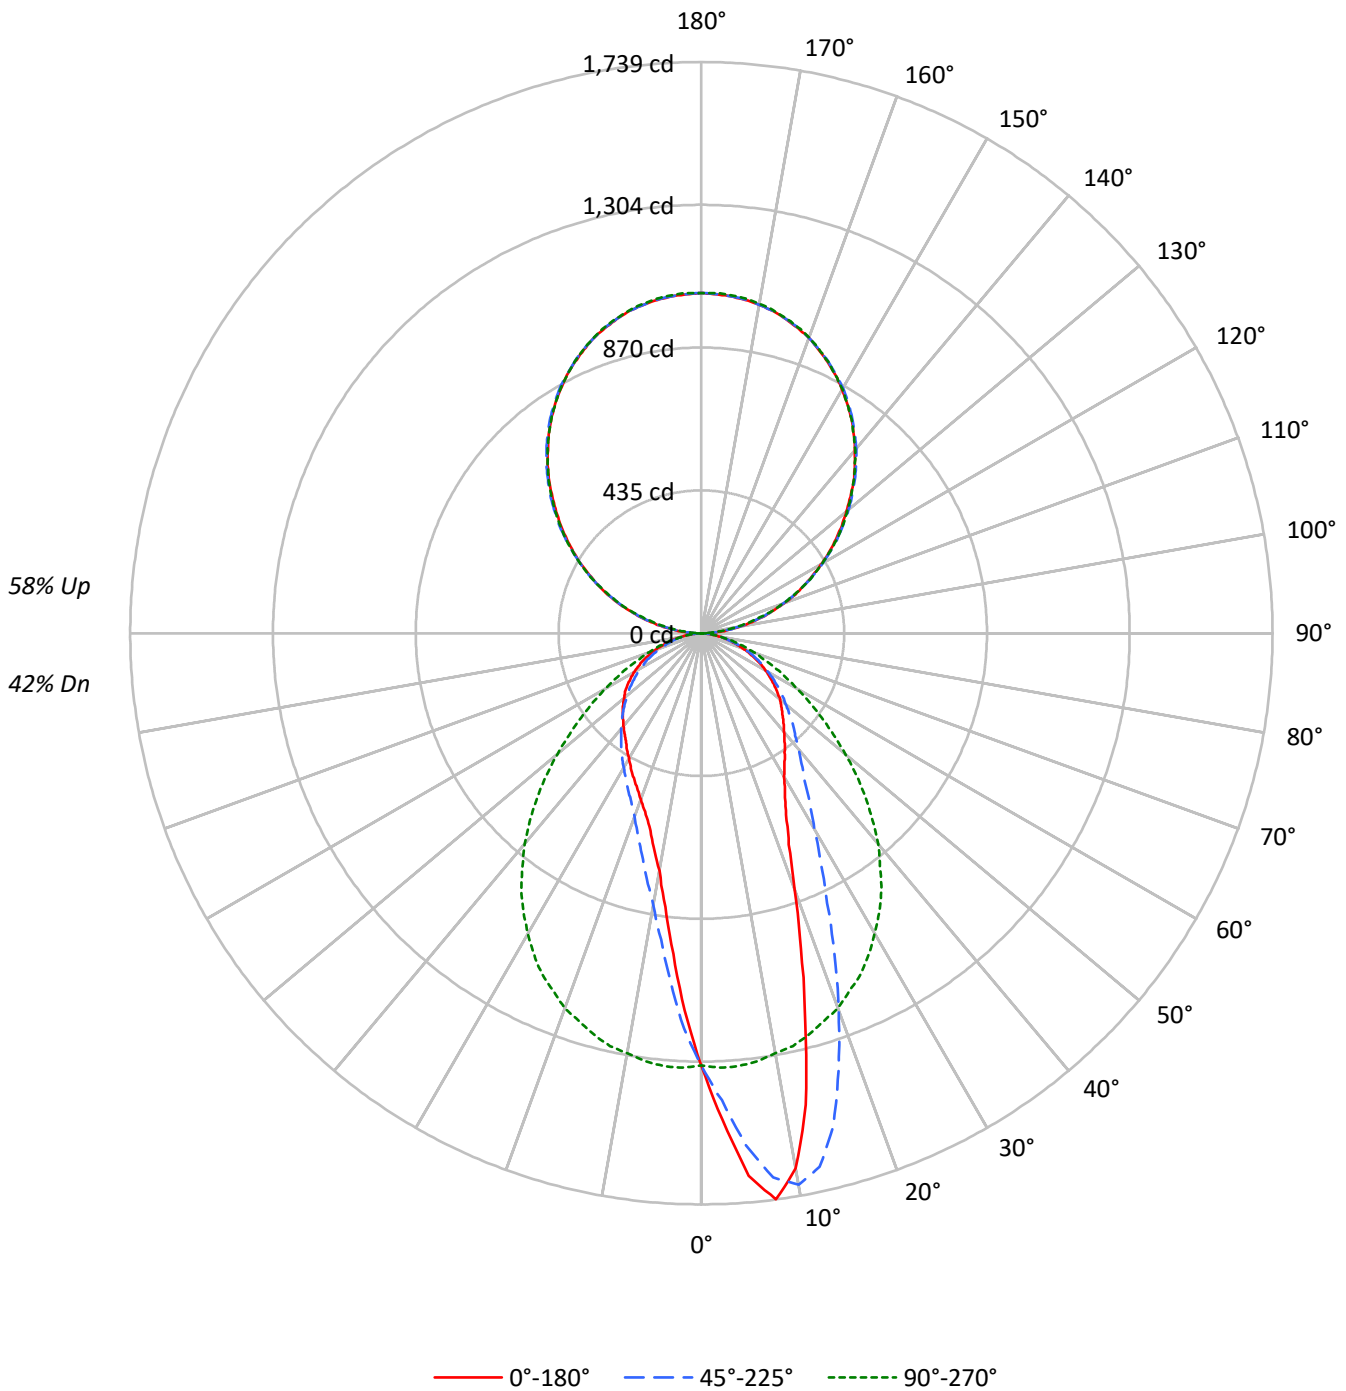



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	42				42
1	97	92	89	85	88	85	81	79	70	68	66	56	55	54	44	43	42				37	
2	88	81	75	71	80	74	70	65	62	58	55	50	48	46	39	38	36				31	
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	35	33	32				27	
4	74	64	56	51	68	59	52	47	49	44	41	40	37	34	32	30	28				24	
5	68	57	49	44	62	53	46	41	44	39	35	36	33	30	29	27	25				21	
6	63	52	44	38	58	48	41	36	40	35	31	33	29	27	27	24	22				19	
7	59	47	39	34	53	43	37	32	37	31	28	30	27	24	25	22	20				17	
8	54	43	35	30	50	40	33	28	34	28	25	28	24	21	23	20	18				16	
9	51	39	32	27	47	36	30	25	31	26	22	26	22	19	21	18	16				14	
10	48	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15				13	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	14165	14165	14165	14165	14165
5°	17915	16908	14292	11517	10584
10°	18088	18636	14197	9181	8023
15°	13624	17302	14100	7775	6784
20°	9493	14001	13920	6800	6163
25°	7238	10766	13613	6255	5780
30°	6262	8554	13123	5872	5473
35°	5809	7222	12558	5593	5256
40°	5500	6479	11764	5328	5182
45°	5317	5996	10755	5122	5150
50°	5226	5615	9562	4933	5123
55°	5031	5335	8389	4755	5146
60°	4850	5035	7231	4588	5061
65°	4557	4753	6238	4409	4961
70°	4208	4390	5303	4113	4670
75°	3810	3938	4546	3822	4267
80°	3143	3446	3595	3329	3595
85°	2495	2791	2643	2828	2865

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 12280 cd/sqm



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	124.4	2.5
10°-20°	309.5	6.2
20°-30°	366.5	7.3
30°-40°	368.5	7.4
40°-50°	338.1	6.8
50°-60°	279.0	5.6
60°-70°	197.4	4.0
70°-80°	105.4	2.1
80°-90°	28.9	0.6
90°-100°	66.7	1.3
100°-110°	201.9	4.0
110°-120°	343.6	6.9
120°-130°	452.1	9.1
130°-140°	508.1	10.2
140°-150°	499.6	10.0
150°-160°	420.6	8.4
160°-170°	280.0	5.6
170°-180°	98.0	2.0
0°-30°	800.4	16.0
0°-40°	1168.9	23.4
0°-60°	1786.0	35.8
0°-90°	2117.7	42.5
90°-120°	612.2	12.3
90°-150°	2072.0	41.5
90°-180°	2871.0	57.6
0°-180°	4988.3	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	1316	1316	1316	1316	1316	
5°	1658	1565	1323	1066	980	158
15°	1223	1553	1265	698	609	338
25°	609	906	1146	527	487	288
35°	442	550	956	426	400	278
45°	349	394	706	336	338	271
55°	268	284	447	253	274	240
65°	179	187	245	173	195	178
75°	92	95	109	92	103	96
85°	20	23	21	23	23	23
90°	24	20	1	20	24	13
95°	64	60	48	60	64	64
105°	194	192	183	192	194	205
115°	347	347	346	347	347	343
125°	500	507	506	507	500	448
135°	656	661	657	661	656	505
145°	797	801	797	801	797	498
155°	911	913	912	913	911	420
165°	990	991	994	991	990	279
175°	1030	1030	1034	1030	1030	98
180°	1036	1036	1036	1036	1036	



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0
2.5°	1483.3	1481.8	1480.3	1472.6	1465.0	1461.3	1457.7	1446.7	1435.7	1423.5	1411.3
5°	1658.0	1662.2	1666.5	1661.6	1656.7	1641.8	1626.8	1607.0	1587.1	1564.8	1542.5
7.5°	1738.6	1741.0	1743.5	1740.4	1737.4	1733.4	1729.4	1711.7	1694.0	1671.1	1648.2
10°	1654.9	1660.4	1665.9	1677.8	1689.7	1703.2	1716.6	1714.1	1711.7	1705.0	1698.3
12.5°	1471.1	1477.8	1484.5	1508.4	1532.2	1562.7	1593.2	1619.5	1645.8	1664.1	1682.4
15°	1222.6	1241.2	1259.8	1281.5	1303.2	1348.0	1392.9	1448.2	1503.5	1552.6	1601.8
17.5°	1007.0	1014.0	1021.0	1044.2	1067.4	1123.9	1180.4	1244.2	1308.1	1389.6	1471.1
20°	828.7	835.1	841.5	872.0	902.6	946.8	991.1	1062.9	1134.6	1222.3	1309.9
22.5°	696.2	706.2	716.3	733.4	750.5	793.0	835.4	899.2	963.0	1059.8	1156.6
25°	609.4	616.8	624.1	634.5	644.9	678.8	712.6	765.2	817.7	906.5	995.4
27.5°	550.2	553.3	556.3	566.7	577.1	599.1	621.0	666.2	711.4	786.8	862.3
30°	503.8	505.9	508.1	517.2	526.4	541.4	556.3	589.0	621.7	688.2	754.8
32.5°	471.4	473.0	474.5	481.5	488.5	499.2	509.9	533.7	557.5	612.5	667.5
35°	442.1	443.0	444.0	449.1	454.3	462.3	470.2	488.2	506.2	549.6	593.0
37.5°	416.5	417.7	418.9	422.0	425.0	432.0	439.1	453.4	467.8	501.1	534.3
40°	391.4	393.6	395.7	397.9	400.0	405.8	411.6	422.6	433.6	461.1	488.5
42.5°	370.1	372.2	374.3	375.3	376.2	379.5	382.9	393.0	403.0	423.5	444.0
45°	349.3	350.2	351.1	352.1	353.0	355.7	358.5	367.3	376.2	393.9	411.6
47.5°	330.4	330.4	330.4	331.0	331.6	334.0	336.5	342.9	349.3	363.0	376.8
50°	312.1	312.1	312.1	311.1	310.2	311.7	313.3	318.2	323.0	335.3	347.5
52.5°	290.1	290.1	290.1	290.4	290.7	290.7	290.7	295.0	299.2	310.2	321.2
55°	268.1	269.3	270.5	269.6	268.7	269.3	269.9	272.7	275.4	284.3	293.1
57.5°	246.1	246.7	247.3	247.0	246.7	247.0	247.3	249.8	252.2	258.9	265.6
60°	225.3	225.3	225.3	224.7	224.1	224.7	225.3	226.6	227.8	233.9	240.0
62.5°	202.1	202.4	202.7	203.0	203.4	202.7	202.1	203.7	205.2	209.8	214.3
65°	178.9	179.2	179.5	180.5	181.4	180.8	180.1	181.7	183.2	186.6	189.9
67.5°	158.2	157.6	156.9	157.2	157.6	158.5	159.4	159.7	160.0	163.7	167.3
70°	133.7	134.3	135.0	134.7	134.3	134.7	135.0	135.9	136.8	139.5	142.3
72.5°	111.8	112.1	112.4	112.4	112.4	113.0	113.6	114.5	115.4	116.9	118.5
75°	91.6	91.6	91.6	92.2	92.8	93.1	93.4	93.4	93.4	94.7	95.9
77.5°	69.6	71.1	72.7	72.4	72.1	72.7	73.3	74.2	75.1	75.7	76.3
80°	50.7	50.7	50.7	51.0	51.3	52.2	53.1	53.7	54.3	55.6	56.8
82.5°	32.4	32.7	33.0	33.9	34.8	35.4	36.0	36.9	37.9	37.9	37.9
85°	20.2	19.5	18.9	19.5	20.2	20.8	21.4	21.7	22.0	22.6	23.2
87.5°	9.8	9.8	9.8	9.8	9.8	10.1	10.4	10.4	10.4	10.4	10.4
90°	24.4	24.1	23.7	23.3	23.0	22.4	21.7	21.0	20.3	19.5	17.2
92.5°	35.0	35.4	35.7	36.1	36.4	36.4	35.8	35.3	34.7	34.2	33.1
95°	63.5	63.5	63.5	63.5	63.5	63.1	62.4	61.7	60.9	60.2	58.8
97.5°	91.1	91.3	91.5	91.7	91.9	91.5	90.6	89.7	88.8	87.9	86.8
100°	123.7	123.3	123.0	122.6	122.3	121.8	121.3	120.7	120.2	119.6	118.7
102.5°	157.1	157.3	157.4	157.6	157.8	157.6	157.1	156.5	156.0	155.4	154.2
105°	193.7	193.3	193.0	192.6	192.2	192.1	192.1	192.1	192.1	192.1	190.4
107.5°	231.1	231.3	231.5	231.7	231.9	231.7	231.1	230.6	230.0	229.5	228.8
110°	269.4	269.7	270.1	270.5	270.8	270.6	269.9	269.2	268.5	267.8	267.4



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	310.1	310.1	310.1	310.1	310.1	309.6	308.7	307.8	306.9	306.0	306.0
115°	346.7	346.9	347.1	347.2	347.4	347.4	347.2	347.1	346.9	346.7	347.1
117.5°	384.1	384.7	385.2	385.8	386.3	386.6	386.6	386.6	386.6	386.6	386.9
120°	424.0	424.4	424.7	425.1	425.5	425.7	425.9	426.1	426.3	426.5	427.4
122.5°	462.3	462.8	463.3	463.9	464.4	465.0	465.5	466.1	466.6	467.1	467.5
125°	500.5	501.2	502.0	502.7	503.4	504.1	504.9	505.6	506.3	507.0	507.4
127.5°	538.8	539.5	540.2	540.9	541.7	542.6	543.6	544.7	545.8	546.9	547.3
130°	576.2	577.5	578.7	580.0	581.3	582.3	583.0	583.7	584.4	585.1	585.7
132.5°	615.3	616.2	617.1	618.0	618.9	619.8	620.7	621.6	622.5	623.4	623.8
135°	656.0	656.3	656.7	657.0	657.4	657.9	658.7	659.4	660.1	660.8	661.0
137.5°	691.8	692.3	692.8	693.4	693.9	694.7	695.6	696.5	697.4	698.3	697.7
140°	726.8	728.0	729.3	730.6	731.8	732.5	732.7	732.9	733.1	733.3	733.1
142.5°	762.6	763.5	764.4	765.3	766.2	766.7	766.9	767.1	767.3	767.4	767.1
145°	796.7	797.5	798.2	798.9	799.6	800.1	800.3	800.5	800.6	800.8	800.3
147.5°	827.7	828.8	829.8	830.9	832.0	832.6	832.6	832.6	832.6	832.6	832.0
150°	857.0	858.1	859.1	860.2	861.3	861.9	861.9	861.9	861.9	861.9	861.5
152.5°	885.5	886.4	887.3	888.2	889.1	889.3	889.0	888.6	888.3	887.9	887.7
155°	910.7	912.0	913.2	914.5	915.7	916.0	915.3	914.6	913.8	913.1	912.9
157.5°	934.3	935.4	936.5	937.5	938.6	938.8	938.1	937.4	936.6	935.9	935.7
160°	957.1	957.8	958.5	959.2	960.0	959.9	959.0	958.1	957.2	956.3	956.3
162.5°	974.2	975.4	976.7	978.0	979.2	979.4	978.5	977.6	976.7	975.8	975.6
165°	990.4	991.7	993.0	994.2	995.5	995.6	994.5	993.4	992.3	991.3	991.3
167.5°	1005.1	1006.2	1007.3	1008.3	1009.4	1009.4	1008.3	1007.3	1006.2	1005.1	1004.9
170°	1015.7	1016.9	1018.2	1019.5	1020.7	1020.7	1019.5	1018.2	1016.9	1015.7	1015.7
172.5°	1023.8	1025.1	1026.3	1027.6	1028.9	1029.0	1027.9	1026.8	1025.7	1024.6	1024.6
175°	1029.5	1030.8	1032.0	1033.3	1034.6	1034.7	1033.6	1032.5	1031.4	1030.3	1030.3
177.5°	1032.8	1034.0	1035.3	1036.6	1037.8	1037.9	1036.8	1035.7	1034.7	1033.6	1033.6
180°	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0
2.5°	1407.6	1403.9	1390.5	1377.1	1361.8	1346.5	1335.2	1323.9	1307.1	1290.3	1276.6
5°	1525.4	1508.4	1480.0	1451.6	1413.1	1374.6	1348.7	1322.7	1287.9	1253.1	1225.3
7.5°	1618.9	1589.6	1549.9	1510.2	1459.8	1409.4	1361.8	1314.2	1261.0	1207.9	1164.5
10°	1678.4	1658.6	1612.8	1567.0	1499.5	1432.0	1365.5	1298.9	1230.5	1162.1	1104.7
12.5°	1684.2	1686.1	1643.9	1601.8	1525.4	1449.1	1368.2	1287.3	1201.2	1115.1	1048.2
15°	1633.2	1664.7	1641.5	1618.3	1541.3	1464.4	1364.8	1265.3	1166.1	1066.8	989.6
17.5°	1538.6	1606.1	1609.4	1612.8	1535.8	1458.9	1348.7	1238.4	1126.1	1013.7	932.5
20°	1409.4	1509.0	1543.2	1577.4	1514.8	1452.2	1333.7	1215.2	1089.4	963.6	878.4
22.5°	1277.5	1398.4	1461.0	1523.6	1477.2	1430.8	1304.7	1178.6	1045.8	912.9	826.5
25°	1127.3	1259.2	1355.4	1451.6	1423.2	1394.8	1270.5	1146.2	1004.9	863.5	775.2
27.5°	996.3	1130.3	1246.4	1362.4	1356.3	1350.2	1226.8	1103.5	958.7	814.0	728.8
30°	879.7	1004.5	1134.3	1264.1	1279.0	1294.0	1174.9	1055.8	910.8	765.8	683.6
32.5°	776.5	885.5	1024.7	1163.9	1193.2	1222.6	1115.1	1007.6	864.1	720.6	641.5
35°	691.9	790.8	930.0	1069.3	1105.9	1142.6	1049.1	955.7	815.9	676.0	600.6
37.5°	617.1	699.8	835.7	971.6	1016.5	1061.3	977.7	894.0	763.0	632.0	562.7
40°	555.1	621.7	746.5	871.4	923.3	975.2	906.2	837.2	713.0	588.7	524.9
42.5°	503.2	562.4	675.7	789.0	838.8	888.5	830.2	771.9	661.4	550.8	492.5
45°	458.9	506.2	609.1	712.0	759.4	806.7	756.6	706.5	609.1	511.7	457.4
47.5°	417.4	458.0	545.9	633.9	676.0	718.1	679.1	640.0	557.5	475.1	425.9
50°	380.1	412.8	489.8	566.7	603.3	640.0	605.5	571.0	503.2	435.4	392.7
52.5°	347.8	374.3	438.8	503.2	534.6	566.1	536.5	506.9	453.1	399.4	362.1
55°	315.7	338.3	394.2	450.1	471.4	492.8	469.9	447.0	403.7	360.3	328.8
57.5°	285.8	305.9	351.7	397.5	414.0	430.5	409.8	389.0	356.3	323.7	297.4
60°	256.5	273.0	311.1	349.3	359.4	369.5	352.7	335.9	313.0	290.1	266.6
62.5°	229.3	244.3	272.7	301.1	307.8	314.5	301.7	288.8	271.4	254.0	235.7
65°	201.2	212.5	235.7	258.9	263.2	267.5	256.2	244.9	231.7	218.6	205.2
67.5°	175.3	183.2	202.1	221.1	221.4	221.7	212.5	203.4	196.0	188.7	178.0
70°	149.9	157.6	170.1	182.6	182.9	183.2	175.9	168.5	163.0	157.6	149.6
72.5°	124.0	129.5	138.9	148.4	147.8	147.2	142.6	138.0	133.7	129.5	123.7
75°	100.5	105.0	111.4	117.9	116.0	114.2	111.8	109.3	105.6	102.0	98.3
77.5°	79.1	81.8	85.5	89.2	87.9	86.7	84.6	82.4	79.7	76.9	75.4
80°	58.0	59.2	61.7	64.1	63.5	62.9	60.5	58.0	57.4	56.8	54.7
82.5°	39.4	40.9	41.5	42.1	41.8	41.5	39.7	37.9	37.3	36.6	36.3
85°	23.5	23.8	24.1	24.4	23.5	22.6	22.0	21.4	21.4	21.4	21.1
87.5°	10.7	11.0	11.0	11.0	10.7	10.4	9.8	9.2	9.5	9.8	9.8
90°	14.8	12.5	10.1	8.0	6.2	4.4	2.6	0.8	2.6	4.4	6.2
92.5°	32.0	30.9	29.8	28.8	27.7	26.6	25.5	24.4	25.5	26.6	27.7
95°	57.3	55.9	54.4	53.1	51.8	50.5	49.3	48.0	49.3	50.5	51.8
97.5°	85.7	84.6	83.6	82.6	81.7	80.8	79.8	78.9	79.8	80.8	81.7
100°	117.8	116.9	116.0	115.0	113.9	112.9	111.8	110.7	111.8	112.9	113.9
102.5°	152.9	151.6	150.4	149.5	148.9	148.4	147.8	147.3	147.8	148.4	148.9
105°	188.8	187.2	185.6	184.6	184.2	183.8	183.5	183.1	183.5	183.8	184.2
107.5°	228.1	227.3	226.6	226.2	226.0	225.8	225.6	225.4	225.6	225.8	226.0
110°	267.0	266.7	266.3	265.9	265.6	265.2	264.9	264.5	264.9	265.2	265.6



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	306.0	306.0	306.0	305.9	305.7	305.6	305.4	305.2	305.4	305.6	305.7
115°	347.4	347.8	348.1	348.1	347.5	347.0	346.4	345.9	346.4	347.0	347.5
117.5°	387.3	387.7	388.0	388.1	387.9	387.7	387.6	387.4	387.6	387.7	387.9
120°	428.3	429.2	430.1	430.0	428.9	427.8	426.7	425.6	426.7	427.8	428.9
122.5°	467.9	468.2	468.6	468.4	467.7	467.0	466.2	465.5	466.2	467.0	467.7
125°	507.7	508.1	508.5	508.4	507.8	507.3	506.7	506.2	506.7	507.3	507.8
127.5°	547.6	548.0	548.3	548.0	546.9	545.8	544.7	543.6	544.7	545.8	546.9
130°	586.2	586.8	587.3	586.9	585.4	584.0	582.5	581.1	582.5	584.0	585.4
132.5°	624.1	624.5	624.8	624.3	622.9	621.4	620.0	618.5	620.0	621.4	622.9
135°	661.2	661.4	661.6	661.1	660.0	658.9	657.9	656.8	657.9	658.9	660.0
137.5°	697.2	696.6	696.1	695.4	694.5	693.6	692.7	691.8	692.7	693.6	694.5
140°	732.9	732.7	732.5	732.0	731.1	730.2	729.3	728.4	729.3	730.2	731.1
142.5°	766.7	766.4	766.0	765.4	764.5	763.6	762.7	761.8	762.7	763.6	764.5
145°	799.7	799.2	798.6	798.2	797.8	797.5	797.1	796.7	797.1	797.5	797.8
147.5°	831.5	830.9	830.4	829.8	829.0	828.3	827.6	826.9	827.6	828.3	829.0
150°	861.1	860.8	860.4	860.0	859.7	859.3	859.0	858.6	859.0	859.3	859.7
152.5°	887.5	887.4	887.2	886.8	886.3	885.7	885.2	884.6	885.2	885.7	886.3
155°	912.8	912.6	912.4	912.3	912.3	912.3	912.3	912.3	912.3	912.3	912.3
157.5°	935.6	935.4	935.2	935.2	935.4	935.6	935.7	935.9	935.7	935.6	935.4
160°	956.3	956.3	956.3	956.4	956.8	957.2	957.5	957.9	957.5	957.2	956.8
162.5°	975.4	975.2	975.1	975.2	975.8	976.3	976.9	977.4	976.9	976.3	975.8
165°	991.3	991.3	991.3	991.5	992.1	992.6	993.2	993.7	993.2	992.6	992.1
167.5°	1004.7	1004.5	1004.4	1004.6	1005.4	1006.1	1006.8	1007.5	1006.8	1006.1	1005.4
170°	1015.7	1015.7	1015.7	1016.0	1016.8	1017.5	1018.2	1018.9	1018.2	1017.5	1016.8
172.5°	1024.6	1024.6	1024.6	1025.0	1025.7	1026.4	1027.2	1027.9	1027.2	1026.4	1025.7
175°	1030.3	1030.3	1030.3	1030.7	1031.4	1032.1	1032.9	1033.6	1032.9	1032.1	1031.4
177.5°	1033.6	1033.6	1033.6	1033.9	1034.7	1035.4	1036.1	1036.8	1036.1	1035.4	1034.7
180°	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0
2.5°	1262.9	1251.0	1239.0	1229.9	1220.7	1205.2	1189.6	1185.9	1182.3	1177.1	1171.9
5°	1197.5	1168.2	1138.9	1112.6	1086.4	1065.9	1045.5	1032.0	1018.6	1008.8	999.1
7.5°	1121.2	1077.2	1033.3	1002.1	971.0	941.3	911.7	902.3	892.8	880.0	867.1
10°	1047.3	998.7	950.2	909.6	869.0	840.0	811.0	799.4	787.8	771.6	755.4
12.5°	981.3	928.2	875.1	834.2	793.3	765.2	737.1	720.3	703.5	694.3	685.2
15°	912.3	855.5	798.8	760.9	723.0	697.7	672.3	657.7	643.0	634.2	625.3
17.5°	851.3	795.1	738.9	702.6	666.2	643.0	619.8	607.0	594.2	587.5	580.7
20°	793.3	738.3	683.3	647.9	612.5	593.6	574.6	566.4	558.2	552.7	547.2
22.5°	740.1	686.1	632.0	601.8	571.6	556.3	541.1	535.3	529.4	524.9	520.3
25°	687.0	638.8	590.5	564.9	539.2	526.7	514.2	508.4	502.6	498.0	493.4
27.5°	643.6	597.5	551.4	529.4	507.5	497.7	487.9	483.3	478.8	474.5	470.2
30°	601.5	560.3	519.1	500.1	481.2	472.4	463.5	458.9	454.3	450.4	446.4
32.5°	562.4	527.0	491.6	474.2	456.8	449.5	442.1	436.6	431.1	428.1	425.0
35°	525.2	493.4	461.7	447.3	433.0	425.6	418.3	413.7	409.1	406.7	404.3
37.5°	493.4	465.0	436.6	422.9	409.1	402.1	395.1	391.1	387.2	386.2	385.3
40°	461.1	436.6	412.2	398.8	385.3	379.2	373.1	370.7	368.2	367.6	367.0
42.5°	434.2	410.4	386.6	374.3	362.1	356.9	351.7	350.5	349.3	350.2	351.1
45°	403.0	383.2	363.3	352.1	340.8	336.5	332.2	331.3	330.4	332.2	334.0
47.5°	376.8	358.5	340.1	329.5	318.8	315.7	312.7	312.4	312.1	314.5	316.9
50°	349.9	332.2	314.5	305.9	297.4	294.6	291.9	292.8	293.7	297.7	301.7
52.5°	324.9	308.4	291.9	284.0	276.0	274.2	272.4	274.5	276.6	280.9	285.2
55°	297.4	282.4	267.5	261.4	255.3	253.4	251.6	255.9	260.1	264.1	268.1
57.5°	271.1	258.0	244.9	239.4	233.9	233.6	233.3	237.2	241.2	245.5	249.8
60°	243.0	232.1	221.1	216.8	212.5	213.1	213.7	218.3	222.9	226.3	229.6
62.5°	217.4	208.2	199.1	195.1	191.1	192.7	194.2	198.8	203.4	207.3	211.3
65°	191.7	184.1	176.5	173.7	171.0	173.1	175.3	179.2	183.2	185.9	188.7
67.5°	167.3	160.9	154.5	152.4	150.2	152.4	154.5	158.5	162.4	165.2	167.9
70°	141.7	136.5	131.3	129.8	128.2	130.7	133.1	136.5	139.8	142.6	145.3
72.5°	117.9	113.9	109.9	109.6	109.3	111.4	113.6	116.9	120.3	122.1	124.0
75°	94.7	92.5	90.4	90.1	89.8	91.9	94.0	95.9	97.7	99.2	100.8
77.5°	73.9	72.1	70.2	70.5	70.8	72.4	73.9	75.7	77.6	78.5	79.4
80°	52.5	51.9	51.3	51.9	52.5	53.7	55.0	56.2	57.4	58.0	58.6
82.5°	36.0	35.4	34.8	35.7	36.6	37.6	38.5	39.4	40.3	40.6	40.9
85°	20.8	21.7	22.6	22.6	22.6	22.9	23.2	23.5	23.8	23.5	23.2
87.5°	9.8	10.1	10.4	10.4	10.4	10.7	11.0	11.0	11.0	10.7	10.4
90°	8.0	10.1	12.5	14.8	17.2	19.5	20.3	21.0	21.7	22.4	23.0
92.5°	28.8	29.8	30.9	32.0	33.1	34.2	34.7	35.3	35.8	36.4	36.4
95°	53.1	54.4	55.9	57.3	58.8	60.2	60.9	61.7	62.4	63.1	63.5
97.5°	82.6	83.6	84.6	85.7	86.8	87.9	88.8	89.7	90.6	91.5	91.9
100°	115.0	116.0	116.9	117.8	118.7	119.6	120.2	120.7	121.3	121.8	122.3
102.5°	149.5	150.4	151.6	152.9	154.2	155.4	156.0	156.5	157.1	157.6	157.8
105°	184.6	185.6	187.2	188.8	190.4	192.1	192.1	192.1	192.1	192.1	192.2
107.5°	226.2	226.6	227.3	228.1	228.8	229.5	230.0	230.6	231.1	231.7	231.9
110°	265.9	266.3	266.7	267.0	267.4	267.8	268.5	269.2	269.9	270.6	270.8



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	305.9	306.0	306.0	306.0	306.0	306.0	306.9	307.8	308.7	309.6	310.1
115°	348.1	348.1	347.8	347.4	347.1	346.7	346.9	347.1	347.2	347.4	347.4
117.5°	388.1	388.0	387.7	387.3	386.9	386.6	386.6	386.6	386.6	386.6	386.3
120°	430.0	430.1	429.2	428.3	427.4	426.5	426.3	426.1	425.9	425.7	425.5
122.5°	468.4	468.6	468.2	467.9	467.5	467.1	466.6	466.1	465.5	465.0	464.4
125°	508.4	508.5	508.1	507.7	507.4	507.0	506.3	505.6	504.9	504.1	503.4
127.5°	548.0	548.3	548.0	547.6	547.3	546.9	545.8	544.7	543.6	542.6	541.7
130°	586.9	587.3	586.8	586.2	585.7	585.1	584.4	583.7	583.0	582.3	581.3
132.5°	624.3	624.8	624.5	624.1	623.8	623.4	622.5	621.6	620.7	619.8	618.9
135°	661.1	661.6	661.4	661.2	661.0	660.8	660.1	659.4	658.7	657.9	657.4
137.5°	695.4	696.1	696.6	697.2	697.7	698.3	697.4	696.5	695.6	694.7	693.9
140°	732.0	732.5	732.7	732.9	733.1	733.3	733.1	732.9	732.7	732.5	731.8
142.5°	765.4	766.0	766.4	766.7	767.1	767.4	767.3	767.1	766.9	766.7	766.2
145°	798.2	798.6	799.2	799.7	800.3	800.8	800.6	800.5	800.3	800.1	799.6
147.5°	829.8	830.4	830.9	831.5	832.0	832.6	832.6	832.6	832.6	832.6	832.0
150°	860.0	860.4	860.8	861.1	861.5	861.9	861.9	861.9	861.9	861.9	861.3
152.5°	886.8	887.2	887.4	887.5	887.7	887.9	888.3	888.6	889.0	889.3	889.1
155°	912.3	912.4	912.6	912.8	912.9	913.1	913.8	914.6	915.3	916.0	915.7
157.5°	935.2	935.2	935.4	935.6	935.7	935.9	936.6	937.4	938.1	938.8	938.6
160°	956.4	956.3	956.3	956.3	956.3	956.3	957.2	958.1	959.0	959.9	960.0
162.5°	975.2	975.1	975.2	975.4	975.6	975.8	976.7	977.6	978.5	979.4	979.2
165°	991.5	991.3	991.3	991.3	991.3	991.3	992.3	993.4	994.5	995.6	995.5
167.5°	1004.6	1004.4	1004.5	1004.7	1004.9	1005.1	1006.2	1007.3	1008.3	1009.4	1009.4
170°	1016.0	1015.7	1015.7	1015.7	1015.7	1015.7	1016.9	1018.2	1019.5	1020.7	1020.7
172.5°	1025.0	1024.6	1024.6	1024.6	1024.6	1024.6	1025.7	1026.8	1027.9	1029.0	1028.9
175°	1030.7	1030.3	1030.3	1030.3	1030.3	1030.3	1031.4	1032.5	1033.6	1034.7	1034.6
177.5°	1033.9	1033.6	1033.6	1033.6	1033.6	1033.6	1034.7	1035.7	1036.8	1037.9	1037.8
180°	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	1316.0	1316.0	1316.0	1316.0
2.5°	1169.7	1167.6	1159.0	1150.5
5°	991.7	984.4	982.0	979.5
7.5°	866.5	865.9	853.1	840.3
10°	756.3	757.2	745.6	734.0
12.5°	677.5	669.9	669.0	668.1
15°	618.3	611.3	610.1	608.8
17.5°	576.5	572.2	571.0	569.8
20°	544.7	542.3	540.1	538.0
22.5°	517.2	514.2	512.4	510.5
25°	490.7	487.9	487.3	486.7
27.5°	466.9	463.5	463.5	463.5
30°	444.3	442.1	441.2	440.3
32.5°	423.2	421.4	421.4	421.4
35°	403.3	402.4	401.2	400.0
37.5°	385.3	385.3	384.7	384.1
40°	367.9	368.8	368.8	368.8
42.5°	352.1	353.0	353.0	353.0
45°	335.6	337.1	337.7	338.3
47.5°	319.4	321.8	322.4	323.0
50°	303.5	305.3	305.6	305.9
52.5°	287.3	289.5	291.0	292.5
55°	270.2	272.4	273.3	274.2
57.5°	251.9	254.0	254.3	254.6
60°	231.7	233.9	234.5	235.1
62.5°	212.5	213.7	214.3	215.0
65°	190.5	192.4	193.6	194.8
67.5°	169.5	171.0	171.0	171.0
70°	145.9	146.6	147.5	148.4
72.5°	124.3	124.6	124.6	124.6
75°	101.4	102.0	102.3	102.6
77.5°	79.7	80.0	80.0	80.0
80°	58.3	58.0	58.0	58.0
82.5°	40.0	39.1	39.1	39.1
85°	22.9	22.6	22.9	23.2
87.5°	10.4	10.4	10.4	10.4
90°	23.3	23.7	24.1	24.4
92.5°	36.1	35.7	35.4	35.0
95°	63.5	63.5	63.5	63.5
97.5°	91.7	91.5	91.3	91.1
100°	122.6	123.0	123.3	123.7
102.5°	157.6	157.4	157.3	157.1
105°	192.6	193.0	193.3	193.7
107.5°	231.7	231.5	231.3	231.1
110°	270.5	270.1	269.7	269.4



TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	310.1	310.1	310.1	310.1
115°	347.2	347.1	346.9	346.7
117.5°	385.8	385.2	384.7	384.1
120°	425.1	424.7	424.4	424.0
122.5°	463.9	463.3	462.8	462.3
125°	502.7	502.0	501.2	500.5
127.5°	540.9	540.2	539.5	538.8
130°	580.0	578.7	577.5	576.2
132.5°	618.0	617.1	616.2	615.3
135°	657.0	656.7	656.3	656.0
137.5°	693.4	692.8	692.3	691.8
140°	730.6	729.3	728.0	726.8
142.5°	765.3	764.4	763.5	762.6
145°	798.9	798.2	797.5	796.7
147.5°	830.9	829.8	828.8	827.7
150°	860.2	859.1	858.1	857.0
152.5°	888.2	887.3	886.4	885.5
155°	914.5	913.2	912.0	910.7
157.5°	937.5	936.5	935.4	934.3
160°	959.2	958.5	957.8	957.1
162.5°	978.0	976.7	975.4	974.2
165°	994.2	993.0	991.7	990.4
167.5°	1008.3	1007.3	1006.2	1005.1
170°	1019.5	1018.2	1016.9	1015.7
172.5°	1027.6	1026.3	1025.1	1023.8
175°	1033.3	1032.0	1030.8	1029.5
177.5°	1036.6	1035.3	1034.0	1032.8
180°	1036.0	1036.0	1036.0	1036.0

TEST NUMBER: P831466

CATALOG NUMBER: S123DIP-S560D1025U930-4F0-1E-UDD-G1

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.03	12.80	13.05	13.82	15.20	14.26	15.03	15.29	16.06	17.44
	3H	13.67	14.36	14.71	15.39	16.79	15.68	16.37	16.72	17.41	18.81
	4H	14.24	14.89	15.29	15.93	17.34	16.13	16.78	17.18	17.82	19.23
	6H	14.61	15.21	15.67	16.25	17.67	16.40	17.00	17.46	18.04	19.46
	8H	14.70	15.27	15.76	16.33	17.74	16.46	17.03	17.52	18.09	19.50
	12H	14.74	15.29	15.81	16.34	17.78	16.48	17.02	17.54	18.07	19.51
4H	2H	12.59	13.24	13.65	14.28	15.69	14.42	15.07	15.47	16.11	17.51
	3H	14.41	14.96	15.48	16.02	17.44	16.03	16.57	17.09	17.64	19.06
	4H	15.11	15.60	16.18	16.66	18.10	16.61	17.11	17.68	18.16	19.60
	6H	15.58	16.00	16.66	17.09	18.52	17.01	17.43	18.09	18.52	19.95
	8H	15.71	16.11	16.79	17.19	18.64	17.12	17.52	18.20	18.59	20.04
	12H	15.78	16.14	16.87	17.22	18.68	17.16	17.52	18.25	18.61	20.06
8H	4H	15.37	15.76	16.44	16.84	18.29	16.71	17.11	17.78	18.18	19.63
	6H	15.95	16.28	17.05	17.40	18.84	17.21	17.53	18.31	18.65	20.10
	8H	16.16	16.45	17.27	17.55	19.01	17.39	17.67	18.49	18.77	20.24
	12H	16.28	16.53	17.39	17.63	19.13	17.48	17.74	18.59	18.83	20.34
12H	4H	15.36	15.72	16.46	16.81	18.27	16.68	17.04	17.77	18.13	19.58
	6H	16.00	16.29	17.11	17.39	18.86	17.22	17.51	18.33	18.61	20.07
	8H	16.23	16.49	17.34	17.58	19.09	17.42	17.67	18.53	18.76	20.27