

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831493

Luminaire Tested: S123DIP-S560D1195U930-4F0-1E-UDD-G1

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831493
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D1195U930-4F0-1E-UDD-G1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5459.3 lumens
Efficiency: N/A
Efficacy: 107.9 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 50.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

Luminous Intensity Polar Plot

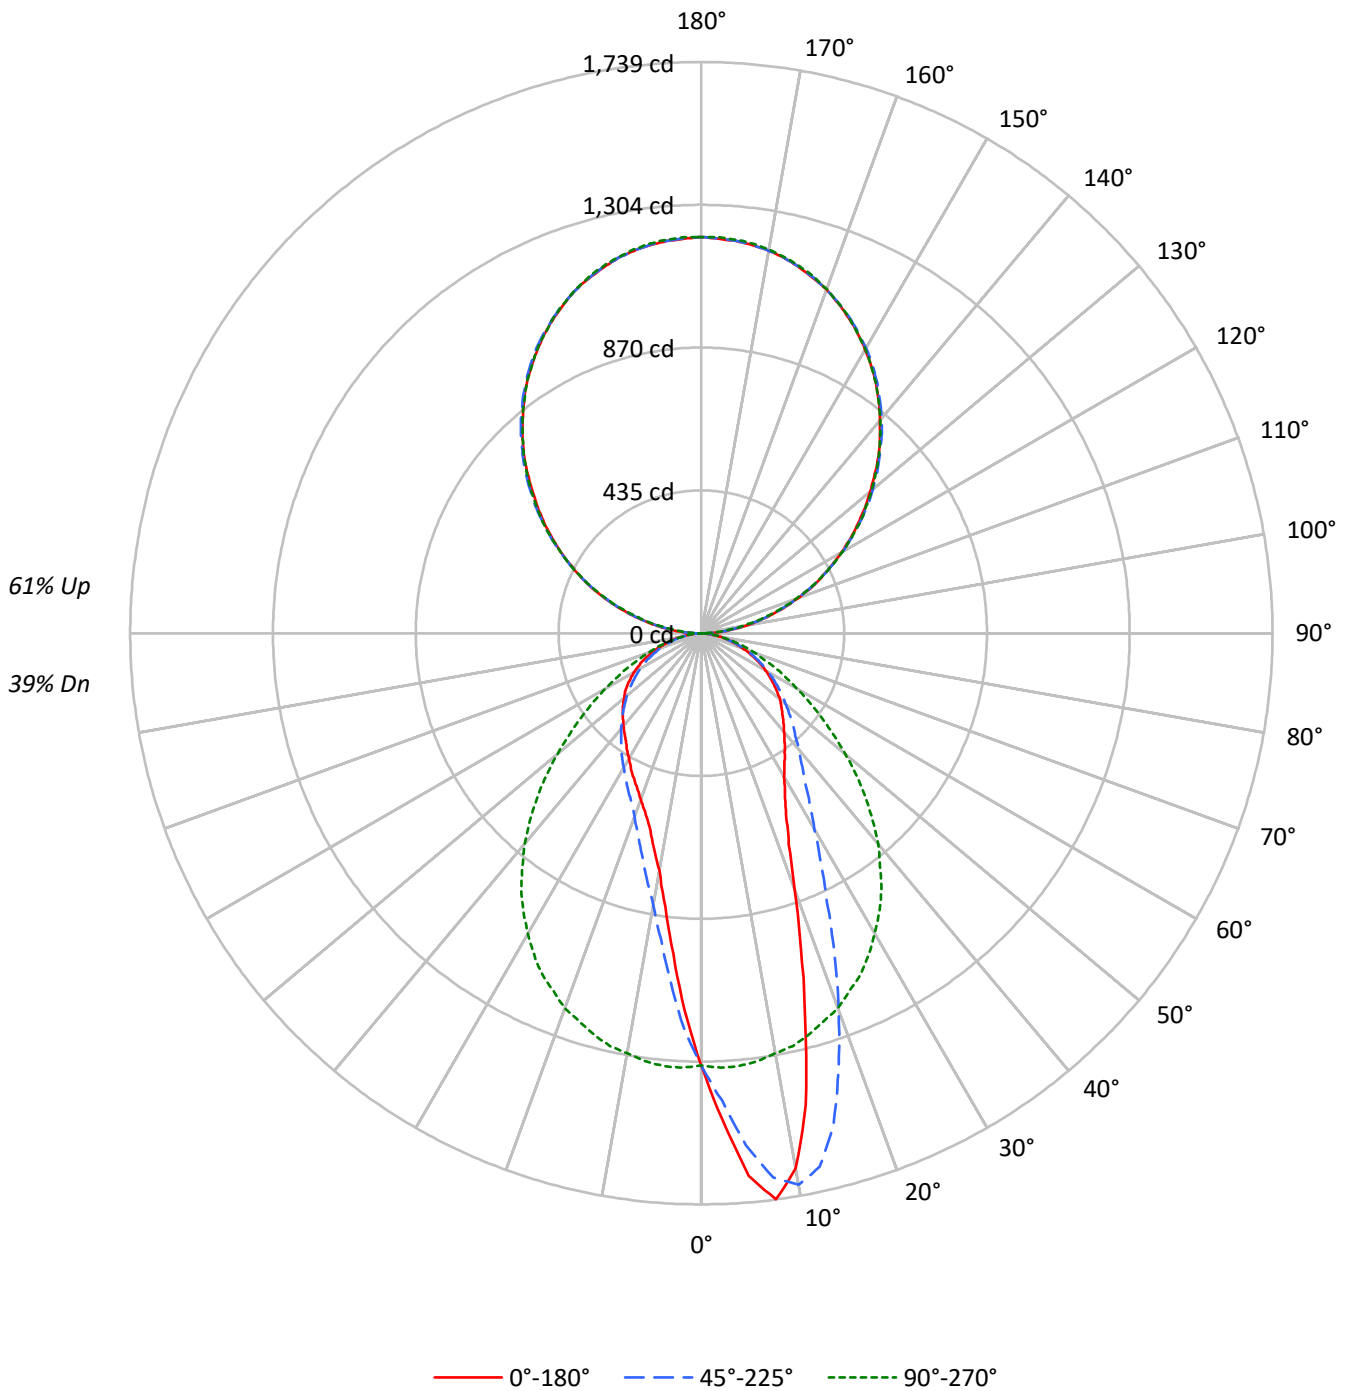



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	96	92	88	85	87	83	80	77	68	66	64	54	53	51	41	40	39	33
2	87	80	75	70	79	73	68	64	60	57	54	48	46	44	37	35	34	29
3	80	71	64	59	73	65	59	54	53	49	46	43	40	37	33	31	29	25
4	73	63	56	50	67	58	51	46	48	43	39	38	35	32	30	28	26	22
5	68	57	49	43	61	52	45	40	43	38	34	35	31	28	27	25	23	19
6	62	51	43	38	57	47	40	35	39	34	30	32	28	25	25	22	20	17
7	58	46	39	33	53	42	36	31	36	30	27	29	25	23	23	20	18	16
8	54	42	35	30	49	39	32	28	33	28	24	27	23	20	21	19	17	14
9	50	38	31	26	46	36	29	25	30	25	22	25	21	18	20	17	15	13
10	47	35	28	24	43	33	27	22	28	23	20	23	19	17	18	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	14165	14165	14165	14165	14165
5°	17915	16908	14292	11517	10584
10°	18088	18636	14197	9181	8023
15°	13624	17302	14100	7775	6784
20°	9493	14001	13920	6800	6163
25°	7238	10766	13613	6255	5780
30°	6262	8554	13123	5872	5473
35°	5809	7222	12558	5593	5256
40°	5500	6479	11764	5328	5182
45°	5317	5996	10755	5122	5150
50°	5226	5615	9562	4933	5123
55°	5031	5335	8389	4755	5146
60°	4850	5035	7231	4588	5061
65°	4557	4753	6238	4409	4961
70°	4208	4390	5303	4113	4670
75°	3810	3938	4546	3822	4267
80°	3143	3446	3595	3329	3595
85°	2495	2791	2643	2828	2865

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 12280 cd/sqm



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	124.4	2.3
10°-20°	309.5	5.7
20°-30°	366.5	6.7
30°-40°	368.5	6.7
40°-50°	338.1	6.2
50°-60°	279.0	5.1
60°-70°	197.4	3.6
70°-80°	105.4	1.9
80°-90°	29.3	0.5
90°-100°	77.6	1.4
100°-110°	235.0	4.3
110°-120°	400.0	7.3
120°-130°	526.2	9.6
130°-140°	591.5	10.8
140°-150°	581.5	10.7
150°-160°	489.5	9.0
160°-170°	325.9	6.0
170°-180°	114.1	2.1
0°-30°	800.4	14.7
0°-40°	1168.9	21.4
0°-60°	1786.0	32.7
0°-90°	2118.0	38.8
90°-120°	712.6	13.1
90°-150°	2411.7	44.2
90°-180°	3341.0	61.2
0°-180°	5459.3	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	1316	1316	1316	1316	1316	
5°	1658	1565	1323	1066	980	158
15°	1223	1553	1265	698	609	338
25°	609	906	1146	527	487	288
35°	442	550	956	426	400	278
45°	349	394	706	336	338	271
55°	268	284	447	253	274	240
65°	179	187	245	173	195	178
75°	92	95	109	92	103	96
85°	20	23	21	23	23	23
90°	28	23	1	23	28	15
95°	74	70	56	70	74	74
105°	226	224	213	224	226	239
115°	404	404	403	404	404	400
125°	583	590	589	590	583	521
135°	764	769	764	769	764	587
145°	927	932	927	932	927	579
155°	1060	1063	1062	1063	1060	488
165°	1153	1154	1157	1154	1153	325
175°	1198	1199	1203	1199	1198	114
180°	1206	1206	1206	1206	1206	



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0
2.5°	1483.3	1481.8	1480.3	1472.6	1465.0	1461.3	1457.7	1446.7	1435.7	1423.5	1411.3
5°	1658.0	1662.2	1666.5	1661.6	1656.7	1641.8	1626.8	1607.0	1587.1	1564.8	1542.5
7.5°	1738.6	1741.0	1743.5	1740.4	1737.4	1733.4	1729.4	1711.7	1694.0	1671.1	1648.2
10°	1654.9	1660.4	1665.9	1677.8	1689.7	1703.2	1716.6	1714.1	1711.7	1705.0	1698.3
12.5°	1471.1	1477.8	1484.5	1508.4	1532.2	1562.7	1593.2	1619.5	1645.8	1664.1	1682.4
15°	1222.6	1241.2	1259.8	1281.5	1303.2	1348.0	1392.9	1448.2	1503.5	1552.6	1601.8
17.5°	1007.0	1014.0	1021.0	1044.2	1067.4	1123.9	1180.4	1244.2	1308.1	1389.6	1471.1
20°	828.7	835.1	841.5	872.0	902.6	946.8	991.1	1062.9	1134.6	1222.3	1309.9
22.5°	696.2	706.2	716.3	733.4	750.5	793.0	835.4	899.2	963.0	1059.8	1156.6
25°	609.4	616.8	624.1	634.5	644.9	678.8	712.6	765.2	817.7	906.5	995.4
27.5°	550.2	553.3	556.3	566.7	577.1	599.1	621.0	666.2	711.4	786.8	862.3
30°	503.8	505.9	508.1	517.2	526.4	541.4	556.3	589.0	621.7	688.2	754.8
32.5°	471.4	473.0	474.5	481.5	488.5	499.2	509.9	533.7	557.5	612.5	667.5
35°	442.1	443.0	444.0	449.1	454.3	462.3	470.2	488.2	506.2	549.6	593.0
37.5°	416.5	417.7	418.9	422.0	425.0	432.0	439.1	453.4	467.8	501.1	534.3
40°	391.4	393.6	395.7	397.9	400.0	405.8	411.6	422.6	433.6	461.1	488.5
42.5°	370.1	372.2	374.3	375.3	376.2	379.5	382.9	393.0	403.0	423.5	444.0
45°	349.3	350.2	351.1	352.1	353.0	355.7	358.5	367.3	376.2	393.9	411.6
47.5°	330.4	330.4	330.4	331.0	331.6	334.0	336.5	342.9	349.3	363.0	376.8
50°	312.1	312.1	312.1	311.1	310.2	311.7	313.3	318.2	323.0	335.3	347.5
52.5°	290.1	290.1	290.1	290.4	290.7	290.7	290.7	295.0	299.2	310.2	321.2
55°	268.1	269.3	270.5	269.6	268.7	269.3	269.9	272.7	275.4	284.3	293.1
57.5°	246.1	246.7	247.3	247.0	246.7	247.0	247.3	249.8	252.2	258.9	265.6
60°	225.3	225.3	225.3	224.7	224.1	224.7	225.3	226.6	227.8	233.9	240.0
62.5°	202.1	202.4	202.7	203.0	203.4	202.7	202.1	203.7	205.2	209.8	214.3
65°	178.9	179.2	179.5	180.5	181.4	180.8	180.1	181.7	183.2	186.6	189.9
67.5°	158.2	157.6	156.9	157.2	157.6	158.5	159.4	159.7	160.0	163.7	167.3
70°	133.7	134.3	135.0	134.7	134.3	134.7	135.0	135.9	136.8	139.5	142.3
72.5°	111.8	112.1	112.4	112.4	112.4	113.0	113.6	114.5	115.4	116.9	118.5
75°	91.6	91.6	91.6	92.2	92.8	93.1	93.4	93.4	93.4	94.7	95.9
77.5°	69.6	71.1	72.7	72.4	72.1	72.7	73.3	74.2	75.1	75.7	76.3
80°	50.7	50.7	50.7	51.0	51.3	52.2	53.1	53.7	54.3	55.6	56.8
82.5°	32.4	32.7	33.0	33.9	34.8	35.4	36.0	36.9	37.9	37.9	37.9
85°	20.2	19.5	18.9	19.5	20.2	20.8	21.4	21.7	22.0	22.6	23.2
87.5°	9.8	9.8	9.8	9.8	9.8	10.1	10.4	10.4	10.4	10.4	10.4
90°	28.4	28.0	27.6	27.2	26.7	26.1	25.3	24.4	23.6	22.7	20.0
92.5°	40.7	41.2	41.6	42.0	42.4	42.3	41.7	41.0	40.4	39.8	38.5
95°	73.9	73.9	73.9	73.9	73.9	73.5	72.6	71.8	70.9	70.1	68.4
97.5°	106.1	106.3	106.5	106.7	106.9	106.5	105.5	104.4	103.4	102.3	101.0
100°	144.0	143.6	143.1	142.7	142.3	141.8	141.1	140.5	139.9	139.3	138.2
102.5°	182.8	183.0	183.2	183.5	183.7	183.5	182.8	182.2	181.6	180.9	179.5
105°	225.5	225.0	224.6	224.2	223.8	223.6	223.6	223.6	223.6	223.6	221.7
107.5°	269.0	269.2	269.4	269.7	269.9	269.7	269.0	268.4	267.8	267.1	266.3
110°	313.5	314.0	314.4	314.8	315.2	315.0	314.2	313.3	312.5	311.7	311.2



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	360.9	360.9	360.9	360.9	360.9	360.4	359.3	358.3	357.2	356.2	356.2
115°	403.5	403.8	404.0	404.2	404.4	404.4	404.2	404.0	403.8	403.5	404.0
117.5°	447.1	447.7	448.4	449.0	449.6	450.0	450.0	450.0	450.0	450.0	450.4
120°	493.5	494.0	494.4	494.8	495.2	495.5	495.7	496.0	496.2	496.4	497.4
122.5°	538.1	538.7	539.3	539.9	540.6	541.2	541.8	542.5	543.1	543.7	544.2
125°	582.6	583.4	584.3	585.1	585.9	586.8	587.6	588.5	589.3	590.2	590.6
127.5°	627.1	627.9	628.8	629.6	630.5	631.5	632.8	634.0	635.3	636.6	637.0
130°	670.7	672.1	673.6	675.1	676.6	677.7	678.6	679.4	680.3	681.1	681.7
132.5°	716.1	717.2	718.2	719.3	720.4	721.4	722.5	723.5	724.6	725.6	726.0
135°	763.5	763.9	764.3	764.8	765.2	765.8	766.7	767.5	768.3	769.2	769.4
137.5°	805.2	805.8	806.5	807.1	807.7	808.6	809.6	810.7	811.7	812.8	812.1
140°	845.9	847.4	848.9	850.3	851.8	852.7	852.9	853.1	853.3	853.5	853.3
142.5°	887.6	888.7	889.7	890.8	891.8	892.4	892.7	892.9	893.1	893.3	892.9
145°	927.4	928.2	929.1	929.9	930.8	931.3	931.5	931.7	931.9	932.1	931.5
147.5°	963.4	964.6	965.9	967.2	968.4	969.1	969.1	969.1	969.1	969.1	968.4
150°	997.5	998.7	1000.0	1001.3	1002.5	1003.2	1003.2	1003.2	1003.2	1003.2	1002.7
152.5°	1030.6	1031.7	1032.7	1033.8	1034.9	1035.2	1034.7	1034.3	1033.9	1033.5	1033.3
155°	1060.0	1061.5	1063.0	1064.4	1065.9	1066.2	1065.4	1064.5	1063.7	1062.8	1062.6
157.5°	1087.5	1088.7	1090.0	1091.3	1092.5	1092.7	1091.9	1091.1	1090.2	1089.4	1089.2
160°	1114.0	1114.8	1115.7	1116.5	1117.4	1117.3	1116.2	1115.2	1114.1	1113.1	1113.1
162.5°	1133.9	1135.4	1136.8	1138.3	1139.8	1140.0	1138.9	1137.9	1136.8	1135.8	1135.6
165°	1152.8	1154.3	1155.8	1157.3	1158.7	1158.8	1157.6	1156.3	1155.1	1153.8	1153.8
167.5°	1169.9	1171.2	1172.4	1173.7	1174.9	1174.9	1173.7	1172.4	1171.2	1169.9	1169.7
170°	1182.2	1183.7	1185.2	1186.6	1188.1	1188.1	1186.6	1185.2	1183.7	1182.2	1182.2
172.5°	1191.7	1193.2	1194.6	1196.1	1197.6	1197.7	1196.4	1195.2	1193.9	1192.6	1192.6
175°	1198.3	1199.8	1201.3	1202.7	1204.2	1204.3	1203.0	1201.8	1200.5	1199.3	1199.3
177.5°	1202.1	1203.6	1205.0	1206.5	1208.0	1208.1	1206.8	1205.6	1204.3	1203.0	1203.0
180°	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0
2.5°	1407.6	1403.9	1390.5	1377.1	1361.8	1346.5	1335.2	1323.9	1307.1	1290.3	1276.6
5°	1525.4	1508.4	1480.0	1451.6	1413.1	1374.6	1348.7	1322.7	1287.9	1253.1	1225.3
7.5°	1618.9	1589.6	1549.9	1510.2	1459.8	1409.4	1361.8	1314.2	1261.0	1207.9	1164.5
10°	1678.4	1658.6	1612.8	1567.0	1499.5	1432.0	1365.5	1298.9	1230.5	1162.1	1104.7
12.5°	1684.2	1686.1	1643.9	1601.8	1525.4	1449.1	1368.2	1287.3	1201.2	1115.1	1048.2
15°	1633.2	1664.7	1641.5	1618.3	1541.3	1464.4	1364.8	1265.3	1166.1	1066.8	989.6
17.5°	1538.6	1606.1	1609.4	1612.8	1535.8	1458.9	1348.7	1238.4	1126.1	1013.7	932.5
20°	1409.4	1509.0	1543.2	1577.4	1514.8	1452.2	1333.7	1215.2	1089.4	963.6	878.4
22.5°	1277.5	1398.4	1461.0	1523.6	1477.2	1430.8	1304.7	1178.6	1045.8	912.9	826.5
25°	1127.3	1259.2	1355.4	1451.6	1423.2	1394.8	1270.5	1146.2	1004.9	863.5	775.2
27.5°	996.3	1130.3	1246.4	1362.4	1356.3	1350.2	1226.8	1103.5	958.7	814.0	728.8
30°	879.7	1004.5	1134.3	1264.1	1279.0	1294.0	1174.9	1055.8	910.8	765.8	683.6
32.5°	776.5	885.5	1024.7	1163.9	1193.2	1222.6	1115.1	1007.6	864.1	720.6	641.5
35°	691.9	790.8	930.0	1069.3	1105.9	1142.6	1049.1	955.7	815.9	676.0	600.6
37.5°	617.1	699.8	835.7	971.6	1016.5	1061.3	977.7	894.0	763.0	632.0	562.7
40°	555.1	621.7	746.5	871.4	923.3	975.2	906.2	837.2	713.0	588.7	524.9
42.5°	503.2	562.4	675.7	789.0	838.8	888.5	830.2	771.9	661.4	550.8	492.5
45°	458.9	506.2	609.1	712.0	759.4	806.7	756.6	706.5	609.1	511.7	457.4
47.5°	417.4	458.0	545.9	633.9	676.0	718.1	679.1	640.0	557.5	475.1	425.9
50°	380.1	412.8	489.8	566.7	603.3	640.0	605.5	571.0	503.2	435.4	392.7
52.5°	347.8	374.3	438.8	503.2	534.6	566.1	536.5	506.9	453.1	399.4	362.1
55°	315.7	338.3	394.2	450.1	471.4	492.8	469.9	447.0	403.7	360.3	328.8
57.5°	285.8	305.9	351.7	397.5	414.0	430.5	409.8	389.0	356.3	323.7	297.4
60°	256.5	273.0	311.1	349.3	359.4	369.5	352.7	335.9	313.0	290.1	266.6
62.5°	229.3	244.3	272.7	301.1	307.8	314.5	301.7	288.8	271.4	254.0	235.7
65°	201.2	212.5	235.7	258.9	263.2	267.5	256.2	244.9	231.7	218.6	205.2
67.5°	175.3	183.2	202.1	221.1	221.4	221.7	212.5	203.4	196.0	188.7	178.0
70°	149.9	157.6	170.1	182.6	182.9	183.2	175.9	168.5	163.0	157.6	149.6
72.5°	124.0	129.5	138.9	148.4	147.8	147.2	142.6	138.0	133.7	129.5	123.7
75°	100.5	105.0	111.4	117.9	116.0	114.2	111.8	109.3	105.6	102.0	98.3
77.5°	79.1	81.8	85.5	89.2	87.9	86.7	84.6	82.4	79.7	76.9	75.4
80°	58.0	59.2	61.7	64.1	63.5	62.9	60.5	58.0	57.4	56.8	54.7
82.5°	39.4	40.9	41.5	42.1	41.8	41.5	39.7	37.9	37.3	36.6	36.3
85°	23.5	23.8	24.1	24.4	23.5	22.6	22.0	21.4	21.4	21.4	21.1
87.5°	10.7	11.0	11.0	11.0	10.7	10.4	9.8	9.2	9.5	9.8	9.8
90°	17.3	14.5	11.8	9.4	7.3	5.2	3.1	0.9	3.1	5.2	7.3
92.5°	37.3	36.0	34.7	33.5	32.2	30.9	29.7	28.4	29.7	30.9	32.2
95°	66.7	65.0	63.4	61.8	60.3	58.8	57.4	55.9	57.4	58.8	60.3
97.5°	99.8	98.5	97.3	96.1	95.0	94.0	92.9	91.9	92.9	94.0	95.0
100°	137.1	136.1	135.0	133.9	132.6	131.4	130.1	128.8	130.1	131.4	132.6
102.5°	178.0	176.5	175.0	174.0	173.4	172.7	172.1	171.5	172.1	172.7	173.4
105°	219.8	217.9	216.0	214.8	214.4	214.0	213.6	213.1	213.6	214.0	214.4
107.5°	265.4	264.6	263.8	263.2	263.0	262.8	262.6	262.4	262.6	262.8	263.0
110°	310.8	310.4	310.0	309.6	309.1	308.7	308.3	307.9	308.3	308.7	309.1



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	356.2	356.2	356.2	356.1	355.9	355.7	355.4	355.2	355.4	355.7	355.9
115°	404.4	404.8	405.2	405.1	404.5	403.9	403.2	402.6	403.2	403.9	404.5
117.5°	450.8	451.2	451.6	451.7	451.5	451.3	451.1	450.9	451.1	451.3	451.5
120°	498.5	499.5	500.6	500.5	499.2	498.0	496.7	495.4	496.7	498.0	499.2
122.5°	544.6	545.0	545.4	545.2	544.4	543.5	542.7	541.8	542.7	543.5	544.4
125°	591.0	591.4	591.8	591.7	591.1	590.5	589.8	589.2	589.8	590.5	591.1
127.5°	637.4	637.8	638.3	637.8	636.6	635.3	634.0	632.8	634.0	635.3	636.6
130°	682.4	683.0	683.6	683.1	681.4	679.7	678.0	676.4	678.0	679.7	681.4
132.5°	726.5	726.9	727.3	726.7	725.0	723.3	721.6	719.9	721.6	723.3	725.0
135°	769.6	769.8	770.0	769.5	768.2	767.0	765.7	764.5	765.7	767.0	768.2
137.5°	811.5	810.9	810.2	809.4	808.3	807.3	806.2	805.2	806.2	807.3	808.3
140°	853.1	852.9	852.7	852.0	851.0	849.9	848.9	847.8	848.9	849.9	851.0
142.5°	892.4	892.0	891.6	890.9	889.8	888.8	887.7	886.7	887.7	888.8	889.8
145°	930.9	930.2	929.6	929.1	928.7	928.2	927.8	927.4	927.8	928.2	928.7
147.5°	967.8	967.2	966.5	965.8	965.0	964.1	963.3	962.4	963.3	964.1	965.0
150°	1002.3	1001.9	1001.5	1001.1	1000.6	1000.2	999.8	999.4	999.8	1000.2	1000.6
152.5°	1033.1	1032.9	1032.6	1032.2	1031.6	1031.0	1030.3	1029.7	1030.3	1031.0	1031.6
155°	1062.4	1062.2	1062.0	1061.9	1061.9	1061.9	1061.9	1061.9	1061.9	1061.9	1061.9
157.5°	1089.0	1088.7	1088.5	1088.5	1088.7	1089.0	1089.2	1089.4	1089.2	1089.0	1088.7
160°	1113.1	1113.1	1113.1	1113.3	1113.7	1114.1	1114.5	1114.9	1114.5	1114.1	1113.7
162.5°	1135.4	1135.2	1134.9	1135.2	1135.8	1136.4	1137.1	1137.7	1137.1	1136.4	1135.8
165°	1153.8	1153.8	1153.8	1154.1	1154.7	1155.4	1156.0	1156.6	1156.0	1155.4	1154.7
167.5°	1169.5	1169.3	1169.0	1169.4	1170.2	1171.0	1171.9	1172.7	1171.9	1171.0	1170.2
170°	1182.2	1182.2	1182.2	1182.6	1183.5	1184.3	1185.2	1186.0	1185.2	1184.3	1183.5
172.5°	1192.6	1192.6	1192.6	1193.0	1193.9	1194.7	1195.6	1196.4	1195.6	1194.7	1193.9
175°	1199.3	1199.3	1199.3	1199.7	1200.5	1201.4	1202.2	1203.0	1202.2	1201.4	1200.5
177.5°	1203.0	1203.0	1203.0	1203.5	1204.3	1205.2	1206.0	1206.8	1206.0	1205.2	1204.3
180°	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0
2.5°	1262.9	1251.0	1239.0	1229.9	1220.7	1205.2	1189.6	1185.9	1182.3	1177.1	1171.9
5°	1197.5	1168.2	1138.9	1112.6	1086.4	1065.9	1045.5	1032.0	1018.6	1008.8	999.1
7.5°	1121.2	1077.2	1033.3	1002.1	971.0	941.3	911.7	902.3	892.8	880.0	867.1
10°	1047.3	998.7	950.2	909.6	869.0	840.0	811.0	799.4	787.8	771.6	755.4
12.5°	981.3	928.2	875.1	834.2	793.3	765.2	737.1	720.3	703.5	694.3	685.2
15°	912.3	855.5	798.8	760.9	723.0	697.7	672.3	657.7	643.0	634.2	625.3
17.5°	851.3	795.1	738.9	702.6	666.2	643.0	619.8	607.0	594.2	587.5	580.7
20°	793.3	738.3	683.3	647.9	612.5	593.6	574.6	566.4	558.2	552.7	547.2
22.5°	740.1	686.1	632.0	601.8	571.6	556.3	541.1	535.3	529.4	524.9	520.3
25°	687.0	638.8	590.5	564.9	539.2	526.7	514.2	508.4	502.6	498.0	493.4
27.5°	643.6	597.5	551.4	529.4	507.5	497.7	487.9	483.3	478.8	474.5	470.2
30°	601.5	560.3	519.1	500.1	481.2	472.4	463.5	458.9	454.3	450.4	446.4
32.5°	562.4	527.0	491.6	474.2	456.8	449.5	442.1	436.6	431.1	428.1	425.0
35°	525.2	493.4	461.7	447.3	433.0	425.6	418.3	413.7	409.1	406.7	404.3
37.5°	493.4	465.0	436.6	422.9	409.1	402.1	395.1	391.1	387.2	386.2	385.3
40°	461.1	436.6	412.2	398.8	385.3	379.2	373.1	370.7	368.2	367.6	367.0
42.5°	434.2	410.4	386.6	374.3	362.1	356.9	351.7	350.5	349.3	350.2	351.1
45°	403.0	383.2	363.3	352.1	340.8	336.5	332.2	331.3	330.4	332.2	334.0
47.5°	376.8	358.5	340.1	329.5	318.8	315.7	312.7	312.4	312.1	314.5	316.9
50°	349.9	332.2	314.5	305.9	297.4	294.6	291.9	292.8	293.7	297.7	301.7
52.5°	324.9	308.4	291.9	284.0	276.0	274.2	272.4	274.5	276.6	280.9	285.2
55°	297.4	282.4	267.5	261.4	255.3	253.4	251.6	255.9	260.1	264.1	268.1
57.5°	271.1	258.0	244.9	239.4	233.9	233.6	233.3	237.2	241.2	245.5	249.8
60°	243.0	232.1	221.1	216.8	212.5	213.1	213.7	218.3	222.9	226.3	229.6
62.5°	217.4	208.2	199.1	195.1	191.1	192.7	194.2	198.8	203.4	207.3	211.3
65°	191.7	184.1	176.5	173.7	171.0	173.1	175.3	179.2	183.2	185.9	188.7
67.5°	167.3	160.9	154.5	152.4	150.2	152.4	154.5	158.5	162.4	165.2	167.9
70°	141.7	136.5	131.3	129.8	128.2	130.7	133.1	136.5	139.8	142.6	145.3
72.5°	117.9	113.9	109.9	109.6	109.3	111.4	113.6	116.9	120.3	122.1	124.0
75°	94.7	92.5	90.4	90.1	89.8	91.9	94.0	95.9	97.7	99.2	100.8
77.5°	73.9	72.1	70.2	70.5	70.8	72.4	73.9	75.7	77.6	78.5	79.4
80°	52.5	51.9	51.3	51.9	52.5	53.7	55.0	56.2	57.4	58.0	58.6
82.5°	36.0	35.4	34.8	35.7	36.6	37.6	38.5	39.4	40.3	40.6	40.9
85°	20.8	21.7	22.6	22.6	22.6	22.9	23.2	23.5	23.8	23.5	23.2
87.5°	9.8	10.1	10.4	10.4	10.4	10.7	11.0	11.0	11.0	10.7	10.4
90°	9.4	11.8	14.5	17.3	20.0	22.7	23.6	24.4	25.3	26.1	26.7
92.5°	33.5	34.7	36.0	37.3	38.5	39.8	40.4	41.0	41.7	42.3	42.4
95°	61.8	63.4	65.0	66.7	68.4	70.1	70.9	71.8	72.6	73.5	73.9
97.5°	96.1	97.3	98.5	99.8	101.0	102.3	103.4	104.4	105.5	106.5	106.9
100°	133.9	135.0	136.1	137.1	138.2	139.3	139.9	140.5	141.1	141.8	142.3
102.5°	174.0	175.0	176.5	178.0	179.5	180.9	181.6	182.2	182.8	183.5	183.7
105°	214.8	216.0	217.9	219.8	221.7	223.6	223.6	223.6	223.6	223.6	223.8
107.5°	263.2	263.8	264.6	265.4	266.3	267.1	267.8	268.4	269.0	269.7	269.9
110°	309.6	310.0	310.4	310.8	311.2	311.7	312.5	313.3	314.2	315.0	315.2



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	356.1	356.2	356.2	356.2	356.2	356.2	357.2	358.3	359.3	360.4	360.9
115°	405.1	405.2	404.8	404.4	404.0	403.5	403.8	404.0	404.2	404.4	404.4
117.5°	451.7	451.6	451.2	450.8	450.4	450.0	450.0	450.0	450.0	450.0	449.6
120°	500.5	500.6	499.5	498.5	497.4	496.4	496.2	496.0	495.7	495.5	495.2
122.5°	545.2	545.4	545.0	544.6	544.2	543.7	543.1	542.5	541.8	541.2	540.6
125°	591.7	591.8	591.4	591.0	590.6	590.2	589.3	588.5	587.6	586.8	585.9
127.5°	637.8	638.3	637.8	637.4	637.0	636.6	635.3	634.0	632.8	631.5	630.5
130°	683.1	683.6	683.0	682.4	681.7	681.1	680.3	679.4	678.6	677.7	676.6
132.5°	726.7	727.3	726.9	726.5	726.0	725.6	724.6	723.5	722.5	721.4	720.4
135°	769.5	770.0	769.8	769.6	769.4	769.2	768.3	767.5	766.7	765.8	765.2
137.5°	809.4	810.2	810.9	811.5	812.1	812.8	811.7	810.7	809.6	808.6	807.7
140°	852.0	852.7	852.9	853.1	853.3	853.5	853.3	853.1	852.9	852.7	851.8
142.5°	890.9	891.6	892.0	892.4	892.9	893.3	893.1	892.9	892.7	892.4	891.8
145°	929.1	929.6	930.2	930.9	931.5	932.1	931.9	931.7	931.5	931.3	930.8
147.5°	965.8	966.5	967.2	967.8	968.4	969.1	969.1	969.1	969.1	969.1	968.4
150°	1001.1	1001.5	1001.9	1002.3	1002.7	1003.2	1003.2	1003.2	1003.2	1003.2	1002.5
152.5°	1032.2	1032.6	1032.9	1033.1	1033.3	1033.5	1033.9	1034.3	1034.7	1035.2	1034.9
155°	1061.9	1062.0	1062.2	1062.4	1062.6	1062.8	1063.7	1064.5	1065.4	1066.2	1065.9
157.5°	1088.5	1088.5	1088.7	1089.0	1089.2	1089.4	1090.2	1091.1	1091.9	1092.7	1092.5
160°	1113.3	1113.1	1113.1	1113.1	1113.1	1113.1	1114.1	1115.2	1116.2	1117.3	1117.4
162.5°	1135.2	1134.9	1135.2	1135.4	1135.6	1135.8	1136.8	1137.9	1138.9	1140.0	1139.8
165°	1154.1	1153.8	1153.8	1153.8	1153.8	1153.8	1155.1	1156.3	1157.6	1158.8	1158.7
167.5°	1169.4	1169.0	1169.3	1169.5	1169.7	1169.9	1171.2	1172.4	1173.7	1174.9	1174.9
170°	1182.6	1182.2	1182.2	1182.2	1182.2	1182.2	1183.7	1185.2	1186.6	1188.1	1188.1
172.5°	1193.0	1192.6	1192.6	1192.6	1192.6	1192.6	1193.9	1195.2	1196.4	1197.7	1197.6
175°	1199.7	1199.3	1199.3	1199.3	1199.3	1199.3	1200.5	1201.8	1203.0	1204.3	1204.2
177.5°	1203.5	1203.0	1203.0	1203.0	1203.0	1203.0	1204.3	1205.6	1206.8	1208.1	1208.0
180°	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	1316.0	1316.0	1316.0	1316.0
2.5°	1169.7	1167.6	1159.0	1150.5
5°	991.7	984.4	982.0	979.5
7.5°	866.5	865.9	853.1	840.3
10°	756.3	757.2	745.6	734.0
12.5°	677.5	669.9	669.0	668.1
15°	618.3	611.3	610.1	608.8
17.5°	576.5	572.2	571.0	569.8
20°	544.7	542.3	540.1	538.0
22.5°	517.2	514.2	512.4	510.5
25°	490.7	487.9	487.3	486.7
27.5°	466.9	463.5	463.5	463.5
30°	444.3	442.1	441.2	440.3
32.5°	423.2	421.4	421.4	421.4
35°	403.3	402.4	401.2	400.0
37.5°	385.3	385.3	384.7	384.1
40°	367.9	368.8	368.8	368.8
42.5°	352.1	353.0	353.0	353.0
45°	335.6	337.1	337.7	338.3
47.5°	319.4	321.8	322.4	323.0
50°	303.5	305.3	305.6	305.9
52.5°	287.3	289.5	291.0	292.5
55°	270.2	272.4	273.3	274.2
57.5°	251.9	254.0	254.3	254.6
60°	231.7	233.9	234.5	235.1
62.5°	212.5	213.7	214.3	215.0
65°	190.5	192.4	193.6	194.8
67.5°	169.5	171.0	171.0	171.0
70°	145.9	146.6	147.5	148.4
72.5°	124.3	124.6	124.6	124.6
75°	101.4	102.0	102.3	102.6
77.5°	79.7	80.0	80.0	80.0
80°	58.3	58.0	58.0	58.0
82.5°	40.0	39.1	39.1	39.1
85°	22.9	22.6	22.9	23.2
87.5°	10.4	10.4	10.4	10.4
90°	27.2	27.6	28.0	28.4
92.5°	42.0	41.6	41.2	40.7
95°	73.9	73.9	73.9	73.9
97.5°	106.7	106.5	106.3	106.1
100°	142.7	143.1	143.6	144.0
102.5°	183.5	183.2	183.0	182.8
105°	224.2	224.6	225.0	225.5
107.5°	269.7	269.4	269.2	269.0
110°	314.8	314.4	314.0	313.5



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	360.9	360.9	360.9	360.9
115°	404.2	404.0	403.8	403.5
117.5°	449.0	448.4	447.7	447.1
120°	494.8	494.4	494.0	493.5
122.5°	539.9	539.3	538.7	538.1
125°	585.1	584.3	583.4	582.6
127.5°	629.6	628.8	627.9	627.1
130°	675.1	673.6	672.1	670.7
132.5°	719.3	718.2	717.2	716.1
135°	764.8	764.3	763.9	763.5
137.5°	807.1	806.5	805.8	805.2
140°	850.3	848.9	847.4	845.9
142.5°	890.8	889.7	888.7	887.6
145°	929.9	929.1	928.2	927.4
147.5°	967.2	965.9	964.6	963.4
150°	1001.3	1000.0	998.7	997.5
152.5°	1033.8	1032.7	1031.7	1030.6
155°	1064.4	1063.0	1061.5	1060.0
157.5°	1091.3	1090.0	1088.7	1087.5
160°	1116.5	1115.7	1114.8	1114.0
162.5°	1138.3	1136.8	1135.4	1133.9
165°	1157.3	1155.8	1154.3	1152.8
167.5°	1173.7	1172.4	1171.2	1169.9
170°	1186.6	1185.2	1183.7	1182.2
172.5°	1196.1	1194.6	1193.2	1191.7
175°	1202.7	1201.3	1199.8	1198.3
177.5°	1206.5	1205.0	1203.6	1202.1
180°	1205.9	1205.9	1205.9	1205.9



TEST NUMBER: P831493

CATALOG NUMBER: S123DIP-S560D1195U930-4F0-1E-UDD-G1

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.63	12.37	12.68	13.43	14.85	13.87	14.61	14.92	15.66	17.09
	3H	13.27	13.93	14.33	15.00	16.44	15.28	15.95	16.35	17.01	18.46
	4H	13.84	14.47	14.92	15.54	16.99	15.73	16.36	16.80	17.42	18.87
	6H	14.21	14.79	15.29	15.85	17.32	16.00	16.58	17.08	17.65	19.11
	8H	14.30	14.85	15.39	15.93	17.39	16.06	16.61	17.15	17.69	19.15
	12H	14.34	14.86	15.43	15.94	17.42	16.07	16.60	17.17	17.67	19.15
4H	2H	12.19	12.82	13.27	13.89	15.34	14.02	14.65	15.10	15.71	17.16
	3H	14.01	14.54	15.10	15.63	17.09	15.63	16.15	16.71	17.24	18.71
	4H	14.70	15.19	15.80	16.27	17.75	16.20	16.69	17.30	17.77	19.25
	6H	15.17	15.59	16.27	16.69	18.17	16.60	17.02	17.70	18.12	19.60
	8H	15.31	15.69	16.41	16.79	18.28	16.71	17.10	17.81	18.19	19.69
	12H	15.37	15.72	16.49	16.83	18.33	16.75	17.10	17.87	18.21	19.71
8H	4H	14.96	15.35	16.06	16.44	17.94	16.30	16.69	17.40	17.78	19.28
	6H	15.55	15.86	16.67	17.00	18.49	16.80	17.12	17.92	18.26	19.75
	8H	15.75	16.03	16.88	17.15	18.66	16.98	17.26	18.11	18.38	19.89
	12H	15.87	16.12	17.01	17.23	18.78	17.08	17.32	18.21	18.44	19.98
12H	4H	14.96	15.31	16.08	16.42	17.91	16.27	16.62	17.39	17.73	19.23
	6H	15.60	15.87	16.73	17.00	18.51	16.81	17.09	17.94	18.21	19.72
	8H	15.83	16.07	16.96	17.19	18.73	17.01	17.25	18.14	18.37	19.92