

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331927-930

Luminaire Tested: **S123DIP-S560D585U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331927-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D585U930-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 585 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3620.1 lumens
Efficiency: N/A
Efficacy: 110.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 32.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331927-930

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

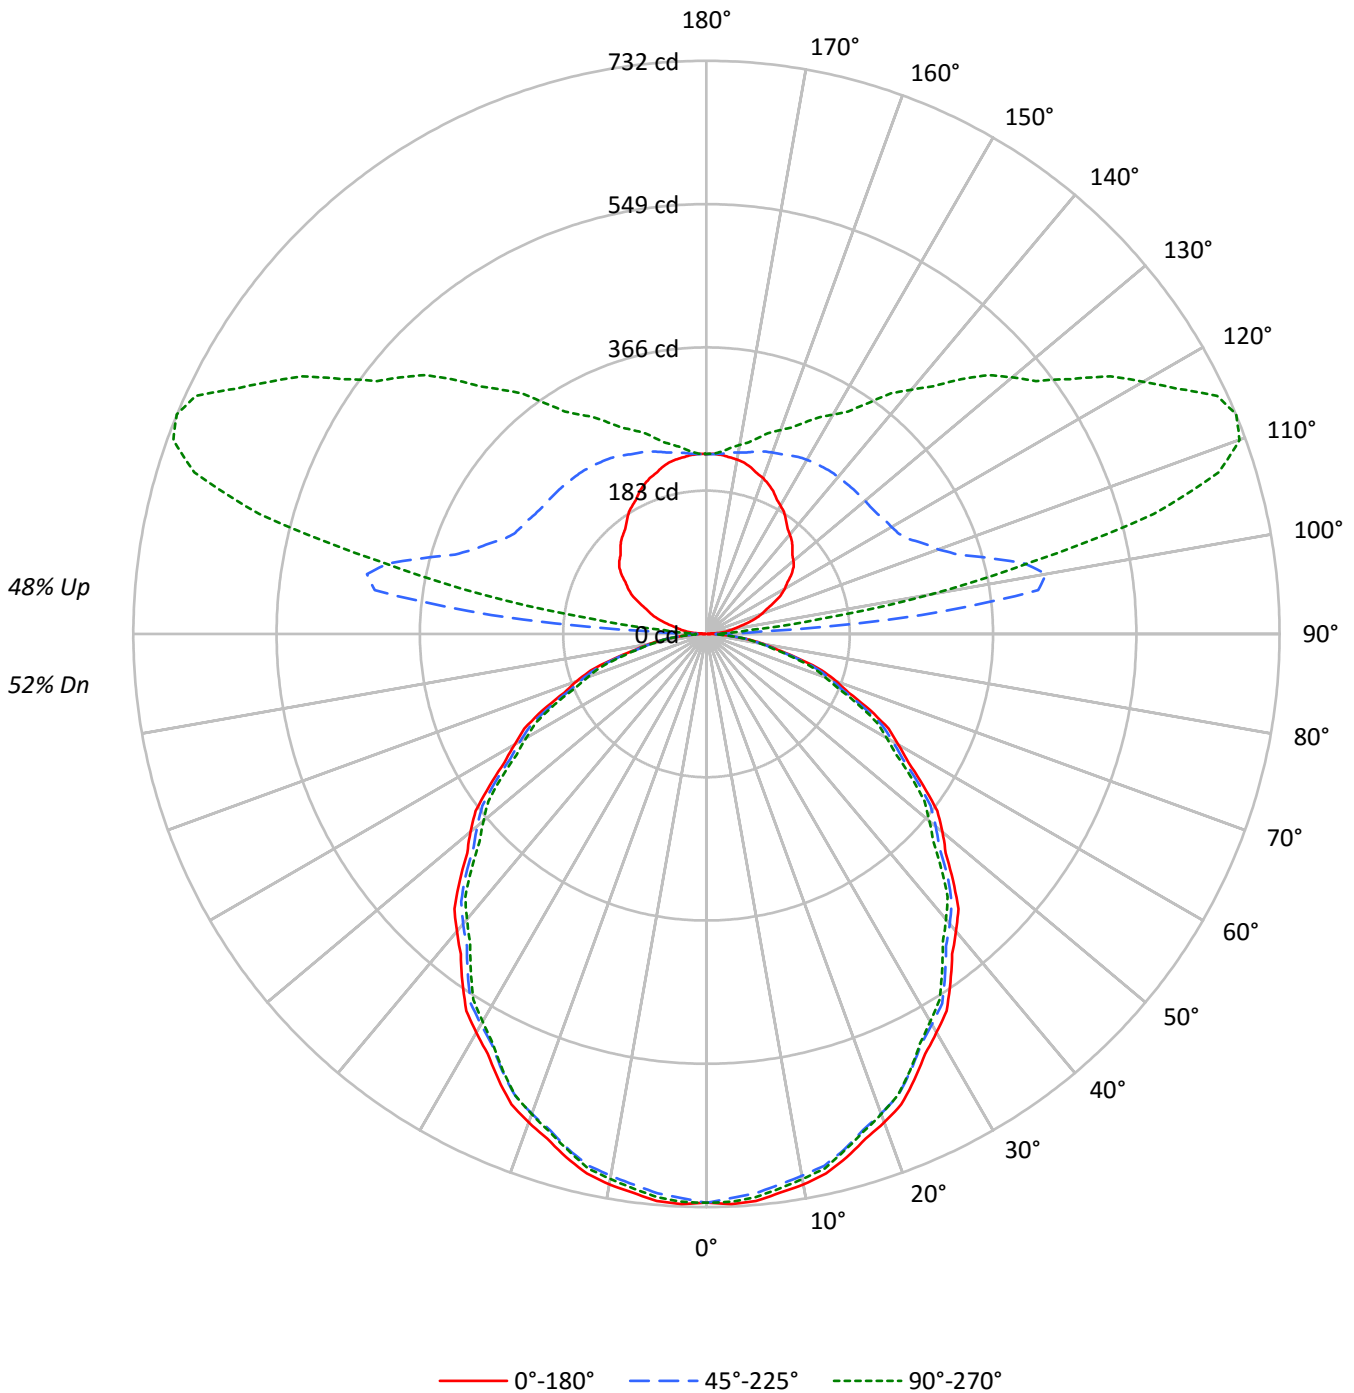



TEST NUMBER: P331927-930

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	58	58	58	52
1	98	94	90	86	91	87	84	81	74	72	69	62	60	59	51	50	49	44
2	89	82	76	70	82	76	71	66	65	61	57	55	52	49	45	43	41	37
3	82	72	65	59	75	67	60	55	57	52	48	48	45	42	40	37	35	31
4	75	64	56	50	69	59	52	47	51	45	41	43	39	36	36	33	30	27
5	68	57	49	43	63	53	46	40	45	40	35	39	34	31	32	29	26	23
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	26	23	20
7	58	46	38	32	54	43	36	31	37	31	27	32	27	24	27	23	21	18
8	54	42	34	29	50	39	32	27	34	28	24	29	25	21	24	21	18	16
9	50	38	31	25	47	36	29	24	31	26	22	27	22	19	23	19	17	14
10	47	35	28	23	44	33	26	22	29	23	20	25	20	17	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7819	7819	7819
5°	7854	7747	7800
10°	7803	7679	7726
15°	7710	7592	7608
20°	7605	7468	7475
25°	7462	7321	7305
30°	7305	7157	7102
35°	7139	6984	6893
40°	6968	6792	6687
45°	6779	6616	6454
50°	6589	6400	6223
55°	6341	6176	5988
60°	6090	5916	5726
65°	5871	5631	5456
70°	5542	5306	5070
75°	5065	4882	4675
80°	4568	4376	4339
85°	4001	3853	3705



TEST NUMBER: P331927-930

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	68.4	1.9
10°-20°	193.2	5.3
20°-30°	285.4	7.9
30°-40°	333.3	9.2
40°-50°	335.1	9.3
50°-60°	294.4	8.1
60°-70°	219.3	6.1
70°-80°	124.9	3.5
80°-90°	37.6	1.0
90°-100°	127.8	3.5
100°-110°	362.0	10.0
110°-120°	356.1	9.8
120°-130°	284.0	7.8
130°-140°	224.0	6.2
140°-150°	167.1	4.6
150°-160°	116.5	3.2
160°-170°	68.4	1.9
170°-180°	22.3	0.6
0°-30°	547.0	15.1
0°-40°	880.3	24.3
0°-60°	1509.9	41.7
0°-90°	1891.8	52.3
90°-120°	846.0	23.4
90°-150°	1521.1	42.0
90°-180°	1728.0	47.7
0°-180°	3620.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	726	726	726	726	726	
5°	727	724	717	723	722	69
15°	692	689	681	686	683	195
25°	628	624	616	617	615	289
35°	543	539	532	528	525	340
45°	445	442	435	427	424	344
55°	338	337	329	322	319	303
65°	230	227	221	216	214	227
75°	122	119	117	114	112	130
85°	32	31	31	30	30	36
90°	1	6	12	13	14	3
95°	16	51	276	80	54	17
105°	54	80	374	654	592	57
115°	95	119	286	627	719	94
125°	133	156	267	484	567	118
135°	155	185	263	398	460	120
145°	177	203	260	327	360	111
155°	201	217	252	286	298	93
165°	220	226	241	256	260	62
175°	229	230	231	234	234	22
180°	230	230	230	230	230	



TEST NUMBER: P331927-930

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4
2.5°	728.8	728.4	728.0	727.5	727.1	726.2	725.0	723.7	722.6	721.4	722.4
5°	726.9	726.3	725.5	724.9	724.1	723.1	721.5	720.0	718.5	717.0	718.4
7.5°	719.8	719.2	718.4	717.8	717.1	715.9	714.4	712.7	711.2	709.6	710.9
10°	713.9	713.1	712.5	711.8	711.1	709.8	708.0	706.2	704.4	702.6	703.8
12.5°	705.9	705.2	704.7	704.1	703.5	702.4	700.7	699.0	697.3	695.6	696.5
15°	691.9	691.5	690.9	690.3	689.7	688.6	686.8	685.0	683.1	681.3	682.5
17.5°	675.9	675.1	674.4	673.7	672.9	671.7	669.9	668.1	666.3	664.5	665.3
20°	663.9	663.1	662.2	661.4	660.6	659.3	657.5	655.7	653.8	652.0	652.6
22.5°	650.4	649.5	648.7	647.9	647.0	645.7	643.9	642.1	640.3	638.5	639.0
25°	628.3	627.5	626.6	625.8	624.9	623.6	621.8	620.0	618.2	616.4	616.5
27.5°	604.7	603.9	603.1	602.3	601.4	600.1	598.1	596.2	594.3	592.3	592.4
30°	587.7	587.0	586.3	585.6	584.9	583.6	581.6	579.7	577.8	575.8	575.8
32.5°	570.7	569.8	568.8	567.9	567.0	565.8	564.4	562.8	561.3	559.9	559.1
35°	543.3	542.5	541.7	540.9	540.1	538.7	536.9	535.1	533.3	531.5	530.7
37.5°	515.4	514.3	513.2	512.2	511.1	509.7	507.8	506.1	504.2	502.4	501.4
40°	495.9	495.0	494.2	493.4	492.5	491.1	489.2	487.3	485.3	483.4	482.2
42.5°	476.4	475.5	474.5	473.5	472.6	471.2	469.2	467.3	465.4	463.4	462.3
45°	445.3	444.7	444.2	443.6	443.0	441.9	440.1	438.3	436.5	434.6	433.0
47.5°	414.4	413.6	412.9	412.1	411.2	409.9	408.3	406.6	404.9	403.2	401.5
50°	393.5	392.7	392.1	391.3	390.7	389.5	387.6	385.8	384.0	382.2	380.7
52.5°	371.5	371.0	370.6	370.1	369.6	368.4	366.5	364.6	362.6	360.8	359.5
55°	337.9	337.7	337.6	337.5	337.3	336.3	334.5	332.7	330.9	329.1	327.6
57.5°	305.9	305.4	304.9	304.5	304.0	303.0	301.6	300.2	298.7	297.3	296.0
60°	282.9	282.7	282.7	282.5	282.3	281.4	279.8	278.1	276.5	274.8	273.5
62.5°	262.4	262.0	261.7	261.4	261.0	260.0	258.3	256.7	254.9	253.3	252.1
65°	230.5	229.8	229.1	228.4	227.7	226.7	225.3	223.9	222.5	221.1	220.0
67.5°	196.6	196.0	195.3	194.8	194.1	193.3	192.2	191.2	190.1	189.1	188.2
70°	176.1	175.3	174.5	173.7	172.8	171.9	171.1	170.3	169.4	168.6	167.6
72.5°	154.7	154.0	153.4	152.8	152.2	151.4	150.5	149.5	148.5	147.7	146.8
75°	121.8	121.2	120.7	120.1	119.6	119.1	118.6	118.2	117.8	117.4	116.8
77.5°	92.7	92.4	92.0	91.8	91.5	91.1	90.6	90.1	89.5	89.0	88.6
80°	73.7	73.3	72.9	72.5	72.0	71.7	71.4	71.1	70.8	70.6	70.4
82.5°	55.2	55.1	55.0	55.0	54.9	54.8	54.8	54.7	54.6	54.6	54.3
85°	32.4	32.2	32.0	31.6	31.4	31.2	31.2	31.2	31.2	31.2	31.0
87.5°	13.2	13.0	12.9	12.8	12.7	12.6	12.8	13.0	13.1	13.3	13.1
90°	0.9	1.9	2.8	4.2	5.1	6.0	7.4	8.8	10.2	11.7	11.2
92.5°	5.8	8.6	12.5	16.1	20.0	26.9	39.1	59.0	78.7	71.5	54.0
95°	15.8	17.2	22.3	30.2	42.3	60.4	100.0	169.3	245.6	275.7	223.6
97.5°	27.0	27.5	31.5	38.3	50.2	69.9	107.6	185.7	312.8	427.4	457.2
100°	34.4	34.9	38.2	44.7	55.8	73.9	106.5	175.3	297.6	440.3	532.0
102.5°	42.2	43.0	46.0	52.1	62.1	78.8	107.9	166.4	275.3	416.2	535.7
105°	54.0	55.4	58.1	63.7	72.6	87.0	112.1	160.0	247.9	373.9	507.4
107.5°	66.4	67.8	70.5	76.0	84.3	97.7	119.7	159.5	230.4	336.5	457.7
110°	75.3	76.7	79.1	84.1	92.0	105.1	126.0	161.3	223.6	315.3	426.4



TEST NUMBER: P331927-930

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	83.5	85.0	87.2	92.4	100.3	112.9	132.3	165.1	220.0	301.2	399.3
115°	95.3	97.2	100.0	104.6	112.5	125.1	142.8	171.1	218.6	286.0	366.5
117.5°	107.1	109.3	111.6	115.9	124.7	136.3	153.8	179.1	219.4	277.0	346.7
120°	115.4	116.8	119.0	123.7	132.6	144.1	160.9	185.1	220.9	273.0	336.2
122.5°	122.4	123.8	126.1	131.1	139.6	152.0	168.4	190.7	223.5	270.4	327.7
125°	132.6	133.5	136.2	141.4	150.2	162.7	179.0	199.5	227.4	266.9	316.7
127.5°	140.2	141.6	145.1	150.3	160.0	172.6	188.3	206.8	231.9	265.2	307.0
130°	145.1	146.5	150.7	156.2	166.0	178.6	193.9	211.6	234.8	264.2	301.8
132.5°	148.8	150.6	155.2	161.8	171.6	183.8	198.8	216.1	237.1	263.7	296.9
135°	155.3	157.2	162.3	169.3	179.0	191.6	206.0	221.8	240.4	263.2	290.7
137.5°	161.4	163.4	168.4	175.9	185.6	197.1	211.0	226.1	242.6	262.2	285.2
140°	165.6	167.9	172.5	179.9	189.2	200.9	214.3	228.4	244.1	261.8	281.8
142.5°	170.0	171.9	177.0	183.7	193.0	203.9	217.0	230.6	245.2	261.1	278.8
145°	177.2	178.6	182.8	189.7	197.6	208.3	220.5	233.0	246.0	259.9	274.8
147.5°	184.4	185.2	189.4	195.4	203.0	212.1	223.2	234.5	246.0	258.2	270.9
150°	189.2	189.7	193.5	199.5	206.0	214.3	225.1	234.8	246.0	256.7	268.3
152.5°	194.1	194.2	198.0	203.3	209.0	217.0	226.2	235.6	244.9	254.9	265.4
155°	201.4	201.4	204.2	208.8	213.9	220.5	228.4	235.8	243.7	251.6	260.9
157.5°	207.1	207.5	209.7	213.9	218.2	223.2	229.5	236.3	242.1	248.7	255.8
160°	211.6	211.6	213.4	217.2	220.5	225.1	230.6	236.3	241.3	246.5	252.5
162.5°	214.9	214.9	216.5	219.4	222.3	226.2	231.1	235.9	239.9	244.3	249.2
165°	220.0	219.5	220.5	222.7	224.6	227.9	231.5	234.8	237.7	240.9	244.6
167.5°	223.8	223.2	223.6	225.4	226.7	228.8	231.5	234.1	235.4	237.5	240.3
170°	226.0	225.1	225.5	226.9	227.9	228.8	231.1	233.0	233.9	235.3	237.7
172.5°	227.5	226.9	227.1	228.0	228.6	229.2	231.1	232.6	232.8	233.4	235.1
175°	229.3	228.8	228.4	229.3	229.3	229.8	230.6	231.5	231.1	231.1	232.0
177.5°	230.1	229.8	229.3	229.8	229.8	229.8	230.1	230.8	230.1	229.8	230.1
180°	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8



TEST NUMBER: P331927-930

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	726.4	726.4	726.4	726.4	726.4	726.4	726.4	726.4
2.5°	723.6	724.6	725.8	726.3	726.2	726.0	725.9	725.9
5°	719.7	721.1	722.5	723.1	722.8	722.5	722.3	721.9
7.5°	712.1	713.3	714.6	715.1	714.9	714.8	714.6	714.4
10°	705.1	706.4	707.6	708.1	707.8	707.5	707.3	706.9
12.5°	697.4	698.4	699.3	699.6	699.4	699.3	699.1	699.0
15°	683.6	684.7	685.8	685.9	685.1	684.3	683.5	682.7
17.5°	666.1	666.8	667.6	667.8	667.6	667.2	666.9	666.6
20°	653.1	653.7	654.2	654.3	653.9	653.5	653.1	652.6
22.5°	639.4	639.8	640.3	640.3	639.8	639.2	638.7	638.1
25°	616.7	616.9	616.9	616.9	616.4	616.0	615.6	615.1
27.5°	592.6	592.6	592.7	592.6	592.0	591.5	590.9	590.4
30°	575.8	575.8	575.8	575.4	574.4	573.4	572.4	571.4
32.5°	558.3	557.5	556.7	556.0	555.5	555.1	554.5	554.0
35°	529.8	529.0	528.2	527.4	526.7	526.0	525.3	524.6
37.5°	500.3	499.4	498.4	497.7	497.3	496.8	496.4	495.9
40°	481.2	480.0	479.0	478.1	477.5	477.0	476.5	475.9
42.5°	461.2	460.1	458.9	458.1	457.5	457.1	456.5	455.9
45°	431.4	429.7	428.0	426.8	426.2	425.4	424.8	424.0
47.5°	399.9	398.3	396.6	395.5	394.9	394.3	393.7	393.1
50°	379.2	377.6	376.1	375.0	374.1	373.2	372.4	371.6
52.5°	358.2	356.9	355.6	354.4	353.6	352.8	352.0	351.1
55°	326.0	324.6	323.0	321.9	321.2	320.5	319.8	319.1
57.5°	294.6	293.2	291.9	290.7	289.9	289.2	288.4	287.6
60°	272.3	271.1	269.8	268.8	268.2	267.4	266.8	266.0
62.5°	250.8	249.6	248.3	247.4	247.0	246.5	246.1	245.6
65°	218.8	217.8	216.6	215.9	215.5	215.1	214.7	214.2
67.5°	187.2	186.2	185.2	184.4	183.8	183.3	182.7	182.1
70°	166.6	165.8	164.8	163.9	163.2	162.5	161.8	161.1
72.5°	145.9	145.0	144.2	143.6	143.2	142.8	142.5	142.1
75°	116.0	115.4	114.6	114.1	113.7	113.2	112.8	112.4
77.5°	88.1	87.6	87.2	86.9	86.9	86.9	86.9	86.9
80°	70.3	70.1	70.0	70.0	70.0	70.0	70.0	70.0
82.5°	54.1	53.8	53.6	53.4	53.3	53.2	53.1	53.0
85°	30.7	30.4	30.1	30.0	30.0	30.0	30.0	30.0
87.5°	13.1	13.0	13.0	13.2	13.1	13.2	13.3	13.2
90°	11.7	12.1	12.6	13.5	13.0	13.5	13.9	13.5
92.5°	39.1	31.1	27.5	25.0	24.2	22.7	23.2	22.4
95°	167.4	113.5	88.8	72.1	63.3	59.0	55.8	54.0
97.5°	417.4	334.3	274.3	218.7	184.3	163.4	150.8	146.8
100°	548.3	510.6	456.2	390.1	343.2	309.2	291.1	291.6
102.5°	591.8	590.6	558.9	517.0	480.5	453.6	438.4	427.7
105°	604.5	651.0	659.9	647.8	626.4	608.7	593.9	591.5
107.5°	567.9	643.4	684.1	700.7	701.1	695.1	690.1	685.8
110°	532.9	618.5	677.1	709.6	722.7	726.4	725.5	724.5



TEST NUMBER: P331927-930

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	498.3	585.7	651.4	693.2	717.1	728.6	732.1	732.3
115°	452.5	533.4	601.8	652.4	687.3	707.8	717.1	719.4
117.5°	419.2	489.1	550.5	601.9	638.3	661.7	675.1	678.2
120°	401.8	464.6	520.3	567.4	604.1	630.1	641.2	644.1
122.5°	388.0	444.8	496.5	540.1	572.8	596.2	608.5	612.0
125°	369.7	420.4	465.0	502.2	532.0	552.4	564.1	567.4
127.5°	353.7	398.9	439.2	473.0	499.5	517.0	527.5	530.5
130°	343.6	385.5	423.1	454.8	479.5	496.2	506.0	509.6
132.5°	334.4	372.8	407.9	438.1	461.2	477.9	486.6	489.2
135°	321.8	354.8	385.1	411.6	434.3	448.3	456.6	459.9
137.5°	310.4	337.5	363.5	386.5	405.6	419.7	426.8	428.9
140°	303.7	327.3	349.7	369.7	387.3	400.4	407.8	407.3
142.5°	297.3	317.7	337.0	354.4	369.5	381.1	387.8	387.3
145°	289.7	305.1	319.9	333.5	345.0	354.8	358.6	359.5
147.5°	283.5	295.6	307.7	317.2	326.0	332.6	336.2	336.6
150°	279.0	289.7	299.5	308.3	315.3	320.4	323.2	323.2
152.5°	274.9	284.1	292.8	300.1	305.6	310.4	312.0	312.0
155°	268.8	276.2	283.2	288.8	292.9	296.7	297.6	298.1
157.5°	262.3	268.5	273.9	278.3	281.9	284.7	285.4	285.4
160°	258.5	263.7	268.3	271.6	274.8	277.6	277.6	277.1
162.5°	254.1	258.4	262.8	265.6	267.7	270.2	270.2	269.7
165°	248.3	251.1	254.4	256.7	258.5	260.4	259.9	259.9
167.5°	243.3	245.4	247.3	249.0	249.8	251.1	250.6	250.6
170°	239.9	241.3	243.2	244.1	244.6	245.6	245.1	245.1
172.5°	237.0	238.0	239.5	240.0	240.1	241.1	240.3	239.9
175°	233.0	233.4	234.4	234.4	234.4	234.8	234.4	233.9
177.5°	230.5	230.8	231.2	231.2	230.8	231.2	230.5	230.5
180°	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8

(END OF REPORT)