

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831546

Luminaire Tested: S123DIP-S560D585U930-4F0-1E-UDD-G

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831546  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S560D585U930-4F0-1E-UDD-G  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 585 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4024.8 lumens  
Efficiency: N/A  
Efficacy: 115.7 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 34.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

### Luminous Intensity Polar Plot

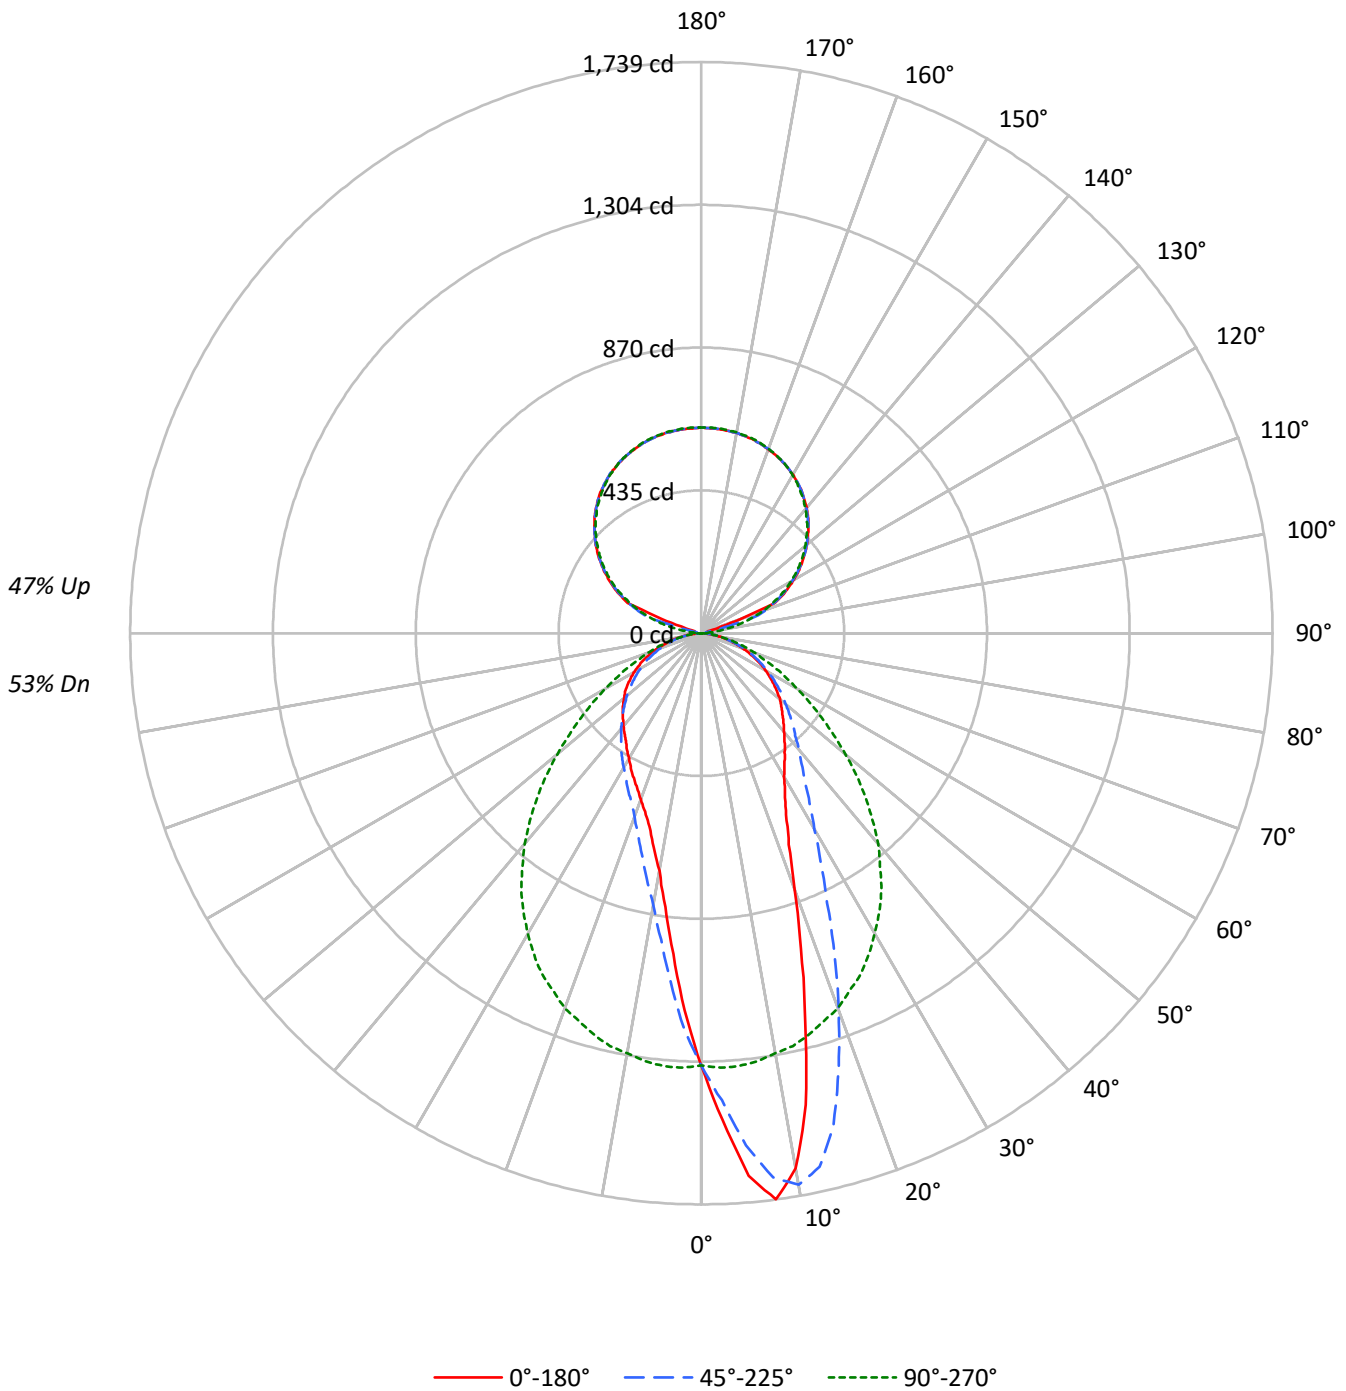



TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53				
1	99	95	91	88	91	88	85	82	75	73	71	63	62	60	53	51	50	45				
2	91	83	78	73	84	78	72	68	67	63	60	56	54	51	47	45	43	39				
3	83	74	67	61	77	69	63	58	59	55	51	50	47	44	42	40	38	34				
4	76	66	58	53	71	62	55	50	53	48	44	45	42	38	38	35	33	30				
5	70	59	51	46	65	55	48	43	48	43	38	41	37	34	35	32	29	26				
6	65	53	46	40	60	50	43	38	44	38	34	38	33	30	32	29	26	24				
7	60	49	41	35	56	46	39	34	40	34	30	34	30	27	29	26	24	21				
8	56	44	37	32	52	42	35	30	37	31	27	32	28	24	27	24	22	19				
9	53	41	34	29	49	38	32	27	34	28	25	29	25	22	25	22	20	18				
10	49	38	31	26	46	35	29	25	31	26	23	27	23	20	24	21	18	16				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	14165	14165	14165	14165	14165
5°	17915	16908	14292	11517	10584
10°	18088	18636	14197	9181	8023
15°	13624	17302	14100	7775	6784
20°	9493	14001	13920	6800	6163
25°	7238	10766	13613	6255	5780
30°	6262	8554	13123	5872	5473
35°	5809	7222	12558	5593	5256
40°	5500	6479	11764	5328	5182
45°	5317	5996	10755	5122	5150
50°	5226	5615	9562	4933	5123
55°	5031	5335	8389	4755	5146
60°	4850	5035	7231	4588	5061
65°	4557	4753	6238	4409	4961
70°	4208	4390	5303	4113	4670
75°	3810	3938	4546	3822	4267
80°	3143	3446	3595	3329	3595
85°	2495	2791	2643	2828	2865

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 12280 cd/sqm



TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	124.4	3.1
10°-20°	309.5	7.7
20°-30°	366.5	9.1
30°-40°	368.5	9.2
40°-50°	338.1	8.4
50°-60°	279.0	6.9
60°-70°	197.4	4.9
70°-80°	105.4	2.6
80°-90°	28.0	0.7
90°-100°	22.1	0.5
100°-110°	106.7	2.7
110°-120°	261.5	6.5
120°-130°	332.0	8.2
130°-140°	354.6	8.8
140°-150°	331.6	8.2
150°-160°	267.5	6.6
160°-170°	172.6	4.3
170°-180°	59.5	1.5
0°-30°	800.4	19.9
0°-40°	1168.9	29.0
0°-60°	1786.0	44.4
0°-90°	2116.7	52.6
90°-120°	390.2	9.7
90°-150°	1408.4	35.0
90°-180°	1908.0	47.4
0°-180°	4024.8	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1316	1316	1316	1316	1316	
5°	1658	1565	1323	1066	980	158
15°	1223	1553	1265	698	609	338
25°	609	906	1146	527	487	288
35°	442	550	956	426	400	278
45°	349	394	706	336	338	271
55°	268	284	447	253	274	240
65°	179	187	245	173	195	178
75°	92	95	109	92	103	96
85°	20	23	21	23	23	23
90°	14	11	0	11	14	7
95°	18	14	28	14	18	15
105°	20	102	139	102	20	43
115°	273	267	260	267	273	257
125°	374	372	366	372	374	334
135°	461	461	456	461	461	355
145°	532	531	526	531	532	332
155°	579	579	580	579	579	267
165°	610	610	612	610	610	172
175°	624	624	626	624	624	59
180°	626	626	626	626	626	



TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0
2.5°	1483.3	1481.8	1480.3	1472.6	1465.0	1461.3	1457.7	1446.7	1435.7	1423.5	1411.3
5°	1658.0	1662.2	1666.5	1661.6	1656.7	1641.8	1626.8	1607.0	1587.1	1564.8	1542.5
7.5°	1738.6	1741.0	1743.5	1740.4	1737.4	1733.4	1729.4	1711.7	1694.0	1671.1	1648.2
10°	1654.9	1660.4	1665.9	1677.8	1689.7	1703.2	1716.6	1714.1	1711.7	1705.0	1698.3
12.5°	1471.1	1477.8	1484.5	1508.4	1532.2	1562.7	1593.2	1619.5	1645.8	1664.1	1682.4
15°	1222.6	1241.2	1259.8	1281.5	1303.2	1348.0	1392.9	1448.2	1503.5	1552.6	1601.8
17.5°	1007.0	1014.0	1021.0	1044.2	1067.4	1123.9	1180.4	1244.2	1308.1	1389.6	1471.1
20°	828.7	835.1	841.5	872.0	902.6	946.8	991.1	1062.9	1134.6	1222.3	1309.9
22.5°	696.2	706.2	716.3	733.4	750.5	793.0	835.4	899.2	963.0	1059.8	1156.6
25°	609.4	616.8	624.1	634.5	644.9	678.8	712.6	765.2	817.7	906.5	995.4
27.5°	550.2	553.3	556.3	566.7	577.1	599.1	621.0	666.2	711.4	786.8	862.3
30°	503.8	505.9	508.1	517.2	526.4	541.4	556.3	589.0	621.7	688.2	754.8
32.5°	471.4	473.0	474.5	481.5	488.5	499.2	509.9	533.7	557.5	612.5	667.5
35°	442.1	443.0	444.0	449.1	454.3	462.3	470.2	488.2	506.2	549.6	593.0
37.5°	416.5	417.7	418.9	422.0	425.0	432.0	439.1	453.4	467.8	501.1	534.3
40°	391.4	393.6	395.7	397.9	400.0	405.8	411.6	422.6	433.6	461.1	488.5
42.5°	370.1	372.2	374.3	375.3	376.2	379.5	382.9	393.0	403.0	423.5	444.0
45°	349.3	350.2	351.1	352.1	353.0	355.7	358.5	367.3	376.2	393.9	411.6
47.5°	330.4	330.4	330.4	331.0	331.6	334.0	336.5	342.9	349.3	363.0	376.8
50°	312.1	312.1	312.1	311.1	310.2	311.7	313.3	318.2	323.0	335.3	347.5
52.5°	290.1	290.1	290.1	290.4	290.7	290.7	290.7	295.0	299.2	310.2	321.2
55°	268.1	269.3	270.5	269.6	268.7	269.3	269.9	272.7	275.4	284.3	293.1
57.5°	246.1	246.7	247.3	247.0	246.7	247.0	247.3	249.8	252.2	258.9	265.6
60°	225.3	225.3	225.3	224.7	224.1	224.7	225.3	226.6	227.8	233.9	240.0
62.5°	202.1	202.4	202.7	203.0	203.4	202.7	202.1	203.7	205.2	209.8	214.3
65°	178.9	179.2	179.5	180.5	181.4	180.8	180.1	181.7	183.2	186.6	189.9
67.5°	158.2	157.6	156.9	157.2	157.6	158.5	159.4	159.7	160.0	163.7	167.3
70°	133.7	134.3	135.0	134.7	134.3	134.7	135.0	135.9	136.8	139.5	142.3
72.5°	111.8	112.1	112.4	112.4	112.4	113.0	113.6	114.5	115.4	116.9	118.5
75°	91.6	91.6	91.6	92.2	92.8	93.1	93.4	93.4	93.4	94.7	95.9
77.5°	69.6	71.1	72.7	72.4	72.1	72.7	73.3	74.2	75.1	75.7	76.3
80°	50.7	50.7	50.7	51.0	51.3	52.2	53.1	53.7	54.3	55.6	56.8
82.5°	32.4	32.7	33.0	33.9	34.8	35.4	36.0	36.9	37.9	37.9	37.9
85°	20.2	19.5	18.9	19.5	20.2	20.8	21.4	21.7	22.0	22.6	23.2
87.5°	9.8	9.8	9.8	9.8	9.8	10.1	10.4	10.4	10.4	10.4	10.4
90°	14.0	13.7	13.5	13.3	13.1	12.8	12.4	12.0	11.6	11.2	9.8
92.5°	15.8	15.7	15.6	15.5	15.4	15.0	14.3	13.5	12.8	12.1	11.2
95°	17.7	17.7	17.7	17.7	17.7	17.3	16.6	15.9	15.1	14.4	13.3
97.5°	19.1	19.0	18.9	18.8	18.7	18.2	17.4	16.5	15.7	14.9	20.2
100°	19.5	19.4	19.3	19.2	19.1	18.7	17.8	17.0	16.2	15.3	31.5
102.5°	20.0	19.8	19.6	19.4	19.2	20.8	24.2	27.6	31.0	34.4	52.4
105°	20.5	20.3	20.0	19.8	19.6	28.7	47.0	65.3	83.5	101.8	111.1
107.5°	48.4	61.9	75.4	89.0	102.5	117.2	133.1	149.1	165.0	180.9	179.3
110°	127.9	142.7	157.4	172.2	187.0	196.1	199.5	202.9	206.3	209.7	208.6

TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	242.3	242.5	242.7	242.9	243.1	242.7	241.8	240.9	239.9	239.0	237.9
115°	273.4	273.0	272.6	272.2	271.8	271.0	270.0	269.0	267.9	266.9	266.0
117.5°	298.5	298.4	298.3	298.2	298.1	297.7	296.8	296.0	295.2	294.4	293.8
120°	324.6	324.6	324.6	324.6	324.6	324.2	323.3	322.5	321.7	320.9	320.5
122.5°	350.2	350.0	349.9	349.8	349.7	349.4	348.9	348.4	347.9	347.4	346.9
125°	373.9	373.7	373.5	373.2	373.0	372.8	372.6	372.4	372.2	372.0	371.6
127.5°	397.1	397.3	397.5	397.7	397.9	397.9	397.6	397.3	397.0	396.7	396.1
130°	419.4	419.6	419.9	420.1	420.3	420.2	419.7	419.3	418.9	418.5	418.1
132.5°	439.9	440.2	440.5	440.8	441.1	441.1	440.7	440.3	439.8	439.4	439.1
135°	460.8	461.1	461.4	461.8	462.1	462.1	461.8	461.4	461.1	460.8	460.4
137.5°	480.8	481.0	481.2	481.4	481.6	481.5	481.0	480.5	479.9	479.4	479.2
140°	498.5	498.7	498.9	499.1	499.3	499.2	498.8	498.4	498.0	497.6	497.3
142.5°	514.8	515.1	515.4	515.7	516.0	516.0	515.7	515.4	515.1	514.8	514.5
145°	531.5	531.5	531.5	531.5	531.5	531.4	531.2	531.0	530.8	530.6	530.4
147.5°	543.6	544.1	544.6	545.1	545.7	545.8	545.6	545.4	545.2	545.0	544.8
150°	557.5	557.9	558.2	558.5	558.8	558.8	558.6	558.4	558.2	558.0	557.8
152.5°	568.7	569.2	569.7	570.3	570.8	570.8	570.4	570.0	569.6	569.2	569.1
155°	578.9	579.6	580.2	580.8	581.4	581.5	581.0	580.4	579.9	579.4	579.3
157.5°	587.8	588.6	589.4	590.3	591.1	591.2	590.6	589.9	589.3	588.7	588.8
160°	596.1	596.9	597.6	598.3	599.0	599.1	598.5	597.8	597.2	596.6	596.7
162.5°	604.0	604.7	605.3	605.9	606.5	606.5	605.8	605.0	604.3	603.6	603.7
165°	610.1	610.8	611.5	612.3	613.0	612.9	612.1	611.3	610.5	609.6	609.7
167.5°	614.7	615.6	616.4	617.2	618.0	618.0	617.2	616.4	615.6	614.7	614.7
170°	618.9	619.8	620.6	621.4	622.2	622.2	621.4	620.6	619.8	618.9	618.9
172.5°	621.3	622.2	623.1	624.0	625.0	625.0	624.2	623.4	622.5	621.7	621.6
175°	623.6	624.4	625.2	626.1	626.9	626.9	626.2	625.5	624.8	624.0	623.9
177.5°	624.0	625.1	626.1	627.1	628.2	628.3	627.5	626.6	625.8	625.0	624.9
180°	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9



TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0
2.5°	1407.6	1403.9	1390.5	1377.1	1361.8	1346.5	1335.2	1323.9	1307.1	1290.3	1276.6
5°	1525.4	1508.4	1480.0	1451.6	1413.1	1374.6	1348.7	1322.7	1287.9	1253.1	1225.3
7.5°	1618.9	1589.6	1549.9	1510.2	1459.8	1409.4	1361.8	1314.2	1261.0	1207.9	1164.5
10°	1678.4	1658.6	1612.8	1567.0	1499.5	1432.0	1365.5	1298.9	1230.5	1162.1	1104.7
12.5°	1684.2	1686.1	1643.9	1601.8	1525.4	1449.1	1368.2	1287.3	1201.2	1115.1	1048.2
15°	1633.2	1664.7	1641.5	1618.3	1541.3	1464.4	1364.8	1265.3	1166.1	1066.8	989.6
17.5°	1538.6	1606.1	1609.4	1612.8	1535.8	1458.9	1348.7	1238.4	1126.1	1013.7	932.5
20°	1409.4	1509.0	1543.2	1577.4	1514.8	1452.2	1333.7	1215.2	1089.4	963.6	878.4
22.5°	1277.5	1398.4	1461.0	1523.6	1477.2	1430.8	1304.7	1178.6	1045.8	912.9	826.5
25°	1127.3	1259.2	1355.4	1451.6	1423.2	1394.8	1270.5	1146.2	1004.9	863.5	775.2
27.5°	996.3	1130.3	1246.4	1362.4	1356.3	1350.2	1226.8	1103.5	958.7	814.0	728.8
30°	879.7	1004.5	1134.3	1264.1	1279.0	1294.0	1174.9	1055.8	910.8	765.8	683.6
32.5°	776.5	885.5	1024.7	1163.9	1193.2	1222.6	1115.1	1007.6	864.1	720.6	641.5
35°	691.9	790.8	930.0	1069.3	1105.9	1142.6	1049.1	955.7	815.9	676.0	600.6
37.5°	617.1	699.8	835.7	971.6	1016.5	1061.3	977.7	894.0	763.0	632.0	562.7
40°	555.1	621.7	746.5	871.4	923.3	975.2	906.2	837.2	713.0	588.7	524.9
42.5°	503.2	562.4	675.7	789.0	838.8	888.5	830.2	771.9	661.4	550.8	492.5
45°	458.9	506.2	609.1	712.0	759.4	806.7	756.6	706.5	609.1	511.7	457.4
47.5°	417.4	458.0	545.9	633.9	676.0	718.1	679.1	640.0	557.5	475.1	425.9
50°	380.1	412.8	489.8	566.7	603.3	640.0	605.5	571.0	503.2	435.4	392.7
52.5°	347.8	374.3	438.8	503.2	534.6	566.1	536.5	506.9	453.1	399.4	362.1
55°	315.7	338.3	394.2	450.1	471.4	492.8	469.9	447.0	403.7	360.3	328.8
57.5°	285.8	305.9	351.7	397.5	414.0	430.5	409.8	389.0	356.3	323.7	297.4
60°	256.5	273.0	311.1	349.3	359.4	369.5	352.7	335.9	313.0	290.1	266.6
62.5°	229.3	244.3	272.7	301.1	307.8	314.5	301.7	288.8	271.4	254.0	235.7
65°	201.2	212.5	235.7	258.9	263.2	267.5	256.2	244.9	231.7	218.6	205.2
67.5°	175.3	183.2	202.1	221.1	221.4	221.7	212.5	203.4	196.0	188.7	178.0
70°	149.9	157.6	170.1	182.6	182.9	183.2	175.9	168.5	163.0	157.6	149.6
72.5°	124.0	129.5	138.9	148.4	147.8	147.2	142.6	138.0	133.7	129.5	123.7
75°	100.5	105.0	111.4	117.9	116.0	114.2	111.8	109.3	105.6	102.0	98.3
77.5°	79.1	81.8	85.5	89.2	87.9	86.7	84.6	82.4	79.7	76.9	75.4
80°	58.0	59.2	61.7	64.1	63.5	62.9	60.5	58.0	57.4	56.8	54.7
82.5°	39.4	40.9	41.5	42.1	41.8	41.5	39.7	37.9	37.3	36.6	36.3
85°	23.5	23.8	24.1	24.4	23.5	22.6	22.0	21.4	21.4	21.4	21.1
87.5°	10.7	11.0	11.0	11.0	10.7	10.4	9.8	9.2	9.5	9.8	9.8
90°	8.5	7.1	5.8	4.6	3.6	2.5	1.5	0.5	1.5	2.5	3.6
92.5°	10.2	9.3	8.4	8.2	8.8	9.5	10.1	10.7	10.1	9.5	8.8
95°	12.1	11.0	9.9	11.4	15.7	19.9	24.1	28.4	24.1	19.9	15.7
97.5°	25.4	30.7	36.0	40.0	42.9	45.8	48.7	51.6	48.7	45.8	42.9
100°	47.6	63.7	79.8	86.9	84.8	82.7	80.7	78.6	80.7	82.7	84.8
102.5°	70.4	88.4	106.3	114.7	113.3	112.0	110.6	109.3	110.6	112.0	113.3
105°	120.4	129.7	139.0	143.1	142.0	140.8	139.7	138.6	139.7	140.8	142.0
107.5°	177.8	176.2	174.7	173.4	172.5	171.6	170.7	169.7	170.7	171.6	172.5
110°	207.4	206.3	205.2	204.2	203.4	202.5	201.7	200.9	201.7	202.5	203.4





TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	236.7	235.6	234.5	233.5	232.8	232.1	231.4	230.6	231.4	232.1	232.8
115°	265.1	264.1	263.2	262.4	261.8	261.2	260.6	259.9	260.6	261.2	261.8
117.5°	293.3	292.8	292.3	291.7	290.9	290.2	289.5	288.8	289.5	290.2	290.9
120°	320.2	319.9	319.6	319.0	318.1	317.1	316.2	315.3	316.2	317.1	318.1
122.5°	346.5	346.1	345.7	345.1	344.4	343.7	343.0	342.2	343.0	343.7	344.4
125°	371.2	370.8	370.4	369.7	368.9	368.1	367.3	366.4	367.3	368.1	368.9
127.5°	395.6	395.1	394.6	393.9	393.1	392.3	391.4	390.6	391.4	392.3	393.1
130°	417.7	417.3	416.9	416.2	415.4	414.6	413.8	412.9	413.8	414.6	415.4
132.5°	438.8	438.5	438.2	437.6	436.8	436.0	435.1	434.3	435.1	436.0	436.8
135°	460.0	459.6	459.2	458.7	458.0	457.4	456.8	456.2	456.8	457.4	458.0
137.5°	479.0	478.8	478.6	478.1	477.3	476.4	475.6	474.8	475.6	476.4	477.3
140°	496.9	496.6	496.3	495.9	495.2	494.6	494.0	493.4	494.0	494.6	495.2
142.5°	514.1	513.8	513.5	513.1	512.4	511.8	511.2	510.6	511.2	511.8	512.4
145°	530.2	530.0	529.7	529.3	528.6	527.8	527.1	526.4	527.1	527.8	528.6
147.5°	544.6	544.4	544.2	543.8	543.3	542.8	542.3	541.7	542.3	542.8	543.3
150°	557.6	557.4	557.2	556.9	556.6	556.3	556.0	555.7	556.0	556.3	556.6
152.5°	569.0	568.9	568.8	568.7	568.6	568.4	568.3	568.2	568.3	568.4	568.6
155°	579.2	579.1	579.0	579.0	579.2	579.5	579.7	579.9	579.7	579.5	579.2
157.5°	588.9	589.0	589.1	589.2	589.2	589.2	589.2	589.2	589.2	589.2	589.2
160°	596.8	596.9	597.0	597.1	597.2	597.3	597.4	597.5	597.4	597.3	597.2
162.5°	603.8	603.9	604.0	604.2	604.5	604.8	605.1	605.4	605.1	604.8	604.5
165°	609.8	609.9	610.0	610.2	610.6	610.9	611.2	611.5	611.2	610.9	610.6
167.5°	614.7	614.7	614.7	614.9	615.4	615.8	616.2	616.6	616.2	615.8	615.4
170°	618.9	618.9	618.9	619.1	619.5	620.0	620.4	620.8	620.4	620.0	619.5
172.5°	621.5	621.4	621.3	621.5	622.0	622.5	623.1	623.6	623.1	622.5	622.0
175°	623.8	623.7	623.6	623.8	624.4	624.9	625.4	625.9	625.4	624.9	624.4
177.5°	624.8	624.7	624.6	624.8	625.3	625.8	626.3	626.8	626.3	625.8	625.3
180°	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9



TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0	1316.0
2.5°	1262.9	1251.0	1239.0	1229.9	1220.7	1205.2	1189.6	1185.9	1182.3	1177.1	1171.9
5°	1197.5	1168.2	1138.9	1112.6	1086.4	1065.9	1045.5	1032.0	1018.6	1008.8	999.1
7.5°	1121.2	1077.2	1033.3	1002.1	971.0	941.3	911.7	902.3	892.8	880.0	867.1
10°	1047.3	998.7	950.2	909.6	869.0	840.0	811.0	799.4	787.8	771.6	755.4
12.5°	981.3	928.2	875.1	834.2	793.3	765.2	737.1	720.3	703.5	694.3	685.2
15°	912.3	855.5	798.8	760.9	723.0	697.7	672.3	657.7	643.0	634.2	625.3
17.5°	851.3	795.1	738.9	702.6	666.2	643.0	619.8	607.0	594.2	587.5	580.7
20°	793.3	738.3	683.3	647.9	612.5	593.6	574.6	566.4	558.2	552.7	547.2
22.5°	740.1	686.1	632.0	601.8	571.6	556.3	541.1	535.3	529.4	524.9	520.3
25°	687.0	638.8	590.5	564.9	539.2	526.7	514.2	508.4	502.6	498.0	493.4
27.5°	643.6	597.5	551.4	529.4	507.5	497.7	487.9	483.3	478.8	474.5	470.2
30°	601.5	560.3	519.1	500.1	481.2	472.4	463.5	458.9	454.3	450.4	446.4
32.5°	562.4	527.0	491.6	474.2	456.8	449.5	442.1	436.6	431.1	428.1	425.0
35°	525.2	493.4	461.7	447.3	433.0	425.6	418.3	413.7	409.1	406.7	404.3
37.5°	493.4	465.0	436.6	422.9	409.1	402.1	395.1	391.1	387.2	386.2	385.3
40°	461.1	436.6	412.2	398.8	385.3	379.2	373.1	370.7	368.2	367.6	367.0
42.5°	434.2	410.4	386.6	374.3	362.1	356.9	351.7	350.5	349.3	350.2	351.1
45°	403.0	383.2	363.3	352.1	340.8	336.5	332.2	331.3	330.4	332.2	334.0
47.5°	376.8	358.5	340.1	329.5	318.8	315.7	312.7	312.4	312.1	314.5	316.9
50°	349.9	332.2	314.5	305.9	297.4	294.6	291.9	292.8	293.7	297.7	301.7
52.5°	324.9	308.4	291.9	284.0	276.0	274.2	272.4	274.5	276.6	280.9	285.2
55°	297.4	282.4	267.5	261.4	255.3	253.4	251.6	255.9	260.1	264.1	268.1
57.5°	271.1	258.0	244.9	239.4	233.9	233.6	233.3	237.2	241.2	245.5	249.8
60°	243.0	232.1	221.1	216.8	212.5	213.1	213.7	218.3	222.9	226.3	229.6
62.5°	217.4	208.2	199.1	195.1	191.1	192.7	194.2	198.8	203.4	207.3	211.3
65°	191.7	184.1	176.5	173.7	171.0	173.1	175.3	179.2	183.2	185.9	188.7
67.5°	167.3	160.9	154.5	152.4	150.2	152.4	154.5	158.5	162.4	165.2	167.9
70°	141.7	136.5	131.3	129.8	128.2	130.7	133.1	136.5	139.8	142.6	145.3
72.5°	117.9	113.9	109.9	109.6	109.3	111.4	113.6	116.9	120.3	122.1	124.0
75°	94.7	92.5	90.4	90.1	89.8	91.9	94.0	95.9	97.7	99.2	100.8
77.5°	73.9	72.1	70.2	70.5	70.8	72.4	73.9	75.7	77.6	78.5	79.4
80°	52.5	51.9	51.3	51.9	52.5	53.7	55.0	56.2	57.4	58.0	58.6
82.5°	36.0	35.4	34.8	35.7	36.6	37.6	38.5	39.4	40.3	40.6	40.9
85°	20.8	21.7	22.6	22.6	22.6	22.9	23.2	23.5	23.8	23.5	23.2
87.5°	9.8	10.1	10.4	10.4	10.4	10.7	11.0	11.0	11.0	10.7	10.4
90°	4.6	5.8	7.1	8.5	9.8	11.2	11.6	12.0	12.4	12.8	13.1
92.5°	8.2	8.4	9.3	10.2	11.2	12.1	12.8	13.5	14.3	15.0	15.4
95°	11.4	9.9	11.0	12.1	13.3	14.4	15.1	15.9	16.6	17.3	17.7
97.5°	40.0	36.0	30.7	25.4	20.2	14.9	15.7	16.5	17.4	18.2	18.7
100°	86.9	79.8	63.7	47.6	31.5	15.3	16.2	17.0	17.8	18.7	19.1
102.5°	114.7	106.3	88.4	70.4	52.4	34.4	31.0	27.6	24.2	20.8	19.2
105°	143.1	139.0	129.7	120.4	111.1	101.8	83.5	65.3	47.0	28.7	19.6
107.5°	173.4	174.7	176.2	177.8	179.3	180.9	165.0	149.1	133.1	117.2	102.5
110°	204.2	205.2	206.3	207.4	208.6	209.7	206.3	202.9	199.5	196.1	187.0



TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	233.5	234.5	235.6	236.7	237.9	239.0	239.9	240.9	241.8	242.7	243.1
115°	262.4	263.2	264.1	265.1	266.0	266.9	267.9	269.0	270.0	271.0	271.8
117.5°	291.7	292.3	292.8	293.3	293.8	294.4	295.2	296.0	296.8	297.7	298.1
120°	319.0	319.6	319.9	320.2	320.5	320.9	321.7	322.5	323.3	324.2	324.6
122.5°	345.1	345.7	346.1	346.5	346.9	347.4	347.9	348.4	348.9	349.4	349.7
125°	369.7	370.4	370.8	371.2	371.6	372.0	372.2	372.4	372.6	372.8	373.0
127.5°	393.9	394.6	395.1	395.6	396.1	396.7	397.0	397.3	397.6	397.9	397.9
130°	416.2	416.9	417.3	417.7	418.1	418.5	418.9	419.3	419.7	420.2	420.3
132.5°	437.6	438.2	438.5	438.8	439.1	439.4	439.8	440.3	440.7	441.1	441.1
135°	458.7	459.2	459.6	460.0	460.4	460.8	461.1	461.4	461.8	462.1	462.1
137.5°	478.1	478.6	478.8	479.0	479.2	479.4	479.9	480.5	481.0	481.5	481.6
140°	495.9	496.3	496.6	496.9	497.3	497.6	498.0	498.4	498.8	499.2	499.3
142.5°	513.1	513.5	513.8	514.1	514.5	514.8	515.1	515.4	515.7	516.0	516.0
145°	529.3	529.7	530.0	530.2	530.4	530.6	530.8	531.0	531.2	531.4	531.5
147.5°	543.8	544.2	544.4	544.6	544.8	545.0	545.2	545.4	545.6	545.8	545.7
150°	556.9	557.2	557.4	557.6	557.8	558.0	558.2	558.4	558.6	558.8	558.8
152.5°	568.7	568.8	568.9	569.0	569.1	569.2	569.6	570.0	570.4	570.8	570.8
155°	579.0	579.0	579.1	579.2	579.3	579.4	579.9	580.4	581.0	581.5	581.4
157.5°	589.2	589.1	589.0	588.9	588.8	588.7	589.3	589.9	590.6	591.2	591.1
160°	597.1	597.0	596.9	596.8	596.7	596.6	597.2	597.8	598.5	599.1	599.0
162.5°	604.2	604.0	603.9	603.8	603.7	603.6	604.3	605.0	605.8	606.5	606.5
165°	610.2	610.0	609.9	609.8	609.7	609.6	610.5	611.3	612.1	612.9	613.0
167.5°	614.9	614.7	614.7	614.7	614.7	614.7	615.6	616.4	617.2	618.0	618.0
170°	619.1	618.9	618.9	618.9	618.9	618.9	619.8	620.6	621.4	622.2	622.2
172.5°	621.5	621.3	621.4	621.5	621.6	621.7	622.5	623.4	624.2	625.0	625.0
175°	623.8	623.6	623.7	623.8	623.9	624.0	624.8	625.5	626.2	626.9	626.9
177.5°	624.8	624.6	624.7	624.8	624.9	625.0	625.8	626.6	627.5	628.3	628.2
180°	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9	625.9

TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	1316.0	1316.0	1316.0	1316.0
2.5°	1169.7	1167.6	1159.0	1150.5
5°	991.7	984.4	982.0	979.5
7.5°	866.5	865.9	853.1	840.3
10°	756.3	757.2	745.6	734.0
12.5°	677.5	669.9	669.0	668.1
15°	618.3	611.3	610.1	608.8
17.5°	576.5	572.2	571.0	569.8
20°	544.7	542.3	540.1	538.0
22.5°	517.2	514.2	512.4	510.5
25°	490.7	487.9	487.3	486.7
27.5°	466.9	463.5	463.5	463.5
30°	444.3	442.1	441.2	440.3
32.5°	423.2	421.4	421.4	421.4
35°	403.3	402.4	401.2	400.0
37.5°	385.3	385.3	384.7	384.1
40°	367.9	368.8	368.8	368.8
42.5°	352.1	353.0	353.0	353.0
45°	335.6	337.1	337.7	338.3
47.5°	319.4	321.8	322.4	323.0
50°	303.5	305.3	305.6	305.9
52.5°	287.3	289.5	291.0	292.5
55°	270.2	272.4	273.3	274.2
57.5°	251.9	254.0	254.3	254.6
60°	231.7	233.9	234.5	235.1
62.5°	212.5	213.7	214.3	215.0
65°	190.5	192.4	193.6	194.8
67.5°	169.5	171.0	171.0	171.0
70°	145.9	146.6	147.5	148.4
72.5°	124.3	124.6	124.6	124.6
75°	101.4	102.0	102.3	102.6
77.5°	79.7	80.0	80.0	80.0
80°	58.3	58.0	58.0	58.0
82.5°	40.0	39.1	39.1	39.1
85°	22.9	22.6	22.9	23.2
87.5°	10.4	10.4	10.4	10.4
90°	13.3	13.5	13.7	14.0
92.5°	15.5	15.6	15.7	15.8
95°	17.7	17.7	17.7	17.7
97.5°	18.8	18.9	19.0	19.1
100°	19.2	19.3	19.4	19.5
102.5°	19.4	19.6	19.8	20.0
105°	19.8	20.0	20.3	20.5
107.5°	89.0	75.4	61.9	48.4
110°	172.2	157.4	142.7	127.9



TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	242.9	242.7	242.5	242.3
115°	272.2	272.6	273.0	273.4
117.5°	298.2	298.3	298.4	298.5
120°	324.6	324.6	324.6	324.6
122.5°	349.8	349.9	350.0	350.2
125°	373.2	373.5	373.7	373.9
127.5°	397.7	397.5	397.3	397.1
130°	420.1	419.9	419.6	419.4
132.5°	440.8	440.5	440.2	439.9
135°	461.8	461.4	461.1	460.8
137.5°	481.4	481.2	481.0	480.8
140°	499.1	498.9	498.7	498.5
142.5°	515.7	515.4	515.1	514.8
145°	531.5	531.5	531.5	531.5
147.5°	545.1	544.6	544.1	543.6
150°	558.5	558.2	557.9	557.5
152.5°	570.3	569.7	569.2	568.7
155°	580.8	580.2	579.6	578.9
157.5°	590.3	589.4	588.6	587.8
160°	598.3	597.6	596.9	596.1
162.5°	605.9	605.3	604.7	604.0
165°	612.3	611.5	610.8	610.1
167.5°	617.2	616.4	615.6	614.7
170°	621.4	620.6	619.8	618.9
172.5°	624.0	623.1	622.2	621.3
175°	626.1	625.2	624.4	623.6
177.5°	627.1	626.1	625.1	624.0
180°	625.9	625.9	625.9	625.9



TEST NUMBER: P831546

CATALOG NUMBER: S123DIP-S560D585U930-4F0-1E-UDD-G

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.02	13.86	13.96	14.82	16.05	15.25	16.10	16.20	17.05	18.29
	3H	14.66	15.42	15.62	16.38	17.64	16.68	17.44	17.63	18.40	19.66
	4H	15.24	15.96	16.21	16.92	18.19	17.13	17.84	18.09	18.81	20.08
	6H	15.61	16.27	16.59	17.24	18.52	17.40	18.06	18.38	19.03	20.32
	8H	15.71	16.33	16.69	17.32	18.60	17.46	18.09	18.45	19.08	20.36
	12H	15.75	16.35	16.74	17.33	18.63	17.48	18.08	18.47	19.06	20.36
4H	2H	13.59	14.31	14.56	15.27	16.54	15.42	16.13	16.39	17.10	18.37
	3H	15.42	16.02	16.40	17.01	18.29	17.03	17.63	18.02	18.63	19.91
	4H	16.12	16.66	17.11	17.65	18.96	17.62	18.16	18.61	19.15	20.46
	6H	16.59	17.06	17.59	18.07	19.38	18.02	18.49	19.02	19.50	20.81
	8H	16.73	17.16	17.73	18.17	19.49	18.13	18.57	19.14	19.58	20.89
	12H	16.79	17.19	17.82	18.21	19.53	18.18	18.57	19.20	19.59	20.92
8H	4H	16.38	16.82	17.39	17.83	19.14	17.72	18.16	18.73	19.17	20.48
	6H	16.97	17.33	18.00	18.38	19.70	18.22	18.58	19.25	19.63	20.95
	8H	17.18	17.49	18.21	18.53	19.87	18.40	18.72	19.44	19.76	21.09
	12H	17.30	17.58	18.34	18.61	19.99	18.50	18.78	19.54	19.81	21.19
12H	4H	16.38	16.78	17.40	17.80	19.12	17.70	18.09	18.72	19.11	20.44
	6H	17.02	17.34	18.06	18.37	19.71	18.24	18.55	19.27	19.59	20.93
	8H	17.25	17.53	18.29	18.56	19.94	18.44	18.72	19.48	19.74	21.12