

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331989-930

Luminaire Tested: **S123DIP-S775D1025U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331989-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D1025U930-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5457.0 lumens
Efficiency: N/A
Efficacy: 104.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331989-930

CATALOG NUMBER: S123DIP-S775D1025U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

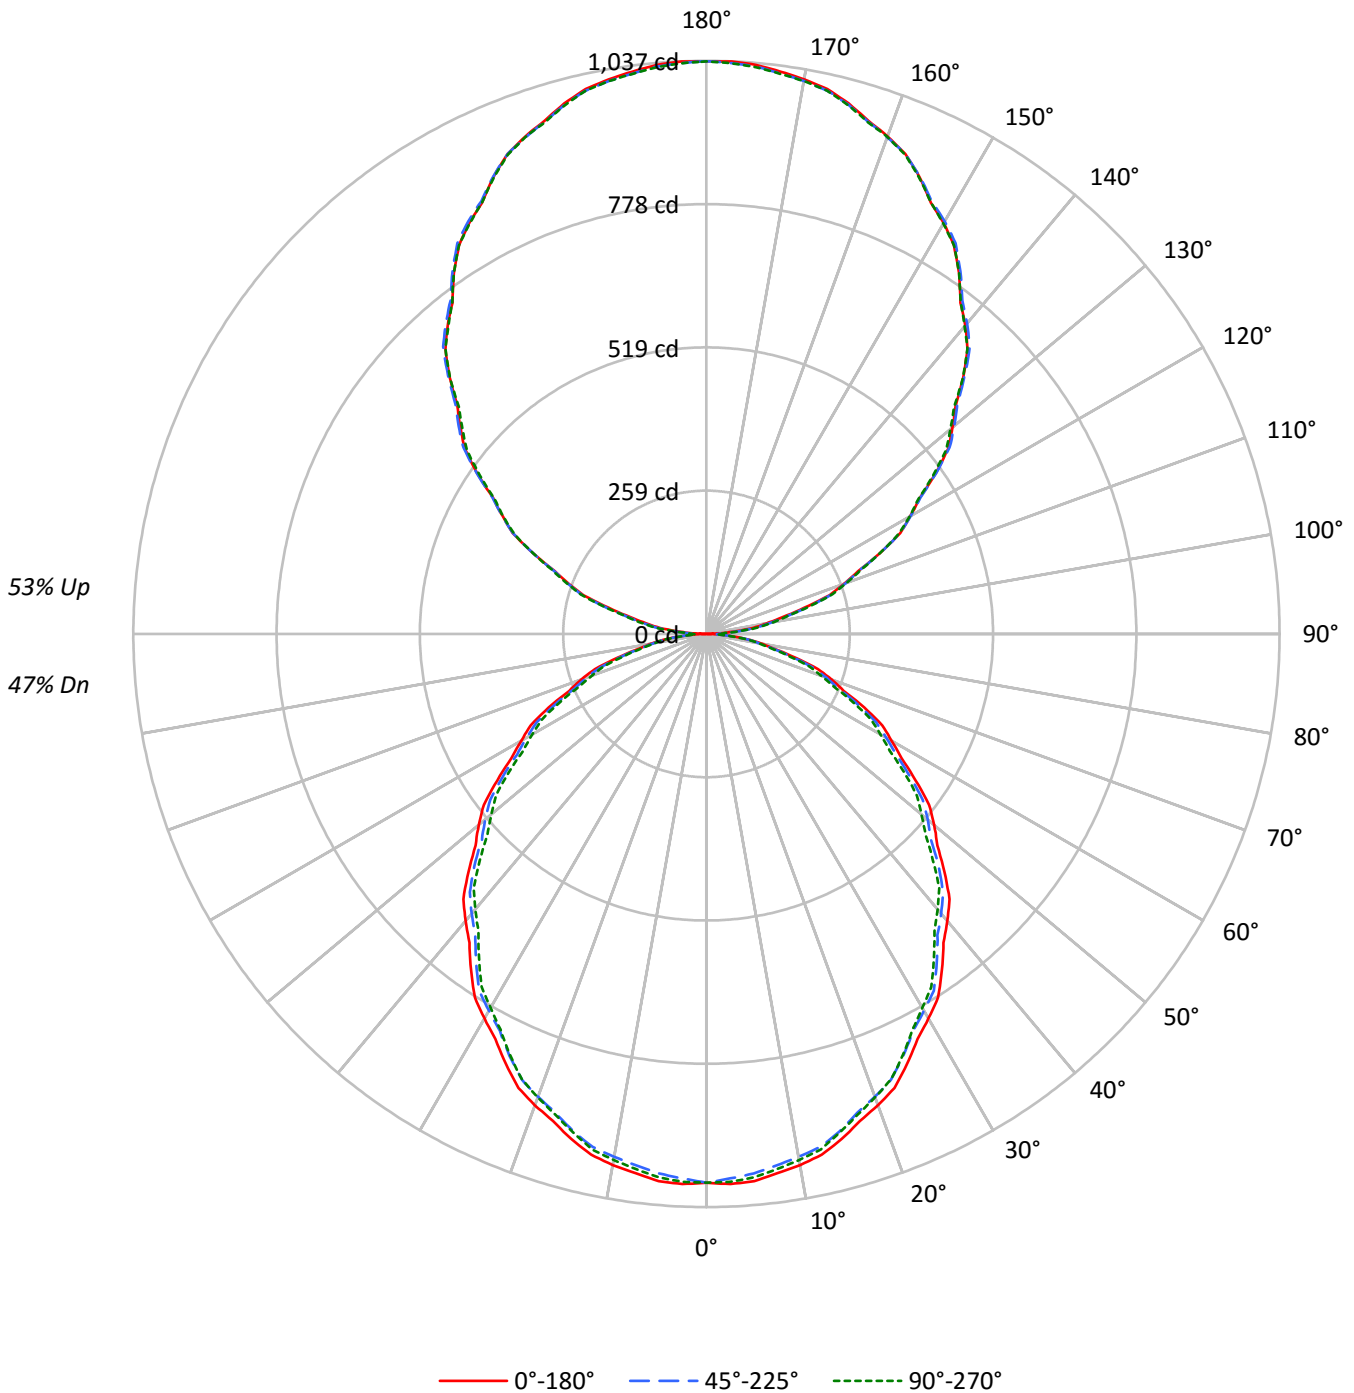



TEST NUMBER: P331989-930

CATALOG NUMBER: S123DIP-S775D1025U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	107	107	107	107	98	98	98	98	82	82	82		67	67	67		54	54	54	47
1	97	93	89	85	89	85	82	79	72	69	67		59	57	56		47	46	45	40
2	88	81	75	70	81	75	69	65	63	59	55		52	49	47		42	40	38	33
3	81	71	64	58	74	66	59	54	55	51	47		46	42	39		37	34	32	28
4	74	63	55	49	67	58	51	46	49	44	40		41	37	34		33	30	28	24
5	68	56	48	42	62	52	45	39	44	38	34		37	32	29		30	27	24	21
6	62	50	42	36	57	47	39	34	40	34	30		33	29	26		27	24	21	18
7	58	45	37	32	53	42	35	30	36	30	26		30	26	23		25	21	19	16
8	53	41	33	28	49	38	31	26	33	27	23		27	23	20		23	19	17	15
9	50	38	30	25	46	35	28	24	30	25	21		25	21	18		21	18	15	13
10	46	34	27	22	43	32	26	21	28	22	19		23	19	16		19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10687	10687	10687
5°	10737	10589	10662
10°	10665	10497	10563
15°	10541	10379	10398
20°	10394	10208	10219
25°	10200	10007	9987
30°	9984	9783	9708
35°	9759	9546	9423
40°	9524	9284	9140
45°	9266	9045	8824
50°	9008	8748	8505
55°	8668	8443	8188
60°	8325	8086	7830
65°	8023	7697	7457
70°	7578	7254	6930
75°	6924	6675	6392
80°	6248	5976	5926
85°	5483	5274	5064



TEST NUMBER: P331989-930

CATALOG NUMBER: S123DIP-S775D1025U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	93.5	1.7
10°-20°	264.1	4.8
20°-30°	390.1	7.1
30°-40°	455.7	8.4
40°-50°	458.1	8.4
50°-60°	402.4	7.4
60°-70°	299.8	5.5
70°-80°	170.8	3.1
80°-90°	52.1	1.0
90°-100°	67.5	1.2
100°-110°	202.0	3.7
110°-120°	343.6	6.3
120°-130°	451.9	8.3
130°-140°	508.0	9.3
140°-150°	499.3	9.1
150°-160°	420.4	7.7
160°-170°	279.8	5.1
170°-180°	98.0	1.8
0°-30°	747.7	13.7
0°-40°	1203.3	22.1
0°-60°	2063.8	37.8
0°-90°	2586.5	47.4
90°-120°	613.1	11.2
90°-150°	2072.3	38.0
90°-180°	2870.0	52.6
0°-180°	5457.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	993	993	993	993	993	
5°	994	989	980	988	987	94
15°	946	942	931	938	933	267
25°	859	853	843	843	841	395
35°	743	737	726	721	717	464
45°	609	605	594	584	580	470
55°	462	460	450	441	436	414
65°	315	310	302	296	293	311
75°	166	163	160	156	154	178
85°	44	43	43	41	41	49
90°	1	9	20	23	24	5
95°	48	54	60	63	64	54
105°	183	185	192	192	194	196
115°	346	348	347	347	347	342
125°	506	508	507	504	500	451
135°	657	661	661	658	656	506
145°	797	798	801	800	797	497
155°	912	912	913	916	911	420
165°	994	991	991	996	990	280
175°	1034	1030	1030	1035	1030	98
180°	1036	1036	1036	1036	1036	



TEST NUMBER: P331989-930

CATALOG NUMBER: S123DIP-S775D1025U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	996.2	995.6	995.1	994.4	993.8	992.7	991.0	989.4	987.7	986.0	987.5
5°	993.7	992.7	991.8	990.8	989.9	988.4	986.3	984.2	982.1	980.0	981.9
7.5°	984.0	983.0	982.0	981.1	980.2	978.6	976.4	974.3	972.1	970.0	971.7
10°	975.8	974.8	973.9	972.9	972.0	970.3	967.8	965.3	962.9	960.4	962.1
12.5°	964.8	964.0	963.3	962.5	961.6	960.1	957.8	955.4	953.2	950.8	952.1
15°	945.9	945.1	944.4	943.6	942.8	941.3	938.7	936.3	933.8	931.4	932.9
17.5°	923.8	922.8	921.9	920.9	919.9	918.2	915.7	913.2	910.8	908.3	909.4
20°	907.4	906.3	905.2	904.1	902.9	901.1	898.6	896.2	893.7	891.2	892.0
22.5°	889.0	887.9	886.7	885.6	884.4	882.6	880.2	877.8	875.3	872.8	873.4
25°	858.8	857.7	856.6	855.4	854.3	852.5	849.9	847.5	845.1	842.6	842.8
27.5°	826.6	825.4	824.3	823.2	822.1	820.3	817.6	815.0	812.3	809.6	809.8
30°	803.3	802.3	801.4	800.5	799.5	797.7	795.1	792.4	789.8	787.1	787.1
32.5°	780.1	778.9	777.6	776.3	775.1	773.5	771.4	769.3	767.3	765.2	764.2
35°	742.7	741.6	740.5	739.3	738.2	736.4	733.9	731.4	729.0	726.5	725.4
37.5°	704.4	703.0	701.6	700.1	698.7	696.8	694.2	691.7	689.2	686.7	685.3
40°	677.8	676.7	675.6	674.4	673.3	671.4	668.7	666.1	663.4	660.7	659.3
42.5°	651.2	649.9	648.6	647.3	646.0	644.1	641.4	638.7	636.1	633.4	631.9
45°	608.7	607.9	607.2	606.4	605.6	604.1	601.5	599.1	596.6	594.2	591.9
47.5°	566.5	565.4	564.3	563.2	562.1	560.4	558.1	555.8	553.4	551.1	548.9
50°	537.9	536.9	535.9	535.0	534.0	532.3	529.9	527.4	524.9	522.4	520.4
52.5°	507.8	507.1	506.5	505.8	505.2	503.5	500.9	498.3	495.7	493.1	491.3
55°	461.9	461.6	461.5	461.3	461.1	459.7	457.3	454.9	452.3	449.9	447.8
57.5°	418.2	417.5	416.9	416.2	415.6	414.3	412.3	410.3	408.3	406.3	404.5
60°	386.7	386.5	386.4	386.1	386.0	384.7	382.5	380.2	377.9	375.6	373.9
62.5°	358.7	358.2	357.8	357.3	356.8	355.4	353.1	350.8	348.5	346.3	344.5
65°	315.0	314.1	313.1	312.2	311.2	309.8	307.9	306.0	304.1	302.2	300.7
67.5°	268.7	267.9	267.1	266.2	265.4	264.2	262.9	261.4	259.9	258.5	257.1
70°	240.8	239.6	238.5	237.3	236.2	235.1	233.9	232.8	231.6	230.5	229.2
72.5°	211.4	210.5	209.7	208.9	208.1	207.0	205.7	204.4	203.1	201.8	200.6
75°	166.5	165.7	164.9	164.2	163.5	162.7	162.2	161.6	161.0	160.5	159.6
77.5°	126.7	126.3	125.9	125.5	125.0	124.5	123.8	123.1	122.5	121.7	121.1
80°	100.8	100.2	99.6	99.1	98.5	98.0	97.6	97.3	96.9	96.4	96.3
82.5°	75.5	75.3	75.3	75.1	75.0	74.9	74.8	74.8	74.7	74.6	74.3
85°	44.4	44.0	43.6	43.3	42.9	42.7	42.7	42.7	42.7	42.7	42.3
87.5°	17.9	17.9	17.7	17.6	17.5	17.7	17.9	18.3	18.6	18.9	18.9
90°	0.8	2.6	4.4	6.3	8.1	10.1	12.5	14.8	17.2	19.6	20.2
92.5°	19.7	21.0	22.2	23.4	24.6	25.9	27.2	28.5	29.9	31.2	31.8
95°	48.0	49.2	50.5	51.9	53.1	54.5	55.8	57.3	58.8	60.3	61.0
97.5°	85.3	86.3	87.2	88.1	89.0	90.0	91.1	92.1	93.2	94.2	95.1
100°	110.7	111.8	112.8	113.9	115.0	116.0	116.9	117.8	118.7	119.6	120.2
102.5°	140.0	140.6	141.3	141.9	142.6	143.5	144.7	145.9	147.1	148.3	148.8
105°	183.1	183.4	183.8	184.2	184.6	185.6	187.2	188.8	190.5	192.1	192.1
107.5°	233.3	233.5	233.7	233.9	234.2	234.6	235.2	235.9	236.5	237.2	237.7
110°	264.5	264.9	265.2	265.5	266.0	266.3	266.7	267.0	267.4	267.7	268.5



TEST NUMBER: P331989-930

CATALOG NUMBER: S123DIP-S775D1025U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	297.0	297.3	297.5	297.7	297.9	298.1	298.2	298.2	298.3	298.3	299.2
115°	345.8	346.4	347.0	347.5	348.1	348.1	347.8	347.4	347.1	346.7	346.9
117.5°	395.0	395.4	395.7	396.2	396.5	396.4	396.0	395.5	395.0	394.5	394.5
120°	425.7	426.7	427.8	428.9	430.0	430.1	429.2	428.3	427.4	426.5	426.2
122.5°	457.5	458.4	459.1	459.9	460.7	460.9	460.4	459.9	459.5	459.0	458.5
125°	506.2	506.8	507.3	507.8	508.3	508.5	508.1	507.8	507.4	507.0	506.3
127.5°	551.1	552.3	553.4	554.6	555.8	556.1	555.7	555.4	555.0	554.6	553.5
130°	581.1	582.5	584.0	585.4	586.9	587.3	586.8	586.2	585.7	585.1	584.4
132.5°	611.1	612.5	613.9	615.4	616.9	617.3	616.9	616.5	616.1	615.7	614.9
135°	656.8	657.9	658.9	660.0	661.1	661.5	661.4	661.2	661.0	660.8	660.1
137.5°	699.1	700.0	700.9	701.8	702.7	703.4	703.8	704.3	704.8	705.2	704.5
140°	728.4	729.3	730.2	731.1	732.0	732.5	732.7	732.9	733.1	733.3	733.1
142.5°	755.0	755.9	756.9	757.8	758.7	759.3	759.6	759.9	760.3	760.6	760.4
145°	796.7	797.1	797.4	797.9	798.2	798.7	799.2	799.7	800.3	800.8	800.6
147.5°	833.2	833.9	834.5	835.2	835.8	836.4	836.9	837.4	837.9	838.5	838.5
150°	858.6	859.0	859.3	859.7	860.1	860.4	860.8	861.1	861.5	861.9	861.9
152.5°	879.5	880.0	880.4	880.9	881.4	881.8	882.1	882.2	882.5	882.7	883.0
155°	912.3	912.3	912.3	912.3	912.3	912.4	912.6	912.7	913.0	913.1	913.9
157.5°	940.3	940.1	939.9	939.6	939.5	939.4	939.6	939.7	939.9	940.0	940.8
160°	957.9	957.5	957.2	956.8	956.4	956.3	956.3	956.3	956.3	956.3	957.2
162.5°	973.5	973.0	972.5	972.0	971.5	971.3	971.4	971.6	971.8	971.9	972.8
165°	993.7	993.1	992.6	992.1	991.6	991.2	991.2	991.2	991.2	991.2	992.3
167.5°	1009.8	1009.1	1008.4	1007.6	1006.9	1006.7	1006.8	1006.9	1007.1	1007.2	1008.4
170°	1019.0	1018.2	1017.5	1016.8	1016.0	1015.7	1015.7	1015.7	1015.7	1015.7	1016.9
172.5°	1026.1	1025.4	1024.7	1023.9	1023.2	1022.8	1022.8	1022.8	1022.8	1022.8	1023.9
175°	1033.6	1032.8	1032.1	1031.4	1030.7	1030.3	1030.3	1030.3	1030.3	1030.3	1031.4
177.5°	1036.7	1036.1	1035.5	1034.9	1034.4	1034.0	1034.0	1034.0	1034.0	1034.0	1034.9
180°	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0



TEST NUMBER: P331989-930

CATALOG NUMBER: S123DIP-S775D1025U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	989.0	990.6	992.1	992.8	992.6	992.5	992.3	992.1
5°	983.8	985.7	987.7	988.4	988.0	987.7	987.2	986.8
7.5°	973.4	975.1	976.8	977.5	977.3	977.1	976.8	976.6
10°	963.8	965.5	967.2	967.9	967.5	967.1	966.8	966.4
12.5°	953.3	954.6	955.9	956.3	956.1	955.9	955.7	955.4
15°	934.4	935.9	937.4	937.6	936.5	935.3	934.3	933.1
17.5°	910.4	911.5	912.6	912.9	912.5	912.1	911.7	911.3
20°	892.8	893.5	894.3	894.4	893.8	893.2	892.7	892.1
22.5°	874.0	874.7	875.2	875.1	874.5	873.8	873.0	872.3
25°	842.9	843.2	843.3	843.2	842.6	842.0	841.5	840.9
27.5°	809.9	810.1	810.2	809.9	809.3	808.5	807.8	807.1
30°	787.1	787.1	787.1	786.4	785.1	783.7	782.4	781.1
32.5°	763.1	762.1	761.0	760.1	759.4	758.6	757.9	757.2
35°	724.2	723.1	721.9	720.9	719.9	719.0	718.0	717.1
37.5°	684.0	682.6	681.3	680.3	679.6	679.1	678.4	677.8
40°	657.7	656.2	654.7	653.5	652.8	652.0	651.3	650.5
42.5°	630.4	628.8	627.4	626.2	625.5	624.7	623.9	623.2
45°	589.6	587.3	585.1	583.4	582.5	581.6	580.6	579.7
47.5°	546.7	544.5	542.2	540.6	539.8	539.0	538.2	537.3
50°	518.3	516.2	514.1	512.5	511.4	510.2	509.1	507.9
52.5°	489.5	487.7	485.9	484.5	483.4	482.2	481.1	480.0
55°	445.7	443.6	441.6	440.0	439.0	438.1	437.2	436.3
57.5°	402.6	400.8	398.9	397.5	396.3	395.3	394.1	393.1
60°	372.2	370.5	368.8	367.5	366.5	365.6	364.6	363.7
62.5°	342.8	341.1	339.4	338.3	337.6	337.0	336.3	335.7
65°	299.1	297.7	296.1	295.1	294.5	293.9	293.3	292.8
67.5°	255.8	254.5	253.2	252.1	251.4	250.5	249.7	248.9
70°	227.9	226.5	225.2	224.0	223.1	222.2	221.2	220.2
72.5°	199.4	198.3	197.1	196.2	195.8	195.3	194.8	194.3
75°	158.6	157.7	156.7	156.0	155.4	154.8	154.3	153.7
77.5°	120.4	119.8	119.1	118.9	118.9	118.9	118.9	118.9
80°	96.1	95.9	95.7	95.6	95.6	95.6	95.6	95.6
82.5°	73.9	73.6	73.2	73.0	72.9	72.7	72.6	72.4
85°	41.9	41.6	41.2	41.0	41.0	41.0	41.0	41.0
87.5°	18.9	18.9	18.9	18.9	19.0	19.1	19.2	19.2
90°	21.0	21.7	22.4	23.0	23.3	23.7	24.1	24.4
92.5°	32.4	33.0	33.6	33.8	33.5	33.3	33.1	32.9
95°	61.6	62.4	63.1	63.5	63.5	63.5	63.5	63.5
97.5°	95.9	96.8	97.6	97.9	97.9	97.8	97.8	97.7
100°	120.7	121.2	121.8	122.3	122.6	122.9	123.4	123.7
102.5°	149.4	149.9	150.4	150.7	150.6	150.5	150.5	150.4
105°	192.1	192.1	192.1	192.2	192.6	193.0	193.3	193.7
107.5°	238.3	238.9	239.5	239.6	239.5	239.2	239.0	238.8
110°	269.2	269.9	270.7	270.8	270.4	270.1	269.8	269.4



TEST NUMBER: P331989-930

CATALOG NUMBER: S123DIP-S775D1025U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	300.1	300.9	301.8	302.2	302.1	302.1	302.0	301.9
115°	347.1	347.2	347.4	347.4	347.2	347.1	346.9	346.7
117.5°	394.4	394.4	394.4	394.1	393.6	393.1	392.6	392.1
120°	426.1	425.9	425.7	425.4	425.1	424.8	424.4	424.0
122.5°	458.0	457.6	457.1	456.6	456.2	455.6	455.1	454.6
125°	505.6	504.8	504.1	503.4	502.7	502.0	501.2	500.5
127.5°	552.5	551.5	550.5	549.6	548.8	547.9	547.1	546.3
130°	583.7	582.9	582.3	581.2	580.0	578.7	577.5	576.2
132.5°	614.0	613.2	612.3	611.4	610.4	609.4	608.5	607.5
135°	659.4	658.7	657.9	657.4	657.0	656.6	656.3	656.0
137.5°	703.8	703.0	702.2	701.5	700.8	700.1	699.4	698.8
140°	732.9	732.7	732.5	731.8	730.6	729.3	728.1	726.8
142.5°	760.3	760.1	759.9	759.3	758.3	757.3	756.4	755.4
145°	800.5	800.3	800.1	799.6	798.9	798.2	797.4	796.7
147.5°	838.5	838.5	838.5	837.9	836.8	835.7	834.6	833.6
150°	861.9	861.9	861.9	861.3	860.2	859.2	858.0	857.0
152.5°	883.3	883.5	883.9	883.5	882.6	881.7	880.7	879.8
155°	914.6	915.3	916.0	915.7	914.5	913.2	911.9	910.7
157.5°	941.5	942.2	943.1	942.9	941.9	940.9	939.9	938.8
160°	958.1	959.0	959.9	959.9	959.3	958.5	957.8	957.1
162.5°	973.7	974.6	975.5	975.3	974.2	973.1	971.9	970.8
165°	993.4	994.5	995.6	995.5	994.3	993.0	991.7	990.4
167.5°	1009.4	1010.6	1011.7	1011.7	1010.6	1009.4	1008.4	1007.2
170°	1018.2	1019.5	1020.8	1020.8	1019.5	1018.2	1016.9	1015.7
172.5°	1025.1	1026.2	1027.3	1027.3	1026.0	1024.7	1023.4	1022.1
175°	1032.5	1033.6	1034.7	1034.5	1033.3	1032.0	1030.8	1029.5
177.5°	1035.8	1036.7	1037.5	1037.5	1036.5	1035.4	1034.5	1033.4
180°	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0	1036.0

(END OF REPORT)