

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331971-930

Luminaire Tested: **S123DIP-S775D585U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331971-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S775D585U930-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 585 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4225.4 lumens  
Efficiency: N/A  
Efficacy: 104.8 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 40.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331971-930

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

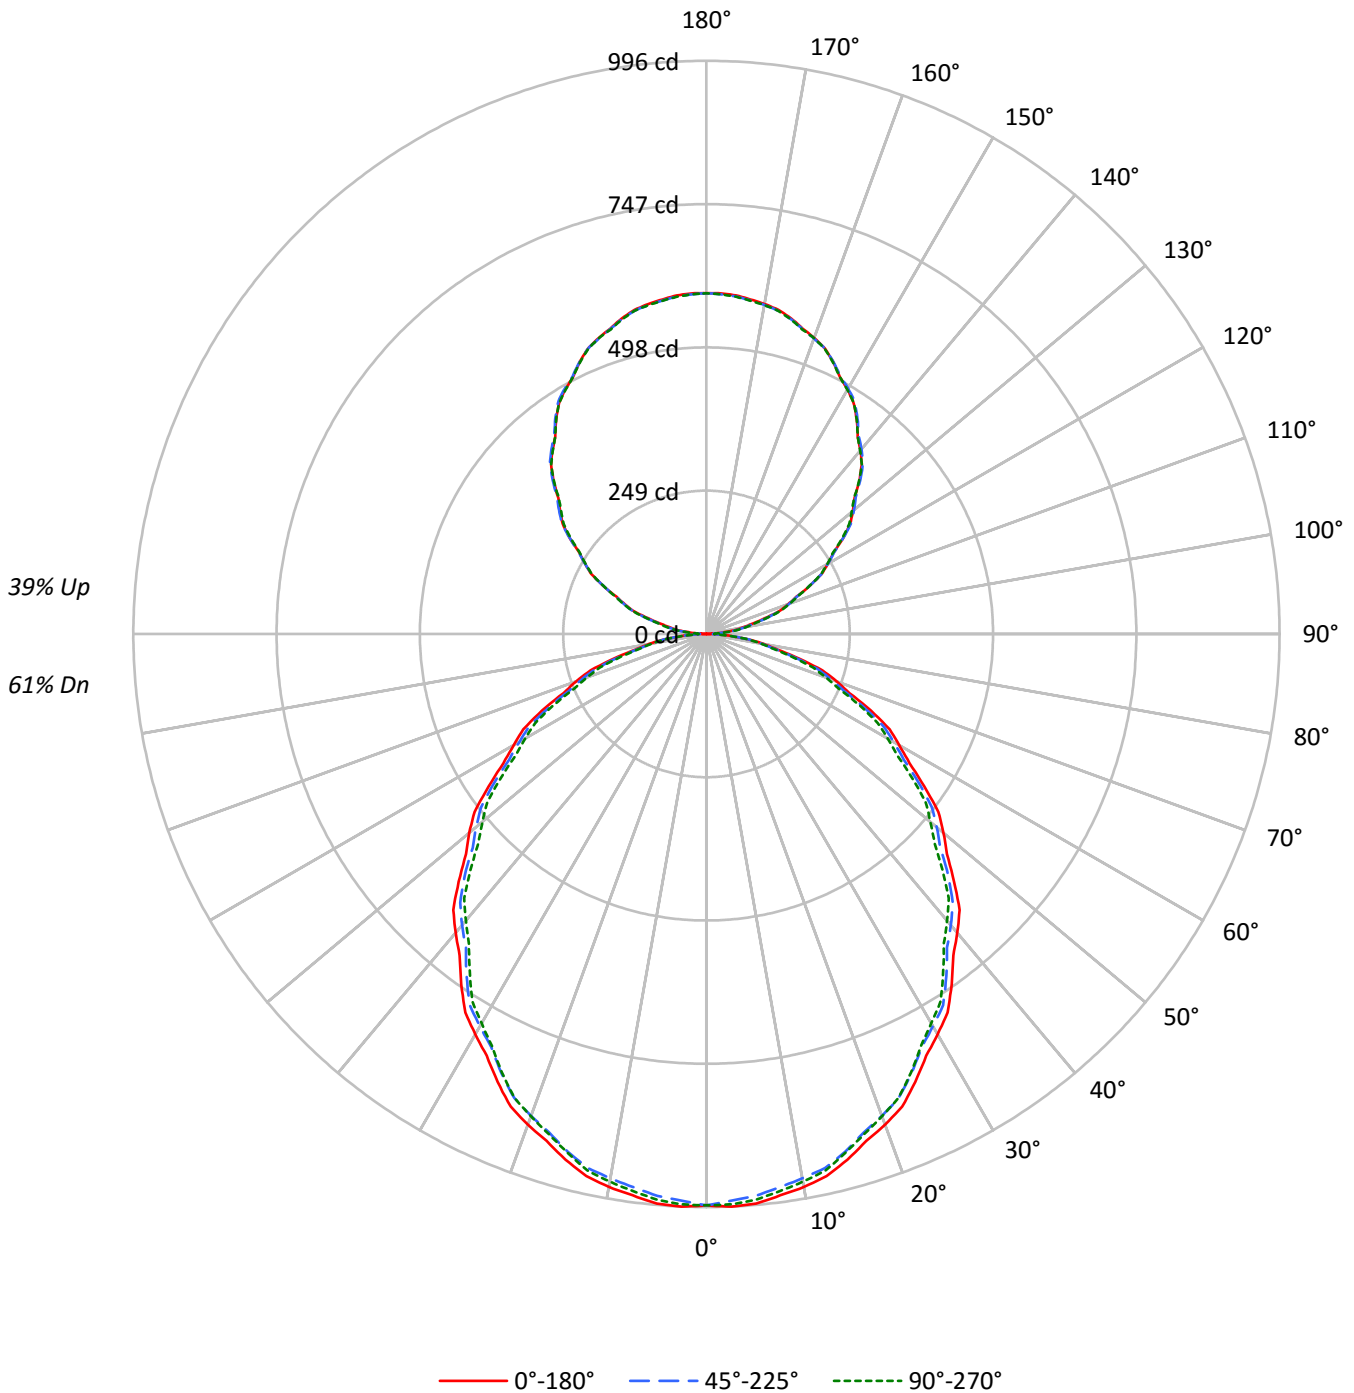



TEST NUMBER: P331971-930

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	77	77	77	66	66	66	61
1	100	96	92	88	94	90	86	83	78	76	73	68	66	64	59	57	56	51
2	91	84	77	72	85	78	73	68	69	64	61	60	57	54	52	49	47	43
3	83	73	66	60	78	69	62	57	61	55	51	53	49	45	46	43	40	36
4	76	65	57	51	71	61	54	48	54	48	44	47	43	39	41	37	34	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	64	52	44	38	60	49	42	36	44	37	33	38	33	30	33	29	26	24
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	27	24	21
8	55	43	35	29	52	41	33	28	36	30	26	32	27	23	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	22	19	24	20	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10687	10687	10687
5°	10737	10589	10662
10°	10665	10497	10563
15°	10541	10379	10398
20°	10394	10208	10219
25°	10200	10007	9987
30°	9984	9783	9708
35°	9759	9546	9423
40°	9524	9284	9140
45°	9266	9045	8824
50°	9008	8748	8505
55°	8668	8443	8188
60°	8325	8086	7830
65°	8023	7697	7457
70°	7578	7254	6930
75°	6924	6675	6392
80°	6248	5976	5926
85°	5483	5274	5064



TEST NUMBER: P331971-930

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	93.5	2.2
10°-20°	264.1	6.2
20°-30°	390.1	9.2
30°-40°	455.7	10.8
40°-50°	458.1	10.8
50°-60°	402.4	9.5
60°-70°	299.8	7.1
70°-80°	170.8	4.0
80°-90°	50.8	1.2
90°-100°	38.6	0.9
100°-110°	115.4	2.7
110°-120°	196.3	4.6
120°-130°	258.2	6.1
130°-140°	290.3	6.9
140°-150°	285.3	6.8
150°-160°	240.2	5.7
160°-170°	159.9	3.8
170°-180°	56.0	1.3
0°-30°	747.7	17.7
0°-40°	1203.3	28.5
0°-60°	2063.8	48.8
0°-90°	2585.2	61.2
90°-120°	350.3	8.3
90°-150°	1184.1	28.0
90°-180°	1640.0	38.8
0°-180°	4225.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	993	993	993	993	993	
5°	994	989	980	988	987	94
15°	946	942	931	938	933	267
25°	859	853	843	843	841	395
35°	743	737	726	721	717	464
45°	609	605	594	584	580	470
55°	462	460	450	441	436	414
65°	315	310	302	296	293	311
75°	166	163	160	156	154	178
85°	44	43	43	41	41	49
90°	0	5	11	13	14	4
95°	28	31	34	36	36	31
105°	105	106	110	110	111	112
115°	198	199	198	198	198	195
125°	289	291	290	288	286	258
135°	375	378	378	376	375	289
145°	455	456	458	457	455	284
155°	521	521	522	523	520	240
165°	568	566	566	569	566	160
175°	591	589	589	591	588	56
180°	592	592	592	592	592	



TEST NUMBER: P331971-930

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	996.2	995.6	995.1	994.4	993.8	992.7	991.0	989.4	987.7	986.0	987.5
5°	993.7	992.7	991.8	990.8	989.9	988.4	986.3	984.2	982.1	980.0	981.9
7.5°	984.0	983.0	982.0	981.1	980.2	978.6	976.4	974.3	972.1	970.0	971.7
10°	975.8	974.8	973.9	972.9	972.0	970.3	967.8	965.3	962.9	960.4	962.1
12.5°	964.8	964.0	963.3	962.5	961.6	960.1	957.8	955.4	953.2	950.8	952.1
15°	945.9	945.1	944.4	943.6	942.8	941.3	938.7	936.3	933.8	931.4	932.9
17.5°	923.8	922.8	921.9	920.9	919.9	918.2	915.7	913.2	910.8	908.3	909.4
20°	907.4	906.3	905.2	904.1	902.9	901.1	898.6	896.2	893.7	891.2	892.0
22.5°	889.0	887.9	886.7	885.6	884.4	882.6	880.2	877.8	875.3	872.8	873.4
25°	858.8	857.7	856.6	855.4	854.3	852.5	849.9	847.5	845.1	842.6	842.8
27.5°	826.6	825.4	824.3	823.2	822.1	820.3	817.6	815.0	812.3	809.6	809.8
30°	803.3	802.3	801.4	800.5	799.5	797.7	795.1	792.4	789.8	787.1	787.1
32.5°	780.1	778.9	777.6	776.3	775.1	773.5	771.4	769.3	767.3	765.2	764.2
35°	742.7	741.6	740.5	739.3	738.2	736.4	733.9	731.4	729.0	726.5	725.4
37.5°	704.4	703.0	701.6	700.1	698.7	696.8	694.2	691.7	689.2	686.7	685.3
40°	677.8	676.7	675.6	674.4	673.3	671.4	668.7	666.1	663.4	660.7	659.3
42.5°	651.2	649.9	648.6	647.3	646.0	644.1	641.4	638.7	636.1	633.4	631.9
45°	608.7	607.9	607.2	606.4	605.6	604.1	601.5	599.1	596.6	594.2	591.9
47.5°	566.5	565.4	564.3	563.2	562.1	560.4	558.1	555.8	553.4	551.1	548.9
50°	537.9	536.9	535.9	535.0	534.0	532.3	529.9	527.4	524.9	522.4	520.4
52.5°	507.8	507.1	506.5	505.8	505.2	503.5	500.9	498.3	495.7	493.1	491.3
55°	461.9	461.6	461.5	461.3	461.1	459.7	457.3	454.9	452.3	449.9	447.8
57.5°	418.2	417.5	416.9	416.2	415.6	414.3	412.3	410.3	408.3	406.3	404.5
60°	386.7	386.5	386.4	386.1	386.0	384.7	382.5	380.2	377.9	375.6	373.9
62.5°	358.7	358.2	357.8	357.3	356.8	355.4	353.1	350.8	348.5	346.3	344.5
65°	315.0	314.1	313.1	312.2	311.2	309.8	307.9	306.0	304.1	302.2	300.7
67.5°	268.7	267.9	267.1	266.2	265.4	264.2	262.9	261.4	259.9	258.5	257.1
70°	240.8	239.6	238.5	237.3	236.2	235.1	233.9	232.8	231.6	230.5	229.2
72.5°	211.4	210.5	209.7	208.9	208.1	207.0	205.7	204.4	203.1	201.8	200.6
75°	166.5	165.7	164.9	164.2	163.5	162.7	162.2	161.6	161.0	160.5	159.6
77.5°	126.7	126.3	125.9	125.5	125.0	124.5	123.8	123.1	122.5	121.7	121.1
80°	100.8	100.2	99.6	99.1	98.5	98.0	97.6	97.3	96.9	96.4	96.3
82.5°	75.5	75.3	75.3	75.1	75.0	74.9	74.8	74.8	74.7	74.6	74.3
85°	44.4	44.0	43.6	43.3	42.9	42.7	42.7	42.7	42.7	42.7	42.3
87.5°	17.9	17.6	17.4	17.1	16.9	16.8	16.9	17.0	17.1	17.3	17.2
90°	0.5	1.5	2.5	3.6	4.6	5.8	7.1	8.5	9.8	11.2	11.6
92.5°	11.3	12.0	12.6	13.4	14.1	14.8	15.6	16.3	17.1	17.9	18.2
95°	27.5	28.1	28.9	29.6	30.3	31.1	32.0	32.8	33.6	34.4	34.8
97.5°	48.8	49.2	49.8	50.4	50.9	51.4	52.0	52.7	53.2	53.9	54.3
100°	63.3	63.8	64.5	65.1	65.7	66.3	66.8	67.3	67.8	68.3	68.6
102.5°	80.0	80.4	80.7	81.1	81.4	82.0	82.7	83.4	84.1	84.7	85.0
105°	104.6	104.8	105.0	105.3	105.5	106.0	107.0	107.9	108.8	109.7	109.7
107.5°	133.3	133.4	133.5	133.6	133.8	134.0	134.4	134.8	135.2	135.5	135.8
110°	151.2	151.3	151.6	151.7	152.0	152.1	152.4	152.6	152.8	153.0	153.4



TEST NUMBER: P331971-930

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	169.7	169.8	170.0	170.1	170.2	170.3	170.4	170.4	170.5	170.5	171.0
115°	197.6	198.0	198.3	198.6	198.9	198.9	198.7	198.5	198.3	198.1	198.2
117.5°	225.8	225.9	226.2	226.3	226.6	226.5	226.2	226.0	225.8	225.4	225.4
120°	243.2	243.9	244.4	245.1	245.7	245.7	245.2	244.8	244.2	243.7	243.6
122.5°	261.5	261.9	262.4	262.8	263.3	263.3	263.1	262.9	262.5	262.3	262.0
125°	289.3	289.6	289.8	290.2	290.5	290.6	290.3	290.2	289.9	289.8	289.3
127.5°	315.0	315.6	316.3	316.9	317.6	317.8	317.6	317.3	317.1	316.9	316.3
130°	332.1	332.9	333.7	334.5	335.3	335.6	335.3	335.0	334.7	334.4	333.9
132.5°	349.1	350.0	350.8	351.6	352.5	352.8	352.5	352.3	352.0	351.9	351.3
135°	375.3	375.9	376.5	377.2	377.7	378.1	377.9	377.8	377.7	377.6	377.2
137.5°	399.5	400.0	400.5	401.0	401.5	401.9	402.2	402.4	402.8	403.0	402.6
140°	416.2	416.7	417.3	417.8	418.2	418.6	418.7	418.8	418.9	419.0	418.9
142.5°	431.5	431.9	432.5	433.0	433.5	433.9	434.1	434.2	434.5	434.6	434.6
145°	455.3	455.5	455.7	455.9	456.1	456.3	456.6	457.0	457.3	457.6	457.5
147.5°	476.1	476.5	476.9	477.2	477.6	477.9	478.3	478.5	478.8	479.1	479.1
150°	490.6	490.8	491.1	491.2	491.5	491.6	491.9	492.0	492.3	492.4	492.4
152.5°	502.6	502.8	503.1	503.4	503.7	503.9	504.0	504.1	504.3	504.3	504.5
155°	521.3	521.3	521.3	521.3	521.3	521.4	521.5	521.5	521.7	521.8	522.2
157.5°	537.3	537.2	537.0	537.0	536.8	536.8	536.9	537.0	537.0	537.1	537.5
160°	547.3	547.1	546.9	546.7	546.5	546.4	546.4	546.4	546.4	546.4	546.9
162.5°	556.3	556.0	555.7	555.4	555.1	555.1	555.1	555.2	555.3	555.4	555.9
165°	567.8	567.5	567.2	566.9	566.6	566.4	566.4	566.4	566.4	566.4	567.0
167.5°	577.0	576.6	576.2	575.8	575.4	575.2	575.3	575.4	575.4	575.5	576.2
170°	582.2	581.8	581.4	581.0	580.6	580.3	580.3	580.3	580.3	580.3	581.1
172.5°	586.3	585.9	585.5	585.1	584.7	584.5	584.5	584.5	584.5	584.5	585.1
175°	590.6	590.2	589.8	589.4	589.0	588.7	588.7	588.7	588.7	588.7	589.4
177.5°	592.4	592.1	591.7	591.3	591.0	590.8	590.8	590.8	590.8	590.8	591.3
180°	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0



TEST NUMBER: P331971-930

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	989.0	990.6	992.1	992.8	992.6	992.5	992.3	992.1
5°	983.8	985.7	987.7	988.4	988.0	987.7	987.2	986.8
7.5°	973.4	975.1	976.8	977.5	977.3	977.1	976.8	976.6
10°	963.8	965.5	967.2	967.9	967.5	967.1	966.8	966.4
12.5°	953.3	954.6	955.9	956.3	956.1	955.9	955.7	955.4
15°	934.4	935.9	937.4	937.6	936.5	935.3	934.3	933.1
17.5°	910.4	911.5	912.6	912.9	912.5	912.1	911.7	911.3
20°	892.8	893.5	894.3	894.4	893.8	893.2	892.7	892.1
22.5°	874.0	874.7	875.2	875.1	874.5	873.8	873.0	872.3
25°	842.9	843.2	843.3	843.2	842.6	842.0	841.5	840.9
27.5°	809.9	810.1	810.2	809.9	809.3	808.5	807.8	807.1
30°	787.1	787.1	787.1	786.4	785.1	783.7	782.4	781.1
32.5°	763.1	762.1	761.0	760.1	759.4	758.6	757.9	757.2
35°	724.2	723.1	721.9	720.9	719.9	719.0	718.0	717.1
37.5°	684.0	682.6	681.3	680.3	679.6	679.1	678.4	677.8
40°	657.7	656.2	654.7	653.5	652.8	652.0	651.3	650.5
42.5°	630.4	628.8	627.4	626.2	625.5	624.7	623.9	623.2
45°	589.6	587.3	585.1	583.4	582.5	581.6	580.6	579.7
47.5°	546.7	544.5	542.2	540.6	539.8	539.0	538.2	537.3
50°	518.3	516.2	514.1	512.5	511.4	510.2	509.1	507.9
52.5°	489.5	487.7	485.9	484.5	483.4	482.2	481.1	480.0
55°	445.7	443.6	441.6	440.0	439.0	438.1	437.2	436.3
57.5°	402.6	400.8	398.9	397.5	396.3	395.3	394.1	393.1
60°	372.2	370.5	368.8	367.5	366.5	365.6	364.6	363.7
62.5°	342.8	341.1	339.4	338.3	337.6	337.0	336.3	335.7
65°	299.1	297.7	296.1	295.1	294.5	293.9	293.3	292.8
67.5°	255.8	254.5	253.2	252.1	251.4	250.5	249.7	248.9
70°	227.9	226.5	225.2	224.0	223.1	222.2	221.2	220.2
72.5°	199.4	198.3	197.1	196.2	195.8	195.3	194.8	194.3
75°	158.6	157.7	156.7	156.0	155.4	154.8	154.3	153.7
77.5°	120.4	119.8	119.1	118.9	118.9	118.9	118.9	118.9
80°	96.1	95.9	95.7	95.6	95.6	95.6	95.6	95.6
82.5°	73.9	73.6	73.2	73.0	72.9	72.7	72.6	72.4
85°	41.9	41.6	41.2	41.0	41.0	41.0	41.0	41.0
87.5°	17.1	17.0	17.0	17.0	17.0	17.0	17.1	17.1
90°	12.0	12.4	12.8	13.1	13.4	13.5	13.8	13.9
92.5°	18.5	18.8	19.2	19.3	19.2	19.0	18.9	18.8
95°	35.2	35.6	36.0	36.3	36.3	36.3	36.3	36.3
97.5°	54.8	55.3	55.8	55.9	55.9	55.8	55.8	55.8
100°	69.0	69.3	69.6	69.9	70.0	70.3	70.4	70.7
102.5°	85.4	85.7	85.9	86.1	86.1	86.0	86.0	85.9
105°	109.7	109.7	109.7	109.8	110.1	110.2	110.5	110.7
107.5°	136.2	136.5	136.8	137.0	136.8	136.7	136.6	136.5
110°	153.8	154.3	154.7	154.7	154.6	154.3	154.2	153.9





TEST NUMBER: P331971-930

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	171.5	171.9	172.4	172.7	172.7	172.6	172.6	172.5
115°	198.3	198.4	198.5	198.5	198.4	198.3	198.2	198.1
117.5°	225.4	225.3	225.3	225.2	224.9	224.6	224.4	224.0
120°	243.4	243.4	243.3	243.1	242.9	242.7	242.5	242.3
122.5°	261.7	261.5	261.2	260.9	260.7	260.3	260.1	259.8
125°	288.9	288.5	288.0	287.6	287.2	286.8	286.4	286.0
127.5°	315.7	315.1	314.5	314.1	313.6	313.1	312.6	312.1
130°	333.5	333.1	332.7	332.2	331.4	330.7	330.0	329.2
132.5°	350.8	350.3	349.8	349.4	348.8	348.2	347.6	347.1
135°	376.7	376.3	375.9	375.6	375.4	375.2	375.0	374.8
137.5°	402.1	401.7	401.3	400.9	400.5	400.1	399.7	399.3
140°	418.8	418.7	418.6	418.2	417.4	416.7	416.0	415.3
142.5°	434.4	434.3	434.2	433.9	433.3	432.8	432.2	431.6
145°	457.4	457.3	457.2	456.9	456.5	456.1	455.7	455.3
147.5°	479.1	479.1	479.1	478.7	478.2	477.5	477.0	476.3
150°	492.4	492.4	492.4	492.2	491.5	490.9	490.3	489.7
152.5°	504.8	504.9	505.1	504.8	504.3	503.8	503.3	502.7
155°	522.6	523.0	523.4	523.3	522.5	521.8	521.1	520.4
157.5°	538.0	538.4	538.8	538.7	538.2	537.6	537.0	536.5
160°	547.5	548.0	548.5	548.5	548.1	547.7	547.3	546.9
162.5°	556.4	556.9	557.4	557.3	556.7	556.0	555.4	554.7
165°	567.7	568.3	568.9	568.8	568.1	567.4	566.7	566.0
167.5°	576.8	577.5	578.1	578.1	577.5	576.8	576.2	575.5
170°	581.8	582.5	583.3	583.3	582.5	581.8	581.1	580.3
172.5°	585.7	586.4	587.0	587.0	586.3	585.5	584.8	584.1
175°	590.0	590.6	591.3	591.2	590.4	589.7	589.0	588.2
177.5°	591.9	592.4	592.9	592.8	592.2	591.7	591.1	590.5
180°	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0

(END OF REPORT)