

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831682

Luminaire Tested: S123DIP-S775D585U930-4F0-1E-UDD-G1

Issue Date: 05/03/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P831682  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S775D585U930-4F0-1E-UDD-G1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 585 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4533.2 lumens  
Efficiency: N/A  
Efficacy: 110.3 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Direct  
  
Input Watts (W): 41.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831682  
CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

### Luminous Intensity Polar Plot

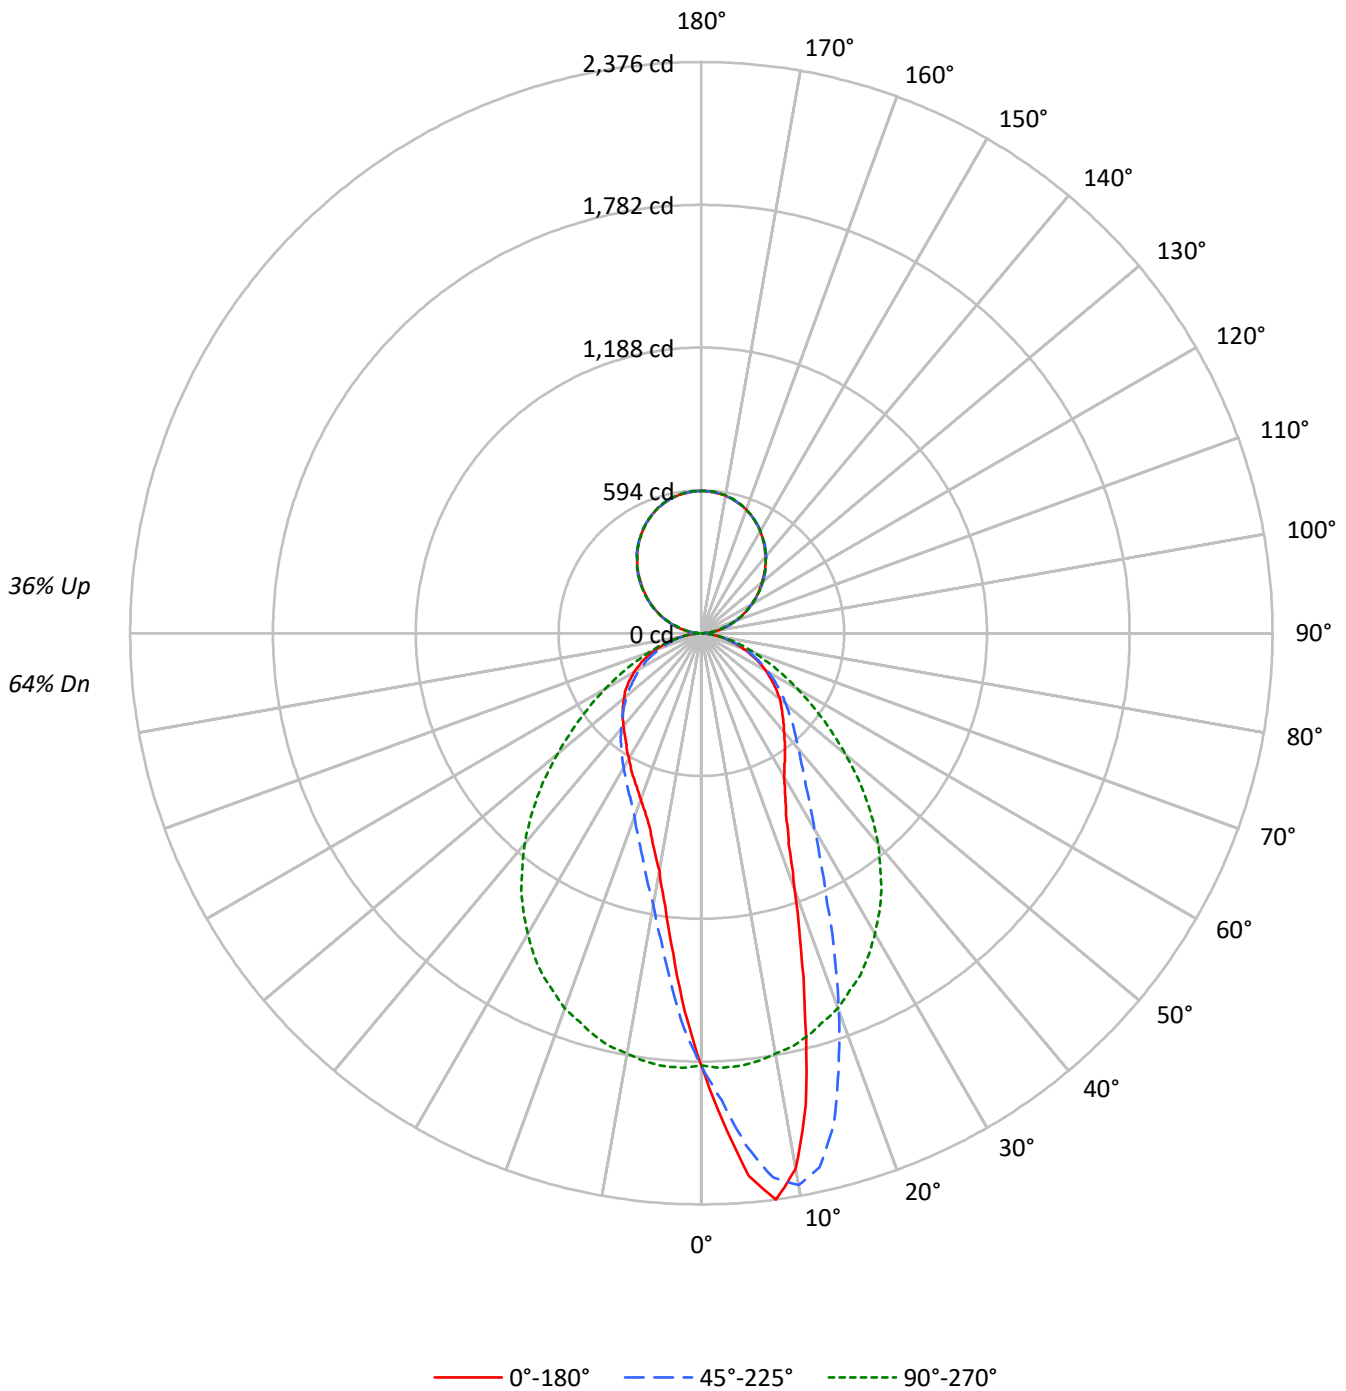



TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									20
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	69	69	69	64																												
1	102	97	94	90	95	92	88	85	81	78	76	71	69	68	62	61	59	55																												
2	93	86	80	75	87	81	76	71	72	68	64	63	60	58	55	53	51	47																												
3	85	76	69	63	80	72	66	61	64	59	55	57	53	50	50	47	44	41																												
4	79	68	60	55	74	64	58	52	58	52	48	51	47	43	45	42	39	36																												
5	73	61	53	48	68	58	51	46	52	46	42	46	42	38	41	38	35	32																												
6	67	56	48	42	63	53	46	40	47	42	37	42	38	34	38	34	31	29																												
7	63	51	43	37	59	48	41	36	43	38	33	39	34	31	35	31	28	26																												
8	58	46	39	34	55	44	37	32	40	34	30	36	31	28	32	28	26	23																												
9	55	43	35	30	52	41	34	29	37	31	27	33	29	25	30	26	23	21																												
10	51	39	32	28	48	38	31	27	34	29	25	31	27	23	28	24	22	20																												

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	19362	19362	19362	19362	19362
5°	24487	23112	19535	15743	14467
10°	24725	25473	19406	12550	10966
15°	18622	23650	19274	10628	9274
20°	12975	19137	19027	9294	8424
25°	9894	14718	18608	8551	7902
30°	8559	11692	17938	8025	7480
35°	7941	9872	17165	7645	7184
40°	7519	8855	16080	7284	7085
45°	7269	8196	14702	7001	7039
50°	7142	7675	13070	6745	7003
55°	6876	7293	11466	6501	7034
60°	6631	6882	9883	6271	6919
65°	6230	6495	8525	6026	6783
70°	5753	6002	7251	5621	6382
75°	5207	5382	6213	5224	5831
80°	4296	4711	4916	4556	4916
85°	3396	3816	3606	3866	3915

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 16786 cd/sqm



TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	170.1	3.8
10°-20°	423.1	9.3
20°-30°	500.9	11.1
30°-40°	503.7	11.1
40°-50°	462.1	10.2
50°-60°	381.4	8.4
60°-70°	269.8	6.0
70°-80°	144.0	3.2
80°-90°	37.8	0.8
90°-100°	38.1	0.8
100°-110°	115.3	2.5
110°-120°	196.4	4.3
120°-130°	258.3	5.7
130°-140°	290.4	6.4
140°-150°	285.5	6.3
150°-160°	240.3	5.3
160°-170°	160.0	3.5
170°-180°	56.0	1.2
0°-30°	1094.1	24.1
0°-40°	1597.8	35.2
0°-60°	2441.3	53.9
0°-90°	2892.9	63.8
90°-120°	349.8	7.7
90°-150°	1183.9	26.1
90°-180°	1640.0	36.2
0°-180°	4533.2	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1799	1799	1799	1799	1799	
5°	2266	2139	1808	1457	1339	216
15°	1671	2122	1730	954	832	462
25°	833	1239	1567	720	665	393
35°	604	751	1306	582	547	380
45°	478	538	966	460	462	370
55°	366	389	611	346	375	328
65°	245	255	335	237	266	243
75°	125	129	149	126	140	132
85°	28	31	29	31	32	31
90°	14	11	0	11	14	8
95°	36	34	27	34	36	36
105°	111	110	105	110	111	117
115°	198	198	198	198	198	196
125°	286	290	289	290	286	256
135°	375	378	375	378	375	288
145°	455	458	455	458	455	284
155°	520	522	521	522	520	240
165°	566	566	568	566	566	160
175°	588	589	591	589	588	56
180°	592	592	592	592	592	



TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8
2.5°	2027.6	2025.5	2023.4	2012.9	2002.5	1997.5	1992.5	1977.5	1962.4	1945.7	1929.1
5°	2266.3	2272.1	2278.0	2271.3	2264.6	2244.2	2223.7	2196.6	2169.5	2139.0	2108.5
7.5°	2376.5	2379.8	2383.1	2379.0	2374.8	2369.4	2363.9	2339.7	2315.5	2284.2	2252.9
10°	2262.1	2269.6	2277.1	2293.4	2309.7	2328.1	2346.4	2343.1	2339.7	2330.6	2321.4
12.5°	2010.9	2020.0	2029.2	2061.8	2094.3	2136.1	2177.8	2213.7	2249.6	2274.6	2299.7
15°	1671.1	1696.6	1722.0	1751.7	1781.3	1842.7	1904.0	1979.6	2055.1	2122.3	2189.5
17.5°	1376.5	1386.1	1395.7	1427.4	1459.1	1536.3	1613.5	1700.8	1788.0	1899.4	2010.9
20°	1132.7	1141.5	1150.3	1192.0	1233.7	1294.2	1354.8	1452.8	1550.9	1670.7	1790.5
22.5°	951.6	965.4	979.1	1002.5	1025.9	1083.9	1141.9	1229.1	1316.4	1448.7	1581.0
25°	833.1	843.1	853.1	867.3	881.5	927.8	974.1	1045.9	1117.7	1239.2	1360.6
27.5°	752.1	756.3	760.4	774.6	788.8	818.9	848.9	910.7	972.5	1075.5	1178.6
30°	688.6	691.6	694.5	707.0	719.5	740.0	760.4	805.1	849.8	940.7	1031.7
32.5°	644.4	646.5	648.6	658.2	667.8	682.4	697.0	729.6	762.1	837.2	912.4
35°	604.3	605.6	606.8	613.9	621.0	631.9	642.7	667.4	692.0	751.3	810.5
37.5°	569.3	571.0	572.6	576.8	581.0	590.6	600.2	619.8	639.4	684.9	730.4
40°	535.1	538.0	540.9	543.8	546.7	554.7	562.6	577.6	592.7	630.2	667.8
42.5°	505.8	508.8	511.7	512.9	514.2	518.8	523.4	537.1	550.9	578.9	606.8
45°	477.5	478.7	480.0	481.2	482.5	486.2	490.0	502.1	514.2	538.4	562.6
47.5°	451.6	451.6	451.6	452.4	453.3	456.6	459.9	468.7	477.5	496.2	515.0
50°	426.5	426.5	426.5	425.3	424.0	426.1	428.2	434.9	441.6	458.3	475.0
52.5°	396.5	396.5	396.5	396.9	397.3	397.3	397.3	403.2	409.0	424.0	439.1
55°	366.4	368.1	369.8	368.5	367.3	368.1	368.9	372.7	376.5	388.6	400.7
57.5°	336.4	337.2	338.1	337.6	337.2	337.6	338.1	341.4	344.7	353.9	363.1
60°	308.0	308.0	308.0	307.2	306.3	307.2	308.0	309.7	311.4	319.7	328.0
62.5°	276.3	276.7	277.1	277.5	278.0	277.1	276.3	278.4	280.5	286.7	293.0
65°	244.6	245.0	245.4	246.7	247.9	247.1	246.2	248.3	250.4	255.0	259.6
67.5°	216.2	215.4	214.5	214.9	215.4	216.6	217.9	218.3	218.7	223.7	228.7
70°	182.8	183.6	184.5	184.1	183.6	184.1	184.5	185.7	187.0	190.7	194.5
72.5°	152.8	153.2	153.6	153.6	153.6	154.4	155.3	156.5	157.8	159.9	161.9
75°	125.2	125.2	125.2	126.0	126.9	127.3	127.7	127.7	127.7	129.4	131.1
77.5°	95.2	97.2	99.3	98.9	98.5	99.3	100.2	101.4	102.7	103.5	104.3
80°	69.3	69.3	69.3	69.7	70.1	71.4	72.6	73.5	74.3	76.0	77.6
82.5°	44.2	44.7	45.1	46.3	47.6	48.4	49.2	50.5	51.8	51.8	51.8
85°	27.5	26.7	25.9	26.7	27.5	28.4	29.2	29.6	30.1	30.9	31.7
87.5°	13.4	13.4	13.4	13.4	13.4	13.8	14.2	14.2	14.2	14.2	14.2
90°	14.0	13.7	13.5	13.3	13.1	12.8	12.4	12.0	11.6	11.2	9.8
92.5°	20.0	20.2	20.4	20.6	20.8	20.8	20.5	20.2	19.8	19.5	18.9
95°	36.3	36.3	36.3	36.3	36.3	36.1	35.7	35.2	34.8	34.4	33.6
97.5°	52.1	52.2	52.3	52.4	52.5	52.3	51.8	51.3	50.7	50.2	49.6
100°	70.7	70.5	70.3	70.1	69.9	69.6	69.3	69.0	68.7	68.4	67.8
102.5°	89.8	89.9	90.0	90.1	90.2	90.1	89.8	89.4	89.1	88.8	88.1
105°	110.7	110.5	110.3	110.1	109.9	109.7	109.7	109.7	109.7	109.7	108.8
107.5°	132.1	132.2	132.3	132.4	132.5	132.4	132.1	131.8	131.5	131.1	130.7
110°	153.9	154.1	154.3	154.5	154.8	154.7	154.2	153.8	153.4	153.0	152.8



TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	177.2	177.2	177.2	177.2	177.2	176.9	176.4	175.9	175.4	174.9	174.9
115°	198.1	198.2	198.3	198.4	198.5	198.5	198.4	198.3	198.2	198.1	198.3
117.5°	219.5	219.8	220.1	220.4	220.7	220.9	220.9	220.9	220.9	220.9	221.1
120°	242.3	242.5	242.7	242.9	243.1	243.3	243.4	243.5	243.6	243.7	244.2
122.5°	264.1	264.5	264.8	265.1	265.4	265.7	266.0	266.3	266.6	266.9	267.1
125°	286.0	286.4	286.8	287.2	287.7	288.1	288.5	288.9	289.3	289.7	289.9
127.5°	307.9	308.3	308.7	309.1	309.5	310.0	310.6	311.3	311.9	312.5	312.7
130°	329.2	330.0	330.7	331.4	332.1	332.7	333.1	333.5	333.9	334.4	334.7
132.5°	351.6	352.1	352.6	353.1	353.6	354.2	354.7	355.2	355.7	356.2	356.4
135°	374.8	375.0	375.2	375.4	375.6	376.0	376.4	376.8	377.2	377.6	377.7
137.5°	395.3	395.6	395.9	396.2	396.5	396.9	397.5	398.0	398.5	399.0	398.7
140°	415.3	416.0	416.7	417.4	418.2	418.6	418.7	418.8	418.9	419.0	418.9
142.5°	435.7	436.3	436.8	437.3	437.8	438.1	438.2	438.3	438.4	438.5	438.3
145°	455.3	455.7	456.1	456.5	456.9	457.2	457.3	457.4	457.5	457.6	457.3
147.5°	472.9	473.6	474.2	474.8	475.4	475.7	475.7	475.7	475.7	475.7	475.4
150°	489.7	490.3	490.9	491.5	492.2	492.5	492.5	492.5	492.5	492.5	492.3
152.5°	506.0	506.5	507.0	507.5	508.0	508.2	508.0	507.8	507.6	507.4	507.3
155°	520.4	521.1	521.8	522.5	523.3	523.4	523.0	522.6	522.2	521.8	521.7
157.5°	533.9	534.5	535.1	535.7	536.3	536.4	536.0	535.6	535.2	534.8	534.7
160°	546.9	547.3	547.7	548.1	548.5	548.5	548.0	547.5	546.9	546.4	546.4
162.5°	556.7	557.4	558.1	558.8	559.5	559.6	559.1	558.6	558.1	557.6	557.5
165°	566.0	566.7	567.4	568.1	568.8	568.9	568.3	567.7	567.0	566.4	566.4
167.5°	574.3	574.9	575.6	576.2	576.8	576.8	576.2	575.6	574.9	574.3	574.2
170°	580.4	581.1	581.8	582.5	583.3	583.3	582.5	581.8	581.1	580.4	580.4
172.5°	585.0	585.7	586.5	587.2	587.9	588.0	587.3	586.7	586.1	585.5	585.5
175°	588.3	589.0	589.7	590.4	591.2	591.2	590.6	590.0	589.4	588.7	588.7
177.5°	590.1	590.9	591.6	592.3	593.0	593.1	592.5	591.8	591.2	590.6	590.6
180°	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0

TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8
2.5°	1924.0	1919.0	1900.7	1882.3	1861.4	1840.6	1825.1	1809.7	1786.7	1763.8	1745.0
5°	2085.1	2061.8	2023.0	1984.1	1931.6	1879.0	1843.5	1808.0	1760.4	1712.9	1674.9
7.5°	2212.9	2172.8	2118.5	2064.3	1995.4	1926.5	1861.4	1796.3	1723.7	1651.1	1591.8
10°	2294.2	2267.1	2204.5	2141.9	2049.7	1957.4	1866.4	1775.5	1682.0	1588.5	1510.0
12.5°	2302.2	2304.7	2247.1	2189.5	2085.1	1980.8	1870.2	1759.6	1641.9	1524.2	1432.8
15°	2232.5	2275.5	2243.7	2212.0	2106.8	2001.7	1865.6	1729.6	1593.9	1458.3	1352.7
17.5°	2103.1	2195.3	2199.9	2204.5	2099.3	1994.2	1843.5	1692.8	1539.2	1385.6	1274.6
20°	1926.5	2062.6	2109.4	2156.1	2070.5	1985.0	1823.0	1661.1	1489.2	1317.2	1200.8
22.5°	1746.2	1911.5	1997.1	2082.6	2019.2	1955.8	1783.4	1611.0	1429.5	1247.9	1129.8
25°	1540.9	1721.2	1852.7	1984.1	1945.3	1906.5	1736.6	1566.8	1373.5	1180.3	1059.7
27.5°	1361.9	1545.1	1703.7	1862.3	1853.9	1845.6	1677.0	1508.4	1310.5	1112.7	996.2
30°	1202.4	1373.1	1550.5	1727.9	1748.3	1768.8	1606.0	1443.2	1245.0	1046.7	934.5
32.5°	1061.4	1210.4	1400.7	1591.0	1631.1	1671.1	1524.2	1377.3	1181.1	985.0	876.9
35°	945.7	1081.0	1271.3	1461.6	1511.7	1561.8	1434.1	1306.3	1115.2	924.0	821.0
37.5°	843.5	956.6	1142.3	1328.1	1389.4	1450.8	1336.4	1222.0	1043.0	863.9	769.2
40°	758.8	849.8	1020.5	1191.2	1262.1	1333.1	1238.7	1144.4	974.5	804.7	717.4
42.5°	687.8	768.8	923.6	1078.5	1146.5	1214.5	1134.8	1055.1	904.0	752.9	673.2
45°	627.3	692.0	832.6	973.3	1038.0	1102.7	1034.2	965.8	832.6	699.5	625.2
47.5°	570.5	626.0	746.2	866.4	924.0	981.6	928.2	874.8	762.1	649.4	582.2
50°	519.6	564.3	669.5	774.6	824.7	874.8	827.6	780.5	687.8	595.2	536.7
52.5°	475.4	511.7	599.8	687.8	730.8	773.8	733.3	692.8	619.4	545.9	495.0
55°	431.6	462.4	538.8	615.2	644.4	673.6	642.3	611.0	551.8	492.5	449.5
57.5°	390.7	418.2	480.8	543.4	565.9	588.5	560.1	531.7	487.1	442.4	406.5
60°	350.6	373.1	425.3	477.5	491.2	505.0	482.1	459.1	427.8	396.5	364.4
62.5°	313.4	333.9	372.7	411.5	420.7	429.9	412.4	394.8	371.0	347.2	322.2
65°	275.0	290.5	322.2	353.9	359.8	365.6	350.2	334.7	316.8	298.8	280.5
67.5°	239.6	250.4	276.3	302.2	302.6	303.0	290.5	278.0	267.9	257.9	243.3
70°	204.9	215.4	232.5	249.6	250.0	250.4	240.4	230.4	222.9	215.4	204.5
72.5°	169.4	177.0	189.9	202.8	202.0	201.2	194.9	188.6	182.8	177.0	169.0
75°	137.3	143.6	152.3	161.1	158.6	156.1	152.8	149.4	144.4	139.4	134.4
77.5°	108.1	111.9	116.9	121.9	120.2	118.5	115.6	112.7	108.9	105.2	103.1
80°	79.3	81.0	84.3	87.6	86.8	86.0	82.6	79.3	78.5	77.6	74.7
82.5°	53.8	55.9	56.8	57.6	57.2	56.8	54.3	51.8	50.9	50.1	49.7
85°	32.1	32.6	33.0	33.4	32.1	30.9	30.1	29.2	29.2	29.2	28.8
87.5°	14.6	15.0	15.0	15.0	14.6	14.2	13.4	12.5	12.9	13.4	13.4
90°	8.5	7.1	5.8	4.6	3.6	2.5	1.5	0.5	1.5	2.5	3.6
92.5°	18.3	17.7	17.1	16.4	15.8	15.2	14.6	14.0	14.6	15.2	15.8
95°	32.8	31.9	31.1	30.3	29.6	28.9	28.2	27.4	28.2	28.9	29.6
97.5°	49.0	48.4	47.7	47.2	46.7	46.1	45.6	45.1	45.6	46.1	46.7
100°	67.3	66.8	66.3	65.7	65.1	64.5	63.9	63.2	63.9	64.5	65.1
102.5°	87.4	86.7	85.9	85.4	85.1	84.8	84.5	84.2	84.5	84.8	85.1
105°	107.9	107.0	106.0	105.5	105.3	105.0	104.8	104.6	104.8	105.0	105.3
107.5°	130.3	129.9	129.5	129.2	129.1	129.0	128.9	128.8	128.9	129.0	129.1
110°	152.6	152.4	152.2	152.0	151.8	151.6	151.3	151.1	151.3	151.6	151.8





TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	174.9	174.9	174.9	174.8	174.7	174.6	174.5	174.4	174.5	174.6	174.7
115°	198.5	198.7	198.9	198.9	198.6	198.3	198.0	197.6	198.0	198.3	198.6
117.5°	221.3	221.5	221.7	221.8	221.7	221.6	221.5	221.4	221.5	221.6	221.7
120°	244.7	245.2	245.7	245.7	245.1	244.5	243.8	243.2	243.8	244.5	245.1
122.5°	267.3	267.6	267.8	267.7	267.2	266.8	266.4	266.0	266.4	266.8	267.2
125°	290.1	290.3	290.5	290.5	290.2	289.9	289.6	289.3	289.6	289.9	290.2
127.5°	312.9	313.1	313.3	313.1	312.5	311.9	311.3	310.6	311.3	311.9	312.5
130°	335.0	335.3	335.6	335.3	334.5	333.7	332.9	332.0	332.9	333.7	334.5
132.5°	356.6	356.8	357.0	356.7	355.9	355.1	354.3	353.4	354.3	355.1	355.9
135°	377.8	377.9	378.0	377.8	377.1	376.5	375.9	375.3	375.9	376.5	377.1
137.5°	398.4	398.1	397.8	397.3	396.8	396.3	395.8	395.3	395.8	396.3	396.8
140°	418.8	418.7	418.6	418.3	417.8	417.2	416.7	416.2	416.7	417.2	417.8
142.5°	438.1	437.9	437.7	437.3	436.8	436.3	435.8	435.3	435.8	436.3	436.8
145°	457.0	456.7	456.4	456.1	455.9	455.7	455.5	455.3	455.5	455.7	455.9
147.5°	475.1	474.8	474.5	474.1	473.7	473.3	472.9	472.5	472.9	473.3	473.7
150°	492.1	491.9	491.6	491.4	491.2	491.0	490.8	490.6	490.8	491.0	491.2
152.5°	507.2	507.0	506.9	506.7	506.4	506.1	505.8	505.5	505.8	506.1	506.4
155°	521.6	521.5	521.4	521.3	521.3	521.3	521.3	521.3	521.3	521.3	521.3
157.5°	534.6	534.5	534.4	534.4	534.5	534.6	534.7	534.8	534.7	534.6	534.5
160°	546.4	546.4	546.4	546.5	546.7	546.9	547.1	547.4	547.1	546.9	546.7
162.5°	557.4	557.3	557.2	557.3	557.6	557.9	558.2	558.5	558.2	557.9	557.6
165°	566.4	566.4	566.4	566.6	566.9	567.2	567.5	567.8	567.5	567.2	566.9
167.5°	574.1	574.0	573.9	574.1	574.5	574.9	575.3	575.7	575.3	574.9	574.5
170°	580.4	580.4	580.4	580.6	581.0	581.4	581.8	582.2	581.8	581.4	581.0
172.5°	585.5	585.5	585.5	585.7	586.1	586.5	586.9	587.3	586.9	586.5	586.1
175°	588.7	588.7	588.7	588.9	589.4	589.8	590.2	590.6	590.2	589.8	589.4
177.5°	590.6	590.6	590.6	590.8	591.2	591.6	592.0	592.5	592.0	591.6	591.2
180°	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0



TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8	1798.8
2.5°	1726.2	1709.9	1693.7	1681.1	1668.6	1647.3	1626.0	1621.0	1616.0	1608.9	1601.8
5°	1636.9	1596.8	1556.8	1520.9	1485.0	1457.0	1429.1	1410.7	1392.3	1379.0	1365.6
7.5°	1532.6	1472.5	1412.4	1369.8	1327.2	1286.7	1246.2	1233.3	1220.4	1202.8	1185.3
10°	1431.6	1365.2	1298.8	1243.3	1187.8	1148.2	1108.5	1092.7	1076.8	1054.7	1032.6
12.5°	1341.4	1268.8	1196.2	1140.2	1084.3	1045.9	1007.5	984.6	961.6	949.1	936.6
15°	1247.1	1169.5	1091.8	1040.1	988.3	953.7	919.0	899.0	879.0	866.9	854.8
17.5°	1163.6	1086.8	1010.0	960.4	910.7	879.0	847.2	829.7	812.2	803.0	793.8
20°	1084.3	1009.2	934.1	885.6	837.2	811.4	785.5	774.2	762.9	755.4	747.9
22.5°	1011.7	937.8	863.9	822.6	781.3	760.4	739.6	731.6	723.7	717.4	711.2
25°	939.1	873.1	807.2	772.1	737.1	720.0	702.8	694.9	687.0	680.7	674.5
27.5°	879.8	816.8	753.8	723.7	693.7	680.3	666.9	660.7	654.4	648.6	642.7
30°	822.2	765.9	709.5	683.6	657.8	645.7	633.6	627.3	621.0	615.6	610.2
32.5°	768.8	720.4	672.0	648.2	624.4	614.4	604.3	596.8	589.3	585.1	581.0
35°	717.9	674.5	631.1	611.4	591.8	581.8	571.8	565.5	559.3	555.9	552.6
37.5°	674.5	635.6	596.8	578.0	559.3	549.7	540.1	534.6	529.2	528.0	526.7
40°	630.2	596.8	563.4	545.1	526.7	518.4	510.0	506.7	503.3	502.5	501.7
42.5°	593.5	560.9	528.4	511.7	495.0	487.9	480.8	479.1	477.5	478.7	480.0
45°	550.9	523.8	496.7	481.2	465.8	459.9	454.1	452.8	451.6	454.1	456.6
47.5°	515.0	490.0	464.9	450.3	435.7	431.6	427.4	427.0	426.5	429.9	433.2
50°	478.3	454.1	429.9	418.2	406.5	402.8	399.0	400.3	401.5	406.9	412.4
52.5°	444.1	421.5	399.0	388.1	377.3	374.8	372.3	375.2	378.1	384.0	389.8
55°	406.5	386.1	365.6	357.3	348.9	346.4	343.9	349.8	355.6	361.0	366.4
57.5°	370.6	352.7	334.7	327.2	319.7	319.3	318.9	324.3	329.7	335.6	341.4
60°	332.2	317.2	302.2	296.3	290.5	291.3	292.2	298.4	304.7	309.3	313.9
62.5°	297.2	284.6	272.1	266.7	261.3	263.4	265.4	271.7	278.0	283.4	288.8
65°	262.1	251.7	241.2	237.5	233.7	236.6	239.6	245.0	250.4	254.2	257.9
67.5°	228.7	220.0	211.2	208.3	205.3	208.3	211.2	216.6	222.0	225.8	229.5
70°	193.7	186.6	179.5	177.4	175.3	178.6	182.0	186.6	191.2	194.9	198.7
72.5°	161.1	155.7	150.3	149.8	149.4	152.3	155.3	159.9	164.4	166.9	169.4
75°	129.4	126.5	123.5	123.1	122.7	125.6	128.5	131.1	133.6	135.6	137.7
77.5°	101.0	98.5	96.0	96.4	96.8	98.9	101.0	103.5	106.0	107.3	108.5
80°	71.8	71.0	70.1	71.0	71.8	73.5	75.1	76.8	78.5	79.3	80.1
82.5°	49.2	48.4	47.6	48.8	50.1	51.3	52.6	53.8	55.1	55.5	55.9
85°	28.4	29.6	30.9	30.9	30.9	31.3	31.7	32.1	32.6	32.1	31.7
87.5°	13.4	13.8	14.2	14.2	14.2	14.6	15.0	15.0	15.0	14.6	14.2
90°	4.6	5.8	7.1	8.5	9.8	11.2	11.6	12.0	12.4	12.8	13.1
92.5°	16.4	17.1	17.7	18.3	18.9	19.5	19.8	20.2	20.5	20.8	20.8
95°	30.3	31.1	31.9	32.8	33.6	34.4	34.8	35.2	35.7	36.1	36.3
97.5°	47.2	47.7	48.4	49.0	49.6	50.2	50.7	51.3	51.8	52.3	52.5
100°	65.7	66.3	66.8	67.3	67.8	68.4	68.7	69.0	69.3	69.6	69.9
102.5°	85.4	85.9	86.7	87.4	88.1	88.8	89.1	89.4	89.8	90.1	90.2
105°	105.5	106.0	107.0	107.9	108.8	109.7	109.7	109.7	109.7	109.7	109.9
107.5°	129.2	129.5	129.9	130.3	130.7	131.1	131.5	131.8	132.1	132.4	132.5
110°	152.0	152.2	152.4	152.6	152.8	153.0	153.4	153.8	154.2	154.7	154.8



TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	174.8	174.9	174.9	174.9	174.9	174.9	175.4	175.9	176.4	176.9	177.2
115°	198.9	198.9	198.7	198.5	198.3	198.1	198.2	198.3	198.4	198.5	198.5
117.5°	221.8	221.7	221.5	221.3	221.1	220.9	220.9	220.9	220.9	220.9	220.7
120°	245.7	245.7	245.2	244.7	244.2	243.7	243.6	243.5	243.4	243.3	243.1
122.5°	267.7	267.8	267.6	267.3	267.1	266.9	266.6	266.3	266.0	265.7	265.4
125°	290.5	290.5	290.3	290.1	289.9	289.7	289.3	288.9	288.5	288.1	287.7
127.5°	313.1	313.3	313.1	312.9	312.7	312.5	311.9	311.3	310.6	310.0	309.5
130°	335.3	335.6	335.3	335.0	334.7	334.4	333.9	333.5	333.1	332.7	332.1
132.5°	356.7	357.0	356.8	356.6	356.4	356.2	355.7	355.2	354.7	354.2	353.6
135°	377.8	378.0	377.9	377.8	377.7	377.6	377.2	376.8	376.4	376.0	375.6
137.5°	397.3	397.8	398.1	398.4	398.7	399.0	398.5	398.0	397.5	396.9	396.5
140°	418.3	418.6	418.7	418.8	418.9	419.0	418.9	418.8	418.7	418.6	418.2
142.5°	437.3	437.7	437.9	438.1	438.3	438.5	438.4	438.3	438.2	438.1	437.8
145°	456.1	456.4	456.7	457.0	457.3	457.6	457.5	457.4	457.3	457.2	456.9
147.5°	474.1	474.5	474.8	475.1	475.4	475.7	475.7	475.7	475.7	475.7	475.4
150°	491.4	491.6	491.9	492.1	492.3	492.5	492.5	492.5	492.5	492.5	492.2
152.5°	506.7	506.9	507.0	507.2	507.3	507.4	507.6	507.8	508.0	508.2	508.0
155°	521.3	521.4	521.5	521.6	521.7	521.8	522.2	522.6	523.0	523.4	523.3
157.5°	534.4	534.4	534.5	534.6	534.7	534.8	535.2	535.6	536.0	536.4	536.3
160°	546.5	546.4	546.4	546.4	546.4	546.4	546.9	547.5	548.0	548.5	548.5
162.5°	557.3	557.2	557.3	557.4	557.5	557.6	558.1	558.6	559.1	559.6	559.5
165°	566.6	566.4	566.4	566.4	566.4	566.4	567.0	567.7	568.3	568.9	568.8
167.5°	574.1	573.9	574.0	574.1	574.2	574.3	574.9	575.6	576.2	576.8	576.8
170°	580.6	580.4	580.4	580.4	580.4	580.4	581.1	581.8	582.5	583.3	583.3
172.5°	585.7	585.5	585.5	585.5	585.5	585.5	586.1	586.7	587.3	588.0	587.9
175°	588.9	588.7	588.7	588.7	588.7	588.7	589.4	590.0	590.6	591.2	591.2
177.5°	590.8	590.6	590.6	590.6	590.6	590.6	591.2	591.8	592.5	593.1	593.0
180°	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0	592.0



TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	1798.8	1798.8	1798.8	1798.8
2.5°	1598.9	1596.0	1584.3	1572.6
5°	1355.6	1345.6	1342.2	1338.9
7.5°	1184.5	1183.6	1166.1	1148.6
10°	1033.8	1035.1	1019.2	1003.3
12.5°	926.1	915.7	914.4	913.2
15°	845.2	835.6	833.9	832.2
17.5°	788.0	782.1	780.5	778.8
20°	744.6	741.2	738.3	735.4
22.5°	707.0	702.8	700.3	697.8
25°	670.7	666.9	666.1	665.3
27.5°	638.1	633.6	633.6	633.6
30°	607.3	604.3	603.1	601.8
32.5°	578.5	576.0	576.0	576.0
35°	551.3	550.1	548.4	546.7
37.5°	526.7	526.7	525.9	525.0
40°	502.9	504.2	504.2	504.2
42.5°	481.2	482.5	482.5	482.5
45°	458.7	460.8	461.6	462.4
47.5°	436.6	439.9	440.7	441.6
50°	414.9	417.4	417.8	418.2
52.5°	392.7	395.7	397.7	399.8
55°	369.4	372.3	373.5	374.8
57.5°	344.3	347.2	347.7	348.1
60°	316.8	319.7	320.5	321.4
62.5°	290.5	292.2	293.0	293.8
65°	260.4	262.9	264.6	266.3
67.5°	231.6	233.7	233.7	233.7
70°	199.5	200.3	201.6	202.8
72.5°	169.9	170.3	170.3	170.3
75°	138.6	139.4	139.8	140.2
77.5°	108.9	109.3	109.3	109.3
80°	79.7	79.3	79.3	79.3
82.5°	54.7	53.4	53.4	53.4
85°	31.3	30.9	31.3	31.7
87.5°	14.2	14.2	14.2	14.2
90°	13.3	13.5	13.7	14.0
92.5°	20.6	20.4	20.2	20.0
95°	36.3	36.3	36.3	36.3
97.5°	52.4	52.3	52.2	52.1
100°	70.1	70.3	70.5	70.7
102.5°	90.1	90.0	89.9	89.8
105°	110.1	110.3	110.5	110.7
107.5°	132.4	132.3	132.2	132.1
110°	154.5	154.3	154.1	153.9



TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	177.2	177.2	177.2	177.2
115°	198.4	198.3	198.2	198.1
117.5°	220.4	220.1	219.8	219.5
120°	242.9	242.7	242.5	242.3
122.5°	265.1	264.8	264.5	264.1
125°	287.2	286.8	286.4	286.0
127.5°	309.1	308.7	308.3	307.9
130°	331.4	330.7	330.0	329.2
132.5°	353.1	352.6	352.1	351.6
135°	375.4	375.2	375.0	374.8
137.5°	396.2	395.9	395.6	395.3
140°	417.4	416.7	416.0	415.3
142.5°	437.3	436.8	436.3	435.7
145°	456.5	456.1	455.7	455.3
147.5°	474.8	474.2	473.6	472.9
150°	491.5	490.9	490.3	489.7
152.5°	507.5	507.0	506.5	506.0
155°	522.5	521.8	521.1	520.4
157.5°	535.7	535.1	534.5	533.9
160°	548.1	547.7	547.3	546.9
162.5°	558.8	558.1	557.4	556.7
165°	568.1	567.4	566.7	566.0
167.5°	576.2	575.6	574.9	574.3
170°	582.5	581.8	581.1	580.4
172.5°	587.2	586.5	585.7	585.0
175°	590.4	589.7	589.0	588.3
177.5°	592.3	591.6	590.9	590.1
180°	592.0	592.0	592.0	592.0



TEST NUMBER: P831682

CATALOG NUMBER: S123DIP-S775D585U930-4F0-1E-UDD-G1

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.07	16.02	15.90	16.87	17.93	17.30	18.25	18.14	19.11	20.17
	3H	16.72	17.57	17.57	18.43	19.53	18.73	19.59	19.58	20.45	21.54
	4H	17.30	18.11	18.17	18.97	20.08	19.19	19.99	20.05	20.86	21.96
	6H	17.68	18.42	18.55	19.29	20.41	19.47	20.21	20.35	21.09	22.20
	8H	17.78	18.48	18.66	19.37	20.49	19.53	20.24	20.42	21.13	22.25
	12H	17.82	18.49	18.71	19.38	20.52	19.56	20.23	20.45	21.11	22.25
4H	2H	15.65	16.46	16.52	17.32	18.43	17.48	18.28	18.35	19.15	20.25
	3H	17.49	18.16	18.37	19.06	20.18	19.10	19.77	19.99	20.67	21.79
	4H	18.19	18.80	19.08	19.70	20.84	19.69	20.30	20.58	21.20	22.34
	6H	18.67	19.19	19.58	20.12	21.26	20.10	20.63	21.01	21.55	22.69
	8H	18.81	19.30	19.72	20.21	21.37	20.21	20.70	21.12	21.62	22.78
	12H	18.88	19.32	19.81	20.26	21.42	20.26	20.70	21.19	21.64	22.80
8H	4H	18.46	18.95	19.37	19.87	21.03	19.80	20.29	20.71	21.21	22.37
	6H	19.05	19.46	19.99	20.42	21.57	20.31	20.71	21.25	21.67	22.83
	8H	19.26	19.62	20.21	20.57	21.74	20.49	20.85	21.44	21.80	22.97
	12H	19.39	19.70	20.34	20.65	21.87	20.59	20.91	21.54	21.85	23.08
12H	4H	18.47	18.91	19.40	19.84	21.01	19.78	20.22	20.71	21.16	22.32
	6H	19.11	19.46	20.05	20.41	21.59	20.32	20.68	21.27	21.63	22.81
	8H	19.34	19.66	20.29	20.60	21.83	20.53	20.84	21.48	21.78	23.01