

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331981-930

Luminaire Tested: **S123DIP-S775D805U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331981-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D805U930-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4954.9 lumens
Efficiency: N/A
Efficacy: 108.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331981-930

CATALOG NUMBER: S123DIP-S775D805U930-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

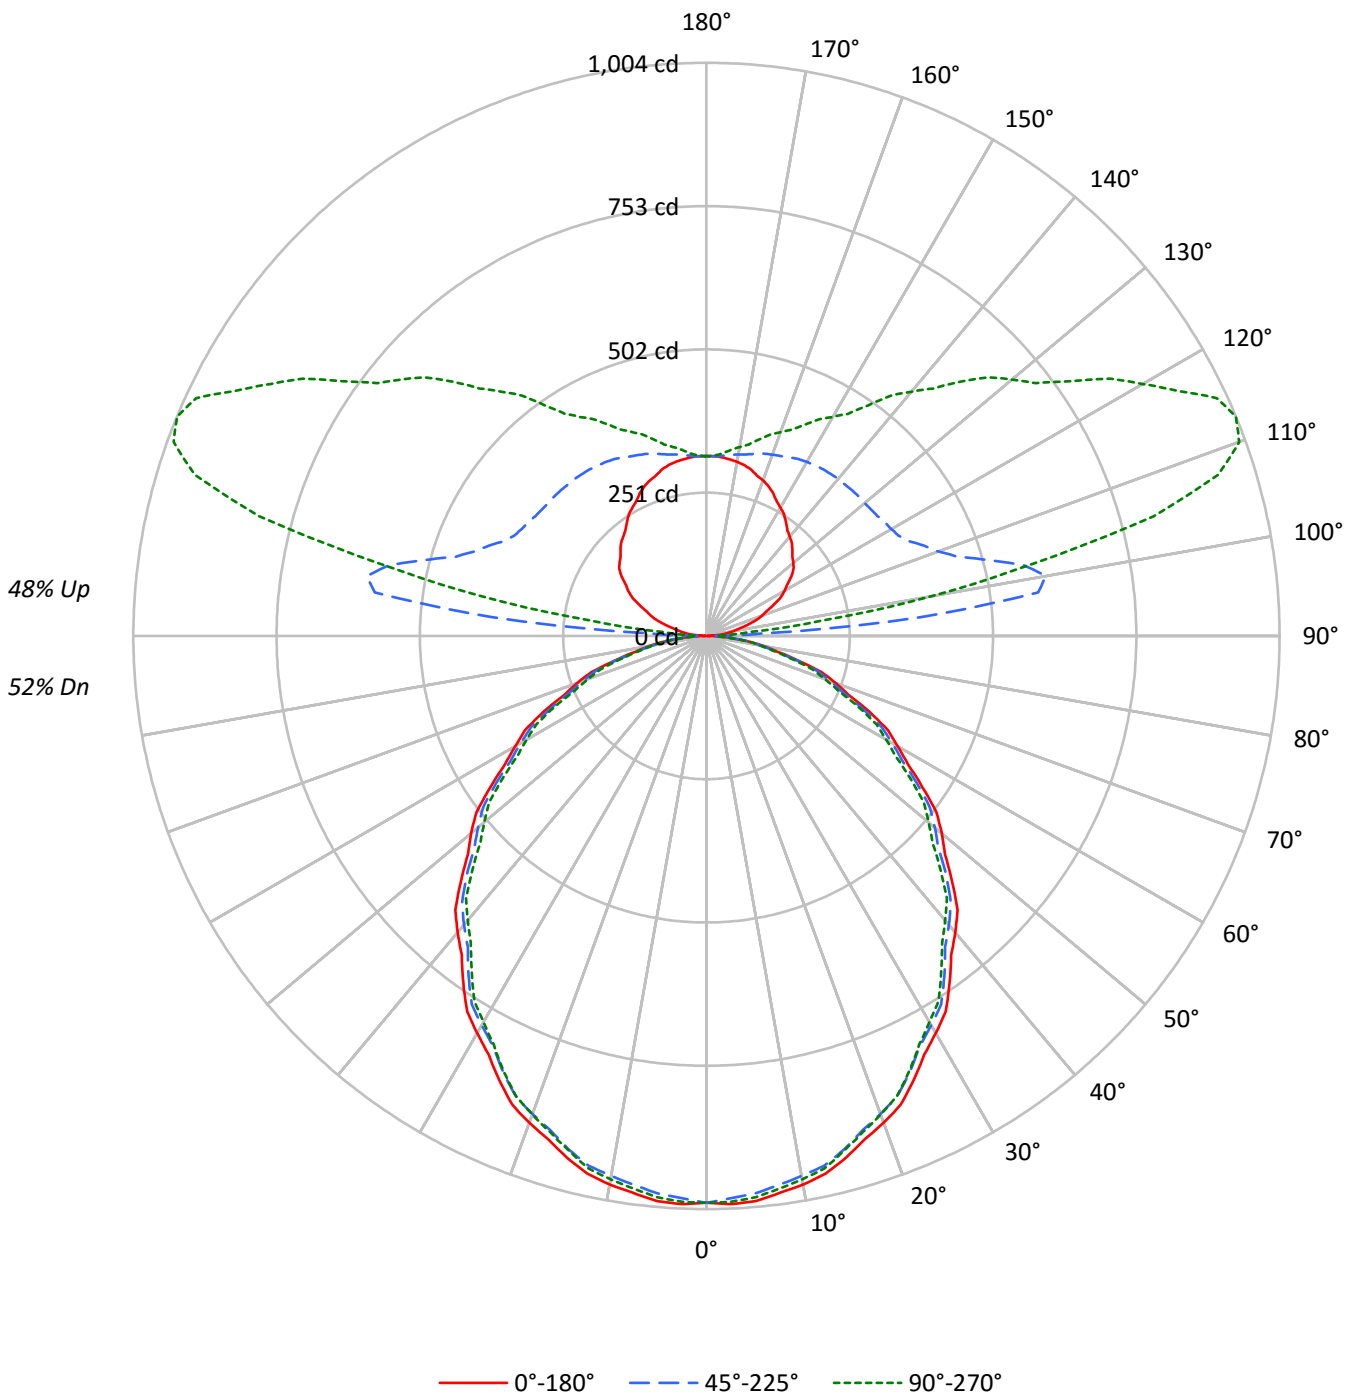



TEST NUMBER: P331981-930

CATALOG NUMBER: S123DIP-S775D805U930-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	58	58	58	52
1	98	94	90	86	91	87	84	80	74	72	69	62	60	59	51	50	49	44
2	89	82	76	70	82	76	71	66	65	61	57	55	52	49	45	43	41	37
3	82	72	65	59	75	67	60	55	57	52	48	48	45	41	40	37	35	31
4	75	64	56	50	69	59	52	47	51	45	41	43	39	36	36	33	30	27
5	68	57	49	43	63	53	46	40	45	40	35	39	34	31	32	29	26	23
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	26	23	20
7	58	46	38	32	54	43	36	31	37	31	27	32	27	24	27	23	21	18
8	54	42	34	29	50	39	32	27	34	28	24	29	25	21	24	21	18	16
9	50	38	31	25	47	36	29	24	31	26	22	27	22	19	23	19	17	14
10	47	35	28	23	44	33	26	22	29	23	19	25	20	17	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10687	10687	10687
5°	10737	10589	10662
10°	10665	10497	10563
15°	10541	10379	10398
20°	10394	10208	10219
25°	10200	10007	9987
30°	9984	9783	9708
35°	9759	9546	9423
40°	9524	9284	9140
45°	9266	9045	8824
50°	9008	8748	8505
55°	8668	8443	8188
60°	8325	8086	7830
65°	8023	7697	7457
70°	7578	7254	6930
75°	6924	6675	6392
80°	6248	5976	5926
85°	5483	5274	5064



TEST NUMBER: P331981-930

CATALOG NUMBER: S123DIP-S775D805U930-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	93.5	1.9
10°-20°	264.1	5.3
20°-30°	390.1	7.9
30°-40°	455.7	9.2
40°-50°	458.1	9.2
50°-60°	402.4	8.1
60°-70°	299.8	6.1
70°-80°	170.8	3.4
80°-90°	51.5	1.0
90°-100°	175.2	3.5
100°-110°	496.2	10.0
110°-120°	488.1	9.9
120°-130°	389.3	7.9
130°-140°	307.0	6.2
140°-150°	229.1	4.6
150°-160°	159.7	3.2
160°-170°	93.8	1.9
170°-180°	30.5	0.6
0°-30°	747.7	15.1
0°-40°	1203.3	24.3
0°-60°	2063.8	41.7
0°-90°	2585.9	52.2
90°-120°	1159.6	23.4
90°-150°	2085.0	42.1
90°-180°	2369.0	47.8
0°-180°	4954.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	993	993	993	993	993	
5°	994	989	980	988	987	94
15°	946	942	931	938	933	267
25°	859	853	843	843	841	395
35°	743	737	726	721	717	464
45°	609	605	594	584	580	470
55°	462	460	450	441	436	414
65°	315	310	302	296	293	311
75°	166	163	160	156	154	178
85°	44	43	43	41	41	49
90°	1	8	16	18	18	4
95°	22	70	378	110	74	23
105°	74	109	512	896	811	79
115°	131	163	392	860	986	129
125°	182	214	366	663	778	161
135°	213	254	361	546	630	164
145°	243	278	356	448	493	152
155°	276	298	345	392	408	127
165°	302	310	330	350	356	85
175°	314	315	317	321	321	30
180°	315	315	315	315	315	



TEST NUMBER: P331981-930

CATALOG NUMBER: S123DIP-S775D805U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	996.2	995.6	995.1	994.4	993.8	992.7	991.0	989.4	987.7	986.0	987.5
5°	993.7	992.7	991.8	990.8	989.9	988.4	986.3	984.2	982.1	980.0	981.9
7.5°	984.0	983.0	982.0	981.1	980.2	978.6	976.4	974.3	972.1	970.0	971.7
10°	975.8	974.8	973.9	972.9	972.0	970.3	967.8	965.3	962.9	960.4	962.1
12.5°	964.8	964.0	963.3	962.5	961.6	960.1	957.8	955.4	953.2	950.8	952.1
15°	945.9	945.1	944.4	943.6	942.8	941.3	938.7	936.3	933.8	931.4	932.9
17.5°	923.8	922.8	921.9	920.9	919.9	918.2	915.7	913.2	910.8	908.3	909.4
20°	907.4	906.3	905.2	904.1	902.9	901.1	898.6	896.2	893.7	891.2	892.0
22.5°	889.0	887.9	886.7	885.6	884.4	882.6	880.2	877.8	875.3	872.8	873.4
25°	858.8	857.7	856.6	855.4	854.3	852.5	849.9	847.5	845.1	842.6	842.8
27.5°	826.6	825.4	824.3	823.2	822.1	820.3	817.6	815.0	812.3	809.6	809.8
30°	803.3	802.3	801.4	800.5	799.5	797.7	795.1	792.4	789.8	787.1	787.1
32.5°	780.1	778.9	777.6	776.3	775.1	773.5	771.4	769.3	767.3	765.2	764.2
35°	742.7	741.6	740.5	739.3	738.2	736.4	733.9	731.4	729.0	726.5	725.4
37.5°	704.4	703.0	701.6	700.1	698.7	696.8	694.2	691.7	689.2	686.7	685.3
40°	677.8	676.7	675.6	674.4	673.3	671.4	668.7	666.1	663.4	660.7	659.3
42.5°	651.2	649.9	648.6	647.3	646.0	644.1	641.4	638.7	636.1	633.4	631.9
45°	608.7	607.9	607.2	606.4	605.6	604.1	601.5	599.1	596.6	594.2	591.9
47.5°	566.5	565.4	564.3	563.2	562.1	560.4	558.1	555.8	553.4	551.1	548.9
50°	537.9	536.9	535.9	535.0	534.0	532.3	529.9	527.4	524.9	522.4	520.4
52.5°	507.8	507.1	506.5	505.8	505.2	503.5	500.9	498.3	495.7	493.1	491.3
55°	461.9	461.6	461.5	461.3	461.1	459.7	457.3	454.9	452.3	449.9	447.8
57.5°	418.2	417.5	416.9	416.2	415.6	414.3	412.3	410.3	408.3	406.3	404.5
60°	386.7	386.5	386.4	386.1	386.0	384.7	382.5	380.2	377.9	375.6	373.9
62.5°	358.7	358.2	357.8	357.3	356.8	355.4	353.1	350.8	348.5	346.3	344.5
65°	315.0	314.1	313.1	312.2	311.2	309.8	307.9	306.0	304.1	302.2	300.7
67.5°	268.7	267.9	267.1	266.2	265.4	264.2	262.9	261.4	259.9	258.5	257.1
70°	240.8	239.6	238.5	237.3	236.2	235.1	233.9	232.8	231.6	230.5	229.2
72.5°	211.4	210.5	209.7	208.9	208.1	207.0	205.7	204.4	203.1	201.8	200.6
75°	166.5	165.7	164.9	164.2	163.5	162.7	162.2	161.6	161.0	160.5	159.6
77.5°	126.7	126.3	125.9	125.5	125.0	124.5	123.8	123.1	122.5	121.7	121.1
80°	100.8	100.2	99.6	99.1	98.5	98.0	97.6	97.3	96.9	96.4	96.3
82.5°	75.5	75.3	75.3	75.1	75.0	74.9	74.8	74.8	74.7	74.6	74.3
85°	44.4	44.0	43.6	43.3	42.9	42.7	42.7	42.7	42.7	42.7	42.3
87.5°	18.0	17.8	17.6	17.5	17.4	17.3	17.5	17.8	18.0	18.2	17.9
90°	1.3	2.5	3.8	5.7	7.0	8.3	10.2	12.1	14.0	15.9	15.3
92.5°	7.9	11.7	17.1	22.1	27.4	36.9	53.6	81.0	107.9	98.0	73.9
95°	21.7	23.6	30.6	41.4	58.0	82.8	137.1	232.0	336.6	378.0	306.6
97.5°	36.9	37.6	43.1	52.5	68.8	95.7	147.5	254.6	428.8	585.8	626.7
100°	47.2	47.8	52.3	61.2	76.5	101.3	145.9	240.3	408.0	603.6	729.2
102.5°	57.9	59.0	62.9	71.4	85.2	107.9	148.0	228.0	377.3	570.5	734.3
105°	73.9	75.8	79.7	87.3	99.5	119.2	153.6	219.2	339.7	512.5	695.5
107.5°	91.0	92.9	96.6	104.1	115.5	133.9	164.0	218.7	315.8	461.2	627.4
110°	103.3	105.2	108.4	115.4	126.2	144.1	172.8	221.2	306.6	432.2	584.5



TEST NUMBER: P331981-930

CATALOG NUMBER: S123DIP-S775D805U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	114.5	116.4	119.6	126.6	137.5	154.7	181.4	226.2	301.5	412.8	547.3
115°	130.7	133.2	137.1	143.4	154.3	171.5	195.7	234.6	299.6	392.0	502.3
117.5°	146.8	149.8	153.0	158.8	171.0	186.9	210.8	245.6	300.8	379.8	475.2
120°	158.1	160.0	163.1	169.6	181.6	197.6	220.5	253.7	302.8	374.1	460.9
122.5°	167.8	169.7	172.8	179.8	191.4	208.3	230.7	261.3	306.3	370.6	449.1
125°	181.6	183.0	186.8	193.8	205.9	223.1	245.4	273.5	311.7	365.9	434.1
127.5°	192.2	194.1	198.9	206.0	219.4	236.6	258.1	283.4	317.8	363.6	420.9
130°	198.9	200.8	206.5	214.2	227.6	244.8	265.8	290.0	321.9	362.1	413.7
132.5°	204.0	206.4	212.6	221.8	235.2	251.9	272.4	296.1	325.0	361.5	407.1
135°	212.9	215.5	222.5	232.0	245.4	262.6	282.3	304.0	329.5	360.8	398.4
137.5°	221.3	224.0	230.9	241.1	254.3	270.3	289.3	309.9	332.6	359.4	390.9
140°	226.9	230.1	236.5	246.7	259.4	275.3	293.8	313.0	334.7	358.9	386.3
142.5°	233.0	235.7	242.6	251.8	264.6	279.4	297.4	316.0	336.1	357.8	382.2
145°	242.9	244.8	250.5	260.1	270.9	285.6	302.1	319.4	337.2	356.3	376.7
147.5°	252.8	254.0	259.6	267.8	278.3	290.8	306.0	321.4	337.2	353.9	371.4
150°	259.4	260.1	265.1	273.5	282.3	293.8	308.5	321.9	337.2	351.9	367.8
152.5°	266.0	266.2	271.3	278.6	286.4	297.4	310.1	322.9	335.7	349.3	363.7
155°	276.0	276.0	279.8	286.2	293.2	302.1	313.0	323.2	334.0	344.9	357.6
157.5°	283.9	284.4	287.5	293.1	299.1	306.0	314.6	323.8	331.8	340.9	350.7
160°	290.0	290.0	292.6	297.7	302.1	308.5	316.2	323.8	330.8	337.9	346.1
162.5°	294.6	294.6	296.7	300.8	304.7	310.1	316.7	323.3	328.8	334.8	341.5
165°	301.5	300.8	302.1	305.3	307.9	312.3	317.4	321.9	325.7	330.2	335.3
167.5°	306.7	306.0	306.6	309.0	310.8	313.6	317.3	320.9	322.7	325.6	329.3
170°	309.8	308.5	309.2	311.0	312.3	313.6	316.8	319.4	320.7	322.5	325.7
172.5°	311.9	311.0	311.2	312.6	313.3	314.1	316.8	318.9	319.1	320.0	322.1
175°	314.2	313.6	313.0	314.2	314.2	314.9	316.2	317.4	316.8	316.8	318.0
177.5°	315.4	314.9	314.4	314.9	314.9	314.9	315.4	316.4	315.4	314.9	315.4
180°	314.9	314.9	314.9	314.9	314.9	314.9	314.9	314.9	314.9	314.9	314.9



TEST NUMBER: P331981-930

CATALOG NUMBER: S123DIP-S775D805U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	992.9	992.9	992.9	992.9	992.9	992.9	992.9	992.9
2.5°	989.0	990.6	992.1	992.8	992.6	992.5	992.3	992.1
5°	983.8	985.7	987.7	988.4	988.0	987.7	987.2	986.8
7.5°	973.4	975.1	976.8	977.5	977.3	977.1	976.8	976.6
10°	963.8	965.5	967.2	967.9	967.5	967.1	966.8	966.4
12.5°	953.3	954.6	955.9	956.3	956.1	955.9	955.7	955.4
15°	934.4	935.9	937.4	937.6	936.5	935.3	934.3	933.1
17.5°	910.4	911.5	912.6	912.9	912.5	912.1	911.7	911.3
20°	892.8	893.5	894.3	894.4	893.8	893.2	892.7	892.1
22.5°	874.0	874.7	875.2	875.1	874.5	873.8	873.0	872.3
25°	842.9	843.2	843.3	843.2	842.6	842.0	841.5	840.9
27.5°	809.9	810.1	810.2	809.9	809.3	808.5	807.8	807.1
30°	787.1	787.1	787.1	786.4	785.1	783.7	782.4	781.1
32.5°	763.1	762.1	761.0	760.1	759.4	758.6	757.9	757.2
35°	724.2	723.1	721.9	720.9	719.9	719.0	718.0	717.1
37.5°	684.0	682.6	681.3	680.3	679.6	679.1	678.4	677.8
40°	657.7	656.2	654.7	653.5	652.8	652.0	651.3	650.5
42.5°	630.4	628.8	627.4	626.2	625.5	624.7	623.9	623.2
45°	589.6	587.3	585.1	583.4	582.5	581.6	580.6	579.7
47.5°	546.7	544.5	542.2	540.6	539.8	539.0	538.2	537.3
50°	518.3	516.2	514.1	512.5	511.4	510.2	509.1	507.9
52.5°	489.5	487.7	485.9	484.5	483.4	482.2	481.1	480.0
55°	445.7	443.6	441.6	440.0	439.0	438.1	437.2	436.3
57.5°	402.6	400.8	398.9	397.5	396.3	395.3	394.1	393.1
60°	372.2	370.5	368.8	367.5	366.5	365.6	364.6	363.7
62.5°	342.8	341.1	339.4	338.3	337.6	337.0	336.3	335.7
65°	299.1	297.7	296.1	295.1	294.5	293.9	293.3	292.8
67.5°	255.8	254.5	253.2	252.1	251.4	250.5	249.7	248.9
70°	227.9	226.5	225.2	224.0	223.1	222.2	221.2	220.2
72.5°	199.4	198.3	197.1	196.2	195.8	195.3	194.8	194.3
75°	158.6	157.7	156.7	156.0	155.4	154.8	154.3	153.7
77.5°	120.4	119.8	119.1	118.9	118.9	118.9	118.9	118.9
80°	96.1	95.9	95.7	95.6	95.6	95.6	95.6	95.6
82.5°	73.9	73.6	73.2	73.0	72.9	72.7	72.6	72.4
85°	41.9	41.6	41.2	41.0	41.0	41.0	41.0	41.0
87.5°	17.9	17.9	17.9	18.0	17.9	18.0	18.2	18.0
90°	15.9	16.6	17.2	18.5	17.9	18.5	19.2	18.5
92.5°	53.6	42.6	37.6	34.3	33.2	31.2	31.9	30.7
95°	229.5	155.6	121.7	98.8	86.7	81.0	76.5	73.9
97.5°	572.0	458.2	375.9	299.7	252.7	224.0	206.8	201.3
100°	751.5	699.9	625.3	534.8	470.4	423.9	399.0	399.7
102.5°	811.1	809.5	766.1	708.7	658.6	621.7	601.0	586.3
105°	828.7	892.3	904.5	887.9	858.6	834.4	814.0	810.8
107.5°	778.4	881.9	937.8	960.4	961.0	952.8	945.9	940.0
110°	730.5	847.7	928.1	972.7	990.5	995.6	994.3	993.1



TEST NUMBER: P331981-930

CATALOG NUMBER: S123DIP-S775D805U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	683.1	802.9	892.9	950.2	982.9	998.7	1003.6	1003.8
115°	620.2	731.1	824.8	894.3	942.1	970.1	982.9	986.1
117.5°	574.7	670.4	754.6	825.1	874.9	907.0	925.4	929.8
120°	550.7	636.7	713.3	777.6	828.0	863.7	879.0	882.8
122.5°	531.9	609.8	680.6	740.5	785.1	817.3	834.1	838.9
125°	506.7	576.3	637.4	688.4	729.2	757.2	773.1	777.6
127.5°	484.9	546.7	602.0	648.4	684.7	708.7	723.1	727.2
130°	471.1	528.4	580.1	623.4	657.2	680.1	693.5	698.6
132.5°	458.3	511.1	559.1	600.5	632.2	655.2	667.0	670.6
135°	441.1	486.3	527.7	564.1	595.3	614.5	625.9	630.4
137.5°	425.4	462.5	498.2	529.7	556.0	575.4	585.1	588.0
140°	416.2	448.7	479.3	506.7	531.0	548.8	559.1	558.4
142.5°	407.6	435.5	462.0	485.8	506.5	522.3	531.5	530.8
145°	397.1	418.2	438.5	457.1	473.0	486.3	491.5	492.7
147.5°	388.6	405.3	421.8	434.9	446.9	456.0	460.9	461.4
150°	382.5	397.1	410.5	422.6	432.2	439.2	443.0	443.0
152.5°	376.8	389.5	401.3	411.4	418.9	425.4	427.7	427.7
155°	368.4	378.6	388.2	395.8	401.5	406.7	408.0	408.5
157.5°	359.5	368.0	375.4	381.4	386.4	390.2	391.3	391.1
160°	354.4	361.4	367.8	372.3	376.7	380.5	380.5	379.9
162.5°	348.3	354.2	360.1	364.1	367.0	370.3	370.3	369.7
165°	340.4	344.2	348.7	351.9	354.4	356.9	356.3	356.3
167.5°	333.5	336.4	339.0	341.3	342.4	344.2	343.6	343.6
170°	328.9	330.8	333.4	334.7	335.3	336.6	335.9	335.9
172.5°	324.8	326.2	328.2	329.1	329.1	330.4	329.3	328.8
175°	319.4	320.0	321.2	321.2	321.2	321.9	321.2	320.7
177.5°	315.9	316.4	316.9	316.9	316.4	316.9	315.9	315.9
180°	314.9	314.9	314.9	314.9	314.9	314.9	314.9	314.9

(END OF REPORT)