

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831888

Luminaire Tested: S123RDIP-S1000D805U930-4F0-1E-UDD-G

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831888
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-5)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D805U930-4F0-1E-UDD-G
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6124.8 lumens
Efficiency: N/A
Efficacy: 110.0 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 55.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

Luminous Intensity Polar Plot

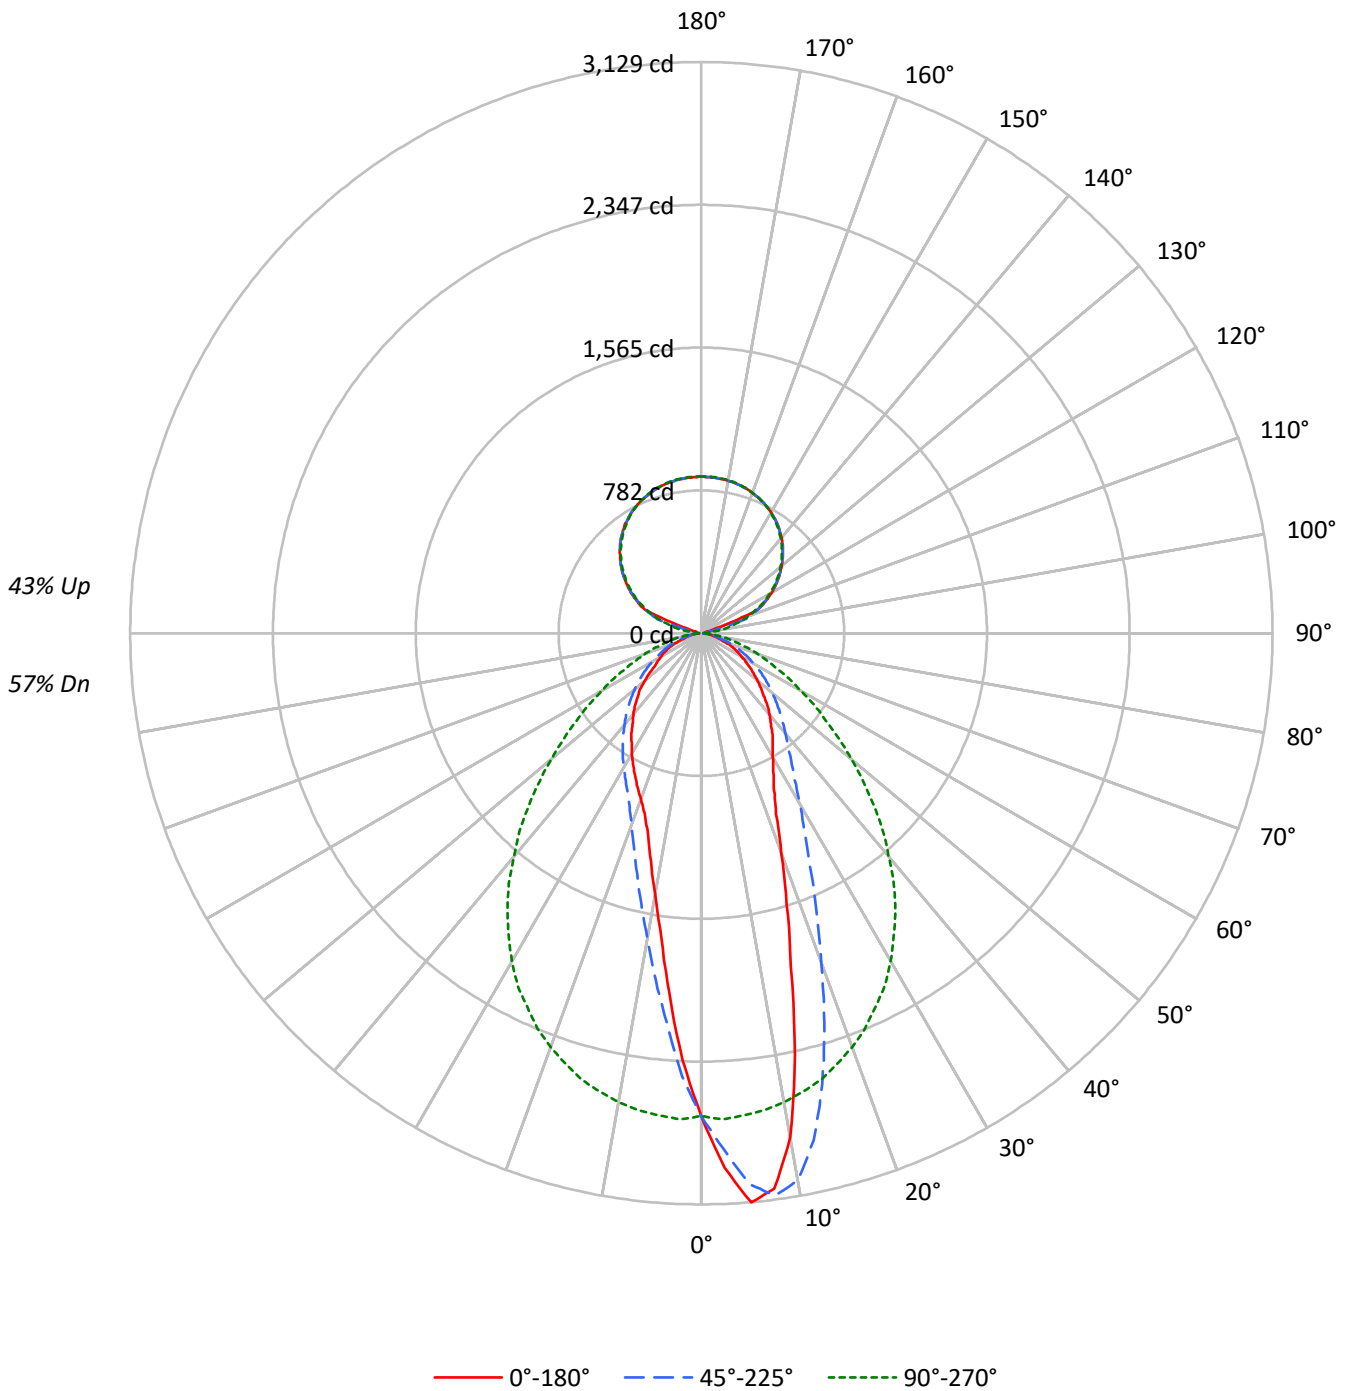



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	109	109	109	109	101	101	101	101	87	87	87	75	75	75	63	63	63	57	57	57	57	57	57	0														
1	100	96	93	89	93	90	87	84	78	76	74	67	65	64	57	56	55	50	50	50	50	50	50	0														
2	92	85	79	75	86	80	75	71	70	66	63	60	57	55	51	49	48	44	44	44	44	44	44	0														
3	85	76	69	64	79	71	65	60	62	58	54	54	51	48	46	44	42	38	38	38	38	38	38	0														
4	78	68	60	55	73	64	57	52	56	51	47	49	45	42	42	39	37	34	34	34	34	34	34	0														
5	72	61	54	48	67	58	51	46	51	45	41	45	40	37	39	36	33	30	30	30	30	30	30	0														
6	67	56	48	42	62	52	45	40	46	41	37	41	37	33	36	32	30	27	27	27	27	27	27	0														
7	62	51	43	38	58	48	41	36	43	37	33	38	33	30	33	30	27	25	25	25	25	25	25	0														
8	58	46	39	34	54	44	37	33	39	34	30	35	30	27	31	27	25	22	22	22	22	22	22	0														
9	54	43	36	31	51	41	34	30	36	31	27	32	28	25	29	25	23	21	21	21	21	21	21	0														
10	51	40	33	28	48	38	31	27	34	29	25	30	26	23	27	23	21	19	19	19	19	19	19	0														

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	28478	28478	28478	28478	28478
5°	33813	32736	28657	23166	21507
10°	30636	33250	28514	18560	15923
15°	21094	28509	28213	15170	12596
20°	14675	21950	27646	12791	11071
25°	11182	16728	26822	11370	10203
30°	9734	13375	25792	10556	9451
35°	8937	11282	24331	9871	8766
40°	8154	10075	22420	9198	8139
45°	7365	9214	20360	8561	7514
50°	6685	8502	17928	7937	6738
55°	6047	7807	15593	7328	5782
60°	5419	7100	13543	6654	5464
65°	5000	6299	11660	5980	5165
70°	4063	5445	10172	5410	4198
75°	3564	4329	8617	4487	3697
80°	3230	3663	7060	3763	3496
85°	2952	3211	5360	3421	3211

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 21482 cd/sqm



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	241.1	3.9
10°-20°	558.0	9.1
20°-30°	640.2	10.5
30°-40°	631.1	10.3
40°-50°	556.5	9.1
50°-60°	428.1	7.0
60°-70°	281.5	4.6
70°-80°	136.7	2.2
80°-90°	36.2	0.6
90°-100°	30.2	0.5
100°-110°	146.2	2.4
110°-120°	358.4	5.9
120°-130°	455.0	7.4
130°-140°	486.1	7.9
140°-150°	454.6	7.4
150°-160°	366.6	6.0
160°-170°	236.6	3.9
170°-180°	81.5	1.3
0°-30°	1439.4	23.5
0°-40°	2070.5	33.8
0°-60°	3055.1	49.9
0°-90°	3509.5	57.3
90°-120°	534.9	8.7
90°-150°	1930.6	31.5
90°-180°	2615.0	42.7
0°-180°	6124.8	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	2646	2646	2646	2646	2646	
5°	3129	3030	2652	2144	1990	286
15°	1893	2558	2532	1361	1130	534
25°	942	1408	2258	957	859	445
35°	680	859	1852	751	667	424
45°	484	605	1338	562	494	376
55°	322	416	831	390	308	289
65°	196	247	458	235	203	192
75°	86	104	207	108	89	92
85°	24	26	43	28	26	25
90°	19	15	1	15	19	10
95°	24	20	39	20	24	20
105°	28	140	190	140	28	58
115°	375	366	356	366	375	353
125°	512	510	502	510	512	458
135°	632	632	625	632	632	487
145°	728	727	722	727	728	455
155°	794	794	795	794	794	366
165°	836	836	838	836	836	236
175°	855	855	858	855	855	81
180°	858	858	858	858	858	



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7
2.5°	2932.0	2922.8	2913.6	2910.9	2908.2	2899.5	2890.8	2871.3	2851.8	2831.7	2811.6
5°	3129.4	3130.5	3131.6	3128.9	3126.2	3114.8	3103.4	3079.6	3055.7	3029.7	3003.6
7.5°	3068.7	3086.1	3103.4	3106.7	3109.9	3118.6	3127.3	3121.9	3116.4	3106.7	3096.9
10°	2802.9	2801.9	2800.8	2820.3	2839.8	2897.9	2955.9	2985.7	3015.6	3042.1	3068.7
12.5°	2369.1	2370.7	2372.3	2436.3	2500.3	2555.1	2609.9	2685.8	2761.7	2843.6	2925.5
15°	1892.9	1919.4	1946.0	2003.0	2059.9	2142.3	2224.8	2326.7	2428.7	2558.3	2688.0
17.5°	1554.4	1565.8	1577.2	1632.0	1686.8	1764.9	1843.0	1958.5	2074.0	2241.1	2408.1
20°	1281.1	1291.4	1301.7	1341.3	1380.9	1455.7	1530.6	1640.7	1750.8	1916.2	2081.6
22.5°	1069.5	1089.6	1109.7	1136.3	1162.8	1217.1	1271.3	1383.6	1495.8	1646.6	1797.4
25°	941.5	950.8	960.0	982.8	1005.5	1057.6	1109.7	1184.0	1258.3	1408.5	1558.8
27.5°	854.8	857.5	860.2	877.0	893.8	927.4	961.1	1030.0	1098.8	1222.5	1346.2
30°	783.2	788.1	792.9	806.0	819.0	843.4	867.8	916.6	965.4	1076.1	1186.7
32.5°	727.9	730.6	733.3	744.1	755.0	772.9	790.8	829.3	867.8	952.4	1037.0
35°	680.1	680.7	681.2	689.3	697.5	714.8	732.2	764.2	796.2	858.6	920.9
37.5°	625.9	629.7	633.5	639.4	645.4	660.6	675.8	701.8	727.9	779.4	830.9
40°	580.3	583.6	586.8	593.9	600.9	612.9	624.8	648.7	672.5	717.0	761.5
42.5°	534.8	536.9	539.1	546.2	553.2	567.9	582.5	601.5	620.5	657.3	694.2
45°	483.8	489.2	494.6	502.2	509.8	522.3	534.8	554.3	573.8	605.3	636.7
47.5°	441.5	444.2	446.9	453.4	459.9	475.1	490.3	507.7	525.0	554.3	583.6
50°	399.2	400.3	401.4	407.3	413.3	426.8	440.4	460.5	480.5	507.7	534.8
52.5°	359.0	361.8	364.5	370.4	376.4	385.6	394.8	415.5	436.1	462.6	489.2
55°	322.2	323.8	325.4	329.8	334.1	344.9	355.8	373.7	391.6	416.0	440.4
57.5°	287.5	289.6	291.8	295.0	298.3	308.1	317.8	333.6	349.3	373.7	398.1
60°	251.7	254.4	257.1	260.9	264.7	272.3	279.9	294.0	308.1	329.8	351.5
62.5°	225.6	226.2	226.7	230.0	233.2	238.6	244.1	255.5	266.8	288.5	310.2
65°	196.3	198.0	199.6	201.2	202.8	207.2	211.5	221.3	231.0	247.3	263.6
67.5°	166.0	167.6	169.2	171.9	174.6	178.4	182.2	188.7	195.3	210.4	225.6
70°	129.1	129.1	129.1	133.4	137.8	144.3	150.8	155.7	160.5	173.0	185.5
72.5°	105.2	105.8	106.3	106.8	107.4	111.2	115.0	123.1	131.3	138.8	146.4
75°	85.7	86.2	86.8	87.3	87.9	88.9	90.0	92.7	95.5	104.1	112.8
77.5°	68.3	68.9	69.4	70.0	70.5	71.6	72.7	73.8	74.8	78.1	81.4
80°	52.1	52.6	53.2	53.7	54.2	54.8	55.3	56.4	57.5	59.1	60.7
82.5°	38.0	38.0	38.0	38.0	38.0	39.1	40.1	40.1	40.1	41.2	42.3
85°	23.9	23.9	23.9	24.4	24.9	24.9	24.9	25.5	26.0	26.0	26.0
87.5°	10.8	10.3	9.8	10.3	10.8	10.8	10.8	11.4	11.9	11.9	11.9
90°	19.1	18.8	18.6	18.3	18.0	17.6	17.0	16.4	15.9	15.3	13.5
92.5°	21.7	21.5	21.4	21.2	21.1	20.5	19.5	18.6	17.6	16.6	15.3
95°	24.2	24.2	24.2	24.2	24.2	23.7	22.7	21.7	20.8	19.8	18.2
97.5°	26.1	26.0	25.8	25.7	25.6	24.9	23.8	22.7	21.5	20.4	27.6
100°	26.8	26.6	26.5	26.3	26.2	25.6	24.4	23.3	22.2	21.0	43.1
102.5°	27.4	27.1	26.8	26.6	26.3	28.5	33.1	37.8	42.5	47.2	71.8
105°	28.0	27.8	27.5	27.2	26.9	39.3	64.4	89.4	114.5	139.6	152.3
107.5°	66.3	84.8	103.4	122.0	140.5	160.7	182.5	204.3	226.1	247.9	245.8
110°	175.3	195.5	215.8	236.0	256.3	268.8	273.4	278.1	282.8	287.5	285.9



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	332.1	332.4	332.6	332.9	333.2	332.7	331.4	330.2	328.9	327.6	326.1
115°	374.8	374.2	373.7	373.1	372.5	371.5	370.1	368.7	367.3	365.9	364.6
117.5°	409.2	409.1	408.9	408.8	408.6	408.0	406.9	405.7	404.6	403.5	402.8
120°	444.9	444.9	444.9	444.9	444.9	444.3	443.2	442.1	440.9	439.8	439.4
122.5°	480.0	479.8	479.7	479.5	479.4	479.0	478.3	477.6	476.8	476.1	475.6
125°	512.5	512.2	511.9	511.6	511.3	511.0	510.8	510.5	510.2	509.9	509.3
127.5°	544.3	544.6	544.9	545.2	545.5	545.4	545.0	544.5	544.1	543.7	543.0
130°	574.9	575.2	575.5	575.8	576.1	575.9	575.4	574.8	574.2	573.7	573.1
132.5°	603.0	603.4	603.8	604.3	604.7	604.6	604.0	603.5	602.9	602.3	601.9
135°	631.7	632.1	632.5	632.9	633.4	633.4	632.9	632.5	632.1	631.7	631.1
137.5°	659.1	659.4	659.6	659.9	660.2	660.0	659.3	658.6	657.9	657.2	656.9
140°	683.3	683.6	683.9	684.1	684.4	684.3	683.7	683.1	682.6	682.0	681.6
142.5°	705.6	706.0	706.4	706.9	707.3	707.3	706.9	706.4	706.0	705.6	705.2
145°	728.5	728.5	728.5	728.5	728.5	728.4	728.1	727.8	727.6	727.3	727.0
147.5°	745.1	745.8	746.5	747.2	747.9	748.2	747.9	747.6	747.3	747.0	746.7
150°	764.2	764.7	765.1	765.5	765.9	766.0	765.7	765.4	765.2	764.9	764.6
152.5°	779.5	780.2	781.0	781.7	782.4	782.4	781.9	781.3	780.7	780.2	780.0
155°	793.6	794.4	795.3	796.1	797.0	797.0	796.3	795.6	794.9	794.2	794.1
157.5°	805.7	806.8	807.9	809.1	810.2	810.3	809.5	808.6	807.8	806.9	807.1
160°	817.1	818.1	819.1	820.1	821.1	821.2	820.3	819.5	818.6	817.8	817.9
162.5°	828.0	828.8	829.7	830.5	831.4	831.3	830.3	829.3	828.3	827.3	827.5
165°	836.3	837.3	838.2	839.2	840.2	840.2	839.0	837.9	836.8	835.6	835.8
167.5°	842.6	843.8	844.9	846.0	847.2	847.2	846.0	844.9	843.8	842.6	842.6
170°	848.4	849.5	850.6	851.8	852.9	852.9	851.8	850.6	849.5	848.4	848.4
172.5°	851.6	852.8	854.1	855.4	856.7	856.7	855.6	854.5	853.3	852.2	852.1
175°	854.7	855.9	857.0	858.1	859.3	859.4	858.4	857.4	856.4	855.4	855.2
177.5°	855.4	856.8	858.2	859.6	861.1	861.2	860.1	858.9	857.8	856.7	856.5
180°	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7
2.5°	2808.9	2806.2	2780.2	2754.1	2728.6	2703.2	2684.2	2665.2	2633.2	2601.2	2581.1
5°	2983.0	2962.4	2921.2	2880.0	2818.1	2756.3	2704.2	2652.2	2586.0	2519.8	2464.5
7.5°	3080.1	3063.3	3013.4	2963.5	2881.6	2799.7	2718.3	2637.0	2539.4	2441.7	2358.2
10°	3082.8	3096.9	3055.7	3014.5	2922.3	2830.1	2719.4	2608.8	2477.5	2346.3	2238.3
12.5°	2986.3	3047.0	3038.3	3029.7	2935.8	2842.0	2707.5	2573.0	2411.9	2250.8	2115.8
15°	2805.7	2923.4	2958.1	2992.8	2915.2	2837.7	2684.7	2531.8	2342.5	2153.2	1998.1
17.5°	2573.0	2737.9	2829.5	2921.2	2864.8	2808.4	2640.8	2473.2	2260.0	2046.9	1878.2
20°	2297.5	2513.3	2657.0	2800.8	2780.2	2759.6	2586.5	2413.5	2183.6	1953.6	1770.8
22.5°	2025.2	2253.0	2451.5	2650.0	2671.2	2692.3	2517.7	2343.0	2091.4	1839.7	1653.7
25°	1790.3	2021.9	2258.4	2494.9	2542.6	2590.3	2424.4	2258.4	1997.5	1736.7	1551.7
27.5°	1566.4	1786.6	2046.9	2307.2	2394.0	2480.8	2328.9	2177.1	1905.3	1633.6	1449.2
30°	1383.6	1580.5	1846.2	2112.0	2232.9	2353.9	2214.5	2075.1	1805.5	1536.0	1355.4
32.5°	1213.3	1389.5	1656.4	1923.2	2063.7	2204.2	2083.8	1963.4	1704.1	1444.9	1266.4
35°	1078.8	1236.6	1485.5	1734.5	1891.8	2049.1	1950.3	1851.6	1598.4	1345.1	1176.4
37.5°	963.2	1095.6	1329.3	1563.1	1730.1	1897.2	1814.8	1732.3	1494.2	1256.1	1096.7
40°	867.8	974.1	1191.6	1409.1	1572.9	1736.7	1666.1	1595.6	1382.5	1169.3	1020.2
42.5°	785.9	877.5	1072.8	1268.1	1418.3	1568.5	1521.9	1475.2	1282.2	1089.1	950.8
45°	713.8	790.8	962.7	1134.6	1272.9	1411.2	1374.4	1337.5	1171.0	1004.5	877.5
47.5°	649.8	715.9	869.4	1022.9	1147.1	1271.3	1237.1	1203.0	1065.2	927.4	811.9
50°	591.2	647.6	775.6	903.6	1015.3	1127.0	1098.8	1070.6	956.7	842.8	743.0
52.5°	535.9	582.5	697.5	812.5	902.5	992.5	970.8	949.1	861.3	773.4	682.8
55°	483.2	526.1	623.2	720.3	797.3	874.3	852.6	830.9	762.6	694.2	614.5
57.5°	435.5	472.9	551.6	630.2	691.5	752.8	742.5	732.2	675.2	618.3	552.7
60°	385.1	418.7	486.5	554.3	603.7	653.0	641.1	629.1	588.5	547.8	491.4
62.5°	340.1	369.9	424.1	478.4	518.5	558.6	550.0	541.3	510.4	479.5	432.8
65°	292.9	322.2	366.1	410.0	441.5	472.9	465.3	457.8	434.4	411.1	373.7
67.5°	250.0	274.4	312.4	350.4	371.5	392.7	388.3	384.0	366.1	348.2	318.9
70°	206.6	227.8	259.3	290.7	305.4	320.0	321.6	323.2	307.0	290.7	269.0
72.5°	163.3	180.1	209.4	238.6	250.0	261.4	260.9	260.3	250.6	240.8	221.3
75°	125.3	137.8	160.5	183.3	193.1	202.8	205.0	207.2	198.0	188.7	177.9
77.5°	90.0	98.7	116.1	133.4	144.3	155.1	156.2	157.3	152.9	148.6	138.3
80°	63.5	66.2	77.0	87.9	99.3	110.6	112.3	113.9	109.6	105.2	98.7
82.5°	43.9	45.6	49.4	53.2	62.4	71.6	73.8	75.9	73.8	71.6	64.5
85°	26.6	27.1	28.7	30.4	34.7	39.1	41.2	43.4	42.3	41.2	37.4
87.5°	11.9	11.9	12.5	13.0	14.1	15.2	17.9	20.6	19.0	17.4	15.7
90°	11.6	9.8	7.9	6.3	4.9	3.5	2.1	0.6	2.1	3.5	4.9
92.5°	14.0	12.7	11.5	11.3	12.1	13.0	13.8	14.7	13.8	13.0	12.1
95°	16.6	15.1	13.5	15.7	21.5	27.3	33.1	38.9	33.1	27.3	21.5
97.5°	34.8	42.1	49.3	54.9	58.9	62.8	66.8	70.8	66.8	62.8	58.9
100°	65.2	87.3	109.4	119.1	116.2	113.4	110.6	107.7	110.6	113.4	116.2
102.5°	96.5	121.1	145.8	157.2	155.3	153.5	151.6	149.8	151.6	153.5	155.3
105°	165.1	177.8	190.6	196.2	194.6	193.1	191.5	189.9	191.5	193.1	194.6
107.5°	243.7	241.6	239.4	237.7	236.5	235.2	233.9	232.6	233.9	235.2	236.5
110°	284.3	282.8	281.2	279.9	278.8	277.6	276.5	275.4	276.5	277.6	278.8



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	324.5	322.9	321.4	320.1	319.1	318.1	317.1	316.1	317.1	318.1	319.1
115°	363.3	362.0	360.8	359.7	358.9	358.0	357.2	356.3	357.2	358.0	358.9
117.5°	402.1	401.3	400.6	399.8	398.8	397.8	396.8	395.8	396.8	397.8	398.8
120°	439.0	438.5	438.1	437.3	436.0	434.7	433.4	432.2	433.4	434.7	436.0
122.5°	475.0	474.4	473.9	473.1	472.1	471.1	470.1	469.1	470.1	471.1	472.1
125°	508.8	508.2	507.7	506.8	505.7	504.5	503.4	502.3	503.4	504.5	505.7
127.5°	542.3	541.6	540.9	539.9	538.8	537.7	536.5	535.4	536.5	537.7	538.8
130°	572.5	572.0	571.4	570.5	569.4	568.3	567.1	566.0	567.1	568.3	569.4
132.5°	601.5	601.1	600.6	599.9	598.7	597.6	596.5	595.3	596.5	597.6	598.7
135°	630.5	630.0	629.4	628.7	627.8	627.0	626.1	625.3	626.1	627.0	627.8
137.5°	656.6	656.3	656.0	655.3	654.2	653.0	651.9	650.8	651.9	653.0	654.2
140°	681.2	680.7	680.3	679.7	678.8	678.0	677.1	676.3	677.1	678.0	678.8
142.5°	704.7	704.3	703.9	703.3	702.4	701.6	700.7	699.9	700.7	701.6	702.4
145°	726.7	726.4	726.1	725.5	724.5	723.5	722.5	721.5	722.5	723.5	724.5
147.5°	746.5	746.2	745.9	745.4	744.7	744.0	743.3	742.6	743.3	744.0	744.7
150°	764.3	764.0	763.7	763.4	763.0	762.5	762.1	761.7	762.1	762.5	763.0
152.5°	779.9	779.7	779.6	779.5	779.3	779.2	779.0	778.9	779.0	779.2	779.3
155°	793.9	793.8	793.6	793.7	794.0	794.3	794.5	794.8	794.5	794.3	794.0
157.5°	807.2	807.4	807.5	807.6	807.6	807.6	807.6	807.6	807.6	807.6	807.6
160°	818.1	818.2	818.3	818.5	818.6	818.8	818.9	819.1	818.9	818.8	818.6
162.5°	827.6	827.8	827.9	828.2	828.6	829.0	829.5	829.9	829.5	829.0	828.6
165°	835.9	836.1	836.2	836.5	836.9	837.3	837.8	838.2	837.8	837.3	836.9
167.5°	842.6	842.6	842.6	842.9	843.5	844.1	844.6	845.2	844.6	844.1	843.5
170°	848.4	848.4	848.4	848.7	849.2	849.8	850.4	850.9	850.4	849.8	849.2
172.5°	851.9	851.8	851.6	851.9	852.6	853.3	854.0	854.7	854.0	853.3	852.6
175°	855.1	855.0	854.8	855.1	855.8	856.5	857.2	857.9	857.2	856.5	855.8
177.5°	856.4	856.2	856.1	856.4	857.1	857.8	858.5	859.2	858.5	857.8	857.1
180°	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9

TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7	2645.7
2.5°	2561.1	2530.1	2499.2	2477.0	2454.7	2427.1	2399.4	2398.3	2397.3	2376.6	2356.0
5°	2409.2	2355.5	2301.8	2249.2	2196.6	2144.0	2091.4	2079.4	2067.5	2049.6	2031.7
7.5°	2274.7	2189.0	2103.3	2036.0	1968.8	1916.2	1863.6	1827.8	1792.0	1764.3	1736.7
10°	2130.4	2024.1	1917.8	1836.5	1755.1	1698.1	1641.2	1600.0	1558.8	1539.2	1519.7
12.5°	1980.7	1865.2	1749.7	1669.9	1590.2	1521.9	1453.5	1416.1	1378.7	1351.6	1324.5
15°	1843.0	1718.8	1594.6	1509.9	1425.3	1361.3	1297.3	1259.9	1222.5	1195.4	1168.3
17.5°	1709.5	1584.3	1459.0	1373.3	1287.6	1229.5	1171.5	1135.2	1098.8	1082.0	1065.2
20°	1588.0	1461.7	1335.3	1254.5	1173.7	1116.7	1059.8	1040.3	1020.7	1005.0	989.3
22.5°	1467.6	1346.2	1224.7	1147.1	1069.5	1028.3	987.1	971.4	955.6	943.7	931.8
25°	1366.8	1245.8	1124.9	1057.1	989.3	957.3	925.3	915.0	904.7	892.7	880.8
27.5°	1264.8	1149.8	1034.8	980.6	926.4	900.3	874.3	861.3	848.3	838.5	828.7
30°	1174.8	1068.5	962.2	917.1	872.1	849.3	826.6	812.5	798.4	789.1	779.9
32.5°	1088.0	993.6	899.2	860.7	822.2	800.0	777.8	764.2	750.6	739.8	728.9
35°	1007.7	925.8	843.9	808.7	773.4	751.2	728.9	715.4	701.8	691.0	680.1
37.5°	937.2	862.9	788.6	755.5	722.4	702.9	683.4	669.3	655.2	643.8	632.4
40°	871.0	805.4	739.8	707.8	675.8	654.6	633.5	621.0	608.5	598.2	587.9
42.5°	812.5	752.3	692.1	660.6	629.1	609.1	589.0	574.4	559.7	553.8	547.8
45°	750.6	697.5	644.3	614.0	583.6	562.4	541.3	528.8	516.3	510.9	505.5
47.5°	696.4	647.0	597.7	567.9	538.0	519.0	500.1	490.3	480.5	472.9	465.3
50°	643.2	595.5	547.8	519.0	490.3	474.0	457.8	445.8	433.9	428.5	423.0
52.5°	592.3	548.9	505.5	476.2	446.9	431.2	415.5	405.1	394.8	383.5	372.1
55°	534.8	496.8	458.8	432.8	406.8	390.5	374.2	362.3	350.4	338.4	326.5
57.5°	487.0	449.6	412.2	388.9	365.6	349.8	334.1	321.1	308.1	298.3	288.5
60°	435.0	402.4	369.9	347.1	324.3	309.1	294.0	281.5	269.0	264.1	259.3
62.5°	386.2	355.8	325.4	305.4	285.3	270.6	256.0	247.9	239.7	236.5	233.2
65°	336.3	310.2	284.2	265.8	247.3	234.8	222.4	218.6	214.8	212.1	209.4
67.5°	289.6	267.4	245.1	228.9	212.6	203.9	195.3	190.9	186.6	183.3	180.1
70°	247.3	227.8	208.3	194.2	180.1	171.9	163.8	160.0	156.2	150.2	144.3
72.5°	201.8	186.6	171.4	160.5	149.7	142.6	135.6	128.0	120.4	115.0	109.6
75°	167.0	151.9	136.7	126.4	116.1	107.9	99.8	97.1	94.4	92.7	91.1
77.5°	128.0	115.0	102.0	93.8	85.7	81.9	78.1	76.5	74.8	74.3	73.8
80°	92.2	81.4	70.5	66.2	61.8	60.7	59.7	58.6	57.5	56.9	56.4
82.5°	57.5	52.1	46.6	45.6	44.5	43.9	43.4	42.8	42.3	41.8	41.2
85°	33.6	31.5	29.3	28.7	28.2	27.7	27.1	27.1	27.1	27.1	27.1
87.5°	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	14.1	13.6	13.0
90°	6.3	7.9	9.8	11.6	13.5	15.3	15.9	16.4	17.0	17.6	18.0
92.5°	11.3	11.5	12.7	14.0	15.3	16.6	17.6	18.6	19.5	20.5	21.1
95°	15.7	13.5	15.1	16.6	18.2	19.8	20.8	21.7	22.7	23.7	24.2
97.5°	54.9	49.3	42.1	34.8	27.6	20.4	21.5	22.7	23.8	24.9	25.6
100°	119.1	109.4	87.3	65.2	43.1	21.0	22.2	23.3	24.4	25.6	26.2
102.5°	157.2	145.8	121.1	96.5	71.8	47.2	42.5	37.8	33.1	28.5	26.3
105°	196.2	190.6	177.8	165.1	152.3	139.6	114.5	89.4	64.4	39.3	26.9
107.5°	237.7	239.4	241.6	243.7	245.8	247.9	226.1	204.3	182.5	160.7	140.5
110°	279.9	281.2	282.8	284.3	285.9	287.5	282.8	278.1	273.4	268.8	256.3



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	320.1	321.4	322.9	324.5	326.1	327.6	328.9	330.2	331.4	332.7	333.2
115°	359.7	360.8	362.0	363.3	364.6	365.9	367.3	368.7	370.1	371.5	372.5
117.5°	399.8	400.6	401.3	402.1	402.8	403.5	404.6	405.7	406.9	408.0	408.6
120°	437.3	438.1	438.5	439.0	439.4	439.8	440.9	442.1	443.2	444.3	444.9
122.5°	473.1	473.9	474.4	475.0	475.6	476.1	476.8	477.6	478.3	479.0	479.4
125°	506.8	507.7	508.2	508.8	509.3	509.9	510.2	510.5	510.8	511.0	511.3
127.5°	539.9	540.9	541.6	542.3	543.0	543.7	544.1	544.5	545.0	545.4	545.5
130°	570.5	571.4	572.0	572.5	573.1	573.7	574.2	574.8	575.4	575.9	576.1
132.5°	599.9	600.6	601.1	601.5	601.9	602.3	602.9	603.5	604.0	604.6	604.7
135°	628.7	629.4	630.0	630.5	631.1	631.7	632.1	632.5	632.9	633.4	633.4
137.5°	655.3	656.0	656.3	656.6	656.9	657.2	657.9	658.6	659.3	660.0	660.2
140°	679.7	680.3	680.7	681.2	681.6	682.0	682.6	683.1	683.7	684.3	684.4
142.5°	703.3	703.9	704.3	704.7	705.2	705.6	706.0	706.4	706.9	707.3	707.3
145°	725.5	726.1	726.4	726.7	727.0	727.3	727.6	727.8	728.1	728.4	728.5
147.5°	745.4	745.9	746.2	746.5	746.7	747.0	747.3	747.6	747.9	748.2	747.9
150°	763.4	763.7	764.0	764.3	764.6	764.9	765.2	765.4	765.7	766.0	765.9
152.5°	779.5	779.6	779.7	779.9	780.0	780.2	780.7	781.3	781.9	782.4	782.4
155°	793.7	793.6	793.8	793.9	794.1	794.2	794.9	795.6	796.3	797.0	797.0
157.5°	807.6	807.5	807.4	807.2	807.1	806.9	807.8	808.6	809.5	810.3	810.2
160°	818.5	818.3	818.2	818.1	817.9	817.8	818.6	819.5	820.3	821.2	821.1
162.5°	828.2	827.9	827.8	827.6	827.5	827.3	828.3	829.3	830.3	831.3	831.4
165°	836.5	836.2	836.1	835.9	835.8	835.6	836.8	837.9	839.0	840.2	840.2
167.5°	842.9	842.6	842.6	842.6	842.6	842.6	843.8	844.9	846.0	847.2	847.2
170°	848.7	848.4	848.4	848.4	848.4	848.4	849.5	850.6	851.8	852.9	852.9
172.5°	851.9	851.6	851.8	851.9	852.1	852.2	853.3	854.5	855.6	856.7	856.7
175°	855.1	854.8	855.0	855.1	855.2	855.4	856.4	857.4	858.4	859.4	859.3
177.5°	856.4	856.1	856.2	856.4	856.5	856.7	857.8	858.9	860.1	861.2	861.1
180°	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9	857.9



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	2645.7	2645.7	2645.7	2645.7
2.5°	2350.6	2345.2	2343.0	2340.9
5°	2014.9	1998.1	1994.3	1990.5
7.5°	1729.6	1722.6	1699.2	1675.9
10°	1498.0	1476.3	1466.6	1456.8
12.5°	1304.4	1284.3	1281.1	1277.8
15°	1154.2	1140.1	1135.2	1130.3
17.5°	1055.4	1045.7	1039.7	1033.7
20°	982.2	975.2	970.8	966.5
22.5°	926.4	920.9	917.7	914.4
25°	872.7	864.5	861.8	859.1
27.5°	821.7	814.6	811.9	809.2
30°	774.0	768.0	764.2	760.4
32.5°	721.9	714.8	712.7	710.5
35°	675.8	671.4	669.3	667.1
37.5°	627.0	621.6	618.3	615.0
40°	585.2	582.5	580.9	579.2
42.5°	542.9	538.0	537.5	536.9
45°	500.6	495.7	494.6	493.6
47.5°	461.0	456.7	456.1	455.6
50°	417.1	411.1	406.8	402.4
52.5°	366.6	361.2	357.4	353.6
55°	320.5	314.6	311.3	308.1
57.5°	285.8	283.1	281.5	279.9
60°	257.6	256.0	254.9	253.8
62.5°	231.6	230.0	230.0	230.0
65°	207.7	206.1	204.5	202.8
67.5°	176.8	173.6	173.0	172.5
70°	139.4	134.5	134.0	133.4
72.5°	109.0	108.5	107.4	106.3
75°	90.0	88.9	88.9	88.9
77.5°	72.7	71.6	71.6	71.6
80°	55.9	55.3	55.9	56.4
82.5°	41.2	41.2	40.7	40.1
85°	26.6	26.0	26.0	26.0
87.5°	13.0	13.0	13.0	13.0
90°	18.3	18.6	18.8	19.1
92.5°	21.2	21.4	21.5	21.7
95°	24.2	24.2	24.2	24.2
97.5°	25.7	25.8	26.0	26.1
100°	26.3	26.5	26.6	26.8
102.5°	26.6	26.8	27.1	27.4
105°	27.2	27.5	27.8	28.0
107.5°	122.0	103.4	84.8	66.3
110°	236.0	215.8	195.5	175.3



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	332.9	332.6	332.4	332.1
115°	373.1	373.7	374.2	374.8
117.5°	408.8	408.9	409.1	409.2
120°	444.9	444.9	444.9	444.9
122.5°	479.5	479.7	479.8	480.0
125°	511.6	511.9	512.2	512.5
127.5°	545.2	544.9	544.6	544.3
130°	575.8	575.5	575.2	574.9
132.5°	604.3	603.8	603.4	603.0
135°	632.9	632.5	632.1	631.7
137.5°	659.9	659.6	659.4	659.1
140°	684.1	683.9	683.6	683.3
142.5°	706.9	706.4	706.0	705.6
145°	728.5	728.5	728.5	728.5
147.5°	747.2	746.5	745.8	745.1
150°	765.5	765.1	764.7	764.2
152.5°	781.7	781.0	780.2	779.5
155°	796.1	795.3	794.4	793.6
157.5°	809.1	807.9	806.8	805.7
160°	820.1	819.1	818.1	817.1
162.5°	830.5	829.7	828.8	828.0
165°	839.2	838.2	837.3	836.3
167.5°	846.0	844.9	843.8	842.6
170°	851.8	850.6	849.5	848.4
172.5°	855.4	854.1	852.8	851.6
175°	858.1	857.0	855.9	854.7
177.5°	859.6	858.2	856.8	855.4
180°	857.9	857.9	857.9	857.9



TEST NUMBER: P831888

CATALOG NUMBER: S123RDIP-S1000D805U930-4F0-1E-UDD-G

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.04	13.91	13.95	14.83	15.99	17.71	18.57	18.61	19.49	20.66
	3H	14.27	15.04	15.18	15.97	17.16	19.21	19.98	20.13	20.91	22.10
	4H	14.65	15.38	15.58	16.31	17.51	19.70	20.43	20.63	21.36	22.56
	6H	14.93	15.61	15.88	16.54	17.76	20.01	20.69	20.96	21.62	22.84
	8H	15.02	15.66	15.97	16.61	17.83	20.09	20.73	21.04	21.69	22.90
	12H	15.08	15.68	16.03	16.63	17.87	20.13	20.74	21.08	21.68	22.92
4H	2H	13.77	14.50	14.71	15.43	16.63	17.71	18.44	18.64	19.37	20.57
	3H	15.14	15.75	16.09	16.71	17.93	19.37	19.97	20.31	20.93	22.15
	4H	15.60	16.15	16.56	17.11	18.35	19.98	20.53	20.93	21.48	22.73
	6H	15.97	16.44	16.94	17.42	18.66	20.42	20.89	21.38	21.87	23.11
	8H	16.10	16.54	17.07	17.51	18.76	20.55	20.99	21.52	21.96	23.22
	12H	16.17	16.57	17.16	17.56	18.82	20.61	21.01	21.60	22.00	23.26
8H	4H	15.92	16.36	16.89	17.33	18.59	19.95	20.39	20.92	21.36	22.61
	6H	16.38	16.75	17.38	17.76	19.01	20.44	20.81	21.44	21.82	23.08
	8H	16.57	16.90	17.58	17.90	19.17	20.63	20.95	21.63	21.95	23.22
	12H	16.72	17.00	17.72	17.99	19.31	20.75	21.03	21.75	22.02	23.34
12H	4H	15.93	16.33	16.92	17.32	18.58	19.90	20.30	20.89	21.28	22.54
	6H	16.44	16.76	17.44	17.76	19.04	20.42	20.74	21.42	21.74	23.01
	8H	16.66	16.94	17.67	17.94	19.26	20.61	20.90	21.62	21.89	23.21