

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332389-930

Luminaire Tested: **S123RDIP-S1165D1195U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332389-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D1195U930-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7094.0 lumens
Efficiency: N/A
Efficacy: 98.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332389-930

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

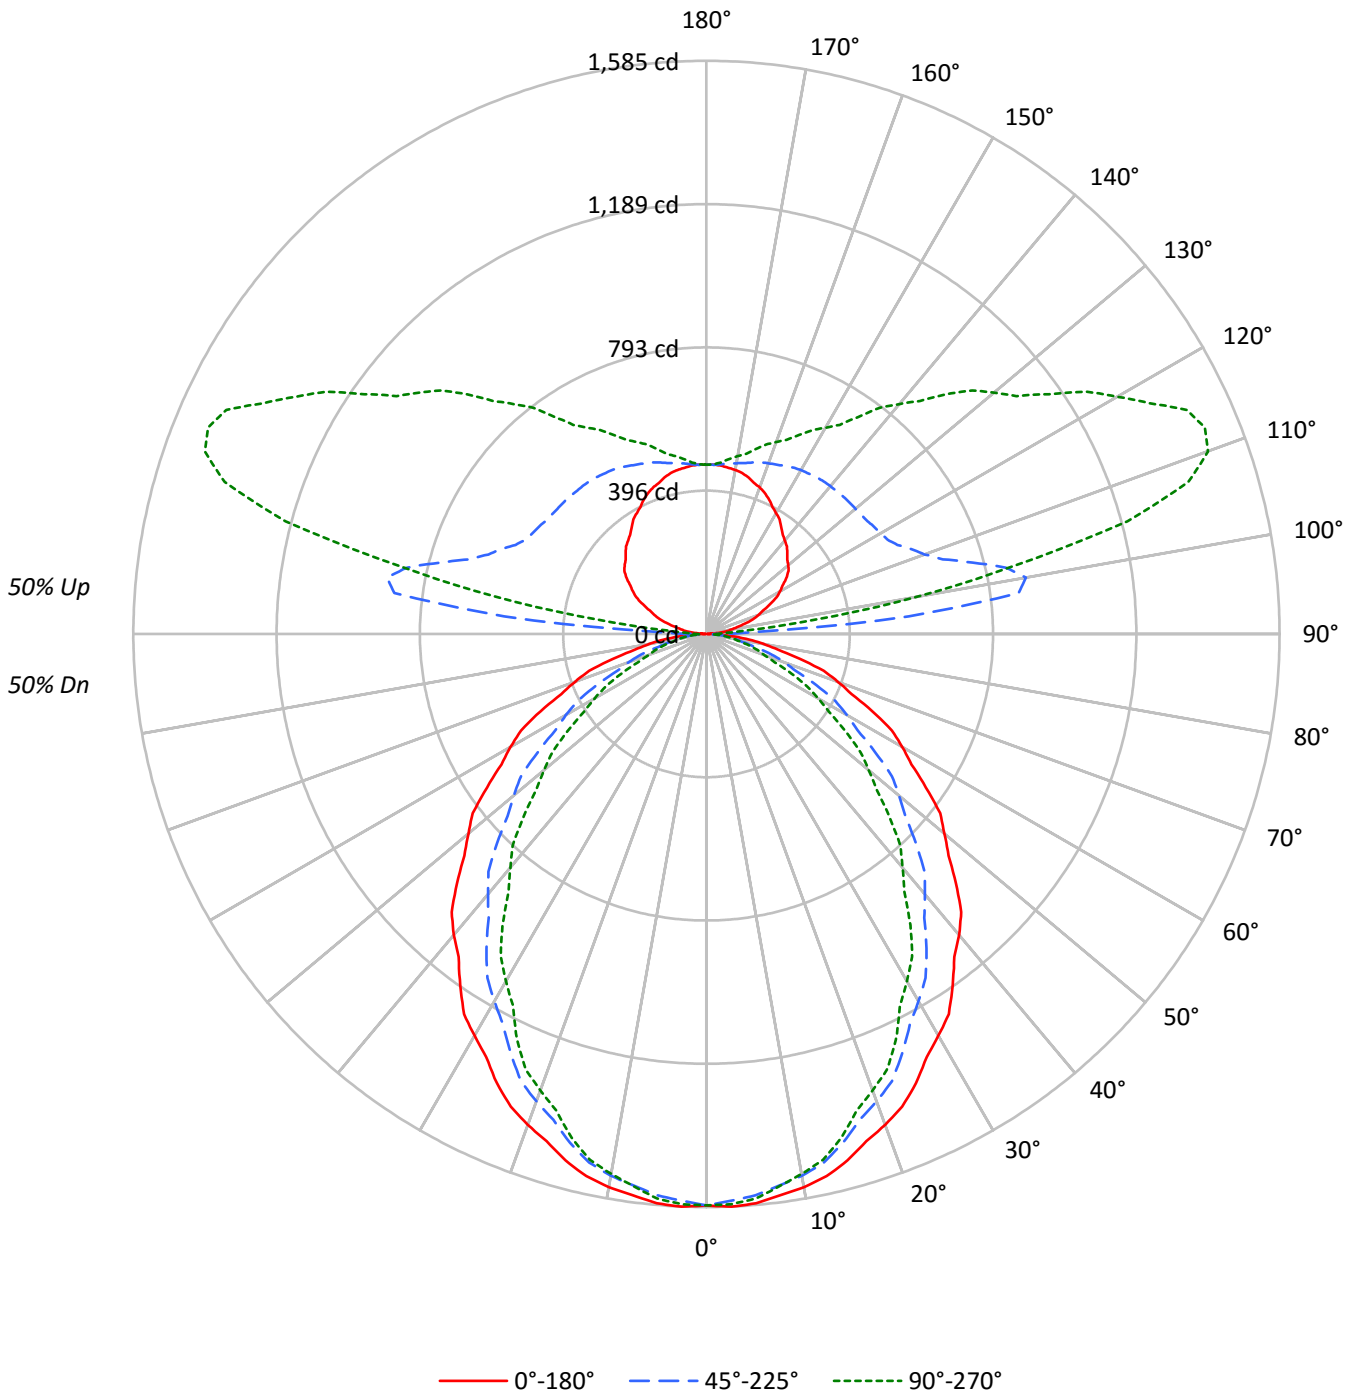



TEST NUMBER: P332389-930

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	107	107	107	107	99	99	99	99	84	84	84		69	69	69		56	56	56	50
1	98	94	90	87	91	87	84	81	74	71	69		62	60	58		50	49	48	43
2	90	82	76	71	83	76	71	67	65	61	58		54	52	49		45	43	41	37
3	82	73	66	60	75	67	61	56	58	53	49		48	45	42		40	37	35	31
4	75	65	57	51	69	60	53	48	51	46	42		43	39	36		36	33	31	27
5	69	58	50	44	64	54	47	41	46	41	36		39	35	32		32	29	27	24
6	64	52	44	38	59	48	41	36	42	36	32		35	31	28		30	26	24	21
7	59	47	39	34	54	44	37	32	38	32	28		32	28	25		27	24	21	19
8	55	43	35	30	51	40	33	28	35	29	25		30	25	22		25	22	19	17
9	51	39	32	27	47	36	30	25	32	26	23		27	23	20		23	20	17	15
10	48	36	29	24	44	34	27	23	29	24	20		25	21	18		21	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17009	17009	17009
5°	17074	16839	16935
10°	16978	16628	16571
15°	16796	16238	16067
20°	16544	15753	15385
25°	16286	15206	14719
30°	15945	14574	13779
35°	15594	13943	12917
40°	15271	13200	11849
45°	14846	12466	10886
50°	14380	11632	9808
55°	13902	10678	8801
60°	13464	9657	7698
65°	12893	8550	6594
70°	12180	7179	5325
75°	11137	5648	5011
80°	9930	5002	4612
85°	8386	4434	4113



TEST NUMBER: P332389-930

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.4	2.1
10°-20°	412.9	5.8
20°-30°	594.5	8.4
30°-40°	669.6	9.4
40°-50°	640.6	9.0
50°-60°	524.6	7.4
60°-70°	354.0	5.0
70°-80°	178.1	2.5
80°-90°	50.7	0.7
90°-100°	260.4	3.7
100°-110°	737.4	10.4
110°-120°	725.4	10.2
120°-130°	578.6	8.2
130°-140°	456.2	6.4
140°-150°	340.5	4.8
150°-160°	237.3	3.3
160°-170°	139.4	2.0
170°-180°	45.4	0.6
0°-30°	1155.7	16.3
0°-40°	1825.4	25.7
0°-60°	2990.6	42.2
0°-90°	3573.4	50.4
90°-120°	1723.2	24.3
90°-150°	3098.5	43.7
90°-180°	3521.0	49.6
0°-180°	7094.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1580	1580	1580	1580	1580	
5°	1580	1573	1558	1569	1567	150
15°	1507	1492	1457	1451	1442	424
25°	1371	1338	1280	1254	1239	630
35°	1187	1139	1061	1008	983	742
45°	975	915	819	748	715	752
55°	741	675	569	497	469	664
65°	506	434	336	276	259	501
75°	268	206	136	124	120	286
85°	68	41	36	33	33	76
90°	2	11	24	27	28	6
95°	32	105	562	164	110	35
105°	110	162	762	1332	1205	117
115°	194	242	582	1277	1465	192
125°	270	319	544	985	1156	239
135°	316	378	536	811	937	244
145°	361	414	530	665	732	226
155°	410	442	512	583	607	189
165°	448	461	491	520	530	126
175°	467	468	471	477	476	44
180°	468	468	468	468	468	



TEST NUMBER: P332389-930

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1580.2	1580.2	1580.2	1580.2	1580.2	1580.2	1580.2	1580.2	1580.2	1580.2	1580.2
2.5°	1585.3	1584.4	1583.5	1582.6	1581.7	1579.8	1577.1	1574.3	1571.7	1568.9	1571.4
5°	1580.2	1578.7	1577.4	1575.9	1574.5	1572.1	1568.6	1565.2	1561.8	1558.4	1561.0
7.5°	1565.5	1564.1	1562.5	1561.0	1559.4	1556.4	1552.0	1547.5	1543.1	1538.6	1540.1
10°	1553.3	1551.3	1549.3	1547.3	1545.3	1541.7	1536.6	1531.5	1526.3	1521.3	1521.5
12.5°	1535.9	1533.7	1531.4	1529.2	1527.0	1522.7	1516.5	1510.2	1503.9	1497.6	1497.5
15°	1507.2	1504.0	1500.9	1497.7	1494.6	1489.1	1481.1	1473.1	1465.1	1457.2	1455.7
17.5°	1471.0	1467.4	1463.7	1460.0	1456.5	1449.5	1439.4	1429.2	1419.1	1409.0	1406.0
20°	1444.3	1439.8	1435.3	1430.7	1426.1	1418.5	1407.6	1396.8	1385.9	1375.2	1371.4
22.5°	1414.6	1409.3	1404.1	1398.9	1393.7	1385.3	1373.8	1362.3	1350.8	1339.2	1334.6
25°	1371.3	1364.2	1357.1	1349.9	1342.8	1332.7	1319.6	1306.5	1293.4	1280.3	1274.3
27.5°	1318.7	1310.9	1303.0	1295.2	1287.3	1276.1	1261.5	1246.9	1232.3	1217.7	1209.4
30°	1282.9	1274.3	1265.8	1257.2	1248.7	1236.4	1220.5	1204.5	1188.6	1172.6	1162.9
32.5°	1247.0	1237.3	1227.6	1217.9	1208.3	1195.0	1178.1	1161.2	1144.4	1127.6	1117.0
35°	1186.7	1176.5	1166.2	1156.0	1145.7	1131.8	1114.1	1096.5	1078.8	1061.1	1048.9
37.5°	1125.8	1114.4	1102.9	1091.5	1080.2	1065.0	1046.2	1027.4	1008.5	989.6	975.8
40°	1086.8	1074.2	1061.7	1049.2	1036.7	1020.3	1000.0	979.8	959.6	939.4	924.5
42.5°	1042.7	1030.1	1017.7	1005.1	992.5	975.8	955.0	934.0	913.1	892.3	876.0
45°	975.3	962.5	949.7	936.9	924.0	906.6	884.7	862.7	840.8	818.9	802.7
47.5°	907.8	893.8	879.7	865.7	851.6	833.6	811.6	789.7	767.8	745.9	728.2
50°	858.7	845.3	831.8	818.5	805.1	786.9	763.9	740.8	717.7	694.6	676.9
52.5°	814.6	800.1	785.5	771.0	756.4	737.8	714.9	692.1	669.3	646.5	628.1
55°	740.8	726.8	712.8	698.9	684.9	665.9	641.6	617.4	593.2	569.0	552.5
57.5°	672.5	657.4	642.1	627.0	611.7	592.0	567.7	543.3	519.0	494.7	479.1
60°	625.4	609.8	594.1	578.5	562.7	543.1	519.4	495.9	472.2	448.6	433.2
62.5°	578.2	562.6	546.9	531.2	515.6	495.9	472.3	448.7	425.0	401.4	386.9
65°	506.2	490.6	474.9	459.3	443.6	424.6	402.4	380.2	358.0	335.7	321.8
67.5°	434.2	418.3	402.5	386.7	370.9	352.3	331.0	309.7	288.4	267.1	256.7
70°	387.0	371.7	356.3	340.9	325.5	307.9	288.0	268.0	248.1	228.1	218.2
72.5°	339.9	324.7	309.6	294.4	279.2	262.6	244.5	226.4	208.3	190.2	182.1
75°	267.8	254.2	240.5	226.8	213.2	198.5	182.9	167.1	151.5	135.8	133.0
77.5°	202.2	189.9	177.5	165.2	152.8	141.5	131.5	121.4	111.3	101.3	99.7
80°	160.2	148.5	136.8	125.1	113.5	104.7	98.7	92.7	86.7	80.7	79.9
82.5°	120.2	110.1	100.0	89.9	79.9	73.5	70.7	67.8	65.1	62.3	61.4
85°	67.9	61.6	55.4	49.2	42.9	39.3	38.5	37.6	36.8	35.9	35.3
87.5°	24.9	22.8	20.7	18.8	16.6	15.8	16.4	17.0	17.5	18.1	17.6
90°	1.9	3.8	5.7	8.6	10.4	12.3	15.2	18.0	20.9	23.6	22.7
92.5°	11.7	17.4	25.4	32.8	40.8	54.8	79.6	120.3	160.3	145.7	109.9
95°	32.2	35.1	45.5	61.6	86.2	123.1	203.7	344.8	500.2	561.7	455.6
97.5°	55.0	55.8	64.0	78.0	102.3	142.3	219.2	378.3	637.3	870.5	931.3
100°	70.1	71.0	77.7	90.9	113.7	150.6	217.0	357.1	606.3	897.1	1083.7
102.5°	86.0	87.7	93.6	106.1	126.5	160.5	220.0	338.9	560.8	847.8	1091.2
105°	109.9	112.8	118.4	129.8	147.7	177.2	228.3	325.9	504.9	761.6	1033.5
107.5°	135.3	138.1	143.6	154.7	171.6	198.9	243.9	324.9	469.3	685.4	932.3
110°	153.4	156.3	161.0	171.5	187.5	214.1	256.7	328.7	455.6	642.2	868.6



TEST NUMBER: P332389-930

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	170.2	173.0	177.7	188.1	204.2	230.0	269.6	336.3	448.1	613.4	813.3
115°	194.2	198.0	203.7	213.1	229.3	254.8	290.8	348.6	445.2	582.5	746.4
117.5°	218.3	222.6	227.3	236.0	254.0	277.8	313.3	364.8	446.9	564.4	706.0
120°	234.9	237.7	242.5	252.0	269.9	293.7	327.8	377.0	450.0	556.0	684.9
122.5°	249.3	252.2	256.9	267.1	284.4	309.6	342.9	388.4	455.3	550.7	667.4
125°	269.9	271.9	277.5	288.0	306.0	331.5	364.7	406.3	463.2	543.7	645.1
127.5°	285.7	288.5	295.5	306.1	326.0	351.6	383.6	421.2	472.3	540.3	625.4
130°	295.5	298.4	306.9	318.3	338.2	363.7	395.0	431.0	478.3	538.0	614.7
132.5°	303.1	306.7	316.0	329.6	349.5	374.4	404.9	440.1	482.9	537.3	605.0
135°	316.4	320.2	330.6	344.8	364.7	390.3	419.6	451.8	489.8	536.1	592.1
137.5°	328.9	332.9	343.1	358.2	378.0	401.6	429.8	460.6	494.3	534.0	580.8
140°	337.2	341.9	351.4	366.6	385.6	409.2	436.7	465.1	497.3	533.3	574.1
142.5°	346.3	350.3	360.5	374.1	393.1	415.3	442.0	469.6	499.6	531.8	567.9
145°	360.9	363.7	372.3	386.5	402.6	424.4	449.0	474.6	501.1	529.5	559.9
147.5°	375.7	377.4	385.7	398.0	413.6	432.1	454.7	477.6	501.1	525.9	551.9
150°	385.6	386.5	394.0	406.3	419.6	436.7	458.4	478.3	501.1	522.9	546.6
152.5°	395.4	395.6	403.2	413.9	425.7	442.0	460.7	479.9	498.8	519.1	540.5
155°	410.2	410.2	415.9	425.3	435.7	449.0	465.1	480.3	496.4	512.5	531.4
157.5°	421.9	422.7	427.2	435.5	444.4	454.7	467.6	481.2	493.2	506.6	521.1
160°	431.0	431.0	434.8	442.4	449.0	458.4	469.9	481.2	491.6	502.1	514.4
162.5°	437.8	437.8	440.8	446.9	452.8	460.7	470.6	480.5	488.6	497.5	507.5
165°	448.1	447.1	449.0	453.7	457.5	464.1	471.7	478.3	484.0	490.6	498.2
167.5°	455.8	454.7	455.6	459.3	461.9	466.0	471.6	476.9	479.5	483.9	489.3
170°	460.4	458.4	459.4	462.3	464.1	466.0	470.8	474.6	476.5	479.3	484.0
172.5°	463.4	462.3	462.4	464.6	465.7	466.8	470.8	473.9	474.2	475.5	478.7
175°	467.0	466.0	465.1	467.0	467.0	468.0	469.9	471.7	470.8	470.8	472.7
177.5°	468.7	468.0	467.2	468.0	468.0	468.0	468.7	470.2	468.7	468.0	468.7
180°	468.0	468.0	468.0	468.0	468.0	468.0	468.0	468.0	468.0	468.0	468.0



TEST NUMBER: P332389-930

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1580.2	1580.2	1580.2	1580.2	1580.2	1580.2	1580.2	1580.2
2.5°	1573.9	1576.5	1578.9	1580.0	1579.5	1579.1	1578.6	1578.1
5°	1563.5	1566.1	1568.6	1569.6	1569.0	1568.5	1567.9	1567.3
7.5°	1541.5	1543.0	1544.3	1544.6	1543.6	1542.6	1541.6	1540.7
10°	1521.8	1522.1	1522.4	1521.8	1520.4	1519.0	1517.5	1516.1
12.5°	1497.3	1497.1	1497.0	1496.1	1494.4	1492.7	1491.1	1489.5
15°	1454.3	1452.9	1451.5	1449.8	1447.7	1445.8	1443.7	1441.8
17.5°	1403.0	1399.9	1396.9	1393.9	1390.9	1388.0	1385.0	1382.0
20°	1367.7	1364.0	1360.3	1356.7	1353.3	1349.9	1346.5	1343.1
22.5°	1330.0	1325.4	1320.8	1316.9	1313.7	1310.5	1307.3	1304.2
25°	1268.4	1262.3	1256.4	1251.8	1248.7	1245.5	1242.4	1239.3
27.5°	1201.1	1192.8	1184.5	1177.9	1173.1	1168.4	1163.6	1158.8
30°	1153.2	1143.6	1133.9	1126.8	1122.3	1117.7	1113.1	1108.6
32.5°	1106.4	1095.8	1085.2	1077.5	1072.7	1067.9	1063.2	1058.3
35°	1036.7	1024.4	1012.2	1003.5	998.3	993.2	988.1	983.0
37.5°	961.8	947.9	934.0	923.9	917.6	911.3	905.0	898.6
40°	909.8	895.0	880.2	869.5	862.9	856.4	849.9	843.3
42.5°	859.9	843.7	827.5	816.5	810.7	804.8	798.9	793.0
45°	786.4	770.2	754.0	742.5	735.6	728.8	721.9	715.1
47.5°	710.5	692.9	675.2	663.4	657.3	651.2	645.1	639.0
50°	659.3	641.6	623.9	611.9	605.4	598.8	592.2	585.7
52.5°	609.8	591.4	573.1	560.9	555.1	549.3	543.4	537.5
55°	536.0	519.4	503.0	491.9	486.2	480.5	474.7	469.0
57.5°	463.5	447.8	432.3	422.0	417.2	412.4	407.5	402.7
60°	417.8	402.4	387.0	376.9	372.1	367.2	362.4	357.6
62.5°	372.4	358.0	343.5	333.8	328.6	323.6	318.5	313.5
65°	307.9	293.9	280.0	271.4	268.3	265.1	262.0	258.9
67.5°	246.2	235.8	225.3	218.5	215.2	211.7	208.4	205.0
70°	208.1	198.2	188.3	181.7	178.6	175.5	172.3	169.2
72.5°	173.9	165.8	157.6	152.9	151.6	150.3	149.0	147.7
75°	130.1	127.3	124.4	122.8	122.2	121.6	121.1	120.5
77.5°	98.2	96.6	95.1	94.0	93.4	92.9	92.3	91.7
80°	79.0	78.2	77.3	76.6	76.1	75.5	74.9	74.4
82.5°	60.6	59.8	58.9	58.4	58.3	58.1	58.0	58.0
85°	34.7	34.2	33.6	33.3	33.3	33.3	33.3	33.3
87.5°	17.6	17.6	17.5	17.7	17.3	17.2	17.2	16.8
90°	23.6	24.6	25.6	27.5	26.5	27.5	28.5	27.5
92.5°	79.7	63.3	55.8	51.0	49.2	46.4	47.4	45.7
95°	341.0	231.1	180.9	146.8	128.8	120.3	113.7	109.9
97.5°	850.0	680.9	558.7	445.4	375.5	332.9	307.3	299.1
100°	1116.8	1040.1	929.3	794.8	699.0	629.9	593.0	593.9
102.5°	1205.5	1203.0	1138.4	1053.1	978.7	924.0	893.1	871.3
105°	1231.4	1326.2	1344.2	1319.6	1275.9	1240.0	1209.7	1204.9
107.5°	1156.7	1310.6	1393.6	1427.3	1428.1	1415.9	1405.7	1397.0
110°	1085.6	1259.9	1379.2	1445.5	1472.0	1479.6	1477.7	1475.9



TEST NUMBER: P332389-930

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1015.0	1193.2	1326.9	1412.2	1460.7	1484.2	1491.3	1491.8
115°	921.7	1086.5	1225.7	1329.0	1400.0	1441.7	1460.7	1465.4
117.5°	854.0	996.3	1121.4	1226.1	1300.2	1347.9	1375.2	1381.7
120°	818.4	946.3	1060.0	1155.7	1230.4	1283.5	1306.3	1312.0
122.5°	790.4	906.1	1011.5	1100.3	1166.9	1214.6	1239.6	1246.8
125°	753.1	856.3	947.2	1023.0	1083.7	1125.4	1149.0	1155.7
127.5°	720.5	812.5	894.5	963.5	1017.6	1053.1	1074.6	1080.6
130°	700.0	785.3	862.0	926.4	976.6	1010.7	1030.6	1038.2
132.5°	681.1	759.5	831.0	892.3	939.5	973.5	991.2	996.5
135°	655.5	722.8	784.3	838.3	884.8	913.1	930.2	936.9
137.5°	632.2	687.3	740.4	787.2	826.2	855.0	869.4	873.8
140°	618.6	666.8	712.3	753.1	789.0	815.6	830.7	829.8
142.5°	605.7	647.2	686.6	722.0	752.7	776.2	789.8	788.9
145°	590.1	621.4	651.8	679.1	702.9	722.8	730.3	732.2
147.5°	577.5	602.3	626.7	646.2	664.2	677.7	684.9	685.6
150°	568.3	590.1	610.0	628.0	642.2	652.6	658.4	658.4
152.5°	560.0	578.8	596.4	611.4	622.6	632.2	635.6	635.6
155°	547.5	562.6	576.9	588.2	596.8	604.4	606.3	607.2
157.5°	534.3	547.0	557.9	566.8	574.2	579.9	581.4	581.2
160°	526.7	537.1	546.6	553.2	559.9	565.5	565.5	564.6
162.5°	517.6	526.5	535.2	541.0	545.4	550.3	550.3	549.4
165°	505.8	511.5	518.1	522.9	526.7	530.4	529.5	529.5
167.5°	495.6	499.9	503.8	507.2	508.8	511.5	510.5	510.5
170°	488.8	491.6	495.4	497.3	498.2	500.2	499.2	499.2
172.5°	482.7	484.8	487.9	488.9	489.2	491.1	489.3	488.6
175°	474.6	475.5	477.4	477.4	477.4	478.3	477.4	476.5
177.5°	469.4	470.2	471.0	471.0	470.2	471.0	469.4	469.4
180°	468.0	468.0	468.0	468.0	468.0	468.0	468.0	468.0

(END OF REPORT)