

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831943

Luminaire Tested: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831943  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7395.0 lumens  
Efficiency: N/A  
Efficacy: 101.0 lumens/watt  
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 73.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

### Luminous Intensity Polar Plot

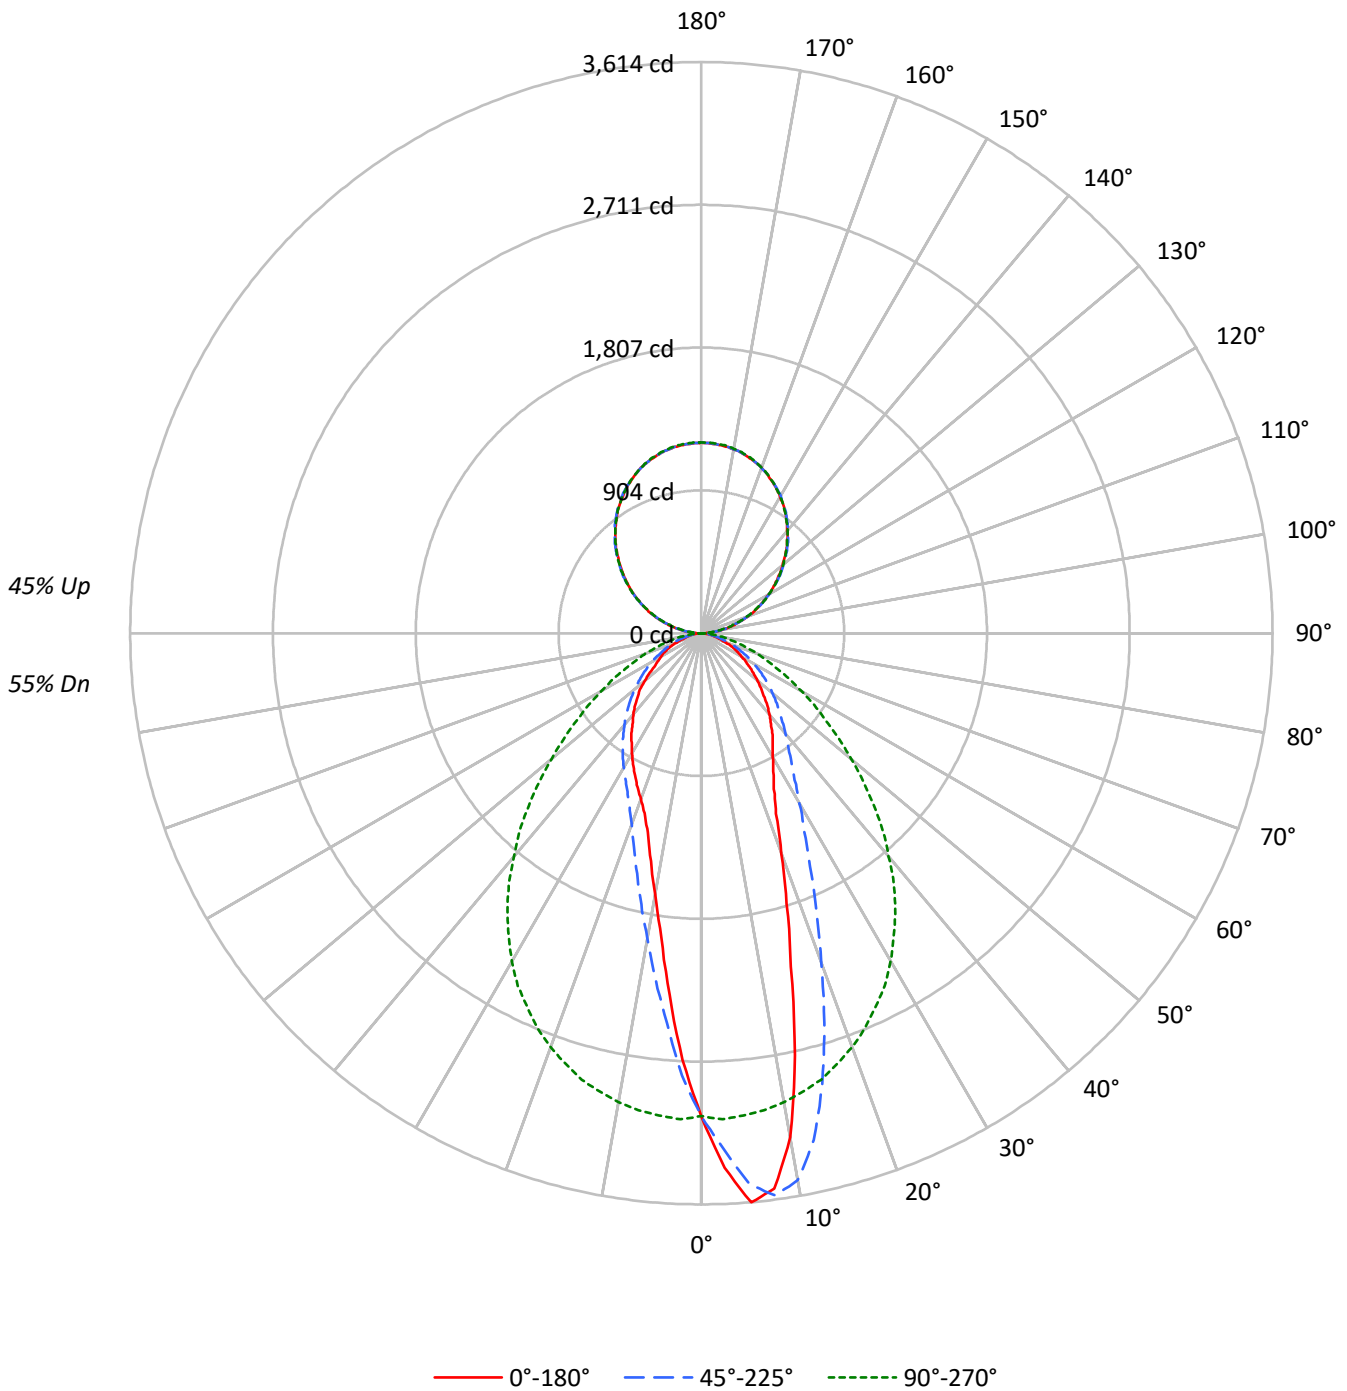



TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55				55
1	100	96	92	89	93	89	86	83	77	74	72	65	64	62	55	54	53				48	
2	92	85	79	74	85	79	74	70	68	65	61	58	56	54	49	48	46				42	
3	84	75	68	63	78	70	64	60	61	57	53	53	49	46	45	42	40				36	
4	78	67	60	54	72	63	57	51	55	50	46	48	44	41	41	38	36				32	
5	72	61	53	47	67	57	50	45	50	45	41	43	39	36	37	34	32				29	
6	66	55	47	42	62	52	45	40	46	40	36	40	36	32	34	31	29				26	
7	62	50	43	37	58	47	40	36	42	36	32	37	32	29	32	28	26				24	
8	58	46	39	33	54	43	37	32	38	33	29	34	30	26	29	26	24				22	
9	54	42	35	30	50	40	33	29	36	30	27	31	27	24	28	24	22				20	
10	51	39	32	28	47	37	31	26	33	28	24	29	25	22	26	23	20				18	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	32890	32890	32890	32890	32890
5°	39053	37807	33097	26754	24840
10°	35382	38402	32932	21436	18390
15°	24361	32926	32584	17521	14547
20°	16947	25350	31930	14773	12786
25°	12915	19320	30978	13131	11784
30°	11242	15447	29788	12192	10915
35°	10322	13030	28101	11401	10125
40°	9417	11636	25895	10624	9400
45°	8505	10642	23514	9889	8677
50°	7720	9818	20706	9168	7783
55°	6983	9015	18008	8464	6677
60°	6256	8198	15642	7685	6312
65°	5777	7274	13466	6907	5968
70°	4692	6288	11748	6250	4850
75°	4117	5003	9952	5186	4271
80°	3725	4234	8151	4351	4035
85°	3409	3717	6187	3940	3717

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 24811 cd/sqm



TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	278.5	3.8
10°-20°	644.5	8.7
20°-30°	739.4	10.0
30°-40°	728.8	9.9
40°-50°	642.7	8.7
50°-60°	494.5	6.7
60°-70°	325.1	4.4
70°-80°	157.9	2.1
80°-90°	42.4	0.6
90°-100°	77.6	1.0
100°-110°	235.0	3.2
110°-120°	400.0	5.4
120°-130°	526.2	7.1
130°-140°	591.5	8.0
140°-150°	581.5	7.9
150°-160°	489.5	6.6
160°-170°	325.9	4.4
170°-180°	114.1	1.5
0°-30°	1662.4	22.5
0°-40°	2391.2	32.3
0°-60°	3528.4	47.7
0°-90°	4053.8	54.8
90°-120°	712.6	9.6
90°-150°	2411.7	32.6
90°-180°	3341.0	45.2
0°-180°	7395.0	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	3056	3056	3056	3056	3056	
5°	3614	3499	3063	2476	2299	330
15°	2186	2955	2924	1572	1305	617
25°	1087	1627	2608	1106	992	514
35°	786	992	2138	868	770	490
45°	559	699	1545	650	570	434
55°	372	480	960	451	356	334
65°	227	286	529	271	234	222
75°	99	120	239	125	103	107
85°	28	30	50	32	30	29
90°	28	23	1	23	28	15
95°	74	70	56	70	74	74
105°	226	224	213	224	226	239
115°	404	404	403	404	404	400
125°	583	590	589	590	583	521
135°	764	769	764	769	764	587
145°	927	932	927	932	927	579
155°	1060	1063	1062	1063	1060	488
165°	1153	1154	1157	1154	1153	325
175°	1198	1199	1203	1199	1198	114
180°	1206	1206	1206	1206	1206	



TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6
2.5°	3386.3	3375.6	3365.0	3361.9	3358.7	3348.7	3338.7	3316.1	3293.6	3270.4	3247.2
5°	3614.3	3615.6	3616.8	3613.7	3610.5	3597.4	3584.2	3556.7	3529.1	3499.0	3469.0
7.5°	3544.1	3564.2	3584.2	3588.0	3591.8	3601.8	3611.8	3605.5	3599.3	3588.0	3576.7
10°	3237.2	3236.0	3234.7	3257.3	3279.8	3346.8	3413.9	3448.3	3482.8	3513.5	3544.1
12.5°	2736.1	2738.0	2739.9	2813.8	2887.7	2950.9	3014.2	3101.9	3189.6	3284.2	3378.8
15°	2186.1	2216.8	2247.5	2313.3	2379.1	2474.3	2569.5	2687.2	2805.0	2954.7	3104.4
17.5°	1795.2	1808.4	1821.6	1884.8	1948.1	2038.3	2128.5	2261.9	2395.3	2588.3	2781.2
20°	1479.5	1491.4	1503.3	1549.1	1594.8	1681.2	1767.7	1894.8	2022.0	2213.1	2404.1
22.5°	1235.3	1258.4	1281.6	1312.3	1343.0	1405.6	1468.3	1597.9	1727.6	1901.7	2075.9
25°	1087.4	1098.1	1108.7	1135.0	1161.3	1221.5	1281.6	1367.4	1453.2	1626.7	1800.3
27.5°	987.2	990.3	993.5	1012.9	1032.3	1071.1	1110.0	1189.5	1269.1	1411.9	1554.7
30°	904.5	910.2	915.8	930.8	945.9	974.0	1002.2	1058.6	1115.0	1242.8	1370.6
32.5°	840.6	843.8	846.9	859.4	871.9	892.6	913.3	957.8	1002.2	1100.0	1197.7
35°	785.5	786.1	786.8	796.1	805.5	825.6	845.6	882.6	919.5	991.6	1063.6
37.5°	722.9	727.2	731.6	738.5	745.4	762.9	780.5	810.6	840.6	900.1	959.6
40°	670.2	674.0	677.8	685.9	694.0	707.8	721.6	749.2	776.7	828.1	879.5
42.5°	617.6	620.1	622.6	630.8	638.9	655.8	672.7	694.7	716.6	759.2	801.8
45°	558.7	565.0	571.3	580.0	588.8	603.2	617.6	640.2	662.7	699.1	735.4
47.5°	509.9	513.0	516.1	523.7	531.2	548.7	566.3	586.3	606.4	640.2	674.0
50°	461.0	462.3	463.5	470.4	477.3	493.0	508.6	531.8	555.0	586.3	617.6
52.5°	414.7	417.8	420.9	427.8	434.7	445.4	456.0	479.8	503.6	534.3	565.0
55°	372.1	374.0	375.8	380.8	385.9	398.4	410.9	431.6	452.3	480.4	508.6
57.5°	332.0	334.5	337.0	340.8	344.5	355.8	367.1	385.2	403.4	431.6	459.8
60°	290.6	293.8	296.9	301.3	305.7	314.5	323.2	339.5	355.8	380.8	405.9
62.5°	260.6	261.2	261.8	265.6	269.4	275.6	281.9	295.0	308.2	333.2	358.3
65°	226.8	228.6	230.5	232.4	234.3	239.3	244.3	255.6	266.8	285.6	304.4
67.5°	191.7	193.6	195.4	198.6	201.7	206.1	210.5	218.0	225.5	243.0	260.6
70°	149.1	149.1	149.1	154.1	159.1	166.6	174.1	179.8	185.4	199.8	214.2
72.5°	121.5	122.1	122.8	123.4	124.0	128.4	132.8	142.2	151.6	160.4	169.1
75°	99.0	99.6	100.2	100.8	101.5	102.7	104.0	107.1	110.2	120.3	130.3
77.5°	78.9	79.6	80.2	80.8	81.4	82.7	83.9	85.2	86.4	90.2	94.0
80°	60.1	60.8	61.4	62.0	62.6	63.3	63.9	65.1	66.4	68.3	70.2
82.5°	43.8	43.8	43.8	43.8	43.8	45.1	46.4	46.4	46.4	47.6	48.9
85°	27.6	27.6	27.6	28.2	28.8	28.8	28.8	29.4	30.1	30.1	30.1
87.5°	12.5	11.9	11.3	11.9	12.5	12.5	12.5	13.2	13.8	13.8	13.8
90°	28.4	28.0	27.6	27.2	26.7	26.1	25.3	24.4	23.6	22.7	20.0
92.5°	40.7	41.2	41.6	42.0	42.4	42.3	41.7	41.0	40.4	39.8	38.5
95°	73.9	73.9	73.9	73.9	73.9	73.5	72.6	71.8	70.9	70.1	68.4
97.5°	106.1	106.3	106.5	106.7	106.9	106.5	105.5	104.4	103.4	102.3	101.0
100°	144.0	143.6	143.1	142.7	142.3	141.8	141.1	140.5	139.9	139.3	138.2
102.5°	182.8	183.0	183.2	183.5	183.7	183.5	182.8	182.2	181.6	180.9	179.5
105°	225.5	225.0	224.6	224.2	223.8	223.6	223.6	223.6	223.6	223.6	221.7
107.5°	269.0	269.2	269.4	269.7	269.9	269.7	269.0	268.4	267.8	267.1	266.3
110°	313.5	314.0	314.4	314.8	315.2	315.0	314.2	313.3	312.5	311.7	311.2



TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	360.9	360.9	360.9	360.9	360.9	360.4	359.3	358.3	357.2	356.2	356.2
115°	403.5	403.8	404.0	404.2	404.4	404.4	404.2	404.0	403.8	403.5	404.0
117.5°	447.1	447.7	448.4	449.0	449.6	450.0	450.0	450.0	450.0	450.0	450.4
120°	493.5	494.0	494.4	494.8	495.2	495.5	495.7	496.0	496.2	496.4	497.4
122.5°	538.1	538.7	539.3	539.9	540.6	541.2	541.8	542.5	543.1	543.7	544.2
125°	582.6	583.4	584.3	585.1	585.9	586.8	587.6	588.5	589.3	590.2	590.6
127.5°	627.1	627.9	628.8	629.6	630.5	631.5	632.8	634.0	635.3	636.6	637.0
130°	670.7	672.1	673.6	675.1	676.6	677.7	678.6	679.4	680.3	681.1	681.7
132.5°	716.1	717.2	718.2	719.3	720.4	721.4	722.5	723.5	724.6	725.6	726.0
135°	763.5	763.9	764.3	764.8	765.2	765.8	766.7	767.5	768.3	769.2	769.4
137.5°	805.2	805.8	806.5	807.1	807.7	808.6	809.6	810.7	811.7	812.8	812.1
140°	845.9	847.4	848.9	850.3	851.8	852.7	852.9	853.1	853.3	853.5	853.3
142.5°	887.6	888.7	889.7	890.8	891.8	892.4	892.7	892.9	893.1	893.3	892.9
145°	927.4	928.2	929.1	929.9	930.8	931.3	931.5	931.7	931.9	932.1	931.5
147.5°	963.4	964.6	965.9	967.2	968.4	969.1	969.1	969.1	969.1	969.1	968.4
150°	997.5	998.7	1000.0	1001.3	1002.5	1003.2	1003.2	1003.2	1003.2	1003.2	1002.7
152.5°	1030.6	1031.7	1032.7	1033.8	1034.9	1035.2	1034.7	1034.3	1033.9	1033.5	1033.3
155°	1060.0	1061.5	1063.0	1064.4	1065.9	1066.2	1065.4	1064.5	1063.7	1062.8	1062.6
157.5°	1087.5	1088.7	1090.0	1091.3	1092.5	1092.7	1091.9	1091.1	1090.2	1089.4	1089.2
160°	1114.0	1114.8	1115.7	1116.5	1117.4	1117.3	1116.2	1115.2	1114.1	1113.1	1113.1
162.5°	1133.9	1135.4	1136.8	1138.3	1139.8	1140.0	1138.9	1137.9	1136.8	1135.8	1135.6
165°	1152.8	1154.3	1155.8	1157.3	1158.7	1158.8	1157.6	1156.3	1155.1	1153.8	1153.8
167.5°	1169.9	1171.2	1172.4	1173.7	1174.9	1174.9	1173.7	1172.4	1171.2	1169.9	1169.7
170°	1182.2	1183.7	1185.2	1186.6	1188.1	1188.1	1186.6	1185.2	1183.7	1182.2	1182.2
172.5°	1191.7	1193.2	1194.6	1196.1	1197.6	1197.7	1196.4	1195.2	1193.9	1192.6	1192.6
175°	1198.3	1199.8	1201.3	1202.7	1204.2	1204.3	1203.0	1201.8	1200.5	1199.3	1199.3
177.5°	1202.1	1203.6	1205.0	1206.5	1208.0	1208.1	1206.8	1205.6	1204.3	1203.0	1203.0
180°	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9



TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6
2.5°	3244.1	3241.0	3210.9	3180.8	3151.4	3122.0	3100.0	3078.1	3041.2	3004.2	2981.0
5°	3445.2	3421.4	3373.8	3326.2	3254.8	3183.3	3123.2	3063.1	2986.7	2910.2	2846.3
7.5°	3557.3	3537.9	3480.3	3422.6	3328.0	3233.5	3139.5	3045.5	2932.8	2820.0	2723.6
10°	3560.4	3576.7	3529.1	3481.5	3375.0	3268.5	3140.7	3013.0	2861.4	2709.8	2585.1
12.5°	3448.9	3519.1	3509.1	3499.0	3390.7	3282.3	3127.0	2971.6	2785.6	2599.5	2443.6
15°	3240.3	3376.3	3416.4	3456.5	3366.9	3277.3	3100.7	2924.0	2705.4	2486.8	2307.6
17.5°	2971.6	3162.0	3267.9	3373.8	3308.6	3243.5	3049.9	2856.4	2610.2	2364.0	2169.2
20°	2653.4	2902.7	3068.7	3234.7	3210.9	3187.1	2987.3	2787.5	2521.9	2256.3	2045.2
22.5°	2339.0	2602.0	2831.3	3060.6	3085.0	3109.4	2907.7	2706.0	2415.4	2124.7	1909.9
25°	2067.7	2335.2	2608.3	2881.4	2936.5	2991.7	2800.0	2608.3	2307.0	2005.7	1792.1
27.5°	1809.0	2063.3	2364.0	2664.7	2764.9	2865.1	2689.7	2514.4	2200.5	1886.7	1673.7
30°	1597.9	1825.3	2132.3	2439.2	2578.9	2718.6	2557.6	2396.6	2085.3	1774.0	1565.4
32.5°	1401.2	1604.8	1913.0	2221.2	2383.4	2545.7	2406.6	2267.6	1968.1	1668.7	1462.6
35°	1245.9	1428.2	1715.7	2003.2	2184.9	2366.5	2252.5	2138.5	1846.0	1553.5	1358.7
37.5°	1112.5	1265.3	1535.3	1805.3	1998.2	2191.1	2095.9	2000.7	1725.7	1450.7	1266.6
40°	1002.2	1125.0	1376.2	1627.4	1816.5	2005.7	1924.3	1842.9	1596.7	1350.5	1178.2
42.5°	907.6	1013.5	1239.0	1464.5	1638.0	1811.5	1757.7	1703.8	1480.8	1257.8	1098.1
45°	824.3	913.3	1111.9	1310.4	1470.2	1629.9	1587.3	1544.7	1352.4	1160.1	1013.5
47.5°	750.4	826.8	1004.1	1181.4	1324.8	1468.3	1428.8	1389.3	1230.2	1071.1	937.7
50°	682.8	747.9	895.7	1043.6	1172.6	1301.6	1269.1	1236.5	1105.0	973.4	858.2
52.5°	618.9	672.7	805.5	938.3	1042.3	1146.3	1121.2	1096.2	994.7	893.2	788.6
55°	558.1	607.6	719.7	831.9	920.8	1009.7	984.7	959.6	880.7	801.8	709.7
57.5°	503.0	546.2	637.0	727.9	798.7	869.4	857.5	845.6	779.9	714.1	638.3
60°	444.7	483.6	561.9	640.2	697.2	754.2	740.4	726.6	679.6	632.7	567.5
62.5°	392.7	427.2	489.8	552.5	598.8	645.2	635.2	625.1	589.4	553.7	499.9
65°	338.3	372.1	422.8	473.6	509.9	546.2	537.4	528.7	501.7	474.8	431.6
67.5°	288.8	317.0	360.8	404.7	429.1	453.5	448.5	443.5	422.8	402.1	368.3
70°	238.7	263.1	299.4	335.7	352.7	369.6	371.5	373.3	354.5	335.7	310.7
72.5°	188.5	208.0	241.8	275.6	288.8	301.9	301.3	300.7	289.4	278.1	255.6
75°	144.7	159.1	185.4	211.7	223.0	234.3	236.8	239.3	228.6	218.0	205.5
77.5°	104.0	114.0	134.0	154.1	166.6	179.1	180.4	181.7	176.6	171.6	159.7
80°	73.3	76.4	88.9	101.5	114.6	127.8	129.7	131.5	126.5	121.5	114.0
82.5°	50.7	52.6	57.0	61.4	72.0	82.7	85.2	87.7	85.2	82.7	74.5
85°	30.7	31.3	33.2	35.1	40.1	45.1	47.6	50.1	48.9	47.6	43.2
87.5°	13.8	13.8	14.4	15.0	16.3	17.5	20.7	23.8	21.9	20.0	18.2
90°	17.3	14.5	11.8	9.4	7.3	5.2	3.1	0.9	3.1	5.2	7.3
92.5°	37.3	36.0	34.7	33.5	32.2	30.9	29.7	28.4	29.7	30.9	32.2
95°	66.7	65.0	63.4	61.8	60.3	58.8	57.4	55.9	57.4	58.8	60.3
97.5°	99.8	98.5	97.3	96.1	95.0	94.0	92.9	91.9	92.9	94.0	95.0
100°	137.1	136.1	135.0	133.9	132.6	131.4	130.1	128.8	130.1	131.4	132.6
102.5°	178.0	176.5	175.0	174.0	173.4	172.7	172.1	171.5	172.1	172.7	173.4
105°	219.8	217.9	216.0	214.8	214.4	214.0	213.6	213.1	213.6	214.0	214.4
107.5°	265.4	264.6	263.8	263.2	263.0	262.8	262.6	262.4	262.6	262.8	263.0
110°	310.8	310.4	310.0	309.6	309.1	308.7	308.3	307.9	308.3	308.7	309.1





TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	356.2	356.2	356.2	356.1	355.9	355.7	355.4	355.2	355.4	355.7	355.9
115°	404.4	404.8	405.2	405.1	404.5	403.9	403.2	402.6	403.2	403.9	404.5
117.5°	450.8	451.2	451.6	451.7	451.5	451.3	451.1	450.9	451.1	451.3	451.5
120°	498.5	499.5	500.6	500.5	499.2	498.0	496.7	495.4	496.7	498.0	499.2
122.5°	544.6	545.0	545.4	545.2	544.4	543.5	542.7	541.8	542.7	543.5	544.4
125°	591.0	591.4	591.8	591.7	591.1	590.5	589.8	589.2	589.8	590.5	591.1
127.5°	637.4	637.8	638.3	637.8	636.6	635.3	634.0	632.8	634.0	635.3	636.6
130°	682.4	683.0	683.6	683.1	681.4	679.7	678.0	676.4	678.0	679.7	681.4
132.5°	726.5	726.9	727.3	726.7	725.0	723.3	721.6	719.9	721.6	723.3	725.0
135°	769.6	769.8	770.0	769.5	768.2	767.0	765.7	764.5	765.7	767.0	768.2
137.5°	811.5	810.9	810.2	809.4	808.3	807.3	806.2	805.2	806.2	807.3	808.3
140°	853.1	852.9	852.7	852.0	851.0	849.9	848.9	847.8	848.9	849.9	851.0
142.5°	892.4	892.0	891.6	890.9	889.8	888.8	887.7	886.7	887.7	888.8	889.8
145°	930.9	930.2	929.6	929.1	928.7	928.2	927.8	927.4	927.8	928.2	928.7
147.5°	967.8	967.2	966.5	965.8	965.0	964.1	963.3	962.4	963.3	964.1	965.0
150°	1002.3	1001.9	1001.5	1001.1	1000.6	1000.2	999.8	999.4	999.8	1000.2	1000.6
152.5°	1033.1	1032.9	1032.6	1032.2	1031.6	1031.0	1030.3	1029.7	1030.3	1031.0	1031.6
155°	1062.4	1062.2	1062.0	1061.9	1061.9	1061.9	1061.9	1061.9	1061.9	1061.9	1061.9
157.5°	1089.0	1088.7	1088.5	1088.5	1088.7	1089.0	1089.2	1089.4	1089.2	1089.0	1088.7
160°	1113.1	1113.1	1113.1	1113.3	1113.7	1114.1	1114.5	1114.9	1114.5	1114.1	1113.7
162.5°	1135.4	1135.2	1134.9	1135.2	1135.8	1136.4	1137.1	1137.7	1137.1	1136.4	1135.8
165°	1153.8	1153.8	1153.8	1154.1	1154.7	1155.4	1156.0	1156.6	1156.0	1155.4	1154.7
167.5°	1169.5	1169.3	1169.0	1169.4	1170.2	1171.0	1171.9	1172.7	1171.9	1171.0	1170.2
170°	1182.2	1182.2	1182.2	1182.6	1183.5	1184.3	1185.2	1186.0	1185.2	1184.3	1183.5
172.5°	1192.6	1192.6	1192.6	1193.0	1193.9	1194.7	1195.6	1196.4	1195.6	1194.7	1193.9
175°	1199.3	1199.3	1199.3	1199.7	1200.5	1201.4	1202.2	1203.0	1202.2	1201.4	1200.5
177.5°	1203.0	1203.0	1203.0	1203.5	1204.3	1205.2	1206.0	1206.8	1206.0	1205.2	1204.3
180°	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9



TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6	3055.6
2.5°	2957.8	2922.1	2886.4	2860.7	2835.1	2803.1	2771.2	2769.9	2768.7	2744.9	2721.1
5°	2782.4	2720.4	2658.4	2597.7	2536.9	2476.1	2415.4	2401.6	2387.8	2367.1	2346.5
7.5°	2627.1	2528.1	2429.2	2351.5	2273.8	2213.1	2152.3	2111.0	2069.6	2037.7	2005.7
10°	2460.5	2337.7	2214.9	2121.0	2027.0	1961.2	1895.5	1847.9	1800.3	1777.7	1755.2
12.5°	2287.6	2154.2	2020.8	1928.7	1836.6	1757.7	1678.7	1635.5	1592.3	1561.0	1529.7
15°	2128.5	1985.0	1841.6	1743.9	1646.2	1572.3	1498.3	1455.1	1411.9	1380.6	1349.3
17.5°	1974.4	1829.7	1685.0	1586.0	1487.1	1420.0	1353.0	1311.0	1269.1	1249.7	1230.2
20°	1834.1	1688.1	1542.2	1448.9	1355.5	1289.7	1224.0	1201.4	1178.9	1160.7	1142.5
22.5°	1695.0	1554.7	1414.4	1324.8	1235.3	1187.6	1140.0	1121.9	1103.7	1089.9	1076.1
25°	1578.5	1438.8	1299.1	1220.8	1142.5	1105.6	1068.6	1056.7	1044.8	1031.0	1017.3
27.5°	1460.8	1328.0	1195.2	1132.5	1069.9	1039.8	1009.7	994.7	979.7	968.4	957.1
30°	1356.8	1234.0	1111.2	1059.2	1007.2	980.9	954.6	938.3	922.1	911.4	900.8
32.5°	1256.5	1147.6	1038.6	994.1	949.6	923.9	898.3	882.6	866.9	854.4	841.9
35°	1163.8	1069.3	974.7	934.0	893.2	867.6	841.9	826.2	810.6	798.0	785.5
37.5°	1082.4	996.6	910.8	872.6	834.4	811.8	789.3	773.0	756.7	743.5	730.4
40°	1006.0	930.2	854.4	817.4	780.5	756.1	731.6	717.2	702.8	690.9	679.0
42.5°	938.3	868.8	799.3	762.9	726.6	703.4	680.3	663.4	646.4	639.5	632.7
45°	866.9	805.5	744.2	709.1	674.0	649.6	625.1	610.7	596.3	590.1	583.8
47.5°	804.3	747.3	690.3	655.8	621.4	599.5	577.5	566.3	555.0	546.2	537.4
50°	742.9	687.8	632.7	599.5	566.3	547.5	528.7	514.9	501.1	494.9	488.6
52.5°	684.0	633.9	583.8	550.0	516.1	498.0	479.8	467.9	456.0	442.9	429.7
55°	617.6	573.8	529.9	499.9	469.8	451.0	432.2	418.4	404.7	390.9	377.1
57.5°	562.5	519.3	476.1	449.1	422.2	404.0	385.9	370.8	355.8	344.5	333.2
60°	502.4	464.8	427.2	400.9	374.6	357.0	339.5	325.1	310.7	305.1	299.4
62.5°	446.0	410.9	375.8	352.7	329.5	312.6	295.7	286.3	276.9	273.1	269.4
65°	388.4	358.3	328.2	306.9	285.6	271.2	256.8	252.4	248.1	244.9	241.8
67.5°	334.5	308.8	283.1	264.3	245.5	235.5	225.5	220.5	215.5	211.7	208.0
70°	285.6	263.1	240.5	224.2	208.0	198.6	189.2	184.8	180.4	173.5	166.6
72.5°	233.0	215.5	197.9	185.4	172.9	164.7	156.6	147.8	139.1	132.8	126.5
75°	192.9	175.4	157.9	146.0	134.0	124.7	115.3	112.1	109.0	107.1	105.2
77.5°	147.8	132.8	117.8	108.4	99.0	94.6	90.2	88.3	86.4	85.8	85.2
80°	106.5	94.0	81.4	76.4	71.4	70.2	68.9	67.7	66.4	65.8	65.1
82.5°	66.4	60.1	53.9	52.6	51.4	50.7	50.1	49.5	48.9	48.2	47.6
85°	38.8	36.3	33.8	33.2	32.6	31.9	31.3	31.3	31.3	31.3	31.3
87.5°	16.3	16.3	16.3	16.3	16.3	16.3	16.3	16.3	16.3	15.7	15.0
90°	9.4	11.8	14.5	17.3	20.0	22.7	23.6	24.4	25.3	26.1	26.7
92.5°	33.5	34.7	36.0	37.3	38.5	39.8	40.4	41.0	41.7	42.3	42.4
95°	61.8	63.4	65.0	66.7	68.4	70.1	70.9	71.8	72.6	73.5	73.9
97.5°	96.1	97.3	98.5	99.8	101.0	102.3	103.4	104.4	105.5	106.5	106.9
100°	133.9	135.0	136.1	137.1	138.2	139.3	139.9	140.5	141.1	141.8	142.3
102.5°	174.0	175.0	176.5	178.0	179.5	180.9	181.6	182.2	182.8	183.5	183.7
105°	214.8	216.0	217.9	219.8	221.7	223.6	223.6	223.6	223.6	223.6	223.8
107.5°	263.2	263.8	264.6	265.4	266.3	267.1	267.8	268.4	269.0	269.7	269.9
110°	309.6	310.0	310.4	310.8	311.2	311.7	312.5	313.3	314.2	315.0	315.2



TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	356.1	356.2	356.2	356.2	356.2	356.2	357.2	358.3	359.3	360.4	360.9
115°	405.1	405.2	404.8	404.4	404.0	403.5	403.8	404.0	404.2	404.4	404.4
117.5°	451.7	451.6	451.2	450.8	450.4	450.0	450.0	450.0	450.0	450.0	449.6
120°	500.5	500.6	499.5	498.5	497.4	496.4	496.2	496.0	495.7	495.5	495.2
122.5°	545.2	545.4	545.0	544.6	544.2	543.7	543.1	542.5	541.8	541.2	540.6
125°	591.7	591.8	591.4	591.0	590.6	590.2	589.3	588.5	587.6	586.8	585.9
127.5°	637.8	638.3	637.8	637.4	637.0	636.6	635.3	634.0	632.8	631.5	630.5
130°	683.1	683.6	683.0	682.4	681.7	681.1	680.3	679.4	678.6	677.7	676.6
132.5°	726.7	727.3	726.9	726.5	726.0	725.6	724.6	723.5	722.5	721.4	720.4
135°	769.5	770.0	769.8	769.6	769.4	769.2	768.3	767.5	766.7	765.8	765.2
137.5°	809.4	810.2	810.9	811.5	812.1	812.8	811.7	810.7	809.6	808.6	807.7
140°	852.0	852.7	852.9	853.1	853.3	853.5	853.3	853.1	852.9	852.7	851.8
142.5°	890.9	891.6	892.0	892.4	892.9	893.3	893.1	892.9	892.7	892.4	891.8
145°	929.1	929.6	930.2	930.9	931.5	932.1	931.9	931.7	931.5	931.3	930.8
147.5°	965.8	966.5	967.2	967.8	968.4	969.1	969.1	969.1	969.1	969.1	968.4
150°	1001.1	1001.5	1001.9	1002.3	1002.7	1003.2	1003.2	1003.2	1003.2	1003.2	1002.5
152.5°	1032.2	1032.6	1032.9	1033.1	1033.3	1033.5	1033.9	1034.3	1034.7	1035.2	1034.9
155°	1061.9	1062.0	1062.2	1062.4	1062.6	1062.8	1063.7	1064.5	1065.4	1066.2	1065.9
157.5°	1088.5	1088.5	1088.7	1089.0	1089.2	1089.4	1090.2	1091.1	1091.9	1092.7	1092.5
160°	1113.3	1113.1	1113.1	1113.1	1113.1	1113.1	1114.1	1115.2	1116.2	1117.3	1117.4
162.5°	1135.2	1134.9	1135.2	1135.4	1135.6	1135.8	1136.8	1137.9	1138.9	1140.0	1139.8
165°	1154.1	1153.8	1153.8	1153.8	1153.8	1153.8	1155.1	1156.3	1157.6	1158.8	1158.7
167.5°	1169.4	1169.0	1169.3	1169.5	1169.7	1169.9	1171.2	1172.4	1173.7	1174.9	1174.9
170°	1182.6	1182.2	1182.2	1182.2	1182.2	1182.2	1183.7	1185.2	1186.6	1188.1	1188.1
172.5°	1193.0	1192.6	1192.6	1192.6	1192.6	1192.6	1193.9	1195.2	1196.4	1197.7	1197.6
175°	1199.7	1199.3	1199.3	1199.3	1199.3	1199.3	1200.5	1201.8	1203.0	1204.3	1204.2
177.5°	1203.5	1203.0	1203.0	1203.0	1203.0	1203.0	1204.3	1205.6	1206.8	1208.1	1208.0
180°	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9	1205.9

TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	3055.6	3055.6	3055.6	3055.6
2.5°	2714.8	2708.5	2706.0	2703.5
5°	2327.1	2307.6	2303.3	2298.9
7.5°	1997.6	1989.4	1962.5	1935.6
10°	1730.1	1705.0	1693.8	1682.5
12.5°	1506.5	1483.3	1479.5	1475.8
15°	1333.0	1316.7	1311.0	1305.4
17.5°	1219.0	1207.7	1200.8	1193.9
20°	1134.4	1126.3	1121.2	1116.2
22.5°	1069.9	1063.6	1059.9	1056.1
25°	1007.9	998.5	995.3	992.2
27.5°	949.0	940.8	937.7	934.6
30°	893.9	887.0	882.6	878.2
32.5°	833.7	825.6	823.1	820.6
35°	780.5	775.5	773.0	770.5
37.5°	724.1	717.8	714.1	710.3
40°	675.9	672.7	670.9	669.0
42.5°	627.0	621.4	620.8	620.1
45°	578.2	572.5	571.3	570.0
47.5°	532.4	527.4	526.8	526.2
50°	481.7	474.8	469.8	464.8
52.5°	423.4	417.2	412.8	408.4
55°	370.2	363.3	359.6	355.8
57.5°	330.1	327.0	325.1	323.2
60°	297.5	295.7	294.4	293.2
62.5°	267.5	265.6	265.6	265.6
65°	239.9	238.0	236.2	234.3
67.5°	204.2	200.4	199.8	199.2
70°	161.0	155.3	154.7	154.1
72.5°	125.9	125.3	124.0	122.8
75°	104.0	102.7	102.7	102.7
77.5°	83.9	82.7	82.7	82.7
80°	64.5	63.9	64.5	65.1
82.5°	47.6	47.6	47.0	46.4
85°	30.7	30.1	30.1	30.1
87.5°	15.0	15.0	15.0	15.0
90°	27.2	27.6	28.0	28.4
92.5°	42.0	41.6	41.2	40.7
95°	73.9	73.9	73.9	73.9
97.5°	106.7	106.5	106.3	106.1
100°	142.7	143.1	143.6	144.0
102.5°	183.5	183.2	183.0	182.8
105°	224.2	224.6	225.0	225.5
107.5°	269.7	269.4	269.2	269.0
110°	314.8	314.4	314.0	313.5



TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	360.9	360.9	360.9	360.9
115°	404.2	404.0	403.8	403.5
117.5°	449.0	448.4	447.7	447.1
120°	494.8	494.4	494.0	493.5
122.5°	539.9	539.3	538.7	538.1
125°	585.1	584.3	583.4	582.6
127.5°	629.6	628.8	627.9	627.1
130°	675.1	673.6	672.1	670.7
132.5°	719.3	718.2	717.2	716.1
135°	764.8	764.3	763.9	763.5
137.5°	807.1	806.5	805.8	805.2
140°	850.3	848.9	847.4	845.9
142.5°	890.8	889.7	888.7	887.6
145°	929.9	929.1	928.2	927.4
147.5°	967.2	965.9	964.6	963.4
150°	1001.3	1000.0	998.7	997.5
152.5°	1033.8	1032.7	1031.7	1030.6
155°	1064.4	1063.0	1061.5	1060.0
157.5°	1091.3	1090.0	1088.7	1087.5
160°	1116.5	1115.7	1114.8	1114.0
162.5°	1138.3	1136.8	1135.4	1133.9
165°	1157.3	1155.8	1154.3	1152.8
167.5°	1173.7	1172.4	1171.2	1169.9
170°	1186.6	1185.2	1183.7	1182.2
172.5°	1196.1	1194.6	1193.2	1191.7
175°	1202.7	1201.3	1199.8	1198.3
177.5°	1206.5	1205.0	1203.6	1202.1
180°	1205.9	1205.9	1205.9	1205.9



TEST NUMBER: P831943

CATALOG NUMBER: S123RDIP-S1165D1195U930-4F0-1E-UDD-G1

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.32	14.17	14.25	15.11	16.31	17.99	18.83	18.92	19.77	20.98
	3H	14.55	15.30	15.49	16.25	17.48	19.49	20.24	20.43	21.19	22.42
	4H	14.93	15.64	15.88	16.59	17.83	19.98	20.69	20.93	21.64	22.88
	6H	15.21	15.87	16.17	16.82	18.07	20.29	20.95	21.26	21.90	23.16
	8H	15.30	15.92	16.27	16.89	18.14	20.37	21.00	21.34	21.97	23.22
	12H	15.35	15.94	16.33	16.91	18.18	20.40	21.00	21.38	21.96	23.24
4H	2H	14.05	14.76	15.01	15.71	16.95	17.99	18.70	18.94	19.65	20.89
	3H	15.42	16.01	16.39	16.99	18.24	19.64	20.24	20.61	21.22	22.47
	4H	15.88	16.42	16.85	17.39	18.67	20.25	20.79	21.23	21.77	23.04
	6H	16.24	16.71	17.23	17.71	18.98	20.69	21.15	21.68	22.15	23.43
	8H	16.37	16.80	17.36	17.79	19.08	20.82	21.25	21.81	22.25	23.54
	12H	16.45	16.84	17.45	17.84	19.14	20.88	21.27	21.89	22.28	23.58
8H	4H	16.19	16.62	17.18	17.61	18.90	20.22	20.65	21.21	21.64	22.93
	6H	16.66	17.01	17.67	18.04	19.33	20.72	21.07	21.73	22.11	23.39
	8H	16.85	17.16	17.87	18.18	19.49	20.90	21.22	21.93	22.24	23.54
	12H	16.99	17.27	18.01	18.28	19.63	21.02	21.30	22.04	22.31	23.66
12H	4H	16.20	16.59	17.21	17.60	18.89	20.17	20.56	21.18	21.57	22.86
	6H	16.71	17.03	17.74	18.05	19.35	20.69	21.01	21.71	22.03	23.33
	8H	16.93	17.21	17.96	18.22	19.57	20.89	21.16	21.91	22.17	23.53