

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332251-930

Luminaire Tested: **S123RDIP-S340D585U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332251-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S340D585U930-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 585 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2788.3 lumens  
Efficiency: N/A  
Efficacy: 108.9 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 25.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332251-930

CATALOG NUMBER: S123RDIP-S340D585U930-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

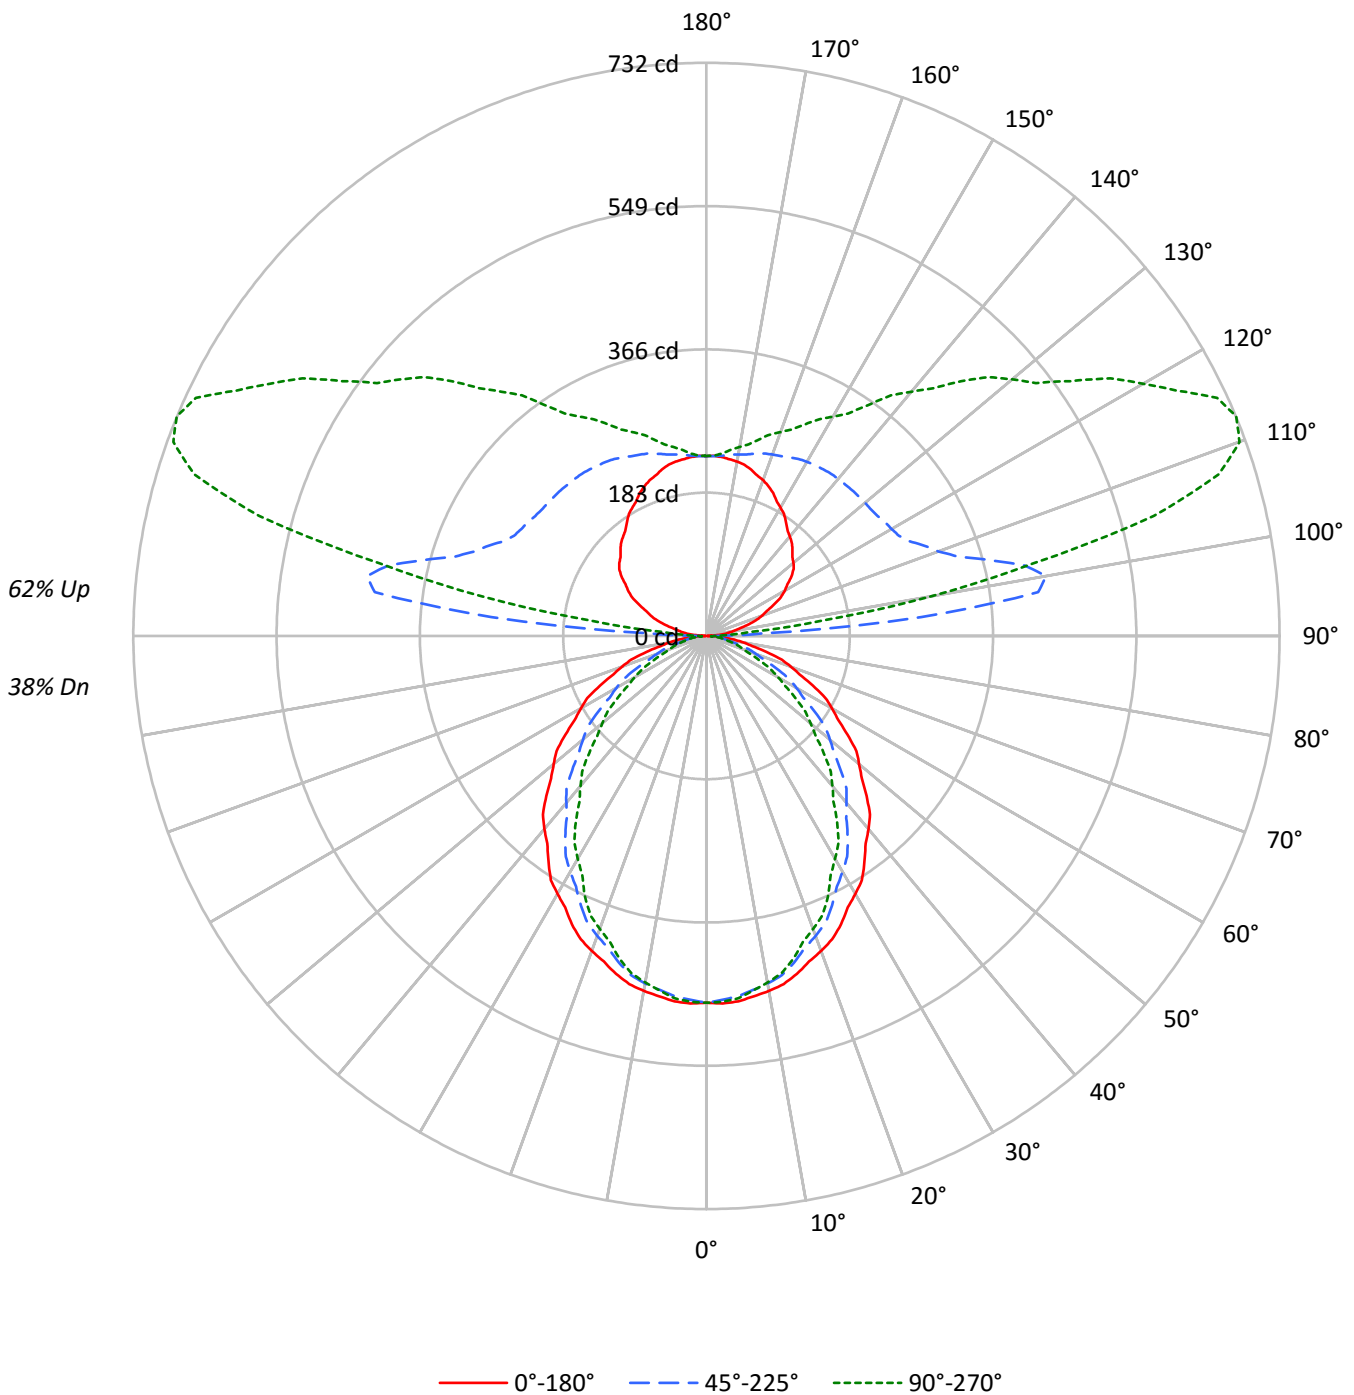



TEST NUMBER: P332251-930

CATALOG NUMBER: S123RDIP-S340D585U930-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45
1	95	91	87	84	86	83	80	77	67	65	63	53	52	51	40	39	39
2	87	80	74	69	79	73	68	63	59	56	53	47	45	43	36	34	33
3	79	70	63	58	72	64	58	53	53	48	45	42	39	36	32	30	28
4	73	62	55	49	66	57	50	45	47	42	38	37	34	31	29	26	24
5	67	56	48	42	60	51	44	39	42	37	33	34	30	27	26	23	21
6	62	50	42	36	56	46	39	34	38	33	29	30	27	24	23	21	19
7	57	45	37	32	52	41	35	30	34	29	25	28	24	21	21	19	17
8	53	41	33	28	48	38	31	26	31	26	23	25	22	19	20	17	15
9	49	37	30	25	45	34	28	23	29	24	20	23	20	17	18	16	14
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5042	5042	5042
5°	5061	4991	5020
10°	5032	4928	4912
15°	4979	4813	4763
20°	4904	4669	4560
25°	4828	4507	4363
30°	4727	4320	4084
35°	4623	4133	3829
40°	4526	3912	3513
45°	4401	3694	3227
50°	4262	3448	2907
55°	4121	3166	2609
60°	3991	2863	2282
65°	3823	2534	1954
70°	3610	2127	1577
75°	3302	1676	1485
80°	2944	1488	1364
85°	2482	1309	1223



TEST NUMBER: P332251-930

CATALOG NUMBER: S123RDIP-S340D585U930-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.0	1.6
10°-20°	122.4	4.4
20°-30°	176.2	6.3
30°-40°	198.5	7.1
40°-50°	189.9	6.8
50°-60°	155.5	5.6
60°-70°	104.9	3.8
70°-80°	52.8	1.9
80°-90°	15.7	0.6
90°-100°	127.8	4.6
100°-110°	362.0	13.0
110°-120°	356.1	12.8
120°-130°	284.0	10.2
130°-140°	224.0	8.0
140°-150°	167.1	6.0
150°-160°	116.5	4.2
160°-170°	68.4	2.5
170°-180°	22.3	0.8
0°-30°	342.6	12.3
0°-40°	541.1	19.4
0°-60°	886.5	31.8
0°-90°	1059.9	38.0
90°-120°	846.0	30.3
90°-150°	1521.1	54.6
90°-180°	1728.0	62.0
0°-180°	2788.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	468	468	468	468	468	
5°	468	466	462	465	465	44
15°	447	442	432	430	427	126
25°	406	396	380	372	367	187
35°	352	338	314	299	291	220
45°	289	271	243	222	212	223
55°	220	200	169	147	139	197
65°	150	129	100	82	77	148
75°	79	61	40	37	36	85
85°	20	12	11	10	10	23
90°	1	6	12	13	14	2
95°	16	51	276	80	54	17
105°	54	80	374	654	592	57
115°	95	119	286	627	719	94
125°	133	156	267	484	567	118
135°	155	185	263	398	460	120
145°	177	203	260	327	360	111
155°	201	217	252	286	298	93
165°	220	226	241	256	260	62
175°	229	230	231	234	234	22
180°	230	230	230	230	230	



TEST NUMBER: P332251-930

CATALOG NUMBER: S123RDIP-S340D585U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4
2.5°	469.9	469.6	469.4	469.1	468.9	468.3	467.5	466.7	465.9	465.0	465.8
5°	468.4	468.0	467.6	467.2	466.7	466.0	465.0	464.0	462.9	461.9	462.7
7.5°	464.1	463.6	463.2	462.7	462.3	461.4	460.1	458.8	457.4	456.1	456.5
10°	460.4	459.8	459.3	458.7	458.0	457.0	455.5	454.0	452.4	450.9	451.0
12.5°	455.3	454.6	454.0	453.3	452.7	451.3	449.5	447.7	445.8	443.9	443.8
15°	446.8	445.8	444.9	443.9	443.0	441.4	439.0	436.7	434.3	431.9	431.5
17.5°	436.0	435.0	433.9	432.8	431.7	429.7	426.6	423.6	420.7	417.7	416.8
20°	428.1	426.8	425.4	424.1	422.7	420.4	417.3	414.0	410.8	407.6	406.5
22.5°	419.3	417.8	416.2	414.7	413.1	410.7	407.2	403.8	400.4	397.0	395.6
25°	406.5	404.4	402.3	400.1	398.0	395.0	391.2	387.3	383.4	379.5	377.7
27.5°	390.9	388.6	386.2	383.9	381.6	378.3	374.0	369.6	365.3	360.9	358.5
30°	380.3	377.7	375.2	372.7	370.1	366.5	361.7	357.0	352.3	347.6	344.7
32.5°	369.7	366.7	363.9	361.0	358.2	354.2	349.2	344.2	339.2	334.2	331.1
35°	351.8	348.7	345.7	342.7	339.7	335.5	330.3	325.0	319.8	314.5	311.0
37.5°	333.7	330.3	326.9	323.6	320.2	315.7	310.1	304.5	299.0	293.3	289.3
40°	322.1	318.5	314.7	311.0	307.3	302.4	296.4	290.4	284.5	278.4	274.1
42.5°	309.1	305.3	301.7	297.9	294.2	289.3	283.1	276.9	270.7	264.5	259.7
45°	289.1	285.3	281.5	277.7	273.9	268.7	262.3	255.8	249.2	242.7	237.9
47.5°	269.1	265.0	260.7	256.6	252.4	247.1	240.6	234.1	227.6	221.1	215.9
50°	254.5	250.5	246.6	242.6	238.6	233.3	226.4	219.6	212.7	205.9	200.6
52.5°	241.5	237.2	232.8	228.5	224.2	218.7	211.9	205.1	198.4	191.6	186.2
55°	219.6	215.4	211.3	207.2	203.0	197.4	190.2	183.0	175.9	168.7	163.8
57.5°	199.3	194.9	190.4	185.8	181.3	175.5	168.3	161.0	153.8	146.7	142.0
60°	185.4	180.8	176.1	171.5	166.8	161.0	154.0	147.0	140.0	133.0	128.4
62.5°	171.4	166.7	162.1	157.5	152.9	147.0	140.0	133.0	126.0	119.0	114.7
65°	150.1	145.4	140.8	136.2	131.5	125.9	119.3	112.7	106.2	99.5	95.4
67.5°	128.7	124.0	119.3	114.6	109.9	104.4	98.1	91.8	85.4	79.2	76.1
70°	114.7	110.1	105.6	101.0	96.5	91.2	85.4	79.4	73.5	67.6	64.7
72.5°	100.8	96.3	91.8	87.2	82.8	77.9	72.5	67.1	61.7	56.3	54.0
75°	79.4	75.3	71.3	67.3	63.2	58.9	54.2	49.6	44.9	40.3	39.5
77.5°	59.9	56.3	52.6	48.9	45.3	42.0	39.0	36.0	33.0	30.0	29.6
80°	47.5	44.0	40.6	37.1	33.7	31.1	29.3	27.5	25.7	24.0	23.6
82.5°	35.6	32.6	29.7	26.7	23.6	21.8	21.0	20.1	19.3	18.4	18.2
85°	20.1	18.3	16.4	14.6	12.7	11.7	11.4	11.2	10.9	10.6	10.4
87.5°	7.5	6.9	6.4	5.9	5.4	5.1	5.5	5.7	6.0	6.3	6.1
90°	0.9	1.9	2.8	4.2	5.1	6.0	7.4	8.8	10.2	11.7	11.2
92.5°	5.8	8.6	12.5	16.1	20.0	26.9	39.1	59.0	78.7	71.5	54.0
95°	15.8	17.2	22.3	30.2	42.3	60.4	100.0	169.3	245.6	275.7	223.6
97.5°	27.0	27.5	31.5	38.3	50.2	69.9	107.6	185.7	312.8	427.4	457.2
100°	34.4	34.9	38.2	44.7	55.8	73.9	106.5	175.3	297.6	440.3	532.0
102.5°	42.2	43.0	46.0	52.1	62.1	78.8	107.9	166.4	275.3	416.2	535.7
105°	54.0	55.4	58.1	63.7	72.6	87.0	112.1	160.0	247.9	373.9	507.4
107.5°	66.4	67.8	70.5	76.0	84.3	97.7	119.7	159.5	230.4	336.5	457.7
110°	75.3	76.7	79.1	84.1	92.0	105.1	126.0	161.3	223.6	315.3	426.4



TEST NUMBER: P332251-930

CATALOG NUMBER: S123RDIP-S340D585U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	83.5	85.0	87.2	92.4	100.3	112.9	132.3	165.1	220.0	301.2	399.3
115°	95.3	97.2	100.0	104.6	112.5	125.1	142.8	171.1	218.6	286.0	366.5
117.5°	107.1	109.3	111.6	115.9	124.7	136.3	153.8	179.1	219.4	277.0	346.7
120°	115.4	116.8	119.0	123.7	132.6	144.1	160.9	185.1	220.9	273.0	336.2
122.5°	122.4	123.8	126.1	131.1	139.6	152.0	168.4	190.7	223.5	270.4	327.7
125°	132.6	133.5	136.2	141.4	150.2	162.7	179.0	199.5	227.4	266.9	316.7
127.5°	140.2	141.6	145.1	150.3	160.0	172.6	188.3	206.8	231.9	265.2	307.0
130°	145.1	146.5	150.7	156.2	166.0	178.6	193.9	211.6	234.8	264.2	301.8
132.5°	148.8	150.6	155.2	161.8	171.6	183.8	198.8	216.1	237.1	263.7	296.9
135°	155.3	157.2	162.3	169.3	179.0	191.6	206.0	221.8	240.4	263.2	290.7
137.5°	161.4	163.4	168.4	175.9	185.6	197.1	211.0	226.1	242.6	262.2	285.2
140°	165.6	167.9	172.5	179.9	189.2	200.9	214.3	228.4	244.1	261.8	281.8
142.5°	170.0	171.9	177.0	183.7	193.0	203.9	217.0	230.6	245.2	261.1	278.8
145°	177.2	178.6	182.8	189.7	197.6	208.3	220.5	233.0	246.0	259.9	274.8
147.5°	184.4	185.2	189.4	195.4	203.0	212.1	223.2	234.5	246.0	258.2	270.9
150°	189.2	189.7	193.5	199.5	206.0	214.3	225.1	234.8	246.0	256.7	268.3
152.5°	194.1	194.2	198.0	203.3	209.0	217.0	226.2	235.6	244.9	254.9	265.4
155°	201.4	201.4	204.2	208.8	213.9	220.5	228.4	235.8	243.7	251.6	260.9
157.5°	207.1	207.5	209.7	213.9	218.2	223.2	229.5	236.3	242.1	248.7	255.8
160°	211.6	211.6	213.4	217.2	220.5	225.1	230.6	236.3	241.3	246.5	252.5
162.5°	214.9	214.9	216.5	219.4	222.3	226.2	231.1	235.9	239.9	244.3	249.2
165°	220.0	219.5	220.5	222.7	224.6	227.9	231.5	234.8	237.7	240.9	244.6
167.5°	223.8	223.2	223.6	225.4	226.7	228.8	231.5	234.1	235.4	237.5	240.3
170°	226.0	225.1	225.5	226.9	227.9	228.8	231.1	233.0	233.9	235.3	237.7
172.5°	227.5	226.9	227.1	228.0	228.6	229.2	231.1	232.6	232.8	233.4	235.1
175°	229.3	228.8	228.4	229.3	229.3	229.8	230.6	231.5	231.1	231.1	232.0
177.5°	230.1	229.8	229.3	229.8	229.8	229.8	230.1	230.8	230.1	229.8	230.1
180°	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8



TEST NUMBER: P332251-930

CATALOG NUMBER: S123RDIP-S340D585U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	468.4	468.4	468.4	468.4	468.4	468.4	468.4	468.4
2.5°	466.5	467.2	468.1	468.3	468.2	468.1	467.9	467.8
5°	463.5	464.2	465.0	465.3	465.1	465.0	464.8	464.6
7.5°	457.0	457.4	457.8	457.9	457.5	457.3	457.0	456.7
10°	451.1	451.2	451.3	451.1	450.7	450.3	449.8	449.4
12.5°	443.8	443.8	443.8	443.4	443.0	442.5	442.0	441.5
15°	431.0	430.6	430.2	429.7	429.2	428.5	428.0	427.4
17.5°	415.9	415.0	414.1	413.2	412.3	411.4	410.6	409.7
20°	405.4	404.3	403.2	402.2	401.1	400.1	399.2	398.1
22.5°	394.3	392.9	391.5	390.4	389.4	388.5	387.5	386.6
25°	375.9	374.2	372.4	371.0	370.1	369.2	368.3	367.4
27.5°	356.0	353.6	351.1	349.2	347.7	346.3	345.0	343.5
30°	341.9	339.0	336.1	334.0	332.6	331.3	330.0	328.6
32.5°	327.9	324.8	321.6	319.4	318.0	316.6	315.1	313.7
35°	307.3	303.6	300.0	297.4	296.0	294.4	292.9	291.4
37.5°	285.1	281.0	276.9	273.9	272.0	270.1	268.2	266.4
40°	269.7	265.3	260.9	257.7	255.8	253.9	251.9	250.0
42.5°	254.9	250.1	245.3	242.1	240.3	238.6	236.8	235.1
45°	233.1	228.3	223.5	220.0	218.1	216.1	214.0	212.0
47.5°	210.6	205.4	200.2	196.7	194.9	193.1	191.2	189.4
50°	195.4	190.2	185.0	181.4	179.4	177.5	175.5	173.6
52.5°	180.8	175.3	169.9	166.3	164.5	162.8	161.1	159.3
55°	158.9	154.0	149.1	145.8	144.1	142.4	140.7	139.0
57.5°	137.4	132.7	128.2	125.1	123.7	122.2	120.8	119.4
60°	123.8	119.3	114.7	111.7	110.3	108.8	107.5	106.0
62.5°	110.4	106.2	101.8	98.9	97.4	96.0	94.4	92.9
65°	91.2	87.2	83.0	80.5	79.5	78.6	77.7	76.7
67.5°	73.0	69.9	66.8	64.7	63.8	62.8	61.8	60.8
70°	61.7	58.8	55.8	53.9	52.9	52.0	51.0	50.1
72.5°	51.5	49.2	46.7	45.3	44.9	44.5	44.2	43.8
75°	38.6	37.7	36.9	36.4	36.2	36.0	35.9	35.7
77.5°	29.1	28.6	28.2	27.9	27.7	27.6	27.4	27.2
80°	23.4	23.2	22.9	22.7	22.5	22.3	22.2	22.0
82.5°	17.9	17.7	17.4	17.3	17.3	17.2	17.2	17.2
85°	10.3	10.1	9.9	9.9	9.9	9.9	9.9	9.9
87.5°	6.1	6.2	6.2	6.3	6.1	6.2	6.2	6.0
90°	11.7	12.1	12.6	13.5	13.0	13.5	13.9	13.5
92.5°	39.1	31.1	27.5	25.0	24.2	22.7	23.2	22.4
95°	167.4	113.5	88.8	72.1	63.3	59.0	55.8	54.0
97.5°	417.4	334.3	274.3	218.7	184.3	163.4	150.8	146.8
100°	548.3	510.6	456.2	390.1	343.2	309.2	291.1	291.6
102.5°	591.8	590.6	558.9	517.0	480.5	453.6	438.4	427.7
105°	604.5	651.0	659.9	647.8	626.4	608.7	593.9	591.5
107.5°	567.9	643.4	684.1	700.7	701.1	695.1	690.1	685.8
110°	532.9	618.5	677.1	709.6	722.7	726.4	725.5	724.5





TEST NUMBER: P332251-930

CATALOG NUMBER: S123RDIP-S340D585U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	498.3	585.7	651.4	693.2	717.1	728.6	732.1	732.3
115°	452.5	533.4	601.8	652.4	687.3	707.8	717.1	719.4
117.5°	419.2	489.1	550.5	601.9	638.3	661.7	675.1	678.2
120°	401.8	464.6	520.3	567.4	604.1	630.1	641.2	644.1
122.5°	388.0	444.8	496.5	540.1	572.8	596.2	608.5	612.0
125°	369.7	420.4	465.0	502.2	532.0	552.4	564.1	567.4
127.5°	353.7	398.9	439.2	473.0	499.5	517.0	527.5	530.5
130°	343.6	385.5	423.1	454.8	479.5	496.2	506.0	509.6
132.5°	334.4	372.8	407.9	438.1	461.2	477.9	486.6	489.2
135°	321.8	354.8	385.1	411.6	434.3	448.3	456.6	459.9
137.5°	310.4	337.5	363.5	386.5	405.6	419.7	426.8	428.9
140°	303.7	327.3	349.7	369.7	387.3	400.4	407.8	407.3
142.5°	297.3	317.7	337.0	354.4	369.5	381.1	387.8	387.3
145°	289.7	305.1	319.9	333.5	345.0	354.8	358.6	359.5
147.5°	283.5	295.6	307.7	317.2	326.0	332.6	336.2	336.6
150°	279.0	289.7	299.5	308.3	315.3	320.4	323.2	323.2
152.5°	274.9	284.1	292.8	300.1	305.6	310.4	312.0	312.0
155°	268.8	276.2	283.2	288.8	292.9	296.7	297.6	298.1
157.5°	262.3	268.5	273.9	278.3	281.9	284.7	285.4	285.4
160°	258.5	263.7	268.3	271.6	274.8	277.6	277.6	277.1
162.5°	254.1	258.4	262.8	265.6	267.7	270.2	270.2	269.7
165°	248.3	251.1	254.4	256.7	258.5	260.4	259.9	259.9
167.5°	243.3	245.4	247.3	249.0	249.8	251.1	250.6	250.6
170°	239.9	241.3	243.2	244.1	244.6	245.6	245.1	245.1
172.5°	237.0	238.0	239.5	240.0	240.1	241.1	240.3	239.9
175°	233.0	233.4	234.4	234.4	234.4	234.8	234.4	233.9
177.5°	230.5	230.8	231.2	231.2	230.8	231.2	230.5	230.5
180°	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8

(END OF REPORT)