

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332311-930

Luminaire Tested: **S123RDIP-S775D585U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332311-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S775D585U930-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 585 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4108.0 lumens
Efficiency: N/A
Efficacy: 101.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332311-930

CATALOG NUMBER: S123RDIP-S775D585U930-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

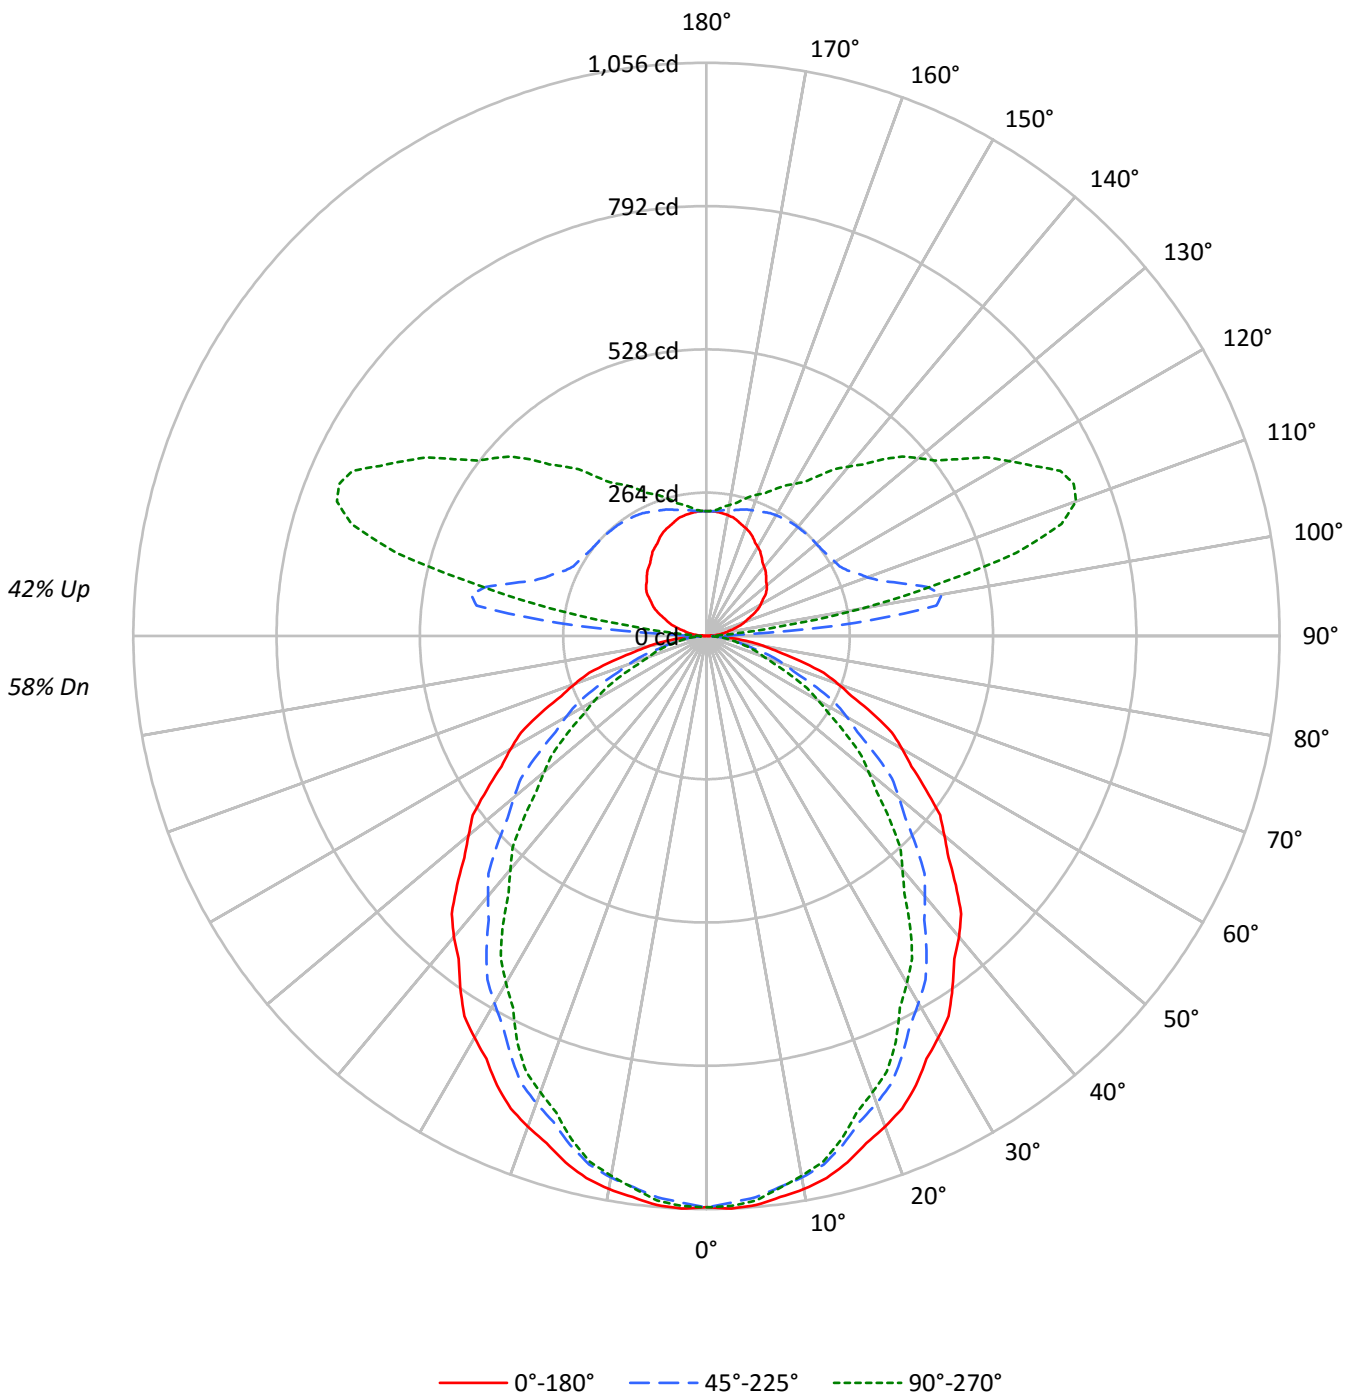



TEST NUMBER: P332311-930

CATALOG NUMBER: S123RDIP-S775D585U930-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63	58
1	100	96	92	88	93	89	86	83	78	75	73	67	65	63	57	55	54	50
2	91	84	78	73	85	79	73	69	68	64	61	59	56	53	50	48	46	42
3	84	74	67	61	78	69	63	58	61	56	52	52	49	46	45	42	40	36
4	77	66	58	52	71	62	55	49	54	49	44	47	43	39	40	37	35	31
5	70	59	51	45	66	55	48	43	49	43	39	42	38	34	37	33	30	27
6	65	53	45	39	61	50	43	37	44	38	34	38	34	30	33	30	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	27	24	22
8	56	44	36	31	52	41	34	29	37	31	27	32	28	24	28	24	22	19
9	52	40	33	28	49	38	31	26	34	28	24	30	25	22	26	22	20	18
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11330	11330	11330
5°	11373	11217	11282
10°	11309	11075	11038
15°	11188	10816	10702
20°	11021	10493	10247
25°	10849	10128	9804
30°	10621	9708	9178
35°	10387	9289	8604
40°	10172	8792	7893
45°	9889	8304	7252
50°	9577	7748	6532
55°	9259	7112	5863
60°	8968	6433	5126
65°	8588	5695	4391
70°	8113	4784	3547
75°	7419	3764	3335
80°	6614	3335	3068
85°	5582	2952	2742



TEST NUMBER: P332311-930

CATALOG NUMBER: S123RDIP-S775D585U930-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.8	2.4
10°-20°	275.0	6.7
20°-30°	396.0	9.6
30°-40°	446.1	10.9
40°-50°	426.7	10.4
50°-60°	349.5	8.5
60°-70°	235.8	5.7
70°-80°	118.6	2.9
80°-90°	33.2	0.8
90°-100°	127.8	3.1
100°-110°	362.0	8.8
110°-120°	356.1	8.7
120°-130°	284.0	6.9
130°-140°	224.0	5.5
140°-150°	167.1	4.1
150°-160°	116.5	2.8
160°-170°	68.4	1.7
170°-180°	22.3	0.5
0°-30°	769.9	18.7
0°-40°	1215.9	29.6
0°-60°	1992.1	48.5
0°-90°	2379.7	57.9
90°-120°	846.0	20.6
90°-150°	1521.1	37.0
90°-180°	1728.0	42.1
0°-180°	4108.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1053	1053	1053	1053	1053	
5°	1053	1048	1038	1045	1044	100
15°	1004	994	971	966	960	283
25°	914	891	853	835	826	420
35°	790	759	707	671	655	495
45°	650	610	546	498	476	501
55°	493	450	379	331	312	442
65°	337	289	224	184	172	334
75°	178	137	90	82	80	190
85°	45	27	24	22	22	51
90°	1	6	12	13	14	3
95°	16	51	276	80	54	17
105°	54	80	374	654	592	57
115°	95	119	286	627	719	94
125°	133	156	267	484	567	118
135°	155	185	263	398	460	120
145°	177	203	260	327	360	111
155°	201	217	252	286	298	93
165°	220	226	241	256	260	62
175°	229	230	231	234	234	22
180°	230	230	230	230	230	



TEST NUMBER: P332311-930

CATALOG NUMBER: S123RDIP-S775D585U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6
2.5°	1056.0	1055.4	1054.8	1054.2	1053.6	1052.4	1050.5	1048.7	1046.9	1045.1	1046.8
5°	1052.6	1051.7	1050.7	1049.8	1048.8	1047.2	1044.9	1042.6	1040.3	1038.1	1039.8
7.5°	1042.8	1041.9	1040.8	1039.8	1038.8	1036.7	1033.8	1030.9	1027.9	1024.9	1025.9
10°	1034.7	1033.3	1032.0	1030.7	1029.3	1027.0	1023.5	1020.2	1016.8	1013.3	1013.5
12.5°	1023.0	1021.6	1020.1	1018.6	1017.2	1014.3	1010.2	1006.0	1001.8	997.6	997.5
15°	1004.0	1001.8	999.7	997.7	995.6	991.9	986.6	981.3	975.9	970.6	969.7
17.5°	979.8	977.5	975.0	972.6	970.1	965.6	958.8	952.0	945.3	938.6	936.5
20°	962.1	959.0	956.0	953.0	950.0	944.9	937.6	930.4	923.2	916.0	913.5
22.5°	942.3	938.8	935.3	931.8	928.3	922.8	915.1	907.4	899.8	892.1	889.0
25°	913.5	908.7	903.9	899.2	894.5	887.7	879.0	870.3	861.5	852.8	848.8
27.5°	878.4	873.2	868.0	862.7	857.5	850.0	840.3	830.6	820.8	811.1	805.6
30°	854.5	848.8	843.2	837.5	831.8	823.6	813.0	802.3	791.7	781.1	774.7
32.5°	830.6	824.2	817.7	811.3	804.9	796.0	784.7	773.6	762.3	751.1	744.0
35°	790.5	783.7	776.8	770.1	763.2	753.9	742.2	730.3	718.6	706.9	698.7
37.5°	749.9	742.2	734.7	727.1	719.5	709.5	696.9	684.4	671.8	659.3	650.0
40°	723.9	715.6	707.2	698.9	690.6	679.6	666.2	652.7	639.2	625.7	615.9
42.5°	694.6	686.2	677.8	669.5	661.2	650.0	636.1	622.2	608.3	594.4	583.6
45°	649.6	641.2	632.6	624.0	615.5	604.0	589.3	574.7	560.1	545.5	534.7
47.5°	604.8	595.4	586.0	576.7	567.3	555.3	540.7	526.0	511.4	496.8	485.1
50°	571.9	563.0	554.2	545.2	536.3	524.2	508.8	493.4	478.1	462.7	450.9
52.5°	542.6	533.0	523.3	513.6	503.9	491.5	476.2	461.1	445.8	430.6	418.4
55°	493.4	484.1	474.8	465.5	456.2	443.5	427.4	411.3	395.2	379.0	368.0
57.5°	448.0	437.9	427.8	417.6	407.5	394.4	378.1	361.9	345.7	329.5	319.1
60°	416.6	406.2	395.7	385.3	374.9	361.7	346.0	330.3	314.5	298.8	288.5
62.5°	385.1	374.7	364.3	353.8	343.5	330.4	314.6	298.9	283.2	267.3	257.7
65°	337.2	326.8	316.3	305.9	295.5	282.8	268.1	253.2	238.5	223.6	214.3
67.5°	289.3	278.7	268.2	257.6	247.0	234.6	220.5	206.3	192.1	177.9	171.0
70°	257.8	247.6	237.3	227.1	216.9	205.0	191.8	178.6	165.3	152.0	145.3
72.5°	226.4	216.3	206.2	196.1	186.1	175.0	162.9	150.8	138.8	126.7	121.2
75°	178.4	169.3	160.2	151.1	142.0	132.2	121.8	111.4	100.9	90.5	88.6
77.5°	134.7	126.5	118.2	110.0	101.7	94.3	87.6	80.9	74.2	67.4	66.4
80°	106.7	98.9	91.2	83.4	75.6	69.7	65.7	61.7	57.8	53.8	53.2
82.5°	80.1	73.4	66.6	59.9	53.2	48.9	47.0	45.2	43.4	41.5	40.9
85°	45.2	41.1	36.9	32.7	28.5	26.2	25.6	25.0	24.5	23.9	23.6
87.5°	16.6	15.1	13.6	12.2	10.8	10.1	10.4	10.7	10.9	11.2	10.9
90°	0.9	1.9	2.8	4.2	5.1	6.0	7.4	8.8	10.2	11.7	11.2
92.5°	5.8	8.6	12.5	16.1	20.0	26.9	39.1	59.0	78.7	71.5	54.0
95°	15.8	17.2	22.3	30.2	42.3	60.4	100.0	169.3	245.6	275.7	223.6
97.5°	27.0	27.5	31.5	38.3	50.2	69.9	107.6	185.7	312.8	427.4	457.2
100°	34.4	34.9	38.2	44.7	55.8	73.9	106.5	175.3	297.6	440.3	532.0
102.5°	42.2	43.0	46.0	52.1	62.1	78.8	107.9	166.4	275.3	416.2	535.7
105°	54.0	55.4	58.1	63.7	72.6	87.0	112.1	160.0	247.9	373.9	507.4
107.5°	66.4	67.8	70.5	76.0	84.3	97.7	119.7	159.5	230.4	336.5	457.7
110°	75.3	76.7	79.1	84.1	92.0	105.1	126.0	161.3	223.6	315.3	426.4



TEST NUMBER: P332311-930

CATALOG NUMBER: S123RDIP-S775D585U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	83.5	85.0	87.2	92.4	100.3	112.9	132.3	165.1	220.0	301.2	399.3
115°	95.3	97.2	100.0	104.6	112.5	125.1	142.8	171.1	218.6	286.0	366.5
117.5°	107.1	109.3	111.6	115.9	124.7	136.3	153.8	179.1	219.4	277.0	346.7
120°	115.4	116.8	119.0	123.7	132.6	144.1	160.9	185.1	220.9	273.0	336.2
122.5°	122.4	123.8	126.1	131.1	139.6	152.0	168.4	190.7	223.5	270.4	327.7
125°	132.6	133.5	136.2	141.4	150.2	162.7	179.0	199.5	227.4	266.9	316.7
127.5°	140.2	141.6	145.1	150.3	160.0	172.6	188.3	206.8	231.9	265.2	307.0
130°	145.1	146.5	150.7	156.2	166.0	178.6	193.9	211.6	234.8	264.2	301.8
132.5°	148.8	150.6	155.2	161.8	171.6	183.8	198.8	216.1	237.1	263.7	296.9
135°	155.3	157.2	162.3	169.3	179.0	191.6	206.0	221.8	240.4	263.2	290.7
137.5°	161.4	163.4	168.4	175.9	185.6	197.1	211.0	226.1	242.6	262.2	285.2
140°	165.6	167.9	172.5	179.9	189.2	200.9	214.3	228.4	244.1	261.8	281.8
142.5°	170.0	171.9	177.0	183.7	193.0	203.9	217.0	230.6	245.2	261.1	278.8
145°	177.2	178.6	182.8	189.7	197.6	208.3	220.5	233.0	246.0	259.9	274.8
147.5°	184.4	185.2	189.4	195.4	203.0	212.1	223.2	234.5	246.0	258.2	270.9
150°	189.2	189.7	193.5	199.5	206.0	214.3	225.1	234.8	246.0	256.7	268.3
152.5°	194.1	194.2	198.0	203.3	209.0	217.0	226.2	235.6	244.9	254.9	265.4
155°	201.4	201.4	204.2	208.8	213.9	220.5	228.4	235.8	243.7	251.6	260.9
157.5°	207.1	207.5	209.7	213.9	218.2	223.2	229.5	236.3	242.1	248.7	255.8
160°	211.6	211.6	213.4	217.2	220.5	225.1	230.6	236.3	241.3	246.5	252.5
162.5°	214.9	214.9	216.5	219.4	222.3	226.2	231.1	235.9	239.9	244.3	249.2
165°	220.0	219.5	220.5	222.7	224.6	227.9	231.5	234.8	237.7	240.9	244.6
167.5°	223.8	223.2	223.6	225.4	226.7	228.8	231.5	234.1	235.4	237.5	240.3
170°	226.0	225.1	225.5	226.9	227.9	228.8	231.1	233.0	233.9	235.3	237.7
172.5°	227.5	226.9	227.1	228.0	228.6	229.2	231.1	232.6	232.8	233.4	235.1
175°	229.3	228.8	228.4	229.3	229.3	229.8	230.6	231.5	231.1	231.1	232.0
177.5°	230.1	229.8	229.3	229.8	229.8	229.8	230.1	230.8	230.1	229.8	230.1
180°	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8



TEST NUMBER: P332311-930

CATALOG NUMBER: S123RDIP-S775D585U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6	1052.6
2.5°	1048.4	1050.1	1051.7	1052.5	1052.1	1051.8	1051.5	1051.2
5°	1041.5	1043.2	1044.9	1045.5	1045.2	1044.8	1044.4	1044.1
7.5°	1026.9	1027.8	1028.7	1028.9	1028.3	1027.6	1027.0	1026.3
10°	1013.7	1013.9	1014.1	1013.7	1012.8	1011.8	1010.9	1009.9
12.5°	997.4	997.3	997.2	996.5	995.5	994.3	993.3	992.1
15°	968.7	967.8	966.9	965.7	964.4	963.0	961.7	960.4
17.5°	934.5	932.5	930.5	928.5	926.5	924.5	922.6	920.6
20°	911.1	908.6	906.1	903.8	901.5	899.2	896.9	894.6
22.5°	886.0	882.9	879.8	877.2	875.1	872.9	870.8	868.7
25°	844.9	840.9	836.9	833.9	831.8	829.6	827.6	825.5
27.5°	800.1	794.6	789.0	784.6	781.5	778.3	775.1	771.9
30°	768.3	761.7	755.3	750.6	747.5	744.5	741.4	738.4
32.5°	736.9	729.9	722.8	717.7	714.5	711.3	708.2	705.0
35°	690.6	682.4	674.3	668.5	665.0	661.6	658.2	654.8
37.5°	640.7	631.4	622.2	615.5	611.2	607.0	602.8	598.6
40°	606.0	596.1	586.3	579.2	574.8	570.5	566.1	561.7
42.5°	572.7	562.0	551.2	543.9	540.0	536.1	532.1	528.2
45°	523.9	513.1	502.2	494.6	490.0	485.4	480.9	476.4
47.5°	473.3	461.5	449.8	441.9	437.8	433.7	429.7	425.7
50°	439.2	427.4	415.6	407.6	403.2	398.8	394.5	390.1
52.5°	406.2	394.0	381.7	373.7	369.7	365.8	361.9	358.0
55°	357.0	346.0	335.0	327.6	323.8	320.0	316.3	312.4
57.5°	308.8	298.3	288.0	281.1	277.9	274.7	271.4	268.2
60°	278.3	268.1	257.8	251.1	247.9	244.6	241.4	238.1
62.5°	248.1	238.5	228.9	222.3	218.9	215.6	212.2	208.8
65°	205.0	195.8	186.5	180.8	178.7	176.6	174.6	172.4
67.5°	164.0	157.1	150.1	145.5	143.3	141.0	138.8	136.6
70°	138.7	132.0	125.4	121.1	119.0	116.8	114.8	112.7
72.5°	115.9	110.4	105.0	101.8	100.9	100.1	99.2	98.3
75°	86.7	84.8	82.9	81.8	81.4	81.0	80.6	80.2
77.5°	65.4	64.3	63.3	62.6	62.3	61.9	61.5	61.1
80°	52.7	52.1	51.5	51.0	50.6	50.3	49.9	49.5
82.5°	40.4	39.8	39.2	38.9	38.8	38.7	38.6	38.6
85°	23.2	22.7	22.4	22.2	22.2	22.2	22.2	22.2
87.5°	10.9	10.8	10.8	10.8	10.6	10.5	10.4	10.2
90°	11.7	12.1	12.6	13.5	13.0	13.5	13.9	13.5
92.5°	39.1	31.1	27.5	25.0	24.2	22.7	23.2	22.4
95°	167.4	113.5	88.8	72.1	63.3	59.0	55.8	54.0
97.5°	417.4	334.3	274.3	218.7	184.3	163.4	150.8	146.8
100°	548.3	510.6	456.2	390.1	343.2	309.2	291.1	291.6
102.5°	591.8	590.6	558.9	517.0	480.5	453.6	438.4	427.7
105°	604.5	651.0	659.9	647.8	626.4	608.7	593.9	591.5
107.5°	567.9	643.4	684.1	700.7	701.1	695.1	690.1	685.8
110°	532.9	618.5	677.1	709.6	722.7	726.4	725.5	724.5



TEST NUMBER: P332311-930

CATALOG NUMBER: S123RDIP-S775D585U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	498.3	585.7	651.4	693.2	717.1	728.6	732.1	732.3
115°	452.5	533.4	601.8	652.4	687.3	707.8	717.1	719.4
117.5°	419.2	489.1	550.5	601.9	638.3	661.7	675.1	678.2
120°	401.8	464.6	520.3	567.4	604.1	630.1	641.2	644.1
122.5°	388.0	444.8	496.5	540.1	572.8	596.2	608.5	612.0
125°	369.7	420.4	465.0	502.2	532.0	552.4	564.1	567.4
127.5°	353.7	398.9	439.2	473.0	499.5	517.0	527.5	530.5
130°	343.6	385.5	423.1	454.8	479.5	496.2	506.0	509.6
132.5°	334.4	372.8	407.9	438.1	461.2	477.9	486.6	489.2
135°	321.8	354.8	385.1	411.6	434.3	448.3	456.6	459.9
137.5°	310.4	337.5	363.5	386.5	405.6	419.7	426.8	428.9
140°	303.7	327.3	349.7	369.7	387.3	400.4	407.8	407.3
142.5°	297.3	317.7	337.0	354.4	369.5	381.1	387.8	387.3
145°	289.7	305.1	319.9	333.5	345.0	354.8	358.6	359.5
147.5°	283.5	295.6	307.7	317.2	326.0	332.6	336.2	336.6
150°	279.0	289.7	299.5	308.3	315.3	320.4	323.2	323.2
152.5°	274.9	284.1	292.8	300.1	305.6	310.4	312.0	312.0
155°	268.8	276.2	283.2	288.8	292.9	296.7	297.6	298.1
157.5°	262.3	268.5	273.9	278.3	281.9	284.7	285.4	285.4
160°	258.5	263.7	268.3	271.6	274.8	277.6	277.6	277.1
162.5°	254.1	258.4	262.8	265.6	267.7	270.2	270.2	269.7
165°	248.3	251.1	254.4	256.7	258.5	260.4	259.9	259.9
167.5°	243.3	245.4	247.3	249.0	249.8	251.1	250.6	250.6
170°	239.9	241.3	243.2	244.1	244.6	245.6	245.1	245.1
172.5°	237.0	238.0	239.5	240.0	240.1	241.1	240.3	239.9
175°	233.0	233.4	234.4	234.4	234.4	234.8	234.4	233.9
177.5°	230.5	230.8	231.2	231.2	230.8	231.2	230.5	230.5
180°	229.8	229.8	229.8	229.8	229.8	229.8	229.8	229.8

(END OF REPORT)