

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332043

Luminaire Tested: **S123DIP-S1000D1195U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332043
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1000D1195U835-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8221.2 lumens
Efficiency: N/A
Efficacy: 125.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332043

CATALOG NUMBER: S123DIP-S1000D1195U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

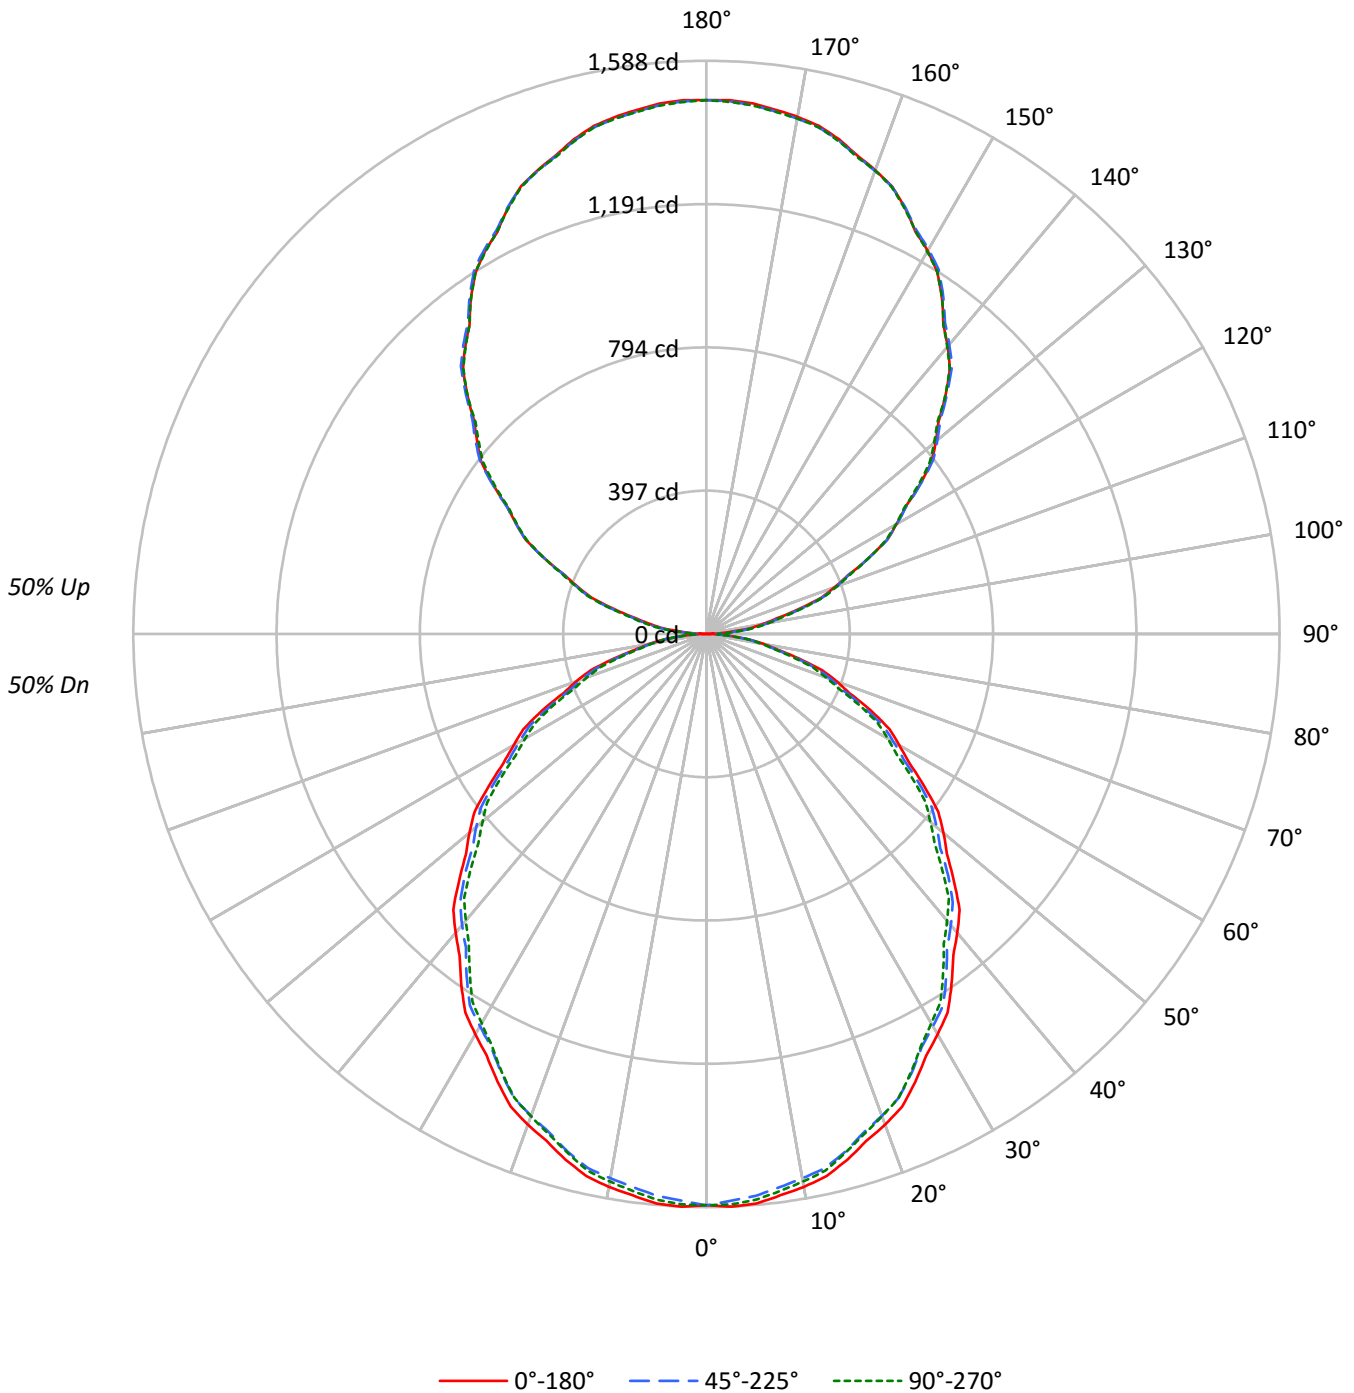



TEST NUMBER: P332043

CATALOG NUMBER: S123DIP-S1000D1195U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	93	89	86	90	86	83	80	73	71	68	61	59	58	50	48	47	42
2	89	82	75	70	82	75	70	65	64	60	57	53	51	48	44	42	40	35
3	81	72	64	58	75	66	60	55	56	52	47	47	44	41	39	36	34	30
4	74	63	55	49	68	59	52	46	50	45	40	42	38	35	35	32	29	26
5	68	56	48	42	63	52	45	40	45	39	35	38	33	30	31	28	25	22
6	63	51	42	37	58	47	40	35	40	35	30	34	30	26	28	25	22	19
7	58	46	38	32	53	43	35	30	37	31	27	31	27	23	26	22	20	17
8	54	41	34	28	50	39	32	27	33	28	24	28	24	21	24	20	18	15
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	18	16	14
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17038	17038	17038
5°	17117	16883	17001
10°	17004	16736	16840
15°	16805	16547	16577
20°	16573	16276	16292
25°	16262	15954	15922
30°	15918	15597	15478
35°	15559	15219	15023
40°	15185	14802	14573
45°	14772	14420	14067
50°	14359	13949	13561
55°	13818	13461	13052
60°	13272	12893	12482
65°	12791	12271	11889
70°	12079	11566	11050
75°	11038	10643	10189
80°	9955	9534	9447
85°	8744	8410	8065



TEST NUMBER: P332043

CATALOG NUMBER: S123DIP-S1000D1195U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.1	1.8
10°-20°	421.0	5.1
20°-30°	621.9	7.6
30°-40°	726.5	8.8
40°-50°	730.4	8.9
50°-60°	641.5	7.8
60°-70°	478.0	5.8
70°-80°	272.3	3.3
80°-90°	82.5	1.0
90°-100°	96.4	1.2
100°-110°	288.4	3.5
110°-120°	490.5	6.0
120°-130°	645.2	7.8
130°-140°	725.2	8.8
140°-150°	712.8	8.7
150°-160°	600.1	7.3
160°-170°	399.5	4.9
170°-180°	139.9	1.7
0°-30°	1192.0	14.5
0°-40°	1918.5	23.3
0°-60°	3290.4	40.0
0°-90°	4123.2	50.2
90°-120°	875.3	10.6
90°-150°	2958.5	36.0
90°-180°	4098.0	49.8
0°-180°	8221.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1583	1583	1583	1583	1583	
5°	1584	1577	1562	1575	1573	150
15°	1508	1502	1485	1495	1488	425
25°	1369	1360	1343	1344	1341	630
35°	1184	1175	1158	1150	1143	740
45°	970	964	947	932	924	749
55°	736	734	717	703	696	659
65°	502	495	482	471	467	495
75°	265	260	256	249	245	284
85°	71	68	68	65	65	78
90°	1	13	28	32	35	8
95°	69	77	86	90	91	77
105°	261	264	274	274	276	280
115°	494	497	495	496	495	488
125°	723	726	724	719	715	644
135°	938	944	943	939	936	722
145°	1138	1140	1143	1142	1138	710
155°	1302	1303	1304	1308	1300	599
165°	1419	1415	1415	1421	1414	400
175°	1476	1471	1471	1477	1470	140
180°	1479	1479	1479	1479	1479	



TEST NUMBER: P332043

CATALOG NUMBER: S123DIP-S1000D1195U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9
2.5°	1588.3	1587.4	1586.4	1585.4	1584.5	1582.6	1580.0	1577.3	1574.7	1572.0	1574.4
5°	1584.2	1582.7	1581.2	1579.7	1578.2	1575.8	1572.5	1569.1	1565.8	1562.5	1565.5
7.5°	1568.7	1567.2	1565.7	1564.2	1562.7	1560.2	1556.8	1553.3	1549.9	1546.4	1549.1
10°	1555.7	1554.2	1552.6	1551.1	1549.6	1546.9	1543.0	1539.0	1535.1	1531.2	1533.9
12.5°	1538.2	1537.0	1535.7	1534.4	1533.2	1530.7	1527.0	1523.3	1519.6	1515.9	1517.9
15°	1508.0	1506.8	1505.6	1504.4	1503.2	1500.6	1496.7	1492.8	1488.8	1484.9	1487.3
17.5°	1472.9	1471.3	1469.8	1468.2	1466.6	1463.9	1459.9	1456.0	1452.1	1448.1	1449.8
20°	1446.8	1445.0	1443.2	1441.3	1439.5	1436.6	1432.7	1428.8	1424.9	1420.9	1422.1
22.5°	1417.4	1415.6	1413.8	1411.9	1410.1	1407.3	1403.3	1399.4	1395.5	1391.5	1392.5
25°	1369.2	1367.4	1365.6	1363.8	1361.9	1359.1	1355.1	1351.2	1347.3	1343.3	1343.6
27.5°	1317.8	1316.0	1314.2	1312.5	1310.7	1307.7	1303.5	1299.3	1295.0	1290.8	1291.0
30°	1280.7	1279.2	1277.7	1276.2	1274.7	1271.8	1267.6	1263.3	1259.1	1254.9	1254.9
32.5°	1243.7	1241.7	1239.7	1237.7	1235.7	1233.1	1229.8	1226.6	1223.3	1220.0	1218.3
35°	1184.1	1182.3	1180.5	1178.7	1176.8	1174.0	1170.0	1166.1	1162.2	1158.2	1156.4
37.5°	1123.1	1120.8	1118.5	1116.2	1113.9	1110.8	1106.8	1102.8	1098.8	1094.8	1092.6
40°	1080.7	1078.8	1077.0	1075.2	1073.4	1070.4	1066.1	1061.9	1057.7	1053.4	1051.0
42.5°	1038.2	1036.1	1034.1	1032.0	1030.0	1026.8	1022.6	1018.4	1014.1	1009.9	1007.5
45°	970.4	969.2	968.0	966.8	965.6	963.0	959.1	955.1	951.2	947.3	943.7
47.5°	903.2	901.4	899.7	897.9	896.2	893.4	889.8	886.1	882.4	878.7	875.1
50°	857.5	855.9	854.4	852.9	851.4	848.7	844.7	840.8	836.9	833.0	829.6
52.5°	809.5	808.5	807.5	806.5	805.4	802.8	798.7	794.5	790.3	786.1	783.3
55°	736.3	736.0	735.7	735.4	735.1	733.0	729.1	725.1	721.2	717.3	713.9
57.5°	666.6	665.6	664.6	663.6	662.5	660.4	657.3	654.1	651.0	647.9	644.9
60°	616.5	616.2	615.9	615.6	615.3	613.4	609.7	606.1	602.5	598.9	596.1
62.5°	571.9	571.1	570.3	569.5	568.8	566.6	562.9	559.3	555.7	552.0	549.3
65°	502.2	500.7	499.2	497.7	496.2	493.9	490.9	487.9	484.8	481.8	479.4
67.5°	428.5	427.1	425.8	424.5	423.1	421.3	419.0	416.7	414.4	412.1	410.0
70°	383.8	382.0	380.2	378.4	376.6	374.7	372.9	371.1	369.3	367.5	365.4
72.5°	337.0	335.7	334.3	333.0	331.7	330.0	327.9	325.9	323.8	321.7	319.9
75°	265.4	264.2	263.0	261.8	260.6	259.5	258.6	257.7	256.8	255.9	254.4
77.5°	202.0	201.3	200.6	200.0	199.3	198.4	197.4	196.3	195.2	194.1	193.1
80°	160.6	159.7	158.8	157.9	157.0	156.2	155.6	155.0	154.4	153.8	153.5
82.5°	120.3	120.1	120.0	119.8	119.6	119.4	119.3	119.2	119.1	119.0	118.4
85°	70.8	70.2	69.6	69.0	68.4	68.1	68.1	68.1	68.1	68.1	67.4
87.5°	28.5	28.3	28.1	27.9	27.7	27.8	28.2	28.7	29.1	29.5	29.5
90°	1.2	3.7	6.3	8.9	11.5	14.5	17.8	21.2	24.5	27.9	28.9
92.5°	28.1	29.9	31.6	33.4	35.1	37.0	38.9	40.8	42.7	44.6	45.4
95°	68.6	70.4	72.2	74.0	75.8	77.7	79.8	81.8	83.9	86.0	87.0
97.5°	121.8	123.1	124.5	125.8	127.1	128.6	130.1	131.6	133.0	134.5	135.7
100°	158.0	159.6	161.1	162.7	164.2	165.6	166.9	168.2	169.5	170.8	171.6
102.5°	199.8	200.8	201.7	202.6	203.6	204.9	206.6	208.3	210.0	211.7	212.5
105°	261.4	261.9	262.5	263.0	263.5	264.9	267.2	269.6	271.9	274.2	274.2
107.5°	333.0	333.3	333.6	333.9	334.2	334.9	335.8	336.7	337.6	338.6	339.4
110°	377.6	378.1	378.6	379.2	379.7	380.2	380.7	381.2	381.7	382.3	383.3



TEST NUMBER: P332043

CATALOG NUMBER: S123DIP-S1000D1195U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	424.1	424.4	424.7	425.0	425.3	425.5	425.6	425.7	425.8	425.9	427.2
115°	493.8	494.6	495.3	496.1	496.9	497.0	496.5	496.0	495.5	495.0	495.2
117.5°	564.0	564.5	565.0	565.5	566.0	566.0	565.3	564.6	564.0	563.3	563.2
120°	607.7	609.2	610.8	612.3	613.9	614.0	612.7	611.4	610.1	608.8	608.6
122.5°	653.2	654.3	655.5	656.6	657.8	658.0	657.3	656.6	656.0	655.3	654.6
125°	722.7	723.5	724.2	725.0	725.8	725.9	725.4	724.9	724.4	723.9	722.8
127.5°	786.8	788.5	790.1	791.8	793.4	794.0	793.4	792.8	792.3	791.7	790.3
130°	829.6	831.6	833.7	835.8	837.8	838.5	837.7	836.9	836.2	835.4	834.4
132.5°	872.3	874.4	876.5	878.5	880.6	881.4	880.8	880.2	879.6	879.1	877.8
135°	937.6	939.2	940.7	942.3	943.8	944.5	944.2	944.0	943.7	943.4	942.4
137.5°	998.1	999.3	1000.6	1001.9	1003.2	1004.2	1004.9	1005.5	1006.2	1006.9	1005.8
140°	1039.9	1041.2	1042.5	1043.8	1045.0	1045.8	1046.1	1046.3	1046.6	1046.9	1046.6
142.5°	1078.0	1079.3	1080.6	1081.9	1083.2	1084.0	1084.5	1085.0	1085.4	1085.9	1085.6
145°	1137.5	1138.0	1138.5	1139.0	1139.5	1140.2	1141.0	1141.7	1142.5	1143.3	1143.0
147.5°	1189.5	1190.5	1191.4	1192.3	1193.3	1194.1	1194.8	1195.5	1196.2	1197.0	1197.0
150°	1225.8	1226.3	1226.8	1227.3	1227.9	1228.4	1228.9	1229.4	1229.9	1230.4	1230.4
152.5°	1255.5	1256.3	1257.0	1257.7	1258.4	1258.9	1259.2	1259.6	1259.9	1260.2	1260.6
155°	1302.5	1302.5	1302.5	1302.5	1302.5	1302.6	1302.9	1303.1	1303.4	1303.6	1304.7
157.5°	1342.4	1342.1	1341.8	1341.5	1341.2	1341.1	1341.4	1341.6	1341.8	1342.0	1343.1
160°	1367.5	1367.0	1366.5	1366.0	1365.5	1365.2	1365.2	1365.2	1365.2	1365.2	1366.5
162.5°	1389.8	1389.1	1388.4	1387.7	1387.0	1386.7	1386.9	1387.1	1387.3	1387.5	1388.8
165°	1418.7	1417.9	1417.1	1416.3	1415.6	1415.2	1415.2	1415.2	1415.2	1415.2	1416.7
167.5°	1441.7	1440.6	1439.6	1438.6	1437.5	1437.1	1437.3	1437.5	1437.7	1437.9	1439.5
170°	1454.7	1453.6	1452.6	1451.6	1450.5	1450.0	1450.0	1450.0	1450.0	1450.0	1451.8
172.5°	1464.9	1463.9	1462.8	1461.8	1460.8	1460.3	1460.3	1460.3	1460.3	1460.3	1461.9
175°	1475.6	1474.6	1473.5	1472.5	1471.5	1470.9	1470.9	1470.9	1470.9	1470.9	1472.5
177.5°	1480.0	1479.2	1478.4	1477.5	1476.7	1476.3	1476.3	1476.3	1476.3	1476.3	1477.5
180°	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1



TEST NUMBER: P332043

CATALOG NUMBER: S123DIP-S1000D1195U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9	1582.9
2.5°	1576.8	1579.3	1581.7	1582.8	1582.5	1582.3	1582.0	1581.8
5°	1568.5	1571.5	1574.6	1575.8	1575.2	1574.6	1574.0	1573.4
7.5°	1551.9	1554.6	1557.3	1558.5	1558.1	1557.8	1557.4	1557.0
10°	1536.6	1539.3	1542.1	1543.1	1542.5	1541.9	1541.3	1540.7
12.5°	1519.9	1521.9	1523.9	1524.7	1524.4	1524.0	1523.6	1523.3
15°	1489.7	1492.1	1494.6	1494.9	1493.1	1491.2	1489.4	1487.6
17.5°	1451.5	1453.2	1454.9	1455.4	1454.8	1454.1	1453.4	1452.8
20°	1423.3	1424.6	1425.8	1425.9	1425.0	1424.1	1423.2	1422.3
22.5°	1393.5	1394.4	1395.4	1395.3	1394.2	1393.0	1391.9	1390.7
25°	1343.9	1344.3	1344.6	1344.3	1343.3	1342.4	1341.5	1340.6
27.5°	1291.3	1291.5	1291.8	1291.3	1290.2	1289.0	1287.9	1286.7
30°	1254.9	1254.9	1254.9	1253.8	1251.7	1249.6	1247.5	1245.3
32.5°	1216.6	1215.0	1213.3	1211.8	1210.7	1209.5	1208.4	1207.2
35°	1154.6	1152.8	1151.0	1149.3	1147.8	1146.3	1144.8	1143.3
37.5°	1090.5	1088.3	1086.1	1084.5	1083.6	1082.6	1081.6	1080.7
40°	1048.6	1046.2	1043.8	1041.9	1040.7	1039.5	1038.3	1037.1
42.5°	1005.0	1002.6	1000.2	998.4	997.2	996.0	994.8	993.6
45°	940.0	936.4	932.8	930.2	928.7	927.2	925.7	924.1
47.5°	871.5	868.0	864.4	862.0	860.6	859.3	858.0	856.6
50°	826.3	823.0	819.6	817.1	815.3	813.4	811.6	809.8
52.5°	780.4	777.6	774.8	772.4	770.6	768.8	767.0	765.2
55°	710.6	707.3	704.0	701.5	700.0	698.5	697.0	695.5
57.5°	641.9	639.0	636.0	633.6	631.9	630.1	628.4	626.6
60°	593.4	590.7	588.0	585.9	584.3	582.8	581.3	579.8
62.5°	546.6	543.9	541.1	539.3	538.2	537.2	536.2	535.2
65°	477.0	474.5	472.1	470.5	469.6	468.7	467.7	466.8
67.5°	407.9	405.8	403.7	402.0	400.7	399.4	398.1	396.9
70°	363.2	361.1	359.0	357.2	355.7	354.2	352.7	351.1
72.5°	318.0	316.1	314.2	312.9	312.1	311.3	310.6	309.8
75°	252.9	251.3	249.8	248.6	247.7	246.8	245.9	245.0
77.5°	192.0	191.0	190.0	189.5	189.5	189.5	189.5	189.5
80°	153.2	152.9	152.6	152.4	152.4	152.4	152.4	152.4
82.5°	117.9	117.3	116.8	116.4	116.1	115.9	115.7	115.4
85°	66.8	66.2	65.6	65.3	65.3	65.3	65.3	65.3
87.5°	29.5	29.4	29.4	29.4	29.5	29.6	29.7	29.8
90°	30.0	31.0	32.0	32.8	33.3	33.8	34.3	34.9
92.5°	46.3	47.1	47.9	48.2	47.9	47.6	47.2	46.9
95°	88.0	89.1	90.1	90.6	90.6	90.6	90.6	90.6
97.5°	136.9	138.1	139.3	139.8	139.7	139.6	139.5	139.4
100°	172.3	173.1	173.9	174.5	175.1	175.6	176.1	176.6
102.5°	213.2	214.0	214.8	215.1	215.0	214.9	214.8	214.7
105°	274.2	274.2	274.2	274.5	275.0	275.5	276.0	276.5
107.5°	340.2	341.1	341.9	342.1	341.8	341.5	341.2	340.9
110°	384.3	385.4	386.4	386.6	386.1	385.6	385.1	384.6



TEST NUMBER: P332043

CATALOG NUMBER: S123DIP-S1000D1195U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	428.4	429.7	430.9	431.5	431.4	431.3	431.2	431.1
115°	495.5	495.7	496.0	496.0	495.7	495.5	495.2	495.0
117.5°	563.2	563.1	563.1	562.7	562.0	561.2	560.5	559.8
120°	608.3	608.1	607.8	607.4	606.9	606.4	605.9	605.3
122.5°	654.0	653.3	652.6	651.9	651.2	650.5	649.7	649.0
125°	721.8	720.8	719.7	718.7	717.7	716.6	715.6	714.6
127.5°	788.8	787.4	785.9	784.6	783.4	782.2	781.0	779.9
130°	833.3	832.3	831.3	829.8	828.0	826.2	824.4	822.6
132.5°	876.6	875.4	874.1	872.8	871.4	870.0	868.6	867.2
135°	941.4	940.3	939.3	938.5	938.0	937.5	937.0	936.5
137.5°	1004.7	1003.6	1002.5	1001.5	1000.5	999.6	998.6	997.6
140°	1046.3	1046.1	1045.8	1044.8	1043.0	1041.2	1039.4	1037.6
142.5°	1085.4	1085.1	1084.9	1084.0	1082.6	1081.2	1079.9	1078.5
145°	1142.8	1142.5	1142.3	1141.6	1140.6	1139.5	1138.5	1137.5
147.5°	1197.0	1197.0	1197.0	1196.2	1194.6	1193.1	1191.5	1190.0
150°	1230.4	1230.4	1230.4	1229.7	1228.1	1226.6	1225.0	1223.5
152.5°	1261.0	1261.4	1261.8	1261.4	1260.0	1258.7	1257.3	1256.0
155°	1305.7	1306.7	1307.8	1307.4	1305.6	1303.8	1302.0	1300.1
157.5°	1344.1	1345.2	1346.3	1346.1	1344.7	1343.2	1341.8	1340.3
160°	1367.8	1369.1	1370.4	1370.5	1369.5	1368.4	1367.4	1366.4
162.5°	1390.1	1391.4	1392.7	1392.5	1390.8	1389.2	1387.5	1385.9
165°	1418.3	1419.8	1421.4	1421.2	1419.4	1417.6	1415.8	1414.0
167.5°	1441.1	1442.7	1444.3	1444.3	1442.7	1441.1	1439.5	1437.9
170°	1453.6	1455.5	1457.3	1457.3	1455.5	1453.6	1451.8	1450.0
172.5°	1463.5	1465.1	1466.7	1466.6	1464.7	1462.9	1461.1	1459.3
175°	1474.0	1475.6	1477.1	1477.0	1475.2	1473.4	1471.6	1469.8
177.5°	1478.8	1480.0	1481.2	1481.1	1479.7	1478.2	1476.8	1475.4
180°	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1

(END OF REPORT)