

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332064

Luminaire Tested: **S123DIP-S1165D805U835-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332064  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1165D805U835-4F0-1E-UDD-A1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 805 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7656.5 lumens  
Efficiency: N/A  
Efficacy: 126.1 lumens/watt  
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 60.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

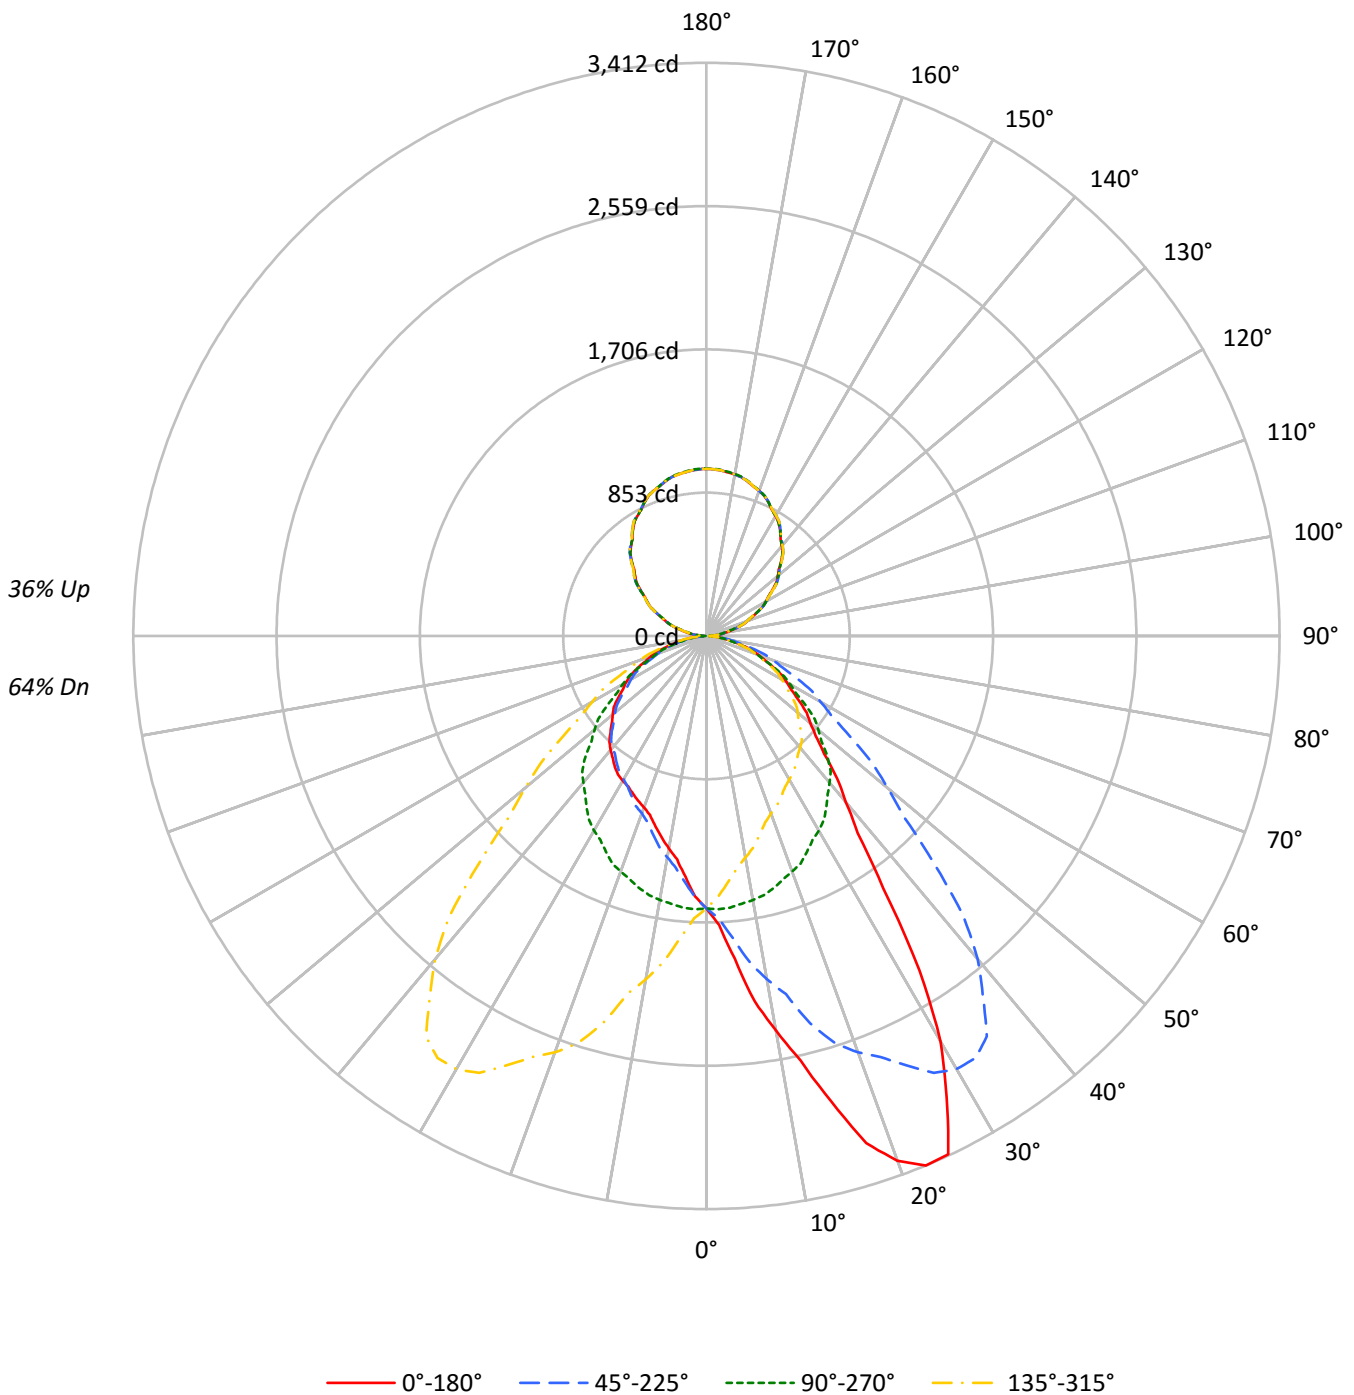



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	104	104	104	104	91	91	91	80	80	80	69	69	69	64
1	101	97	93	90	95	91	88	85	81	78	76	71	69	67	62	60	59	55
2	93	85	79	74	87	80	75	70	71	67	63	62	59	57	55	52	50	46
3	85	75	68	62	79	71	64	59	63	58	54	55	52	48	49	46	43	40
4	78	67	59	53	73	63	56	50	56	50	46	50	45	42	44	40	37	34
5	71	60	51	45	67	56	49	44	50	44	40	45	40	36	39	36	33	30
6	66	54	45	40	62	51	43	38	45	39	35	40	36	32	36	32	29	26
7	61	49	40	35	57	46	39	34	41	35	31	37	32	28	33	29	26	23
8	57	44	36	31	53	42	35	30	38	32	28	34	29	25	30	26	23	21
9	53	40	33	28	50	38	31	27	35	29	25	31	26	23	28	24	21	19
10	49	37	30	25	46	35	29	24	32	26	22	29	24	21	26	22	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	17460	17460	17460	17460
5°	20822	17535	15540	17535
10°	26063	17446	14036	17446
15°	31967	17306	13067	17306
20°	38080	17087	12441	17087
25°	40435	16820	12302	16820
30°	34657	16625	12367	16625
35°	24103	16348	12496	16348
40°	18156	16024	12456	16024
45°	15075	15541	12298	15541
50°	13504	14555	12188	14555
55°	12624	13495	12035	13495
60°	11842	12385	11911	12385
65°	11130	11291	11530	11291
70°	10439	10043	10980	10043
75°	9349	8792	10069	8792
80°	8182	7209	8672	7209
85°	6410	5236	5829	5236



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	159.8	2.1
10°-20°	512.4	6.7
20°-30°	859.9	11.2
30°-40°	973.7	12.7
40°-50°	873.2	11.4
50°-60°	704.7	9.2
60°-70°	491.0	6.4
70°-80°	258.1	3.4
80°-90°	66.1	0.9
90°-100°	64.8	0.8
100°-110°	194.1	2.5
110°-120°	330.1	4.3
120°-130°	434.2	5.7
130°-140°	488.0	6.4
140°-150°	479.7	6.3
150°-160°	403.8	5.3
160°-170°	268.8	3.5
170°-180°	94.1	1.2
0°-30°	1532.1	20.0
0°-40°	2505.8	32.7
0°-60°	4083.7	53.3
0°-90°	4898.9	64.0
90°-120°	589.0	7.7
90°-150°	1990.8	26.0
90°-180°	2758.0	36.0
0°-180°	7656.5	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1622	1622	1622	1622	1622	
5°	1927	1623	1438	1623	1927	200
15°	2869	1553	1173	1553	2869	828
25°	3405	1416	1036	1416	3405	1493
35°	1834	1244	951	1244	1834	1192
45°	990	1021	808	1021	990	784
55°	673	719	641	719	673	604
65°	437	443	453	443	437	435
75°	225	211	242	211	225	241
85°	52	42	47	42	52	62
90°	24	1	24	1	24	14
95°	61	46	61	46	61	63
105°	186	176	186	176	186	197
115°	333	332	333	332	333	330
125°	481	486	481	486	481	430
135°	630	631	630	631	630	484
145°	765	765	765	765	765	478
155°	875	876	875	876	875	403
165°	952	955	952	955	952	268
175°	989	993	989	993	989	94
180°	995	995	995	995	995	



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1721.5	1720.2	1717.1	1719.6	1714.6	1707.6	1707.0	1700.7	1682.5	1681.2	1676.2
5°	1927.1	1920.8	1920.0	1919.2	1908.2	1893.3	1865.0	1862.6	1824.9	1806.0	1783.3
7.5°	2193.3	2196.6	2185.2	2175.1	2141.5	2119.3	2089.0	2050.2	2003.8	1956.8	1925.5
10°	2384.5	2410.4	2378.2	2356.2	2335.8	2297.2	2252.5	2196.6	2140.8	2075.6	2026.1
12.5°	2589.5	2602.2	2595.7	2575.0	2543.2	2484.6	2405.2	2343.8	2292.4	2183.8	2139.9
15°	2868.6	2916.6	2885.9	2815.2	2816.7	2760.9	2657.2	2543.2	2482.7	2387.6	2258.0
17.5°	3166.0	3172.0	3158.9	3100.0	3060.7	2984.0	2888.3	2779.0	2656.4	2541.4	2403.8
20°	3324.4	3319.7	3292.2	3261.6	3194.0	3134.3	3029.7	2907.9	2750.7	2637.6	2487.4
22.5°	3412.5	3404.6	3391.6	3365.9	3309.7	3245.5	3151.7	3018.6	2868.9	2713.0	2539.6
25°	3404.6	3414.8	3416.4	3409.3	3389.7	3351.2	3277.3	3171.2	3021.9	2821.5	2640.7
27.5°	3096.5	3111.0	3153.0	3190.2	3231.9	3274.3	3268.6	3216.0	3105.5	2932.4	2711.4
30°	2788.4	2757.0	2834.8	2933.1	2999.9	3117.7	3183.8	3187.7	3125.6	2977.1	2761.7
32.5°	2360.9	2395.5	2429.9	2550.8	2696.8	2829.2	2960.6	3066.4	3078.5	2979.6	2791.3
35°	1834.3	1877.6	1940.4	2003.3	2160.5	2295.7	2526.7	2727.9	2888.3	2909.5	2793.9
37.5°	1478.2	1499.5	1539.3	1602.3	1705.1	1865.5	2044.2	2298.5	2530.8	2703.6	2711.1
40°	1292.1	1298.3	1343.1	1391.1	1474.4	1606.4	1767.5	1992.3	2270.5	2511.8	2612.4
42.5°	1152.5	1166.3	1185.3	1231.4	1297.7	1397.1	1546.9	1732.6	1987.6	2265.3	2462.1
45°	990.3	1006.0	1017.8	1048.4	1095.6	1162.4	1266.9	1436.7	1630.8	1917.6	2182.5
47.5°	883.1	884.3	893.1	916.2	948.3	998.4	1072.3	1181.4	1359.6	1592.3	1864.2
50°	806.4	818.9	822.1	840.1	865.3	902.2	963.5	1056.3	1202.5	1406.8	1656.7
52.5°	752.3	756.1	764.9	777.9	799.9	828.7	881.8	954.4	1069.2	1243.3	1473.1
55°	672.7	672.7	681.4	691.6	704.2	730.1	765.5	818.9	906.2	1041.3	1231.5
57.5°	599.2	603.1	609.2	612.4	623.1	640.2	669.8	710.3	775.4	879.4	1030.7
60°	550.1	557.2	556.4	562.7	572.2	585.5	610.7	643.7	701.8	785.1	912.5
62.5°	507.4	506.9	506.8	514.3	523.7	536.5	552.8	581.4	630.8	704.7	813.1
65°	437.0	435.4	440.9	445.6	448.8	458.2	470.8	495.9	528.9	583.9	668.0
67.5°	374.4	369.9	372.8	374.4	379.8	387.1	398.9	414.5	440.7	484.9	548.3
70°	331.7	327.7	326.9	328.5	333.2	338.7	347.4	362.3	386.7	422.0	468.4
72.5°	287.6	285.0	284.8	288.3	290.5	294.1	300.2	313.9	333.2	359.8	403.0
75°	224.8	224.8	224.8	225.6	227.9	231.1	235.8	242.8	257.8	276.6	305.7
77.5°	168.5	168.3	167.4	167.2	170.7	172.1	173.2	179.8	188.1	200.9	222.1
80°	132.0	128.1	129.7	132.0	133.6	134.4	136.8	138.3	145.4	152.5	167.4
82.5°	98.1	94.8	95.1	98.7	99.0	99.8	102.2	104.4	107.0	113.5	121.5
85°	51.9	51.9	52.7	52.7	53.4	52.7	55.0	55.8	55.8	59.7	64.4
87.5°	23.6	22.2	22.8	23.3	22.6	23.2	23.7	24.2	24.6	25.1	25.3
90°	23.5	23.1	22.8	22.4	22.1	21.5	20.8	20.2	19.5	18.8	16.5
92.5°	31.6	31.8	32.0	32.2	32.4	32.2	31.7	31.1	30.6	30.0	28.7
95°	61.0	61.0	61.0	61.0	61.0	60.6	59.9	59.2	58.6	57.9	56.5
97.5°	93.8	93.9	94.0	94.0	94.1	93.7	92.9	92.1	91.3	90.5	89.5
100°	118.8	118.5	118.1	117.8	117.5	117.0	116.5	116.0	115.5	114.9	114.1
102.5°	144.5	144.6	144.6	144.7	144.8	144.5	144.0	143.5	143.0	142.5	141.3
105°	186.1	185.7	185.4	185.0	184.7	184.5	184.5	184.5	184.5	184.5	183.0
107.5°	229.4	229.6	229.8	230.0	230.2	230.1	229.5	228.9	228.4	227.8	227.2
110°	258.8	259.1	259.5	259.8	260.2	260.0	259.3	258.6	257.9	257.2	256.9



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	290.1	290.1	290.2	290.3	290.3	290.0	289.1	288.3	287.5	286.6	286.6
115°	333.1	333.2	333.4	333.6	333.8	333.8	333.6	333.4	333.2	333.1	333.4
117.5°	376.7	377.2	377.7	378.2	378.6	378.9	378.9	379.0	379.0	379.0	379.5
120°	407.3	407.7	408.0	408.4	408.7	409.0	409.2	409.3	409.5	409.7	410.6
122.5°	436.7	437.2	437.7	438.2	438.7	439.2	439.6	440.1	440.5	441.0	441.4
125°	480.8	481.5	482.2	482.9	483.6	484.3	485.0	485.7	486.4	487.1	487.4
127.5°	524.8	525.6	526.4	527.2	528.0	528.9	529.8	530.8	531.8	532.7	533.1
130°	553.5	554.8	556.0	557.2	558.4	559.4	560.1	560.8	561.4	562.1	562.7
132.5°	583.6	584.5	585.4	586.4	587.3	588.2	589.0	589.9	590.7	591.5	591.9
135°	630.2	630.5	630.9	631.2	631.6	632.1	632.8	633.5	634.2	634.9	635.0
137.5°	671.3	672.0	672.6	673.3	673.9	674.6	675.4	676.1	676.8	677.5	677.1
140°	698.2	699.4	700.6	701.8	703.1	703.7	703.9	704.1	704.3	704.4	704.3
142.5°	725.7	726.6	727.6	728.5	729.5	730.0	730.2	730.4	730.5	730.7	730.4
145°	765.4	766.1	766.8	767.5	768.2	768.6	768.8	769.0	769.2	769.3	768.8
147.5°	800.8	801.8	802.8	803.9	804.9	805.5	805.5	805.5	805.5	805.5	805.0
150°	823.3	824.3	825.4	826.4	827.5	828.0	828.0	828.0	828.0	828.0	827.6
152.5°	845.2	846.1	847.0	847.9	848.8	849.1	848.8	848.5	848.3	848.0	847.8
155°	874.9	876.1	877.3	878.5	879.7	880.0	879.3	878.6	877.9	877.2	877.1
157.5°	901.9	902.9	903.9	904.9	905.8	905.9	905.2	904.5	903.8	903.0	902.9
160°	919.4	920.1	920.8	921.5	922.2	922.1	921.3	920.4	919.5	918.7	918.7
162.5°	932.6	933.7	934.8	935.9	937.0	937.2	936.3	935.4	934.5	933.7	933.5
165°	951.5	952.7	953.9	955.2	956.4	956.5	955.4	954.4	953.3	952.3	952.3
167.5°	967.6	968.7	969.8	970.8	971.9	971.9	970.8	969.8	968.7	967.6	967.5
170°	975.7	977.0	978.2	979.4	980.6	980.6	979.4	978.2	977.0	975.7	975.7
172.5°	982.0	983.2	984.4	985.6	986.9	986.9	985.9	984.8	983.7	982.6	982.6
175°	989.0	990.2	991.5	992.7	993.9	994.0	992.9	991.9	990.9	989.8	989.8
177.5°	992.8	993.8	994.7	995.7	996.7	996.7	995.9	995.1	994.2	993.4	993.4
180°	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1672.4	1667.4	1662.4	1653.6	1646.0	1635.3	1632.2	1628.4	1617.1	1607.1	1599.5
5°	1774.6	1755.7	1728.2	1703.1	1682.7	1655.2	1639.4	1622.9	1599.3	1578.1	1560.8
7.5°	1881.5	1844.4	1801.6	1755.4	1712.4	1670.9	1637.4	1607.5	1574.5	1543.2	1518.9
10°	1966.4	1912.9	1853.2	1788.8	1733.7	1680.3	1635.5	1596.2	1553.8	1516.8	1486.2
12.5°	2063.2	1984.0	1901.6	1823.3	1758.3	1684.1	1629.8	1579.9	1531.8	1487.3	1452.9
15°	2177.8	2077.2	1979.7	1872.1	1773.0	1680.3	1615.9	1553.0	1497.2	1451.6	1407.6
17.5°	2282.2	2168.2	2039.8	1908.8	1789.4	1679.4	1589.1	1518.1	1448.3	1392.5	1348.6
20°	2341.3	2211.6	2066.2	1930.2	1798.2	1675.6	1576.6	1491.7	1416.2	1357.3	1307.8
22.5°	2392.2	2240.5	2090.1	1944.7	1797.6	1665.5	1553.3	1465.9	1384.2	1326.5	1273.8
25°	2445.0	2263.5	2112.6	1942.0	1777.8	1641.0	1515.3	1416.2	1334.5	1266.9	1212.7
27.5°	2490.3	2261.9	2082.8	1899.4	1746.6	1609.6	1475.3	1369.1	1282.3	1208.9	1153.9
30°	2520.4	2265.0	2052.0	1870.5	1716.5	1575.0	1444.5	1337.6	1246.5	1171.8	1119.9
32.5°	2539.3	2263.1	2023.7	1830.3	1668.7	1543.5	1411.2	1300.5	1206.9	1133.5	1083.5
35°	2550.3	2249.3	1975.0	1747.1	1591.5	1469.7	1358.9	1244.1	1145.9	1077.5	1020.9
37.5°	2528.3	2220.2	1918.4	1666.9	1496.6	1376.6	1283.4	1185.6	1091.6	1016.4	967.6
40°	2493.7	2201.4	1874.4	1610.4	1431.2	1315.6	1236.3	1140.4	1047.6	976.1	930.5
42.5°	2427.7	2163.0	1826.0	1547.5	1363.3	1247.7	1174.6	1094.5	1006.8	939.6	894.1
45°	2266.6	2079.5	1753.4	1453.2	1263.0	1143.5	1079.1	1020.9	941.5	876.3	837.0
47.5°	2043.1	1954.0	1648.4	1353.7	1158.3	1043.4	976.4	929.6	871.6	818.9	781.2
50°	1887.8	1850.8	1577.3	1285.8	1088.5	976.1	911.7	869.2	827.6	774.9	740.3
52.5°	1708.6	1731.4	1494.4	1215.3	1017.5	907.0	846.3	812.6	774.8	731.5	701.4
55°	1456.3	1538.8	1351.0	1097.1	911.7	806.4	749.0	719.1	697.1	664.9	639.0
57.5°	1220.1	1325.1	1196.0	975.3	807.8	716.9	661.9	629.4	615.2	598.4	578.0
60°	1079.9	1183.6	1085.4	893.6	738.0	651.5	602.8	575.3	561.1	549.4	532.1
62.5°	954.7	1059.7	977.2	810.6	669.4	589.3	546.8	520.0	509.0	502.8	488.1
65°	782.8	873.2	818.1	681.4	571.4	500.6	462.1	443.3	433.0	430.7	421.3
67.5°	637.1	705.9	665.8	565.2	478.6	417.5	384.8	368.8	360.9	360.1	353.0
70°	541.5	605.9	575.3	484.1	409.5	361.5	333.2	319.1	314.4	313.6	309.7
72.5°	467.3	512.3	487.9	411.8	354.1	310.6	289.8	275.1	269.7	270.8	268.2
75°	345.8	379.6	365.5	312.8	266.4	238.1	220.8	211.4	206.7	209.1	205.9
77.5°	248.8	270.2	257.5	221.0	192.4	172.0	159.2	153.4	149.2	149.0	147.6
80°	187.8	200.4	193.3	171.3	147.8	130.5	120.2	116.3	114.0	113.2	112.4
82.5°	133.8	144.5	136.1	121.0	105.0	94.6	88.8	83.6	81.9	82.4	81.6
85°	67.6	71.5	68.4	58.9	52.7	47.9	44.8	42.4	40.9	41.7	40.1
87.5°	26.1	26.3	24.0	21.0	19.4	17.2	16.9	15.2	14.3	14.7	14.4
90°	14.2	12.0	9.7	7.7	6.0	4.3	2.5	0.8	2.5	4.3	6.0
92.5°	27.5	26.2	24.9	23.6	22.5	21.3	20.1	18.9	20.1	21.3	22.5
95°	55.1	53.7	52.3	51.0	49.8	48.6	47.3	46.1	47.3	48.6	49.8
97.5°	88.5	87.5	86.5	85.6	84.6	83.7	82.8	81.9	82.8	83.7	84.6
100°	113.2	112.3	111.5	110.5	109.5	108.4	107.4	106.3	107.4	108.4	109.5
102.5°	140.2	139.0	137.9	137.0	136.4	135.7	135.1	134.5	135.1	135.7	136.4
105°	181.4	179.8	178.3	177.3	177.0	176.6	176.3	175.9	176.3	176.6	177.0
107.5°	226.6	226.0	225.3	224.9	224.7	224.5	224.3	224.1	224.3	224.5	224.7
110°	256.5	256.2	255.8	255.5	255.1	254.8	254.4	254.1	254.4	254.8	255.1





TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	286.5	286.4	286.3	286.2	286.0	285.8	285.6	285.4	285.6	285.8	286.0
115°	333.8	334.1	334.5	334.4	333.8	333.3	332.8	332.3	332.8	333.3	333.8
117.5°	379.9	380.4	380.8	380.9	380.5	380.2	379.9	379.5	379.9	380.2	380.5
120°	411.4	412.3	413.2	413.1	412.0	411.0	409.9	408.9	409.9	411.0	412.0
122.5°	441.9	442.3	442.8	442.6	441.8	441.1	440.3	439.6	440.3	441.1	441.8
125°	487.8	488.1	488.5	488.4	487.9	487.3	486.8	486.3	486.8	487.3	487.9
127.5°	533.5	533.9	534.3	533.9	532.8	531.7	530.6	529.5	530.6	531.7	532.8
130°	563.2	563.7	564.2	563.8	562.4	561.0	559.6	558.2	559.6	561.0	562.4
132.5°	592.3	592.7	593.1	592.6	591.2	589.8	588.4	587.0	588.4	589.8	591.2
135°	635.2	635.4	635.6	635.1	634.1	633.0	632.0	630.9	632.0	633.0	634.1
137.5°	676.6	676.2	675.7	675.1	674.2	673.3	672.5	671.6	672.5	673.3	674.2
140°	704.1	703.9	703.7	703.2	702.4	701.5	700.6	699.7	700.6	701.5	702.4
142.5°	730.1	729.8	729.5	728.9	728.0	727.1	726.3	725.4	726.3	727.1	728.0
145°	768.3	767.8	767.2	766.8	766.5	766.1	765.8	765.4	765.8	766.1	766.5
147.5°	804.5	804.0	803.5	803.0	802.3	801.7	801.1	800.5	801.1	801.7	802.3
150°	827.3	826.9	826.6	826.2	825.9	825.5	825.2	824.8	825.2	825.5	825.9
152.5°	847.6	847.4	847.2	846.8	846.3	845.8	845.3	844.9	845.3	845.8	846.3
155°	876.9	876.7	876.5	876.4	876.4	876.4	876.4	876.4	876.4	876.4	876.4
157.5°	902.8	902.6	902.5	902.5	902.7	902.9	903.1	903.3	903.1	902.9	902.7
160°	918.7	918.7	918.7	918.8	919.2	919.5	919.9	920.2	919.9	919.5	919.2
162.5°	933.4	933.3	933.1	933.3	933.8	934.3	934.8	935.2	934.8	934.3	933.8
165°	952.3	952.3	952.3	952.5	953.1	953.6	954.1	954.6	954.1	953.6	953.1
167.5°	967.3	967.2	967.1	967.3	968.0	968.7	969.4	970.1	969.4	968.7	968.0
170°	975.7	975.7	975.7	976.1	976.8	977.5	978.2	978.9	978.2	977.5	976.8
172.5°	982.6	982.6	982.6	983.0	983.7	984.4	985.1	985.7	985.1	984.4	983.7
175°	989.8	989.8	989.8	990.2	990.9	991.6	992.2	992.9	992.2	991.6	990.9
177.5°	993.4	993.4	993.4	993.7	994.2	994.8	995.4	995.9	995.4	994.8	994.2
180°	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1595.1	1590.7	1584.4	1575.0	1567.4	1555.5	1555.5	1557.4	1557.4	1556.8	1555.5
5°	1546.7	1534.9	1520.8	1504.3	1487.0	1469.7	1466.5	1460.2	1455.5	1452.4	1448.5
7.5°	1495.6	1474.7	1454.1	1431.0	1409.9	1392.5	1380.4	1370.3	1363.9	1357.0	1351.9
10°	1461.0	1435.1	1410.7	1386.4	1359.6	1338.4	1325.1	1315.6	1308.6	1302.3	1299.1
12.5°	1420.2	1390.5	1363.6	1340.5	1311.2	1289.4	1276.7	1272.2	1263.9	1250.7	1243.8
15°	1360.4	1332.9	1300.7	1265.3	1251.2	1224.5	1209.5	1202.5	1197.7	1187.5	1184.4
17.5°	1309.3	1273.3	1237.2	1210.8	1184.5	1162.8	1154.5	1145.7	1139.4	1131.1	1128.6
20°	1268.5	1236.3	1203.2	1175.0	1147.4	1123.9	1116.8	1110.5	1104.2	1100.3	1097.1
22.5°	1227.0	1194.8	1167.4	1141.0	1111.6	1096.2	1088.5	1081.6	1077.2	1074.5	1071.4
25°	1168.7	1140.4	1109.7	1086.1	1062.6	1052.3	1047.6	1043.7	1040.6	1036.6	1035.8
27.5°	1116.5	1085.7	1060.8	1038.8	1021.9	1013.4	1008.8	1006.9	1007.6	1009.0	1009.9
30°	1077.5	1049.2	1028.8	1009.9	994.2	986.3	985.5	985.5	988.7	989.5	991.0
32.5°	1041.7	1018.4	998.0	979.7	967.8	962.4	965.4	965.4	967.9	970.0	972.8
35°	989.5	969.0	953.3	937.6	927.4	929.7	931.3	932.9	936.8	941.5	944.7
37.5°	939.6	921.9	905.5	893.3	888.6	892.8	896.6	899.9	904.4	908.1	911.2
40°	903.8	890.4	874.7	863.7	865.3	867.7	870.8	874.7	878.7	881.0	884.2
42.5°	870.5	856.5	844.6	835.4	837.6	840.6	842.5	844.6	849.1	853.4	855.2
45°	819.7	808.7	797.7	792.2	793.8	795.4	796.9	799.3	803.2	806.4	807.1
47.5°	762.7	755.0	747.6	742.2	744.7	744.1	746.2	751.2	752.4	754.3	758.7
50°	726.2	719.1	710.5	708.9	708.9	708.9	709.7	716.0	716.0	719.1	722.3
52.5°	686.0	681.4	675.9	673.1	671.8	671.8	675.1	678.3	679.5	683.9	687.1
55°	626.4	621.7	616.9	614.6	613.0	614.6	620.9	622.4	626.4	628.7	631.1
57.5°	564.3	560.7	556.9	555.6	555.3	557.4	560.8	565.5	566.5	573.7	577.3
60°	523.4	517.9	514.8	514.8	513.2	520.3	518.7	526.6	528.1	532.9	538.4
62.5°	481.3	473.9	472.7	472.7	474.9	476.9	479.1	482.6	486.6	492.6	496.9
65°	413.4	409.5	415.0	414.2	412.6	417.3	417.3	421.3	426.0	431.5	440.1
67.5°	349.1	347.1	347.5	347.5	349.9	352.6	354.8	358.2	363.9	369.7	375.4
70°	305.7	308.1	304.2	307.3	309.7	310.4	312.0	316.7	323.0	326.9	333.2
72.5°	263.6	263.4	263.9	265.2	267.5	268.9	270.5	275.9	282.8	286.1	291.1
75°	202.8	202.0	204.3	204.3	208.3	209.8	211.4	213.8	220.1	224.8	228.7
77.5°	148.1	149.0	148.5	151.2	150.1	150.4	155.3	157.7	158.3	167.6	169.6
80°	111.6	113.2	114.0	114.7	115.5	114.0	119.5	121.8	121.8	127.3	131.2
82.5°	80.2	81.1	83.2	83.9	84.1	85.7	86.1	87.9	89.8	92.1	97.3
85°	40.1	42.4	43.2	42.4	43.2	41.7	44.0	44.8	45.6	45.6	45.6
87.5°	14.1	15.1	15.0	16.1	15.9	17.0	17.1	16.0	16.1	18.1	15.7
90°	7.7	9.7	12.0	14.2	16.5	18.8	19.5	20.2	20.8	21.5	22.1
92.5°	23.6	24.9	26.2	27.5	28.7	30.0	30.6	31.1	31.7	32.2	32.4
95°	51.0	52.3	53.7	55.1	56.5	57.9	58.6	59.2	59.9	60.6	61.0
97.5°	85.6	86.5	87.5	88.5	89.5	90.5	91.3	92.1	92.9	93.7	94.1
100°	110.5	111.5	112.3	113.2	114.1	114.9	115.5	116.0	116.5	117.0	117.5
102.5°	137.0	137.9	139.0	140.2	141.3	142.5	143.0	143.5	144.0	144.5	144.8
105°	177.3	178.3	179.8	181.4	183.0	184.5	184.5	184.5	184.5	184.5	184.7
107.5°	224.9	225.3	226.0	226.6	227.2	227.8	228.4	228.9	229.5	230.1	230.2
110°	255.5	255.8	256.2	256.5	256.9	257.2	257.9	258.6	259.3	260.0	260.2



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	286.2	286.3	286.4	286.5	286.6	286.6	287.5	288.3	289.1	290.0	290.3
115°	334.4	334.5	334.1	333.8	333.4	333.1	333.2	333.4	333.6	333.8	333.8
117.5°	380.9	380.8	380.4	379.9	379.5	379.0	379.0	379.0	378.9	378.9	378.6
120°	413.1	413.2	412.3	411.4	410.6	409.7	409.5	409.3	409.2	409.0	408.7
122.5°	442.6	442.8	442.3	441.9	441.4	441.0	440.5	440.1	439.6	439.2	438.7
125°	488.4	488.5	488.1	487.8	487.4	487.1	486.4	485.7	485.0	484.3	483.6
127.5°	533.9	534.3	533.9	533.5	533.1	532.7	531.8	530.8	529.8	528.9	528.0
130°	563.8	564.2	563.7	563.2	562.7	562.1	561.4	560.8	560.1	559.4	558.4
132.5°	592.6	593.1	592.7	592.3	591.9	591.5	590.7	589.9	589.0	588.2	587.3
135°	635.1	635.6	635.4	635.2	635.0	634.9	634.2	633.5	632.8	632.1	631.6
137.5°	675.1	675.7	676.2	676.6	677.1	677.5	676.8	676.1	675.4	674.6	673.9
140°	703.2	703.7	703.9	704.1	704.3	704.4	704.3	704.1	703.9	703.7	703.1
142.5°	728.9	729.5	729.8	730.1	730.4	730.7	730.5	730.4	730.2	730.0	729.5
145°	766.8	767.2	767.8	768.3	768.8	769.3	769.2	769.0	768.8	768.6	768.2
147.5°	803.0	803.5	804.0	804.5	805.0	805.5	805.5	805.5	805.5	805.5	804.9
150°	826.2	826.6	826.9	827.3	827.6	828.0	828.0	828.0	828.0	828.0	827.5
152.5°	846.8	847.2	847.4	847.6	847.8	848.0	848.3	848.5	848.8	849.1	848.8
155°	876.4	876.5	876.7	876.9	877.1	877.2	877.9	878.6	879.3	880.0	879.7
157.5°	902.5	902.5	902.6	902.8	902.9	903.0	903.8	904.5	905.2	905.9	905.8
160°	918.8	918.7	918.7	918.7	918.7	918.7	919.5	920.4	921.3	922.1	922.2
162.5°	933.3	933.1	933.3	933.4	933.5	933.7	934.5	935.4	936.3	937.2	937.0
165°	952.5	952.3	952.3	952.3	952.3	952.3	953.3	954.4	955.4	956.5	956.4
167.5°	967.3	967.1	967.2	967.3	967.5	967.6	968.7	969.8	970.8	971.9	971.9
170°	976.1	975.7	975.7	975.7	975.7	975.7	977.0	978.2	979.4	980.6	980.6
172.5°	983.0	982.6	982.6	982.6	982.6	982.6	983.7	984.8	985.9	986.9	986.9
175°	990.2	989.8	989.8	989.8	989.8	989.8	990.9	991.9	992.9	994.0	993.9
177.5°	993.7	993.4	993.4	993.4	993.4	993.4	994.2	995.1	995.9	996.7	996.7
180°	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1551.1	1550.5	1554.9	1551.7	1554.9	1550.5	1551.1	1555.5	1556.8	1557.4	1557.4
5°	1443.7	1446.1	1438.2	1438.2	1438.2	1446.1	1443.7	1448.5	1452.4	1455.5	1460.2
7.5°	1348.2	1344.7	1345.0	1340.8	1345.0	1344.7	1348.2	1351.9	1357.0	1363.9	1370.3
10°	1289.7	1285.0	1283.4	1284.2	1283.4	1285.0	1289.7	1299.1	1302.3	1308.6	1315.6
12.5°	1241.3	1240.3	1230.0	1230.1	1230.0	1240.3	1241.3	1243.8	1250.7	1263.9	1272.2
15°	1184.4	1169.5	1167.9	1172.6	1167.9	1169.5	1184.4	1184.4	1187.5	1197.7	1202.5
17.5°	1127.3	1119.5	1119.9	1117.6	1119.9	1119.5	1127.3	1128.6	1131.1	1139.4	1145.7
20°	1097.1	1092.4	1091.6	1086.1	1091.6	1092.4	1097.1	1097.1	1100.3	1104.2	1110.5
22.5°	1069.5	1067.9	1068.4	1062.3	1068.4	1067.9	1069.5	1071.4	1074.5	1077.2	1081.6
25°	1035.1	1039.0	1035.8	1035.8	1035.8	1039.0	1035.1	1035.8	1036.6	1040.6	1043.7
27.5°	1011.8	1011.6	1010.1	1010.1	1010.1	1011.6	1011.8	1009.9	1009.0	1007.6	1006.9
30°	994.2	993.4	995.0	995.0	995.0	993.4	994.2	991.0	989.5	988.7	985.5
32.5°	976.6	977.7	978.0	978.6	978.0	977.7	976.6	972.8	970.0	967.9	965.4
35°	949.4	950.2	952.5	951.0	952.5	950.2	949.4	944.7	941.5	936.8	932.9
37.5°	912.6	916.2	915.4	916.7	915.4	916.2	912.6	911.2	908.1	904.4	899.9
40°	884.9	887.3	886.5	886.5	886.5	887.3	884.9	884.2	881.0	878.7	874.7
42.5°	856.7	858.4	856.3	855.1	856.3	858.4	856.7	855.2	853.4	849.1	844.6
45°	810.3	808.7	811.1	807.9	811.1	808.7	810.3	807.1	806.4	803.2	799.3
47.5°	758.4	760.0	760.6	763.0	760.6	760.0	758.4	758.7	754.3	752.4	751.2
50°	723.8	728.5	728.5	727.8	728.5	728.5	723.8	722.3	719.1	716.0	716.0
52.5°	689.9	692.1	695.2	695.1	695.2	692.1	689.9	687.1	683.9	679.5	678.3
55°	637.4	639.0	640.5	641.3	640.5	639.0	637.4	631.1	628.7	626.4	622.4
57.5°	583.0	582.4	586.1	587.2	586.1	582.4	583.0	577.3	573.7	566.5	565.5
60°	544.6	544.6	550.9	553.3	550.9	544.6	544.6	538.4	532.9	528.1	526.6
62.5°	503.8	506.3	512.6	509.3	512.6	506.3	503.8	496.9	492.6	486.6	482.6
65°	444.0	450.3	449.5	452.7	449.5	450.3	444.0	440.1	431.5	426.0	421.3
67.5°	381.6	385.6	391.2	391.7	391.2	385.6	381.6	375.4	369.7	363.9	358.2
70°	339.5	343.4	346.6	348.9	346.6	343.4	339.5	333.2	326.9	323.0	316.7
72.5°	298.7	300.7	308.2	304.9	308.2	300.7	298.7	291.1	286.1	282.8	275.9
75°	234.2	239.7	244.4	242.1	244.4	239.7	234.2	228.7	224.8	220.1	213.8
77.5°	173.2	178.7	180.9	178.9	180.9	178.7	173.2	169.6	167.6	158.3	157.7
80°	136.8	136.0	140.7	139.9	140.7	136.0	136.8	131.2	127.3	121.8	121.8
82.5°	100.3	99.5	101.7	102.2	101.7	99.5	100.3	97.3	92.1	89.8	87.9
85°	48.7	51.1	47.9	47.2	47.9	51.1	48.7	45.6	45.6	45.6	44.8
87.5°	15.8	15.9	15.3	14.8	15.3	15.9	15.8	15.7	18.1	16.1	16.0
90°	22.4	22.8	23.1	23.5	23.1	22.8	22.4	22.1	21.5	20.8	20.2
92.5°	32.2	32.0	31.8	31.6	31.8	32.0	32.2	32.4	32.2	31.7	31.1
95°	61.0	61.0	61.0	61.0	61.0	61.0	61.0	61.0	60.6	59.9	59.2
97.5°	94.0	94.0	93.9	93.8	93.9	94.0	94.0	94.1	93.7	92.9	92.1
100°	117.8	118.1	118.5	118.8	118.5	118.1	117.8	117.5	117.0	116.5	116.0
102.5°	144.7	144.6	144.6	144.5	144.6	144.6	144.7	144.8	144.5	144.0	143.5
105°	185.0	185.4	185.7	186.1	185.7	185.4	185.0	184.7	184.5	184.5	184.5
107.5°	230.0	229.8	229.6	229.4	229.6	229.8	230.0	230.2	230.1	229.5	228.9
110°	259.8	259.5	259.1	258.8	259.1	259.5	259.8	260.2	260.0	259.3	258.6



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	290.3	290.2	290.1	290.1	290.1	290.2	290.3	290.3	290.0	289.1	288.3
115°	333.6	333.4	333.2	333.1	333.2	333.4	333.6	333.8	333.8	333.6	333.4
117.5°	378.2	377.7	377.2	376.7	377.2	377.7	378.2	378.6	378.9	378.9	379.0
120°	408.4	408.0	407.7	407.3	407.7	408.0	408.4	408.7	409.0	409.2	409.3
122.5°	438.2	437.7	437.2	436.7	437.2	437.7	438.2	438.7	439.2	439.6	440.1
125°	482.9	482.2	481.5	480.8	481.5	482.2	482.9	483.6	484.3	485.0	485.7
127.5°	527.2	526.4	525.6	524.8	525.6	526.4	527.2	528.0	528.9	529.8	530.8
130°	557.2	556.0	554.8	553.5	554.8	556.0	557.2	558.4	559.4	560.1	560.8
132.5°	586.4	585.4	584.5	583.6	584.5	585.4	586.4	587.3	588.2	589.0	589.9
135°	631.2	630.9	630.5	630.2	630.5	630.9	631.2	631.6	632.1	632.8	633.5
137.5°	673.3	672.6	672.0	671.3	672.0	672.6	673.3	673.9	674.6	675.4	676.1
140°	701.8	700.6	699.4	698.2	699.4	700.6	701.8	703.1	703.7	703.9	704.1
142.5°	728.5	727.6	726.6	725.7	726.6	727.6	728.5	729.5	730.0	730.2	730.4
145°	767.5	766.8	766.1	765.4	766.1	766.8	767.5	768.2	768.6	768.8	769.0
147.5°	803.9	802.8	801.8	800.8	801.8	802.8	803.9	804.9	805.5	805.5	805.5
150°	826.4	825.4	824.3	823.3	824.3	825.4	826.4	827.5	828.0	828.0	828.0
152.5°	847.9	847.0	846.1	845.2	846.1	847.0	847.9	848.8	849.1	848.8	848.5
155°	878.5	877.3	876.1	874.9	876.1	877.3	878.5	879.7	880.0	879.3	878.6
157.5°	904.9	903.9	902.9	901.9	902.9	903.9	904.9	905.8	905.9	905.2	904.5
160°	921.5	920.8	920.1	919.4	920.1	920.8	921.5	922.2	922.1	921.3	920.4
162.5°	935.9	934.8	933.7	932.6	933.7	934.8	935.9	937.0	937.2	936.3	935.4
165°	955.2	953.9	952.7	951.5	952.7	953.9	955.2	956.4	956.5	955.4	954.4
167.5°	970.8	969.8	968.7	967.6	968.7	969.8	970.8	971.9	971.9	970.8	969.8
170°	979.4	978.2	977.0	975.7	977.0	978.2	979.4	980.6	980.6	979.4	978.2
172.5°	985.6	984.4	983.2	982.0	983.2	984.4	985.6	986.9	986.9	985.9	984.8
175°	992.7	991.5	990.2	989.0	990.2	991.5	992.7	993.9	994.0	992.9	991.9
177.5°	995.7	994.7	993.8	992.8	993.8	994.7	995.7	996.7	996.7	995.9	995.1
180°	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1555.5	1555.5	1567.4	1575.0	1584.4	1590.7	1595.1	1599.5	1607.1	1617.1	1628.4
5°	1466.5	1469.7	1487.0	1504.3	1520.8	1534.9	1546.7	1560.8	1578.1	1599.3	1622.9
7.5°	1380.4	1392.5	1409.9	1431.0	1454.1	1474.7	1495.6	1518.9	1543.2	1574.5	1607.5
10°	1325.1	1338.4	1359.6	1386.4	1410.7	1435.1	1461.0	1486.2	1516.8	1553.8	1596.2
12.5°	1276.7	1289.4	1311.2	1340.5	1363.6	1390.5	1420.2	1452.9	1487.3	1531.8	1579.9
15°	1209.5	1224.5	1251.2	1265.3	1300.7	1332.9	1360.4	1407.6	1451.6	1497.2	1553.0
17.5°	1154.5	1162.8	1184.5	1210.8	1237.2	1273.3	1309.3	1348.6	1392.5	1448.3	1518.1
20°	1116.8	1123.9	1147.4	1175.0	1203.2	1236.3	1268.5	1307.8	1357.3	1416.2	1491.7
22.5°	1088.5	1096.2	1111.6	1141.0	1167.4	1194.8	1227.0	1273.8	1326.5	1384.2	1465.9
25°	1047.6	1052.3	1062.6	1086.1	1109.7	1140.4	1168.7	1212.7	1266.9	1334.5	1416.2
27.5°	1008.8	1013.4	1021.9	1038.8	1060.8	1085.7	1116.5	1153.9	1208.9	1282.3	1369.1
30°	985.5	986.3	994.2	1009.9	1028.8	1049.2	1077.5	1119.9	1171.8	1246.5	1337.6
32.5°	965.4	962.4	967.8	979.7	998.0	1018.4	1041.7	1083.5	1133.5	1206.9	1300.5
35°	931.3	929.7	927.4	937.6	953.3	969.0	989.5	1020.9	1077.5	1145.9	1244.1
37.5°	896.6	892.8	888.6	893.3	905.5	921.9	939.6	967.6	1016.4	1091.6	1185.6
40°	870.8	867.7	865.3	863.7	874.7	890.4	903.8	930.5	976.1	1047.6	1140.4
42.5°	842.5	840.6	837.6	835.4	844.6	856.5	870.5	894.1	939.6	1006.8	1094.5
45°	796.9	795.4	793.8	792.2	797.7	808.7	819.7	837.0	876.3	941.5	1020.9
47.5°	746.2	744.1	744.7	742.2	747.6	755.0	762.7	781.2	818.9	871.6	929.6
50°	709.7	708.9	708.9	708.9	710.5	719.1	726.2	740.3	774.9	827.6	869.2
52.5°	675.1	671.8	671.8	673.1	675.9	681.4	686.0	701.4	731.5	774.8	812.6
55°	620.9	614.6	613.0	614.6	616.9	621.7	626.4	639.0	664.9	697.1	719.1
57.5°	560.8	557.4	555.3	555.6	556.9	560.7	564.3	578.0	598.4	615.2	629.4
60°	518.7	520.3	513.2	514.8	514.8	517.9	523.4	532.1	549.4	561.1	575.3
62.5°	479.1	476.9	474.9	472.7	472.7	473.9	481.3	488.1	502.8	509.0	520.0
65°	417.3	417.3	412.6	414.2	415.0	409.5	413.4	421.3	430.7	433.0	443.3
67.5°	354.8	352.6	349.9	347.5	347.5	347.1	349.1	353.0	360.1	360.9	368.8
70°	312.0	310.4	309.7	307.3	304.2	308.1	305.7	309.7	313.6	314.4	319.1
72.5°	270.5	268.9	267.5	265.2	263.9	263.4	263.6	268.2	270.8	269.7	275.1
75°	211.4	209.8	208.3	204.3	204.3	202.0	202.8	205.9	209.1	206.7	211.4
77.5°	155.3	150.4	150.1	151.2	148.5	149.0	148.1	147.6	149.0	149.2	153.4
80°	119.5	114.0	115.5	114.7	114.0	113.2	111.6	112.4	113.2	114.0	116.3
82.5°	86.1	85.7	84.1	83.9	83.2	81.1	80.2	81.6	82.4	81.9	83.6
85°	44.0	41.7	43.2	42.4	43.2	42.4	40.1	40.1	41.7	40.9	42.4
87.5°	17.1	17.0	15.9	16.1	15.0	15.1	14.1	14.4	14.7	14.3	15.2
90°	19.5	18.8	16.5	14.2	12.0	9.7	7.7	6.0	4.3	2.5	0.8
92.5°	30.6	30.0	28.7	27.5	26.2	24.9	23.6	22.5	21.3	20.1	18.9
95°	58.6	57.9	56.5	55.1	53.7	52.3	51.0	49.8	48.6	47.3	46.1
97.5°	91.3	90.5	89.5	88.5	87.5	86.5	85.6	84.6	83.7	82.8	81.9
100°	115.5	114.9	114.1	113.2	112.3	111.5	110.5	109.5	108.4	107.4	106.3
102.5°	143.0	142.5	141.3	140.2	139.0	137.9	137.0	136.4	135.7	135.1	134.5
105°	184.5	184.5	183.0	181.4	179.8	178.3	177.3	177.0	176.6	176.3	175.9
107.5°	228.4	227.8	227.2	226.6	226.0	225.3	224.9	224.7	224.5	224.3	224.1
110°	257.9	257.2	256.9	256.5	256.2	255.8	255.5	255.1	254.8	254.4	254.1



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	287.5	286.6	286.6	286.5	286.4	286.3	286.2	286.0	285.8	285.6	285.4
115°	333.2	333.1	333.4	333.8	334.1	334.5	334.4	333.8	333.3	332.8	332.3
117.5°	379.0	379.0	379.5	379.9	380.4	380.8	380.9	380.5	380.2	379.9	379.5
120°	409.5	409.7	410.6	411.4	412.3	413.2	413.1	412.0	411.0	409.9	408.9
122.5°	440.5	441.0	441.4	441.9	442.3	442.8	442.6	441.8	441.1	440.3	439.6
125°	486.4	487.1	487.4	487.8	488.1	488.5	488.4	487.9	487.3	486.8	486.3
127.5°	531.8	532.7	533.1	533.5	533.9	534.3	533.9	532.8	531.7	530.6	529.5
130°	561.4	562.1	562.7	563.2	563.7	564.2	563.8	562.4	561.0	559.6	558.2
132.5°	590.7	591.5	591.9	592.3	592.7	593.1	592.6	591.2	589.8	588.4	587.0
135°	634.2	634.9	635.0	635.2	635.4	635.6	635.1	634.1	633.0	632.0	630.9
137.5°	676.8	677.5	677.1	676.6	676.2	675.7	675.1	674.2	673.3	672.5	671.6
140°	704.3	704.4	704.3	704.1	703.9	703.7	703.2	702.4	701.5	700.6	699.7
142.5°	730.5	730.7	730.4	730.1	729.8	729.5	728.9	728.0	727.1	726.3	725.4
145°	769.2	769.3	768.8	768.3	767.8	767.2	766.8	766.5	766.1	765.8	765.4
147.5°	805.5	805.5	805.0	804.5	804.0	803.5	803.0	802.3	801.7	801.1	800.5
150°	828.0	828.0	827.6	827.3	826.9	826.6	826.2	825.9	825.5	825.2	824.8
152.5°	848.3	848.0	847.8	847.6	847.4	847.2	846.8	846.3	845.8	845.3	844.9
155°	877.9	877.2	877.1	876.9	876.7	876.5	876.4	876.4	876.4	876.4	876.4
157.5°	903.8	903.0	902.9	902.8	902.6	902.5	902.5	902.7	902.9	903.1	903.3
160°	919.5	918.7	918.7	918.7	918.7	918.7	918.8	919.2	919.5	919.9	920.2
162.5°	934.5	933.7	933.5	933.4	933.3	933.1	933.3	933.8	934.3	934.8	935.2
165°	953.3	952.3	952.3	952.3	952.3	952.3	952.5	953.1	953.6	954.1	954.6
167.5°	968.7	967.6	967.5	967.3	967.2	967.1	967.3	968.0	968.7	969.4	970.1
170°	977.0	975.7	975.7	975.7	975.7	975.7	976.1	976.8	977.5	978.2	978.9
172.5°	983.7	982.6	982.6	982.6	982.6	982.6	983.0	983.7	984.4	985.1	985.7
175°	990.9	989.8	989.8	989.8	989.8	989.8	990.2	990.9	991.6	992.2	992.9
177.5°	994.2	993.4	993.4	993.4	993.4	993.4	993.7	994.2	994.8	995.4	995.9
180°	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1632.2	1635.3	1646.0	1653.6	1662.4	1667.4	1672.4	1676.2	1681.2	1682.5	1700.7
5°	1639.4	1655.2	1682.7	1703.1	1728.2	1755.7	1774.6	1783.3	1806.0	1824.9	1862.6
7.5°	1637.4	1670.9	1712.4	1755.4	1801.6	1844.4	1881.5	1925.5	1956.8	2003.8	2050.2
10°	1635.5	1680.3	1733.7	1788.8	1853.2	1912.9	1966.4	2026.1	2075.6	2140.8	2196.6
12.5°	1629.8	1684.1	1758.3	1823.3	1901.6	1984.0	2063.2	2139.9	2183.8	2292.4	2343.8
15°	1615.9	1680.3	1773.0	1872.1	1979.7	2077.2	2177.8	2258.0	2387.6	2482.7	2543.2
17.5°	1589.1	1679.4	1789.4	1908.8	2039.8	2168.2	2282.2	2403.8	2541.4	2656.4	2779.0
20°	1576.6	1675.6	1798.2	1930.2	2066.2	2211.6	2341.3	2487.4	2637.6	2750.7	2907.9
22.5°	1553.3	1665.5	1797.6	1944.7	2090.1	2240.5	2392.2	2539.6	2713.0	2868.9	3018.6
25°	1515.3	1641.0	1777.8	1942.0	2112.6	2263.5	2445.0	2640.7	2821.5	3021.9	3171.2
27.5°	1475.3	1609.6	1746.6	1899.4	2082.8	2261.9	2490.3	2711.4	2932.4	3105.5	3216.0
30°	1444.5	1575.0	1716.5	1870.5	2052.0	2265.0	2520.4	2761.7	2977.1	3125.6	3187.7
32.5°	1411.2	1543.5	1668.7	1830.3	2023.7	2263.1	2539.3	2791.3	2979.6	3078.5	3066.4
35°	1358.9	1469.7	1591.5	1747.1	1975.0	2249.3	2550.3	2793.9	2909.5	2888.3	2727.9
37.5°	1283.4	1376.6	1496.6	1666.9	1918.4	2220.2	2528.3	2711.1	2703.6	2530.8	2298.5
40°	1236.3	1315.6	1431.2	1610.4	1874.4	2201.4	2493.7	2612.4	2511.8	2270.5	1992.3
42.5°	1174.6	1247.7	1363.3	1547.5	1826.0	2163.0	2427.7	2462.1	2265.3	1987.6	1732.6
45°	1079.1	1143.5	1263.0	1453.2	1753.4	2079.5	2266.6	2182.5	1917.6	1630.8	1436.7
47.5°	976.4	1043.4	1158.3	1353.7	1648.4	1954.0	2043.1	1864.2	1592.3	1359.6	1181.4
50°	911.7	976.1	1088.5	1285.8	1577.3	1850.8	1887.8	1656.7	1406.8	1202.5	1056.3
52.5°	846.3	907.0	1017.5	1215.3	1494.4	1731.4	1708.6	1473.1	1243.3	1069.2	954.4
55°	749.0	806.4	911.7	1097.1	1351.0	1538.8	1456.3	1231.5	1041.3	906.2	818.9
57.5°	661.9	716.9	807.8	975.3	1196.0	1325.1	1220.1	1030.7	879.4	775.4	710.3
60°	602.8	651.5	738.0	893.6	1085.4	1183.6	1079.9	912.5	785.1	701.8	643.7
62.5°	546.8	589.3	669.4	810.6	977.2	1059.7	954.7	813.1	704.7	630.8	581.4
65°	462.1	500.6	571.4	681.4	818.1	873.2	782.8	668.0	583.9	528.9	495.9
67.5°	384.8	417.5	478.6	565.2	665.8	705.9	637.1	548.3	484.9	440.7	414.5
70°	333.2	361.5	409.5	484.1	575.3	605.9	541.5	468.4	422.0	386.7	362.3
72.5°	289.8	310.6	354.1	411.8	487.9	512.3	467.3	403.0	359.8	333.2	313.9
75°	220.8	238.1	266.4	312.8	365.5	379.6	345.8	305.7	276.6	257.8	242.8
77.5°	159.2	172.0	192.4	221.0	257.5	270.2	248.8	222.1	200.9	188.1	179.8
80°	120.2	130.5	147.8	171.3	193.3	200.4	187.8	167.4	152.5	145.4	138.3
82.5°	88.8	94.6	105.0	121.0	136.1	144.5	133.8	121.5	113.5	107.0	104.4
85°	44.8	47.9	52.7	58.9	68.4	71.5	67.6	64.4	59.7	55.8	55.8
87.5°	16.9	17.2	19.4	21.0	24.0	26.3	26.1	25.3	25.1	24.6	24.2
90°	2.5	4.3	6.0	7.7	9.7	12.0	14.2	16.5	18.8	19.5	20.2
92.5°	20.1	21.3	22.5	23.6	24.9	26.2	27.5	28.7	30.0	30.6	31.1
95°	47.3	48.6	49.8	51.0	52.3	53.7	55.1	56.5	57.9	58.6	59.2
97.5°	82.8	83.7	84.6	85.6	86.5	87.5	88.5	89.5	90.5	91.3	92.1
100°	107.4	108.4	109.5	110.5	111.5	112.3	113.2	114.1	114.9	115.5	116.0
102.5°	135.1	135.7	136.4	137.0	137.9	139.0	140.2	141.3	142.5	143.0	143.5
105°	176.3	176.6	177.0	177.3	178.3	179.8	181.4	183.0	184.5	184.5	184.5
107.5°	224.3	224.5	224.7	224.9	225.3	226.0	226.6	227.2	227.8	228.4	228.9
110°	254.4	254.8	255.1	255.5	255.8	256.2	256.5	256.9	257.2	257.9	258.6





TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	285.6	285.8	286.0	286.2	286.3	286.4	286.5	286.6	286.6	287.5	288.3
115°	332.8	333.3	333.8	334.4	334.5	334.1	333.8	333.4	333.1	333.2	333.4
117.5°	379.9	380.2	380.5	380.9	380.8	380.4	379.9	379.5	379.0	379.0	379.0
120°	409.9	411.0	412.0	413.1	413.2	412.3	411.4	410.6	409.7	409.5	409.3
122.5°	440.3	441.1	441.8	442.6	442.8	442.3	441.9	441.4	441.0	440.5	440.1
125°	486.8	487.3	487.9	488.4	488.5	488.1	487.8	487.4	487.1	486.4	485.7
127.5°	530.6	531.7	532.8	533.9	534.3	533.9	533.5	533.1	532.7	531.8	530.8
130°	559.6	561.0	562.4	563.8	564.2	563.7	563.2	562.7	562.1	561.4	560.8
132.5°	588.4	589.8	591.2	592.6	593.1	592.7	592.3	591.9	591.5	590.7	589.9
135°	632.0	633.0	634.1	635.1	635.6	635.4	635.2	635.0	634.9	634.2	633.5
137.5°	672.5	673.3	674.2	675.1	675.7	676.2	676.6	677.1	677.5	676.8	676.1
140°	700.6	701.5	702.4	703.2	703.7	703.9	704.1	704.3	704.4	704.3	704.1
142.5°	726.3	727.1	728.0	728.9	729.5	729.8	730.1	730.4	730.7	730.5	730.4
145°	765.8	766.1	766.5	766.8	767.2	767.8	768.3	768.8	769.3	769.2	769.0
147.5°	801.1	801.7	802.3	803.0	803.5	804.0	804.5	805.0	805.5	805.5	805.5
150°	825.2	825.5	825.9	826.2	826.6	826.9	827.3	827.6	828.0	828.0	828.0
152.5°	845.3	845.8	846.3	846.8	847.2	847.4	847.6	847.8	848.0	848.3	848.5
155°	876.4	876.4	876.4	876.4	876.5	876.7	876.9	877.1	877.2	877.9	878.6
157.5°	903.1	902.9	902.7	902.5	902.5	902.6	902.8	902.9	903.0	903.8	904.5
160°	919.9	919.5	919.2	918.8	918.7	918.7	918.7	918.7	918.7	919.5	920.4
162.5°	934.8	934.3	933.8	933.3	933.1	933.3	933.4	933.5	933.7	934.5	935.4
165°	954.1	953.6	953.1	952.5	952.3	952.3	952.3	952.3	952.3	953.3	954.4
167.5°	969.4	968.7	968.0	967.3	967.1	967.2	967.3	967.5	967.6	968.7	969.8
170°	978.2	977.5	976.8	976.1	975.7	975.7	975.7	975.7	975.7	977.0	978.2
172.5°	985.1	984.4	983.7	983.0	982.6	982.6	982.6	982.6	982.6	983.7	984.8
175°	992.2	991.6	990.9	990.2	989.8	989.8	989.8	989.8	989.8	990.9	991.9
177.5°	995.4	994.8	994.2	993.7	993.4	993.4	993.4	993.4	993.4	994.2	995.1
180°	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3	995.3



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1	1622.1
2.5°	1707.0	1707.6	1714.6	1719.6	1717.1	1720.2	1721.5
5°	1865.0	1893.3	1908.2	1919.2	1920.0	1920.8	1927.1
7.5°	2089.0	2119.3	2141.5	2175.1	2185.2	2196.6	2193.3
10°	2252.5	2297.2	2335.8	2356.2	2378.2	2410.4	2384.5
12.5°	2405.2	2484.6	2543.2	2575.0	2595.7	2602.2	2589.5
15°	2657.2	2760.9	2816.7	2815.2	2885.9	2916.6	2868.6
17.5°	2888.3	2984.0	3060.7	3100.0	3158.9	3172.0	3166.0
20°	3029.7	3134.3	3194.0	3261.6	3292.2	3319.7	3324.4
22.5°	3151.7	3245.5	3309.7	3365.9	3391.6	3404.6	3412.5
25°	3277.3	3351.2	3389.7	3409.3	3416.4	3414.8	3404.6
27.5°	3268.6	3274.3	3231.9	3190.2	3153.0	3111.0	3096.5
30°	3183.8	3117.7	2999.9	2933.1	2834.8	2757.0	2788.4
32.5°	2960.6	2829.2	2696.8	2550.8	2429.9	2395.5	2360.9
35°	2526.7	2295.7	2160.5	2003.3	1940.4	1877.6	1834.3
37.5°	2044.2	1865.5	1705.1	1602.3	1539.3	1499.5	1478.2
40°	1767.5	1606.4	1474.4	1391.1	1343.1	1298.3	1292.1
42.5°	1546.9	1397.1	1297.7	1231.4	1185.3	1166.3	1152.5
45°	1266.9	1162.4	1095.6	1048.4	1017.8	1006.0	990.3
47.5°	1072.3	998.4	948.3	916.2	893.1	884.3	883.1
50°	963.5	902.2	865.3	840.1	822.1	818.9	806.4
52.5°	881.8	828.7	799.9	777.9	764.9	756.1	752.3
55°	765.5	730.1	704.2	691.6	681.4	672.7	672.7
57.5°	669.8	640.2	623.1	612.4	609.2	603.1	599.2
60°	610.7	585.5	572.2	562.7	556.4	557.2	550.1
62.5°	552.8	536.5	523.7	514.3	506.8	506.9	507.4
65°	470.8	458.2	448.8	445.6	440.9	435.4	437.0
67.5°	398.9	387.1	379.8	374.4	372.8	369.9	374.4
70°	347.4	338.7	333.2	328.5	326.9	327.7	331.7
72.5°	300.2	294.1	290.5	288.3	284.8	285.0	287.6
75°	235.8	231.1	227.9	225.6	224.8	224.8	224.8
77.5°	173.2	172.1	170.7	167.2	167.4	168.3	168.5
80°	136.8	134.4	133.6	132.0	129.7	128.1	132.0
82.5°	102.2	99.8	99.0	98.7	95.1	94.8	98.1
85°	55.0	52.7	53.4	52.7	52.7	51.9	51.9
87.5°	23.7	23.2	22.6	23.3	22.8	22.2	23.6
90°	20.8	21.5	22.1	22.4	22.8	23.1	23.5
92.5°	31.7	32.2	32.4	32.2	32.0	31.8	31.6
95°	59.9	60.6	61.0	61.0	61.0	61.0	61.0
97.5°	92.9	93.7	94.1	94.0	94.0	93.9	93.8
100°	116.5	117.0	117.5	117.8	118.1	118.5	118.8
102.5°	144.0	144.5	144.8	144.7	144.6	144.6	144.5
105°	184.5	184.5	184.7	185.0	185.4	185.7	186.1
107.5°	229.5	230.1	230.2	230.0	229.8	229.6	229.4
110°	259.3	260.0	260.2	259.8	259.5	259.1	258.8



TEST NUMBER: P332064

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	289.1	290.0	290.3	290.3	290.2	290.1	290.1
115°	333.6	333.8	333.8	333.6	333.4	333.2	333.1
117.5°	378.9	378.9	378.6	378.2	377.7	377.2	376.7
120°	409.2	409.0	408.7	408.4	408.0	407.7	407.3
122.5°	439.6	439.2	438.7	438.2	437.7	437.2	436.7
125°	485.0	484.3	483.6	482.9	482.2	481.5	480.8
127.5°	529.8	528.9	528.0	527.2	526.4	525.6	524.8
130°	560.1	559.4	558.4	557.2	556.0	554.8	553.5
132.5°	589.0	588.2	587.3	586.4	585.4	584.5	583.6
135°	632.8	632.1	631.6	631.2	630.9	630.5	630.2
137.5°	675.4	674.6	673.9	673.3	672.6	672.0	671.3
140°	703.9	703.7	703.1	701.8	700.6	699.4	698.2
142.5°	730.2	730.0	729.5	728.5	727.6	726.6	725.7
145°	768.8	768.6	768.2	767.5	766.8	766.1	765.4
147.5°	805.5	805.5	804.9	803.9	802.8	801.8	800.8
150°	828.0	828.0	827.5	826.4	825.4	824.3	823.3
152.5°	848.8	849.1	848.8	847.9	847.0	846.1	845.2
155°	879.3	880.0	879.7	878.5	877.3	876.1	874.9
157.5°	905.2	905.9	905.8	904.9	903.9	902.9	901.9
160°	921.3	922.1	922.2	921.5	920.8	920.1	919.4
162.5°	936.3	937.2	937.0	935.9	934.8	933.7	932.6
165°	955.4	956.5	956.4	955.2	953.9	952.7	951.5
167.5°	970.8	971.9	971.9	970.8	969.8	968.7	967.6
170°	979.4	980.6	980.6	979.4	978.2	977.0	975.7
172.5°	985.9	986.9	986.9	985.6	984.4	983.2	982.0
175°	992.9	994.0	993.9	992.7	991.5	990.2	989.0
177.5°	995.9	996.7	996.7	995.7	994.7	993.8	992.8
180°	995.3	995.3	995.3	995.3	995.3	995.3	995.3

(END OF REPORT)