

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332071

Luminaire Tested: **S123DIP-S1165D805U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332071  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1165D805U835-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7665.7 lumens  
Efficiency: N/A  
Efficacy: 126.3 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 60.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332071  
CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

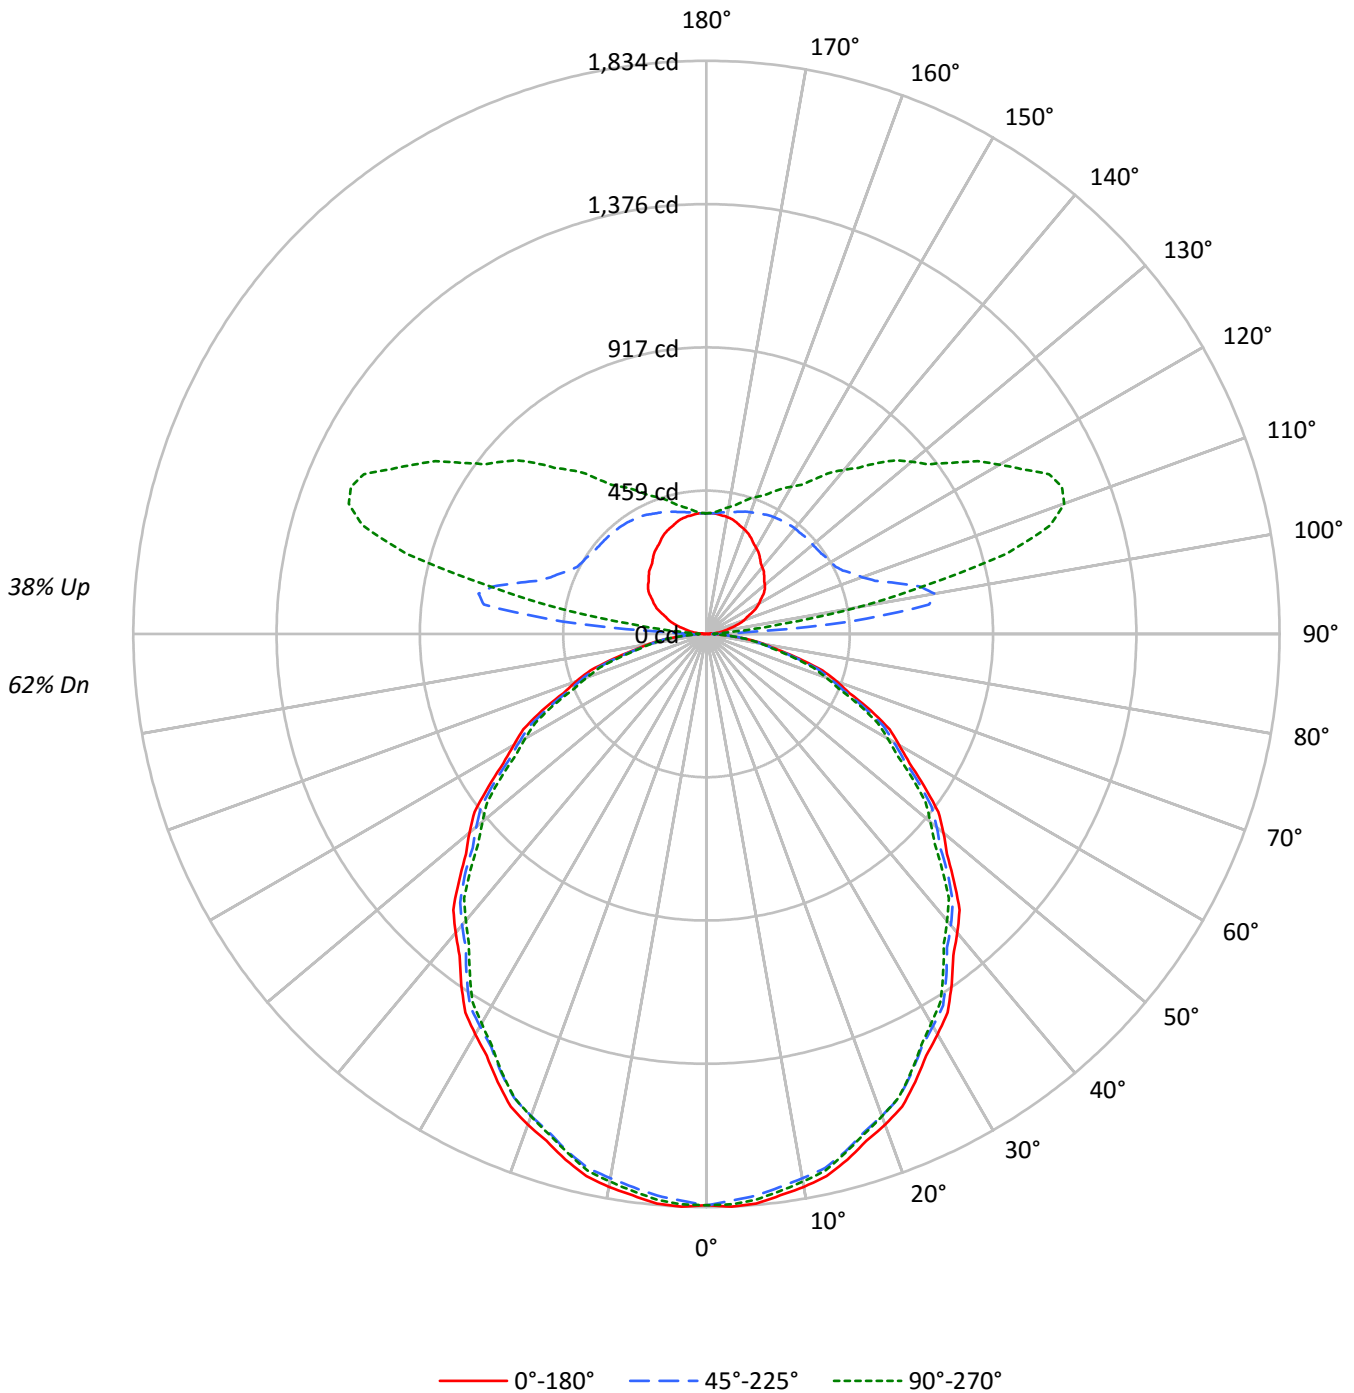



TEST NUMBER: P332071

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	62
1	100	96	92	88	94	90	87	83	79	76	74	69	67	65	59	58	57	52
2	91	84	77	72	85	79	73	68	69	65	61	60	57	54	52	50	48	44
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	41	37
4	76	65	57	51	71	61	54	49	54	48	44	48	43	39	41	38	35	32
5	70	58	50	44	65	55	47	42	49	42	38	43	38	34	37	33	30	27
6	65	52	44	38	60	49	42	36	44	38	33	39	34	30	34	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29	35	30	26	31	27	24	21
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	30	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	23	19	24	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	19678	19678	19678
5°	19770	19498	19634
10°	19638	19329	19449
15°	19409	19110	19146
20°	19140	18798	18816
25°	18781	18427	18389
30°	18385	18013	17877
35°	17971	17578	17350
40°	17537	17096	16831
45°	17061	16653	16247
50°	16583	16109	15662
55°	15959	15546	15073
60°	15330	14889	14415
65°	14772	14174	13733
70°	13951	13357	12765
75°	12747	12289	11765
80°	11499	11009	10916
85°	10090	9707	9324



TEST NUMBER: P332071

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	172.2	2.2
10°-20°	486.2	6.3
20°-30°	718.3	9.4
30°-40°	839.0	10.9
40°-50°	843.5	11.0
50°-60°	740.9	9.7
60°-70°	552.0	7.2
70°-80°	314.5	4.1
80°-90°	93.3	1.2
90°-100°	214.9	2.8
100°-110°	608.6	7.9
110°-120°	598.7	7.8
120°-130°	477.5	6.2
130°-140°	376.5	4.9
140°-150°	281.0	3.7
150°-160°	195.9	2.6
160°-170°	115.1	1.5
170°-180°	37.4	0.5
0°-30°	1376.7	18.0
0°-40°	2215.7	28.9
0°-60°	3800.2	49.6
0°-90°	4759.9	62.1
90°-120°	1422.2	18.6
90°-150°	2557.3	33.4
90°-180°	2906.0	37.9
0°-180°	7665.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1828	1828	1828	1828	1828	
5°	1830	1821	1804	1819	1817	173
15°	1742	1735	1715	1726	1718	491
25°	1581	1571	1552	1553	1548	728
35°	1368	1358	1338	1328	1320	855
45°	1121	1114	1094	1076	1067	865
55°	850	848	828	812	803	761
65°	580	572	556	544	539	572
75°	306	300	296	288	283	328
85°	82	79	79	76	76	90
90°	2	9	20	22	23	6
95°	27	86	464	135	91	29
105°	91	134	629	1099	994	96
115°	160	200	481	1054	1210	159
125°	223	263	449	813	954	198
135°	261	312	442	670	773	202
145°	298	341	437	549	604	187
155°	338	365	423	481	501	156
165°	370	380	405	430	437	104
175°	385	386	389	394	393	37
180°	386	386	386	386	386	



TEST NUMBER: P332071

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1
2.5°	1834.4	1833.3	1832.2	1831.1	1829.9	1827.8	1824.8	1821.7	1818.6	1815.5	1818.3
5°	1829.7	1828.0	1826.2	1824.5	1822.7	1819.9	1816.1	1812.2	1808.4	1804.5	1808.0
7.5°	1811.8	1810.0	1808.3	1806.5	1804.8	1801.9	1797.9	1794.0	1790.0	1786.0	1789.1
10°	1796.7	1794.9	1793.2	1791.4	1789.7	1786.6	1782.0	1777.5	1772.9	1768.4	1771.5
12.5°	1776.6	1775.1	1773.6	1772.2	1770.7	1767.8	1763.6	1759.3	1755.0	1750.8	1753.1
15°	1741.7	1740.3	1738.9	1737.5	1736.1	1733.1	1728.6	1724.0	1719.5	1714.9	1717.7
17.5°	1701.1	1699.3	1697.5	1695.7	1693.8	1690.7	1686.1	1681.6	1677.0	1672.5	1674.5
20°	1670.9	1668.8	1666.7	1664.6	1662.6	1659.2	1654.7	1650.2	1645.6	1641.1	1642.5
22.5°	1637.0	1634.9	1632.8	1630.7	1628.6	1625.3	1620.7	1616.2	1611.7	1607.1	1608.2
25°	1581.3	1579.2	1577.1	1575.0	1573.0	1569.6	1565.1	1560.6	1556.0	1551.5	1551.8
27.5°	1521.9	1519.9	1517.9	1515.8	1513.8	1510.4	1505.5	1500.6	1495.7	1490.8	1491.1
30°	1479.2	1477.4	1475.7	1473.9	1472.2	1468.9	1464.0	1459.1	1454.2	1449.3	1449.3
32.5°	1436.4	1434.1	1431.8	1429.5	1427.2	1424.1	1420.4	1416.6	1412.8	1409.1	1407.1
35°	1367.6	1365.5	1363.4	1361.3	1359.2	1355.9	1351.3	1346.8	1342.2	1337.7	1335.6
37.5°	1297.1	1294.5	1291.8	1289.2	1286.5	1282.9	1278.3	1273.7	1269.1	1264.4	1261.9
40°	1248.1	1246.0	1243.9	1241.8	1239.7	1236.2	1231.3	1226.4	1221.5	1216.7	1213.9
42.5°	1199.0	1196.7	1194.3	1191.9	1189.5	1185.9	1181.0	1176.1	1171.2	1166.4	1163.6
45°	1120.8	1119.4	1118.0	1116.6	1115.2	1112.2	1107.7	1103.1	1098.6	1094.0	1089.9
47.5°	1043.1	1041.1	1039.1	1037.0	1035.0	1031.9	1027.6	1023.3	1019.1	1014.8	1010.7
50°	990.3	988.6	986.8	985.1	983.3	980.2	975.6	971.1	966.5	962.0	958.2
52.5°	935.0	933.8	932.6	931.4	930.2	927.2	922.4	917.6	912.8	907.9	904.6
55°	850.4	850.1	849.7	849.4	849.0	846.6	842.0	837.5	832.9	828.4	824.6
57.5°	769.9	768.7	767.5	766.4	765.2	762.8	759.1	755.5	751.9	748.2	744.8
60°	712.1	711.7	711.4	711.0	710.7	708.4	704.2	700.0	695.8	691.6	688.5
62.5°	660.5	659.6	658.7	657.8	656.9	654.3	650.1	645.9	641.8	637.6	634.4
65°	580.0	578.3	576.5	574.8	573.0	570.4	566.9	563.4	559.9	556.5	553.7
67.5°	494.8	493.3	491.8	490.2	488.7	486.6	483.9	481.3	478.6	476.0	473.5
70°	443.3	441.2	439.1	437.0	434.9	432.8	430.7	428.6	426.5	424.4	422.0
72.5°	389.2	387.7	386.1	384.6	383.1	381.1	378.7	376.3	374.0	371.6	369.4
75°	306.5	305.1	303.7	302.3	300.9	299.7	298.7	297.6	296.6	295.5	293.8
77.5°	233.3	232.5	231.7	231.0	230.2	229.2	227.9	226.7	225.4	224.2	223.0
80°	185.5	184.4	183.4	182.3	181.3	180.4	179.7	179.0	178.3	177.6	177.3
82.5°	139.0	138.7	138.5	138.3	138.1	137.9	137.8	137.7	137.5	137.4	136.8
85°	81.7	81.0	80.3	79.6	78.9	78.6	78.6	78.6	78.6	78.6	77.9
87.5°	33.0	32.5	32.0	31.6	31.1	30.8	31.0	31.2	31.4	31.6	31.1
90°	1.6	3.1	4.7	7.0	8.6	10.2	12.5	14.9	17.2	19.5	18.8
92.5°	9.7	14.4	21.0	27.1	33.6	45.2	65.7	99.3	132.3	120.2	90.7
95°	26.6	28.9	37.5	50.8	71.1	101.6	168.1	284.6	412.8	463.6	376.1
97.5°	45.3	46.1	52.9	64.4	84.4	117.4	180.9	312.3	526.0	718.5	768.7
100°	57.9	58.6	64.1	75.1	93.8	124.3	179.0	294.7	500.4	740.4	894.4
102.5°	71.0	72.4	77.2	87.6	104.5	132.4	181.5	279.7	462.8	699.7	900.7
105°	90.7	93.0	97.7	107.1	122.0	146.2	188.4	268.9	416.7	628.6	853.0
107.5°	111.6	114.0	118.5	127.7	141.7	164.2	201.2	268.2	387.3	565.7	769.5
110°	126.7	129.0	132.9	141.5	154.8	176.7	211.9	271.3	376.1	530.1	716.9



TEST NUMBER: P332071

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	140.4	142.8	146.7	155.3	168.6	189.8	222.5	277.5	369.8	506.3	671.3
115°	160.3	163.4	168.1	175.9	189.2	210.3	240.0	287.7	367.5	480.8	616.1
117.5°	180.1	183.7	187.6	194.8	209.7	229.2	258.6	301.2	368.9	465.8	582.8
120°	193.9	196.2	200.1	208.0	222.8	242.4	270.5	311.2	371.4	458.9	565.3
122.5°	205.8	208.1	212.0	220.5	234.7	255.5	283.0	320.5	375.7	454.6	550.9
125°	222.8	224.4	229.1	237.7	252.5	273.6	301.0	335.4	382.3	448.8	532.4
127.5°	235.8	238.1	243.9	252.7	269.1	290.2	316.6	347.6	389.8	446.0	516.2
130°	243.9	246.3	253.3	262.7	279.1	300.2	326.0	355.7	394.8	444.1	507.4
132.5°	250.2	253.2	260.8	272.1	288.5	309.0	334.1	363.2	398.6	443.4	499.3
135°	261.1	264.3	272.9	284.6	301.0	322.1	346.3	372.9	404.2	442.5	488.6
137.5°	271.4	274.7	283.2	295.7	311.9	331.5	354.8	380.1	408.0	440.8	479.4
140°	278.3	282.2	290.1	302.6	318.2	337.7	360.4	383.9	410.5	440.2	473.8
142.5°	285.8	289.1	297.6	308.8	324.5	342.7	364.8	387.6	412.3	438.9	468.8
145°	297.9	300.2	307.3	319.0	332.3	350.3	370.6	391.7	413.6	437.0	462.1
147.5°	310.1	311.5	318.4	328.5	341.3	356.7	375.3	394.2	413.6	434.1	455.5
150°	318.2	319.0	325.2	335.4	346.3	360.4	378.4	394.8	413.6	431.6	451.1
152.5°	326.3	326.5	332.7	341.7	351.3	364.8	380.3	396.1	411.7	428.4	446.1
155°	338.5	338.5	343.2	351.0	359.6	370.6	383.9	396.4	409.7	423.0	438.6
157.5°	348.2	348.8	352.6	359.5	366.8	375.3	385.9	397.2	407.0	418.1	430.2
160°	355.7	355.7	358.9	365.1	370.6	378.4	387.8	397.2	405.8	414.4	424.5
162.5°	361.4	361.4	363.9	368.9	373.7	380.3	388.4	396.5	403.3	410.6	418.9
165°	369.8	369.0	370.6	374.5	377.6	383.1	389.3	394.8	399.5	405.0	411.2
167.5°	376.2	375.3	376.1	379.0	381.2	384.7	389.2	393.6	395.8	399.4	403.9
170°	380.0	378.4	379.2	381.5	383.1	384.7	388.6	391.7	393.3	395.6	399.5
172.5°	382.5	381.5	381.7	383.4	384.3	385.3	388.6	391.1	391.4	392.5	395.1
175°	385.4	384.7	383.9	385.4	385.4	386.2	387.8	389.3	388.6	388.6	390.1
177.5°	386.8	386.2	385.6	386.2	386.2	386.2	386.8	388.1	386.8	386.2	386.8
180°	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2



TEST NUMBER: P332071

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1	1828.1
2.5°	1821.1	1823.9	1826.7	1828.0	1827.7	1827.4	1827.1	1826.9
5°	1811.5	1815.0	1818.5	1819.9	1819.2	1818.5	1817.8	1817.1
7.5°	1792.3	1795.4	1798.6	1799.9	1799.5	1799.1	1798.7	1798.3
10°	1774.7	1777.8	1781.0	1782.2	1781.5	1780.8	1780.1	1779.4
12.5°	1755.4	1757.7	1760.0	1761.0	1760.5	1760.1	1759.7	1759.3
15°	1720.5	1723.3	1726.1	1726.5	1724.4	1722.3	1720.2	1718.1
17.5°	1676.4	1678.4	1680.3	1680.9	1680.2	1679.4	1678.6	1677.9
20°	1643.9	1645.3	1646.7	1646.8	1645.8	1644.7	1643.7	1642.6
22.5°	1609.4	1610.5	1611.6	1611.5	1610.2	1608.8	1607.5	1606.2
25°	1552.2	1552.5	1552.9	1552.5	1551.5	1550.4	1549.4	1548.3
27.5°	1491.4	1491.6	1491.9	1491.4	1490.1	1488.7	1487.4	1486.1
30°	1449.3	1449.3	1449.3	1448.1	1445.6	1443.2	1440.7	1438.3
32.5°	1405.1	1403.2	1401.2	1399.6	1398.3	1396.9	1395.6	1394.3
35°	1333.5	1331.4	1329.3	1327.4	1325.6	1323.9	1322.1	1320.4
37.5°	1259.4	1256.9	1254.4	1252.6	1251.4	1250.3	1249.2	1248.1
40°	1211.1	1208.3	1205.5	1203.4	1202.0	1200.6	1199.2	1197.8
42.5°	1160.8	1158.0	1155.2	1153.1	1151.7	1150.3	1148.9	1147.5
45°	1085.7	1081.5	1077.3	1074.3	1072.6	1070.8	1069.1	1067.3
47.5°	1006.6	1002.5	998.3	995.5	994.0	992.4	990.9	989.4
50°	954.3	950.5	946.6	943.7	941.6	939.5	937.4	935.3
52.5°	901.4	898.1	894.8	892.1	890.0	887.9	885.8	883.7
55°	820.7	816.9	813.0	810.2	808.5	806.7	805.0	803.2
57.5°	741.4	738.0	734.5	731.8	729.8	727.8	725.7	723.7
60°	685.4	682.2	679.1	676.6	674.9	673.1	671.4	669.6
62.5°	631.3	628.1	625.0	622.8	621.6	620.4	619.3	618.1
65°	550.9	548.1	545.3	543.4	542.3	541.3	540.2	539.2
67.5°	471.1	468.6	466.2	464.2	462.8	461.3	459.8	458.4
70°	419.5	417.1	414.6	412.5	410.8	409.0	407.3	405.6
72.5°	367.3	365.1	362.9	361.4	360.5	359.6	358.7	357.8
75°	292.0	290.3	288.5	287.1	286.1	285.0	284.0	282.9
77.5°	221.8	220.6	219.4	218.8	218.8	218.8	218.8	218.8
80°	176.9	176.6	176.2	176.1	176.1	176.1	176.1	176.1
82.5°	136.1	135.5	134.9	134.4	134.1	133.9	133.6	133.3
85°	77.2	76.5	75.8	75.5	75.5	75.5	75.5	75.5
87.5°	31.0	30.9	30.8	30.9	30.8	30.9	31.1	30.9
90°	19.5	20.3	21.1	22.7	21.9	22.7	23.5	22.7
92.5°	65.8	52.2	46.1	42.1	40.7	38.3	39.1	37.7
95°	281.5	190.8	149.3	121.2	106.3	99.3	93.8	90.7
97.5°	701.6	562.0	461.1	367.6	309.9	274.7	253.6	246.9
100°	921.8	858.4	767.0	655.9	577.0	519.9	489.4	490.2
102.5°	994.9	992.9	939.6	869.2	807.8	762.6	737.1	719.1
105°	1016.4	1094.5	1109.4	1089.1	1053.1	1023.4	998.4	994.5
107.5°	954.8	1081.7	1150.2	1178.0	1178.7	1168.7	1160.2	1153.0
110°	896.0	1039.8	1138.3	1193.1	1214.9	1221.2	1219.6	1218.1





TEST NUMBER: P332071

CATALOG NUMBER: S123DIP-S1165D805U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	837.8	984.8	1095.2	1165.5	1205.6	1225.0	1230.9	1231.2
115°	760.7	896.7	1011.7	1096.9	1155.5	1189.9	1205.6	1209.5
117.5°	704.9	822.3	925.5	1012.0	1073.1	1112.5	1135.0	1140.4
120°	675.5	781.0	874.9	953.8	1015.6	1059.4	1078.1	1082.8
122.5°	652.4	747.9	834.8	908.2	963.0	1002.4	1023.1	1029.0
125°	621.5	706.8	781.8	844.4	894.4	928.8	948.3	953.8
127.5°	594.7	670.6	738.4	795.3	839.8	869.2	886.9	891.9
130°	577.8	648.1	711.5	764.6	806.1	834.2	850.6	856.9
132.5°	562.1	626.9	685.8	736.5	775.4	803.6	818.1	822.5
135°	541.0	596.5	647.3	691.9	730.2	753.7	767.7	773.2
137.5°	521.8	567.3	611.1	649.7	681.9	705.7	717.6	721.2
140°	510.5	550.4	587.9	621.5	651.3	673.1	685.7	684.9
142.5°	499.9	534.1	566.7	595.9	621.2	640.6	651.9	651.1
145°	487.1	512.9	537.9	560.6	580.1	596.5	602.8	604.3
147.5°	476.6	497.1	517.3	533.4	548.2	559.3	565.3	565.9
150°	469.1	487.1	503.5	518.3	530.1	538.7	543.4	543.4
152.5°	462.2	477.7	492.2	504.6	513.8	521.8	524.6	524.6
155°	451.9	464.4	476.1	485.5	492.5	498.8	500.4	501.1
157.5°	440.9	451.4	460.5	467.8	473.9	478.6	479.9	479.7
160°	434.7	443.3	451.1	456.6	462.1	466.7	466.7	466.0
162.5°	427.2	434.5	441.7	446.6	450.2	454.2	454.2	453.5
165°	417.5	422.2	427.7	431.6	434.7	437.8	437.0	437.0
167.5°	409.0	412.6	415.8	418.6	420.0	422.2	421.4	421.4
170°	403.4	405.8	408.9	410.5	411.2	412.8	412.0	412.0
172.5°	398.4	400.1	402.6	403.6	403.7	405.3	403.9	403.3
175°	391.7	392.5	394.0	394.0	394.0	394.8	394.0	393.3
177.5°	387.5	388.1	388.7	388.7	388.1	388.7	387.5	387.5
180°	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2

(END OF REPORT)