

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331902

Luminaire Tested: **S123DIP-S340D1195U835-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331902  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S340D1195U835-4F0-1E-UDD-A1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5553.6 lumens  
Efficiency: N/A  
Efficacy: 131.6 lumens/watt  
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 42.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

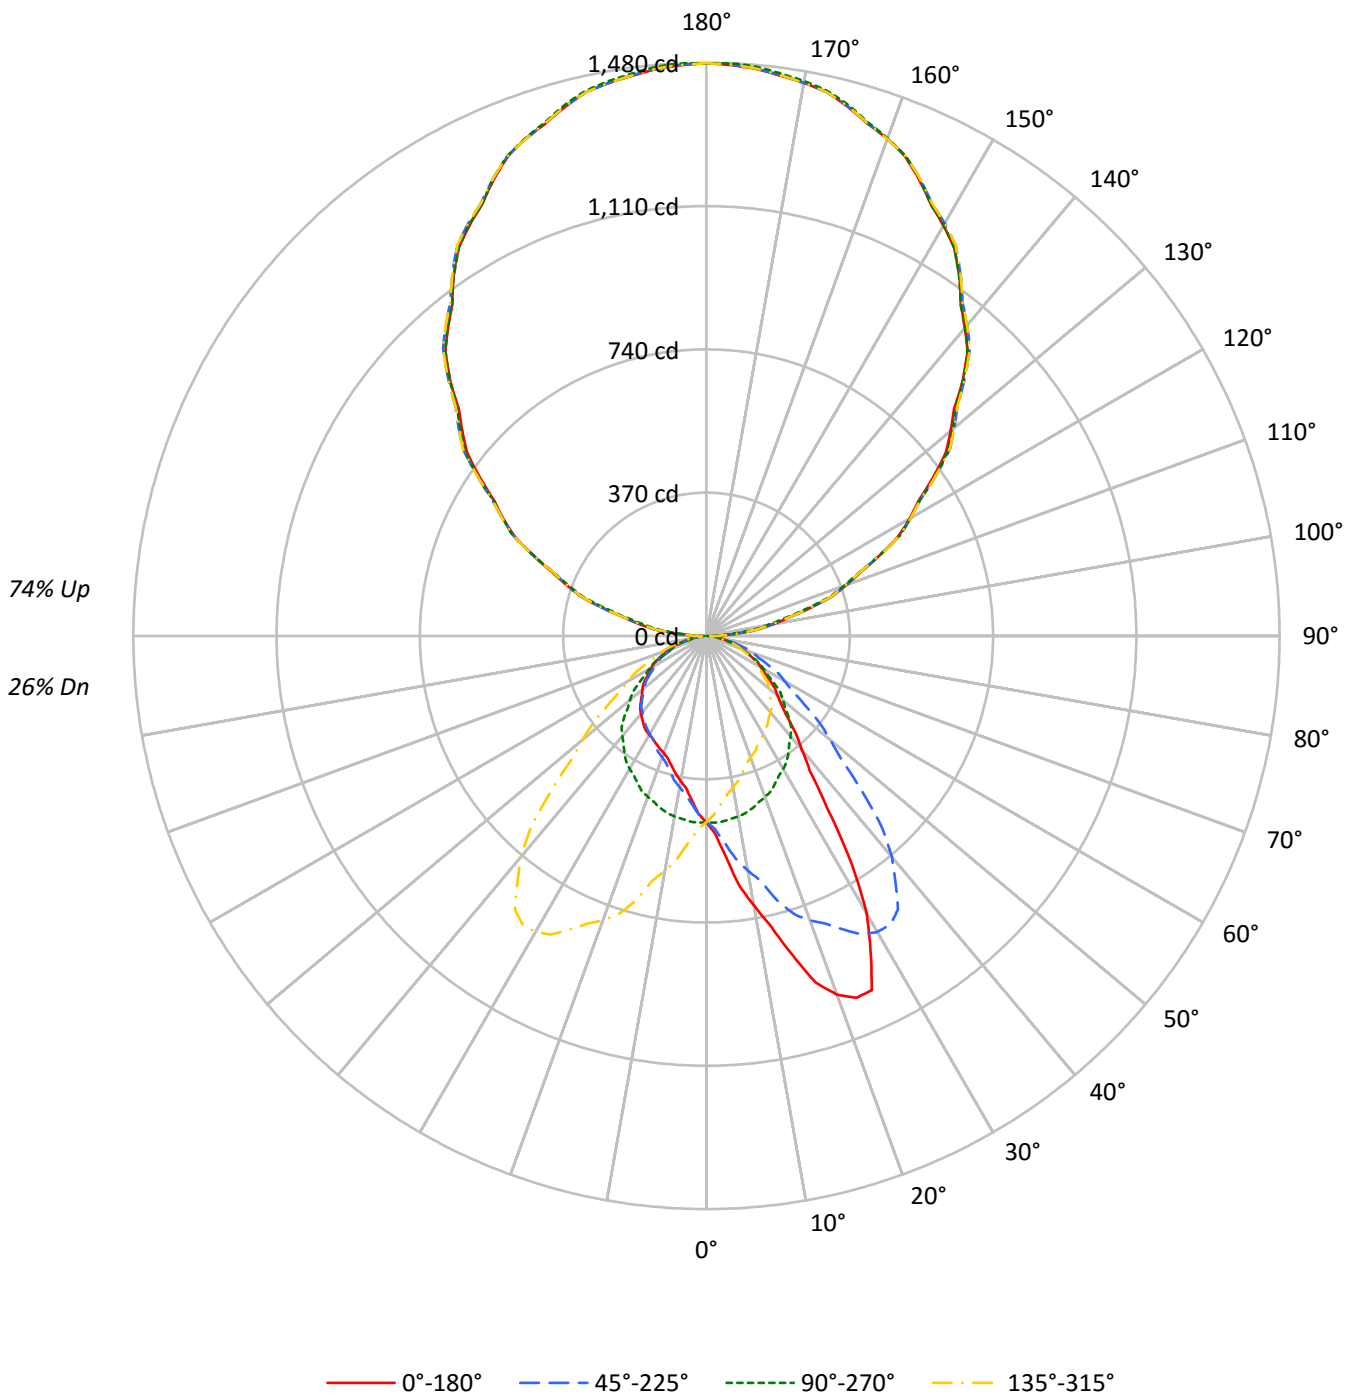



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	101	101	101	101	91	91	91	91	70	70	70	51	51	51	34	34	34	26				
1	93	88	85	81	82	79	76	73	61	59	58	45	44	43	30	30	29	22				
2	84	77	72	67	75	69	64	60	54	51	48	40	38	36	27	26	25	19				
3	77	68	61	56	68	61	55	50	48	44	40	35	33	31	24	22	21	16				
4	70	60	53	47	63	54	48	43	42	38	34	32	29	26	21	20	18	14				
5	65	53	46	40	57	48	41	36	38	33	29	28	25	23	19	17	16	12				
6	59	48	40	35	53	43	36	32	34	29	26	25	22	20	18	16	14	11				
7	55	43	35	30	49	39	32	28	31	26	22	23	20	17	16	14	12	10				
8	51	39	32	26	45	35	29	24	28	23	20	21	18	15	15	13	11	9				
9	47	35	28	23	42	32	26	21	25	21	18	19	16	14	13	11	10	8				
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	12	10	9	7				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	5175	5175	5175	5175
5°	6172	5198	4606	5198
10°	7725	5172	4161	5172
15°	9475	5129	3874	5129
20°	11287	5065	3688	5065
25°	11986	4986	3646	4986
30°	10274	4928	3665	4928
35°	7144	4846	3704	4846
40°	5382	4749	3693	4749
45°	4468	4606	3646	4606
50°	4002	4315	3612	4315
55°	3742	4001	3567	4001
60°	3511	3670	3531	3670
65°	3298	3347	3418	3347
70°	3094	2977	3254	2977
75°	2770	2608	2986	2608
80°	2424	2139	2572	2139
85°	1902	1556	1729	1556



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	47.4	0.9
10°-20°	151.9	2.7
20°-30°	254.9	4.6
30°-40°	288.6	5.2
40°-50°	258.8	4.7
50°-60°	208.9	3.8
60°-70°	145.6	2.6
70°-80°	76.5	1.4
80°-90°	23.1	0.4
90°-100°	96.4	1.7
100°-110°	288.4	5.2
110°-120°	490.5	8.8
120°-130°	645.2	11.6
130°-140°	725.2	13.1
140°-150°	712.8	12.8
150°-160°	600.1	10.8
160°-170°	399.5	7.2
170°-180°	139.9	2.5
0°-30°	454.2	8.2
0°-40°	742.8	13.4
0°-60°	1210.5	21.8
0°-90°	1455.6	26.2
90°-120°	875.3	15.8
90°-150°	2958.5	53.3
90°-180°	4098.0	73.8
0°-180°	5553.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	481	481	481	481	481	
5°	571	481	426	481	571	59
15°	850	460	348	460	850	246
25°	1009	420	307	420	1009	443
35°	544	369	282	369	544	353
45°	294	303	240	303	294	232
55°	199	213	190	213	199	179
65°	130	131	134	131	130	129
75°	67	63	72	63	67	71
85°	15	13	14	13	15	19
90°	35	1	35	1	35	18
95°	91	69	91	69	91	93
105°	276	261	276	261	276	293
115°	495	494	495	494	495	490
125°	715	723	715	723	715	639
135°	936	938	936	938	936	720
145°	1138	1138	1138	1138	1138	710
155°	1300	1302	1300	1302	1300	599
165°	1414	1419	1414	1419	1414	399
175°	1470	1476	1470	1476	1470	140
180°	1479	1479	1479	1479	1479	



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8
2.5°	510.3	509.9	509.0	509.7	508.2	506.2	506.0	504.1	498.7	498.4	496.9
5°	571.2	569.4	569.1	568.9	565.6	561.2	552.8	552.1	540.9	535.4	528.6
7.5°	650.2	651.1	647.7	644.8	634.8	628.2	619.2	607.7	594.0	580.0	570.8
10°	706.8	714.5	705.0	698.4	692.4	681.0	667.7	651.1	634.6	615.3	600.6
12.5°	767.6	771.3	769.4	763.3	753.9	736.5	713.0	694.7	679.5	647.3	634.3
15°	850.3	864.5	855.4	834.5	834.9	818.4	787.7	753.9	735.9	707.7	669.3
17.5°	938.5	940.2	936.4	918.9	907.3	884.5	856.1	823.8	787.4	753.3	712.5
20°	985.4	984.0	975.9	966.8	946.8	929.1	898.1	862.0	815.4	781.8	737.3
22.5°	1011.5	1009.2	1005.3	997.7	981.1	962.1	934.2	894.8	850.4	804.2	752.8
25°	1009.2	1012.2	1012.7	1010.6	1004.8	993.4	971.5	940.0	895.8	836.3	782.8
27.5°	917.9	922.2	934.6	945.7	958.0	970.6	968.9	953.3	920.5	869.2	803.7
30°	826.6	817.2	840.3	869.4	889.2	924.2	943.7	944.9	926.5	882.5	818.6
32.5°	699.8	710.1	720.3	756.1	799.4	838.6	877.6	908.9	912.5	883.2	827.4
35°	543.7	556.6	575.2	593.8	640.4	680.5	749.0	808.6	856.1	862.4	828.2
37.5°	438.2	444.5	456.3	475.0	505.4	553.0	605.9	681.3	750.2	801.4	803.6
40°	383.0	384.9	398.1	412.3	437.0	476.2	523.9	590.6	673.0	744.6	774.4
42.5°	341.6	345.7	351.4	365.0	384.7	414.1	458.5	513.6	589.2	671.5	729.8
45°	293.5	298.2	301.7	310.8	324.8	344.6	375.5	425.9	483.4	568.4	646.9
47.5°	261.8	262.1	264.7	271.6	281.1	296.0	317.9	350.2	403.0	472.0	552.6
50°	239.0	242.7	243.7	249.0	256.5	267.4	285.6	313.1	356.4	417.0	491.1
52.5°	223.0	224.1	226.7	230.6	237.1	245.6	261.4	282.9	316.9	368.6	436.7
55°	199.4	199.4	202.0	205.0	208.7	216.4	226.9	242.7	268.6	308.7	365.1
57.5°	177.6	178.8	180.6	181.5	184.7	189.8	198.5	210.6	229.8	260.7	305.5
60°	163.1	165.2	164.9	166.8	169.6	173.6	181.0	190.8	208.0	232.7	270.5
62.5°	150.4	150.3	150.2	152.5	155.2	159.0	163.9	172.3	187.0	208.9	241.0
65°	129.5	129.1	130.7	132.1	133.0	135.8	139.5	147.0	156.8	173.1	198.0
67.5°	111.0	109.6	110.5	111.0	112.6	114.8	118.3	122.9	130.6	143.7	162.5
70°	98.3	97.1	96.9	97.4	98.8	100.4	103.0	107.4	114.6	125.1	138.8
72.5°	85.3	84.5	84.4	85.5	86.1	87.2	89.0	93.0	98.8	106.7	119.5
75°	66.6	66.6	66.6	66.9	67.6	68.5	69.9	72.0	76.4	82.0	90.6
77.5°	49.9	49.9	49.6	49.6	50.6	51.0	51.3	53.3	55.8	59.5	65.8
80°	39.1	38.0	38.4	39.1	39.6	39.8	40.5	41.0	43.1	45.2	49.6
82.5°	29.1	28.1	28.2	29.3	29.4	29.6	30.3	30.9	31.7	33.6	36.0
85°	15.4	15.4	15.6	15.6	15.8	15.6	16.3	16.5	16.5	17.7	19.1
87.5°	12.6	12.1	12.2	12.3	12.0	12.0	12.0	12.0	11.9	11.9	11.4
90°	34.9	34.3	33.8	33.3	32.8	32.0	31.0	30.0	28.9	27.9	24.5
92.5°	46.9	47.2	47.6	47.9	48.2	47.9	47.1	46.3	45.4	44.6	42.7
95°	90.6	90.6	90.6	90.6	90.6	90.1	89.1	88.0	87.0	86.0	83.9
97.5°	139.4	139.5	139.6	139.7	139.8	139.3	138.1	136.9	135.7	134.5	133.0
100°	176.6	176.1	175.6	175.1	174.5	173.9	173.1	172.3	171.6	170.8	169.5
102.5°	214.7	214.8	214.9	215.0	215.1	214.8	214.0	213.2	212.5	211.7	210.0
105°	276.5	276.0	275.5	275.0	274.5	274.2	274.2	274.2	274.2	274.2	271.9
107.5°	340.9	341.2	341.5	341.8	342.1	341.9	341.1	340.2	339.4	338.6	337.6
110°	384.6	385.1	385.6	386.1	386.6	386.4	385.4	384.3	383.3	382.3	381.7



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	431.1	431.2	431.3	431.4	431.5	430.9	429.7	428.4	427.2	425.9	425.8
115°	495.0	495.2	495.5	495.7	496.0	496.0	495.7	495.5	495.2	495.0	495.5
117.5°	559.8	560.5	561.2	562.0	562.7	563.1	563.1	563.2	563.2	563.3	564.0
120°	605.3	605.9	606.4	606.9	607.4	607.8	608.1	608.3	608.6	608.8	610.1
122.5°	649.0	649.7	650.5	651.2	651.9	652.6	653.3	654.0	654.6	655.3	656.0
125°	714.6	715.6	716.6	717.7	718.7	719.7	720.8	721.8	722.8	723.9	724.4
127.5°	779.9	781.0	782.2	783.4	784.6	785.9	787.4	788.8	790.3	791.7	792.3
130°	822.6	824.4	826.2	828.0	829.8	831.3	832.3	833.3	834.4	835.4	836.2
132.5°	867.2	868.6	870.0	871.4	872.8	874.1	875.4	876.6	877.8	879.1	879.6
135°	936.5	937.0	937.5	938.0	938.5	939.3	940.3	941.4	942.4	943.4	943.7
137.5°	997.6	998.6	999.6	1000.5	1001.5	1002.5	1003.6	1004.7	1005.8	1006.9	1006.2
140°	1037.6	1039.4	1041.2	1043.0	1044.8	1045.8	1046.1	1046.3	1046.6	1046.9	1046.6
142.5°	1078.5	1079.9	1081.2	1082.6	1084.0	1084.9	1085.1	1085.4	1085.6	1085.9	1085.4
145°	1137.5	1138.5	1139.5	1140.6	1141.6	1142.3	1142.5	1142.8	1143.0	1143.3	1142.5
147.5°	1190.0	1191.5	1193.1	1194.6	1196.2	1197.0	1197.0	1197.0	1197.0	1197.0	1196.2
150°	1223.5	1225.0	1226.6	1228.1	1229.7	1230.4	1230.4	1230.4	1230.4	1230.4	1229.9
152.5°	1256.0	1257.3	1258.7	1260.0	1261.4	1261.8	1261.4	1261.0	1260.6	1260.2	1259.9
155°	1300.1	1302.0	1303.8	1305.6	1307.4	1307.8	1306.7	1305.7	1304.7	1303.6	1303.4
157.5°	1340.3	1341.8	1343.2	1344.7	1346.1	1346.3	1345.2	1344.1	1343.1	1342.0	1341.8
160°	1366.4	1367.4	1368.4	1369.5	1370.5	1370.4	1369.1	1367.8	1366.5	1365.2	1365.2
162.5°	1385.9	1387.5	1389.2	1390.8	1392.5	1392.7	1391.4	1390.1	1388.8	1387.5	1387.3
165°	1414.0	1415.8	1417.6	1419.4	1421.2	1421.4	1419.8	1418.3	1416.7	1415.2	1415.2
167.5°	1437.9	1439.5	1441.1	1442.7	1444.3	1444.3	1442.7	1441.1	1439.5	1437.9	1437.7
170°	1450.0	1451.8	1453.6	1455.5	1457.3	1457.3	1455.5	1453.6	1451.8	1450.0	1450.0
172.5°	1459.3	1461.1	1462.9	1464.7	1466.6	1466.7	1465.1	1463.5	1461.9	1460.3	1460.3
175°	1469.8	1471.6	1473.4	1475.2	1477.0	1477.1	1475.6	1474.0	1472.5	1470.9	1470.9
177.5°	1475.4	1476.8	1478.2	1479.7	1481.1	1481.2	1480.0	1478.8	1477.5	1476.3	1476.3
180°	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8
2.5°	495.7	494.3	492.8	490.2	487.9	484.8	483.8	482.7	479.3	476.4	474.1
5°	526.0	520.4	512.3	504.8	498.8	490.6	486.0	481.1	474.1	467.8	462.7
7.5°	557.7	546.7	534.0	520.4	507.6	495.3	485.4	476.5	466.7	457.5	450.2
10°	582.9	567.0	549.3	530.2	513.9	498.1	484.8	473.2	460.6	449.6	440.5
12.5°	611.6	588.1	563.7	540.5	521.2	499.2	483.1	468.3	454.0	440.9	430.7
15°	645.5	615.7	586.8	554.9	525.6	498.1	479.0	460.3	443.8	430.3	417.2
17.5°	676.5	642.7	604.6	565.8	530.4	497.8	471.1	450.0	429.3	412.8	399.8
20°	694.0	655.6	612.5	572.2	533.0	496.7	467.3	442.2	419.8	402.3	387.7
22.5°	709.1	664.1	619.5	576.4	532.8	493.7	460.4	434.5	410.3	393.2	377.6
25°	724.8	670.9	626.2	575.7	527.0	486.4	449.2	419.8	395.6	375.5	359.5
27.5°	738.2	670.5	617.4	563.0	517.7	477.1	437.3	405.8	380.1	358.3	342.0
30°	747.1	671.4	608.3	554.5	508.8	466.9	428.2	396.5	369.5	347.4	332.0
32.5°	752.7	670.8	599.9	542.5	494.6	457.5	418.3	385.5	357.7	336.0	321.2
35°	756.0	666.7	585.4	517.9	471.8	435.6	402.8	368.8	339.7	319.4	302.6
37.5°	749.4	658.1	568.7	494.1	443.6	408.1	380.4	351.5	323.6	301.3	286.8
40°	739.2	652.5	555.6	477.3	424.2	390.0	366.5	338.0	310.5	289.3	275.8
42.5°	719.6	641.2	541.3	458.7	404.1	369.9	348.2	324.4	298.4	278.5	265.0
45°	671.9	616.4	519.7	430.8	374.4	339.0	319.9	302.6	279.1	259.8	248.1
47.5°	605.6	579.2	488.6	401.3	343.3	309.3	289.4	275.6	258.4	242.7	231.6
50°	559.6	548.6	467.6	381.1	322.7	289.3	270.2	257.7	245.3	229.7	219.5
52.5°	506.5	513.2	443.0	360.3	301.6	268.8	250.9	240.9	229.7	216.8	207.9
55°	431.7	456.1	400.5	325.2	270.2	239.0	222.0	213.2	206.6	197.1	189.4
57.5°	361.7	392.8	354.5	289.1	239.4	212.5	196.2	186.6	182.4	177.4	171.3
60°	320.1	350.8	321.7	264.9	218.8	193.1	178.7	170.5	166.3	162.8	157.7
62.5°	283.0	314.1	289.7	240.3	198.4	174.7	162.1	154.1	150.9	149.1	144.7
65°	232.0	258.8	242.5	202.0	169.4	148.4	137.0	131.4	128.4	127.7	124.9
67.5°	188.8	209.2	197.4	167.5	141.9	123.8	114.1	109.3	107.0	106.7	104.6
70°	160.5	179.6	170.5	143.5	121.4	107.2	98.8	94.6	93.2	93.0	91.8
72.5°	138.5	151.8	144.6	122.1	105.0	92.1	85.9	81.5	80.0	80.3	79.5
75°	102.5	112.5	108.3	92.7	79.0	70.6	65.5	62.7	61.3	62.0	61.0
77.5°	73.8	80.1	76.3	65.5	57.0	51.0	47.2	45.5	44.2	44.2	43.8
80°	55.7	59.4	57.3	50.8	43.8	38.7	35.6	34.5	33.8	33.5	33.3
82.5°	39.7	42.8	40.3	35.9	31.1	28.0	26.3	24.8	24.3	24.4	24.2
85°	20.0	21.2	20.3	17.5	15.6	14.2	13.3	12.6	12.1	12.3	11.9
87.5°	11.1	10.6	9.4	8.1	7.2	6.1	5.6	4.7	4.8	5.4	5.7
90°	21.2	17.8	14.5	11.5	8.9	6.3	3.7	1.2	3.7	6.3	8.9
92.5°	40.8	38.9	37.0	35.1	33.4	31.6	29.9	28.1	29.9	31.6	33.4
95°	81.8	79.8	77.7	75.8	74.0	72.2	70.4	68.6	70.4	72.2	74.0
97.5°	131.6	130.1	128.6	127.1	125.8	124.5	123.1	121.8	123.1	124.5	125.8
100°	168.2	166.9	165.6	164.2	162.7	161.1	159.6	158.0	159.6	161.1	162.7
102.5°	208.3	206.6	204.9	203.6	202.6	201.7	200.8	199.8	200.8	201.7	202.6
105°	269.6	267.2	264.9	263.5	263.0	262.5	261.9	261.4	261.9	262.5	263.0
107.5°	336.7	335.8	334.9	334.2	333.9	333.6	333.3	333.0	333.3	333.6	333.9
110°	381.2	380.7	380.2	379.7	379.2	378.6	378.1	377.6	378.1	378.6	379.2





TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	425.7	425.6	425.5	425.3	425.0	424.7	424.4	424.1	424.4	424.7	425.0
115°	496.0	496.5	497.0	496.9	496.1	495.3	494.6	493.8	494.6	495.3	496.1
117.5°	564.6	565.3	566.0	566.0	565.5	565.0	564.5	564.0	564.5	565.0	565.5
120°	611.4	612.7	614.0	613.9	612.3	610.8	609.2	607.7	609.2	610.8	612.3
122.5°	656.6	657.3	658.0	657.8	656.6	655.5	654.3	653.2	654.3	655.5	656.6
125°	724.9	725.4	725.9	725.8	725.0	724.2	723.5	722.7	723.5	724.2	725.0
127.5°	792.8	793.4	794.0	793.4	791.8	790.1	788.5	786.8	788.5	790.1	791.8
130°	836.9	837.7	838.5	837.8	835.8	833.7	831.6	829.6	831.6	833.7	835.8
132.5°	880.2	880.8	881.4	880.6	878.5	876.5	874.4	872.3	874.4	876.5	878.5
135°	944.0	944.2	944.5	943.8	942.3	940.7	939.2	937.6	939.2	940.7	942.3
137.5°	1005.5	1004.9	1004.2	1003.2	1001.9	1000.6	999.3	998.1	999.3	1000.6	1001.9
140°	1046.3	1046.1	1045.8	1045.0	1043.8	1042.5	1041.2	1039.9	1041.2	1042.5	1043.8
142.5°	1085.0	1084.5	1084.0	1083.2	1081.9	1080.6	1079.3	1078.0	1079.3	1080.6	1081.9
145°	1141.7	1141.0	1140.2	1139.5	1139.0	1138.5	1138.0	1137.5	1138.0	1138.5	1139.0
147.5°	1195.5	1194.8	1194.1	1193.3	1192.3	1191.4	1190.5	1189.5	1190.5	1191.4	1192.3
150°	1229.4	1228.9	1228.4	1227.9	1227.3	1226.8	1226.3	1225.8	1226.3	1226.8	1227.3
152.5°	1259.6	1259.2	1258.9	1258.4	1257.7	1257.0	1256.3	1255.5	1256.3	1257.0	1257.7
155°	1303.1	1302.9	1302.6	1302.5	1302.5	1302.5	1302.5	1302.5	1302.5	1302.5	1302.5
157.5°	1341.6	1341.4	1341.1	1341.2	1341.5	1341.8	1342.1	1342.4	1342.1	1341.8	1341.5
160°	1365.2	1365.2	1365.2	1365.5	1366.0	1366.5	1367.0	1367.5	1367.0	1366.5	1366.0
162.5°	1387.1	1386.9	1386.7	1387.0	1387.7	1388.4	1389.1	1389.8	1389.1	1388.4	1387.7
165°	1415.2	1415.2	1415.2	1415.6	1416.3	1417.1	1417.9	1418.7	1417.9	1417.1	1416.3
167.5°	1437.5	1437.3	1437.1	1437.5	1438.6	1439.6	1440.6	1441.7	1440.6	1439.6	1438.6
170°	1450.0	1450.0	1450.0	1450.5	1451.6	1452.6	1453.6	1454.7	1453.6	1452.6	1451.6
172.5°	1460.3	1460.3	1460.3	1460.8	1461.8	1462.8	1463.9	1464.9	1463.9	1462.8	1461.8
175°	1470.9	1470.9	1470.9	1471.5	1472.5	1473.5	1474.6	1475.6	1474.6	1473.5	1472.5
177.5°	1476.3	1476.3	1476.3	1476.7	1477.5	1478.4	1479.2	1480.0	1479.2	1478.4	1477.5
180°	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8
2.5°	472.8	471.5	469.7	466.9	464.6	461.1	461.1	461.6	461.6	461.5	461.1
5°	458.5	455.0	450.8	445.9	440.8	435.6	434.7	432.8	431.5	430.5	429.4
7.5°	443.3	437.1	431.0	424.2	417.9	412.8	409.2	406.2	404.3	402.2	400.7
10°	433.1	425.4	418.2	411.0	403.0	396.7	392.8	390.0	387.9	386.0	385.1
12.5°	421.0	412.2	404.2	397.3	388.7	382.2	378.4	377.1	374.7	370.7	368.7
15°	403.3	395.1	385.6	375.1	370.9	363.0	358.5	356.4	355.0	352.0	351.1
17.5°	388.1	377.5	366.7	358.9	351.1	344.7	342.2	339.6	337.8	335.3	334.5
20°	376.0	366.5	356.7	348.3	340.1	333.1	331.0	329.2	327.3	326.2	325.2
22.5°	363.7	354.2	346.0	338.2	329.5	324.9	322.7	320.6	319.3	318.5	317.6
25°	346.4	338.0	328.9	322.0	315.0	311.9	310.5	309.4	308.4	307.3	307.0
27.5°	331.0	321.8	314.5	307.9	302.9	300.4	299.0	298.5	298.7	299.1	299.4
30°	319.4	311.0	305.0	299.4	294.7	292.4	292.1	292.1	293.1	293.3	293.8
32.5°	308.8	301.9	295.8	290.4	286.9	285.3	286.2	286.2	286.9	287.5	288.4
35°	293.3	287.2	282.6	277.9	274.9	275.6	276.1	276.5	277.7	279.1	280.0
37.5°	278.5	273.3	268.4	264.8	263.4	264.6	265.8	266.7	268.1	269.2	270.1
40°	267.9	263.9	259.3	256.0	256.5	257.2	258.1	259.3	260.5	261.2	262.1
42.5°	258.0	253.9	250.3	247.6	248.3	249.2	249.7	250.3	251.7	253.0	253.5
45°	243.0	239.7	236.5	234.8	235.3	235.8	236.2	236.9	238.1	239.0	239.3
47.5°	226.1	223.8	221.6	220.0	220.8	220.6	221.2	222.7	223.0	223.6	224.9
50°	215.3	213.2	210.6	210.1	210.1	210.1	210.4	212.2	212.2	213.2	214.1
52.5°	203.3	202.0	200.4	199.5	199.1	199.1	200.1	201.0	201.4	202.7	203.7
55°	185.7	184.3	182.9	182.2	181.7	182.2	184.0	184.5	185.7	186.4	187.1
57.5°	167.3	166.2	165.1	164.7	164.6	165.2	166.2	167.6	167.9	170.1	171.1
60°	155.2	153.5	152.6	152.6	152.1	154.2	153.8	156.1	156.6	158.0	159.6
62.5°	142.7	140.5	140.1	140.1	140.8	141.4	142.0	143.0	144.3	146.0	147.3
65°	122.5	121.4	123.0	122.8	122.3	123.7	123.7	124.9	126.3	127.9	130.5
67.5°	103.5	102.9	103.0	103.0	103.7	104.5	105.2	106.2	107.9	109.6	111.3
70°	90.6	91.3	90.2	91.1	91.8	92.0	92.5	93.9	95.7	96.9	98.8
72.5°	78.1	78.1	78.2	78.6	79.3	79.7	80.2	81.8	83.8	84.8	86.3
75°	60.1	59.9	60.6	60.6	61.7	62.2	62.7	63.4	65.2	66.6	67.8
77.5°	43.9	44.2	44.0	44.8	44.5	44.6	46.0	46.7	46.9	49.7	50.3
80°	33.1	33.5	33.8	34.0	34.2	33.8	35.4	36.1	36.1	37.7	38.9
82.5°	23.8	24.0	24.6	24.9	24.9	25.4	25.5	26.0	26.6	27.3	28.8
85°	11.9	12.6	12.8	12.6	12.8	12.3	13.0	13.3	13.5	13.5	13.5
87.5°	6.0	6.8	7.3	8.1	8.6	9.5	9.7	9.5	9.7	10.5	9.9
90°	11.5	14.5	17.8	21.2	24.5	27.9	28.9	30.0	31.0	32.0	32.8
92.5°	35.1	37.0	38.9	40.8	42.7	44.6	45.4	46.3	47.1	47.9	48.2
95°	75.8	77.7	79.8	81.8	83.9	86.0	87.0	88.0	89.1	90.1	90.6
97.5°	127.1	128.6	130.1	131.6	133.0	134.5	135.7	136.9	138.1	139.3	139.8
100°	164.2	165.6	166.9	168.2	169.5	170.8	171.6	172.3	173.1	173.9	174.5
102.5°	203.6	204.9	206.6	208.3	210.0	211.7	212.5	213.2	214.0	214.8	215.1
105°	263.5	264.9	267.2	269.6	271.9	274.2	274.2	274.2	274.2	274.2	274.5
107.5°	334.2	334.9	335.8	336.7	337.6	338.6	339.4	340.2	341.1	341.9	342.1
110°	379.7	380.2	380.7	381.2	381.7	382.3	383.3	384.3	385.4	386.4	386.6



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	425.3	425.5	425.6	425.7	425.8	425.9	427.2	428.4	429.7	430.9	431.5
115°	496.9	497.0	496.5	496.0	495.5	495.0	495.2	495.5	495.7	496.0	496.0
117.5°	566.0	566.0	565.3	564.6	564.0	563.3	563.2	563.2	563.1	563.1	562.7
120°	613.9	614.0	612.7	611.4	610.1	608.8	608.6	608.3	608.1	607.8	607.4
122.5°	657.8	658.0	657.3	656.6	656.0	655.3	654.6	654.0	653.3	652.6	651.9
125°	725.8	725.9	725.4	724.9	724.4	723.9	722.8	721.8	720.8	719.7	718.7
127.5°	793.4	794.0	793.4	792.8	792.3	791.7	790.3	788.8	787.4	785.9	784.6
130°	837.8	838.5	837.7	836.9	836.2	835.4	834.4	833.3	832.3	831.3	829.8
132.5°	880.6	881.4	880.8	880.2	879.6	879.1	877.8	876.6	875.4	874.1	872.8
135°	943.8	944.5	944.2	944.0	943.7	943.4	942.4	941.4	940.3	939.3	938.5
137.5°	1003.2	1004.2	1004.9	1005.5	1006.2	1006.9	1005.8	1004.7	1003.6	1002.5	1001.5
140°	1045.0	1045.8	1046.1	1046.3	1046.6	1046.9	1046.6	1046.3	1046.1	1045.8	1044.8
142.5°	1083.2	1084.0	1084.5	1085.0	1085.4	1085.9	1085.6	1085.4	1085.1	1084.9	1084.0
145°	1139.5	1140.2	1141.0	1141.7	1142.5	1143.3	1143.0	1142.8	1142.5	1142.3	1141.6
147.5°	1193.3	1194.1	1194.8	1195.5	1196.2	1197.0	1197.0	1197.0	1197.0	1197.0	1196.2
150°	1227.9	1228.4	1228.9	1229.4	1229.9	1230.4	1230.4	1230.4	1230.4	1230.4	1229.7
152.5°	1258.4	1258.9	1259.2	1259.6	1259.9	1260.2	1260.6	1261.0	1261.4	1261.8	1261.4
155°	1302.5	1302.6	1302.9	1303.1	1303.4	1303.6	1304.7	1305.7	1306.7	1307.8	1307.4
157.5°	1341.2	1341.1	1341.4	1341.6	1341.8	1342.0	1343.1	1344.1	1345.2	1346.3	1346.1
160°	1365.5	1365.2	1365.2	1365.2	1365.2	1365.2	1366.5	1367.8	1369.1	1370.4	1370.5
162.5°	1387.0	1386.7	1386.9	1387.1	1387.3	1387.5	1388.8	1390.1	1391.4	1392.7	1392.5
165°	1415.6	1415.2	1415.2	1415.2	1415.2	1415.2	1416.7	1418.3	1419.8	1421.4	1421.2
167.5°	1437.5	1437.1	1437.3	1437.5	1437.7	1437.9	1439.5	1441.1	1442.7	1444.3	1444.3
170°	1450.5	1450.0	1450.0	1450.0	1450.0	1450.0	1451.8	1453.6	1455.5	1457.3	1457.3
172.5°	1460.8	1460.3	1460.3	1460.3	1460.3	1460.3	1461.9	1463.5	1465.1	1466.7	1466.6
175°	1471.5	1470.9	1470.9	1470.9	1470.9	1470.9	1472.5	1474.0	1475.6	1477.1	1477.0
177.5°	1476.7	1476.3	1476.3	1476.3	1476.3	1476.3	1477.5	1478.8	1480.0	1481.2	1481.1
180°	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8
2.5°	459.8	459.6	460.9	460.0	460.9	459.6	459.8	461.1	461.5	461.6	461.6
5°	428.0	428.7	426.3	426.3	426.3	428.7	428.0	429.4	430.5	431.5	432.8
7.5°	399.6	398.6	398.7	397.4	398.7	398.6	399.6	400.7	402.2	404.3	406.2
10°	382.3	380.9	380.4	380.7	380.4	380.9	382.3	385.1	386.0	387.9	390.0
12.5°	367.9	367.7	364.6	364.6	364.6	367.7	367.9	368.7	370.7	374.7	377.1
15°	351.1	346.7	346.2	347.6	346.2	346.7	351.1	351.1	352.0	355.0	356.4
17.5°	334.2	331.8	332.0	331.3	332.0	331.8	334.2	334.5	335.3	337.8	339.6
20°	325.2	323.8	323.6	322.0	323.6	323.8	325.2	325.2	326.2	327.3	329.2
22.5°	317.0	316.6	316.7	314.9	316.7	316.6	317.0	317.6	318.5	319.3	320.6
25°	306.8	308.0	307.0	307.0	307.0	308.0	306.8	307.0	307.3	308.4	309.4
27.5°	299.9	299.9	299.4	299.4	299.4	299.9	299.9	299.4	299.1	298.7	298.5
30°	294.7	294.5	294.9	294.9	294.9	294.5	294.7	293.8	293.3	293.1	292.1
32.5°	289.5	289.8	289.9	290.1	289.9	289.8	289.5	288.4	287.5	286.9	286.2
35°	281.4	281.7	282.4	281.9	282.4	281.7	281.4	280.0	279.1	277.7	276.5
37.5°	270.5	271.6	271.4	271.7	271.4	271.6	270.5	270.1	269.2	268.1	266.7
40°	262.3	263.0	262.8	262.8	262.8	263.0	262.3	262.1	261.2	260.5	259.3
42.5°	253.9	254.4	253.8	253.5	253.8	254.4	253.9	253.5	253.0	251.7	250.3
45°	240.2	239.7	240.4	239.5	240.4	239.7	240.2	239.3	239.0	238.1	236.9
47.5°	224.8	225.3	225.5	226.2	225.5	225.3	224.8	224.9	223.6	223.0	222.7
50°	214.6	216.0	216.0	215.7	216.0	216.0	214.6	214.1	213.2	212.2	212.2
52.5°	204.5	205.1	206.1	206.0	206.1	205.1	204.5	203.7	202.7	201.4	201.0
55°	188.9	189.4	189.9	190.1	189.9	189.4	188.9	187.1	186.4	185.7	184.5
57.5°	172.8	172.6	173.7	174.1	173.7	172.6	172.8	171.1	170.1	167.9	167.6
60°	161.4	161.4	163.3	164.0	163.3	161.4	161.4	159.6	158.0	156.6	156.1
62.5°	149.3	150.1	151.9	151.0	151.9	150.1	149.3	147.3	146.0	144.3	143.0
65°	131.6	133.5	133.3	134.2	133.3	133.5	131.6	130.5	127.9	126.3	124.9
67.5°	113.1	114.3	116.0	116.1	116.0	114.3	113.1	111.3	109.6	107.9	106.2
70°	100.6	101.8	102.7	103.4	102.7	101.8	100.6	98.8	96.9	95.7	93.9
72.5°	88.5	89.1	91.4	90.4	91.4	89.1	88.5	86.3	84.8	83.8	81.8
75°	69.4	71.1	72.5	71.8	72.5	71.1	69.4	67.8	66.6	65.2	63.4
77.5°	51.3	53.0	53.6	53.0	53.6	53.0	51.3	50.3	49.7	46.9	46.7
80°	40.5	40.3	41.7	41.5	41.7	40.3	40.5	38.9	37.7	36.1	36.1
82.5°	29.7	29.5	30.1	30.3	30.1	29.5	29.7	28.8	27.3	26.6	26.0
85°	14.4	15.1	14.2	14.0	14.2	15.1	14.4	13.5	13.5	13.5	13.3
87.5°	10.0	10.1	10.0	10.0	10.0	10.1	10.0	9.9	10.5	9.7	9.5
90°	33.3	33.8	34.3	34.9	34.3	33.8	33.3	32.8	32.0	31.0	30.0
92.5°	47.9	47.6	47.2	46.9	47.2	47.6	47.9	48.2	47.9	47.1	46.3
95°	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.6	90.1	89.1	88.0
97.5°	139.7	139.6	139.5	139.4	139.5	139.6	139.7	139.8	139.3	138.1	136.9
100°	175.1	175.6	176.1	176.6	176.1	175.6	175.1	174.5	173.9	173.1	172.3
102.5°	215.0	214.9	214.8	214.7	214.8	214.9	215.0	215.1	214.8	214.0	213.2
105°	275.0	275.5	276.0	276.5	276.0	275.5	275.0	274.5	274.2	274.2	274.2
107.5°	341.8	341.5	341.2	340.9	341.2	341.5	341.8	342.1	341.9	341.1	340.2
110°	386.1	385.6	385.1	384.6	385.1	385.6	386.1	386.6	386.4	385.4	384.3



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	431.4	431.3	431.2	431.1	431.2	431.3	431.4	431.5	430.9	429.7	428.4
115°	495.7	495.5	495.2	495.0	495.2	495.5	495.7	496.0	496.0	495.7	495.5
117.5°	562.0	561.2	560.5	559.8	560.5	561.2	562.0	562.7	563.1	563.1	563.2
120°	606.9	606.4	605.9	605.3	605.9	606.4	606.9	607.4	607.8	608.1	608.3
122.5°	651.2	650.5	649.7	649.0	649.7	650.5	651.2	651.9	652.6	653.3	654.0
125°	717.7	716.6	715.6	714.6	715.6	716.6	717.7	718.7	719.7	720.8	721.8
127.5°	783.4	782.2	781.0	779.9	781.0	782.2	783.4	784.6	785.9	787.4	788.8
130°	828.0	826.2	824.4	822.6	824.4	826.2	828.0	829.8	831.3	832.3	833.3
132.5°	871.4	870.0	868.6	867.2	868.6	870.0	871.4	872.8	874.1	875.4	876.6
135°	938.0	937.5	937.0	936.5	937.0	937.5	938.0	938.5	939.3	940.3	941.4
137.5°	1000.5	999.6	998.6	997.6	998.6	999.6	1000.5	1001.5	1002.5	1003.6	1004.7
140°	1043.0	1041.2	1039.4	1037.6	1039.4	1041.2	1043.0	1044.8	1045.8	1046.1	1046.3
142.5°	1082.6	1081.2	1079.9	1078.5	1079.9	1081.2	1082.6	1084.0	1084.9	1085.1	1085.4
145°	1140.6	1139.5	1138.5	1137.5	1138.5	1139.5	1140.6	1141.6	1142.3	1142.5	1142.8
147.5°	1194.6	1193.1	1191.5	1190.0	1191.5	1193.1	1194.6	1196.2	1197.0	1197.0	1197.0
150°	1228.1	1226.6	1225.0	1223.5	1225.0	1226.6	1228.1	1229.7	1230.4	1230.4	1230.4
152.5°	1260.0	1258.7	1257.3	1256.0	1257.3	1258.7	1260.0	1261.4	1261.8	1261.4	1261.0
155°	1305.6	1303.8	1302.0	1300.1	1302.0	1303.8	1305.6	1307.4	1307.8	1306.7	1305.7
157.5°	1344.7	1343.2	1341.8	1340.3	1341.8	1343.2	1344.7	1346.1	1346.3	1345.2	1344.1
160°	1369.5	1368.4	1367.4	1366.4	1367.4	1368.4	1369.5	1370.5	1370.4	1369.1	1367.8
162.5°	1390.8	1389.2	1387.5	1385.9	1387.5	1389.2	1390.8	1392.5	1392.7	1391.4	1390.1
165°	1419.4	1417.6	1415.8	1414.0	1415.8	1417.6	1419.4	1421.2	1421.4	1419.8	1418.3
167.5°	1442.7	1441.1	1439.5	1437.9	1439.5	1441.1	1442.7	1444.3	1444.3	1442.7	1441.1
170°	1455.5	1453.6	1451.8	1450.0	1451.8	1453.6	1455.5	1457.3	1457.3	1455.5	1453.6
172.5°	1464.7	1462.9	1461.1	1459.3	1461.1	1462.9	1464.7	1466.6	1466.7	1465.1	1463.5
175°	1475.2	1473.4	1471.6	1469.8	1471.6	1473.4	1475.2	1477.0	1477.1	1475.6	1474.0
177.5°	1479.7	1478.2	1476.8	1475.4	1476.8	1478.2	1479.7	1481.1	1481.2	1480.0	1478.8
180°	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8
2.5°	461.1	461.1	464.6	466.9	469.7	471.5	472.8	474.1	476.4	479.3	482.7
5°	434.7	435.6	440.8	445.9	450.8	455.0	458.5	462.7	467.8	474.1	481.1
7.5°	409.2	412.8	417.9	424.2	431.0	437.1	443.3	450.2	457.5	466.7	476.5
10°	392.8	396.7	403.0	411.0	418.2	425.4	433.1	440.5	449.6	460.6	473.2
12.5°	378.4	382.2	388.7	397.3	404.2	412.2	421.0	430.7	440.9	454.0	468.3
15°	358.5	363.0	370.9	375.1	385.6	395.1	403.3	417.2	430.3	443.8	460.3
17.5°	342.2	344.7	351.1	358.9	366.7	377.5	388.1	399.8	412.8	429.3	450.0
20°	331.0	333.1	340.1	348.3	356.7	366.5	376.0	387.7	402.3	419.8	442.2
22.5°	322.7	324.9	329.5	338.2	346.0	354.2	363.7	377.6	393.2	410.3	434.5
25°	310.5	311.9	315.0	322.0	328.9	338.0	346.4	359.5	375.5	395.6	419.8
27.5°	299.0	300.4	302.9	307.9	314.5	321.8	331.0	342.0	358.3	380.1	405.8
30°	292.1	292.4	294.7	299.4	305.0	311.0	319.4	332.0	347.4	369.5	396.5
32.5°	286.2	285.3	286.9	290.4	295.8	301.9	308.8	321.2	336.0	357.7	385.5
35°	276.1	275.6	274.9	277.9	282.6	287.2	293.3	302.6	319.4	339.7	368.8
37.5°	265.8	264.6	263.4	264.8	268.4	273.3	278.5	286.8	301.3	323.6	351.5
40°	258.1	257.2	256.5	256.0	259.3	263.9	267.9	275.8	289.3	310.5	338.0
42.5°	249.7	249.2	248.3	247.6	250.3	253.9	258.0	265.0	278.5	298.4	324.4
45°	236.2	235.8	235.3	234.8	236.5	239.7	243.0	248.1	259.8	279.1	302.6
47.5°	221.2	220.6	220.8	220.0	221.6	223.8	226.1	231.6	242.7	258.4	275.6
50°	210.4	210.1	210.1	210.1	210.6	213.2	215.3	219.5	229.7	245.3	257.7
52.5°	200.1	199.1	199.1	199.5	200.4	202.0	203.3	207.9	216.8	229.7	240.9
55°	184.0	182.2	181.7	182.2	182.9	184.3	185.7	189.4	197.1	206.6	213.2
57.5°	166.2	165.2	164.6	164.7	165.1	166.2	167.3	171.3	177.4	182.4	186.6
60°	153.8	154.2	152.1	152.6	152.6	153.5	155.2	157.7	162.8	166.3	170.5
62.5°	142.0	141.4	140.8	140.1	140.1	140.5	142.7	144.7	149.1	150.9	154.1
65°	123.7	123.7	122.3	122.8	123.0	121.4	122.5	124.9	127.7	128.4	131.4
67.5°	105.2	104.5	103.7	103.0	103.0	102.9	103.5	104.6	106.7	107.0	109.3
70°	92.5	92.0	91.8	91.1	90.2	91.3	90.6	91.8	93.0	93.2	94.6
72.5°	80.2	79.7	79.3	78.6	78.2	78.1	78.1	79.5	80.3	80.0	81.5
75°	62.7	62.2	61.7	60.6	60.6	59.9	60.1	61.0	62.0	61.3	62.7
77.5°	46.0	44.6	44.5	44.8	44.0	44.2	43.9	43.8	44.2	44.2	45.5
80°	35.4	33.8	34.2	34.0	33.8	33.5	33.1	33.3	33.5	33.8	34.5
82.5°	25.5	25.4	24.9	24.9	24.6	24.0	23.8	24.2	24.4	24.3	24.8
85°	13.0	12.3	12.8	12.6	12.8	12.6	11.9	11.9	12.3	12.1	12.6
87.5°	9.7	9.5	8.6	8.1	7.3	6.8	6.0	5.7	5.4	4.8	4.7
90°	28.9	27.9	24.5	21.2	17.8	14.5	11.5	8.9	6.3	3.7	1.2
92.5°	45.4	44.6	42.7	40.8	38.9	37.0	35.1	33.4	31.6	29.9	28.1
95°	87.0	86.0	83.9	81.8	79.8	77.7	75.8	74.0	72.2	70.4	68.6
97.5°	135.7	134.5	133.0	131.6	130.1	128.6	127.1	125.8	124.5	123.1	121.8
100°	171.6	170.8	169.5	168.2	166.9	165.6	164.2	162.7	161.1	159.6	158.0
102.5°	212.5	211.7	210.0	208.3	206.6	204.9	203.6	202.6	201.7	200.8	199.8
105°	274.2	274.2	271.9	269.6	267.2	264.9	263.5	263.0	262.5	261.9	261.4
107.5°	339.4	338.6	337.6	336.7	335.8	334.9	334.2	333.9	333.6	333.3	333.0
110°	383.3	382.3	381.7	381.2	380.7	380.2	379.7	379.2	378.6	378.1	377.6



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	427.2	425.9	425.8	425.7	425.6	425.5	425.3	425.0	424.7	424.4	424.1
115°	495.2	495.0	495.5	496.0	496.5	497.0	496.9	496.1	495.3	494.6	493.8
117.5°	563.2	563.3	564.0	564.6	565.3	566.0	566.0	565.5	565.0	564.5	564.0
120°	608.6	608.8	610.1	611.4	612.7	614.0	613.9	612.3	610.8	609.2	607.7
122.5°	654.6	655.3	656.0	656.6	657.3	658.0	657.8	656.6	655.5	654.3	653.2
125°	722.8	723.9	724.4	724.9	725.4	725.9	725.8	725.0	724.2	723.5	722.7
127.5°	790.3	791.7	792.3	792.8	793.4	794.0	793.4	791.8	790.1	788.5	786.8
130°	834.4	835.4	836.2	836.9	837.7	838.5	837.8	835.8	833.7	831.6	829.6
132.5°	877.8	879.1	879.6	880.2	880.8	881.4	880.6	878.5	876.5	874.4	872.3
135°	942.4	943.4	943.7	944.0	944.2	944.5	943.8	942.3	940.7	939.2	937.6
137.5°	1005.8	1006.9	1006.2	1005.5	1004.9	1004.2	1003.2	1001.9	1000.6	999.3	998.1
140°	1046.6	1046.9	1046.6	1046.3	1046.1	1045.8	1045.0	1043.8	1042.5	1041.2	1039.9
142.5°	1085.6	1085.9	1085.4	1085.0	1084.5	1084.0	1083.2	1081.9	1080.6	1079.3	1078.0
145°	1143.0	1143.3	1142.5	1141.7	1141.0	1140.2	1139.5	1139.0	1138.5	1138.0	1137.5
147.5°	1197.0	1197.0	1196.2	1195.5	1194.8	1194.1	1193.3	1192.3	1191.4	1190.5	1189.5
150°	1230.4	1230.4	1229.9	1229.4	1228.9	1228.4	1227.9	1227.3	1226.8	1226.3	1225.8
152.5°	1260.6	1260.2	1259.9	1259.6	1259.2	1258.9	1258.4	1257.7	1257.0	1256.3	1255.5
155°	1304.7	1303.6	1303.4	1303.1	1302.9	1302.6	1302.5	1302.5	1302.5	1302.5	1302.5
157.5°	1343.1	1342.0	1341.8	1341.6	1341.4	1341.1	1341.2	1341.5	1341.8	1342.1	1342.4
160°	1366.5	1365.2	1365.2	1365.2	1365.2	1365.2	1365.5	1366.0	1366.5	1367.0	1367.5
162.5°	1388.8	1387.5	1387.3	1387.1	1386.9	1386.7	1387.0	1387.7	1388.4	1389.1	1389.8
165°	1416.7	1415.2	1415.2	1415.2	1415.2	1415.2	1415.6	1416.3	1417.1	1417.9	1418.7
167.5°	1439.5	1437.9	1437.7	1437.5	1437.3	1437.1	1437.5	1438.6	1439.6	1440.6	1441.7
170°	1451.8	1450.0	1450.0	1450.0	1450.0	1450.0	1450.5	1451.6	1452.6	1453.6	1454.7
172.5°	1461.9	1460.3	1460.3	1460.3	1460.3	1460.3	1460.8	1461.8	1462.8	1463.9	1464.9
175°	1472.5	1470.9	1470.9	1470.9	1470.9	1470.9	1471.5	1472.5	1473.5	1474.6	1475.6
177.5°	1477.5	1476.3	1476.3	1476.3	1476.3	1476.3	1476.7	1477.5	1478.4	1479.2	1480.0
180°	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8	480.8
2.5°	483.8	484.8	487.9	490.2	492.8	494.3	495.7	496.9	498.4	498.7	504.1
5°	486.0	490.6	498.8	504.8	512.3	520.4	526.0	528.6	535.4	540.9	552.1
7.5°	485.4	495.3	507.6	520.4	534.0	546.7	557.7	570.8	580.0	594.0	607.7
10°	484.8	498.1	513.9	530.2	549.3	567.0	582.9	600.6	615.3	634.6	651.1
12.5°	483.1	499.2	521.2	540.5	563.7	588.1	611.6	634.3	647.3	679.5	694.7
15°	479.0	498.1	525.6	554.9	586.8	615.7	645.5	669.3	707.7	735.9	753.9
17.5°	471.1	497.8	530.4	565.8	604.6	642.7	676.5	712.5	753.3	787.4	823.8
20°	467.3	496.7	533.0	572.2	612.5	655.6	694.0	737.3	781.8	815.4	862.0
22.5°	460.4	493.7	532.8	576.4	619.5	664.1	709.1	752.8	804.2	850.4	894.8
25°	449.2	486.4	527.0	575.7	626.2	670.9	724.8	782.8	836.3	895.8	940.0
27.5°	437.3	477.1	517.7	563.0	617.4	670.5	738.2	803.7	869.2	920.5	953.3
30°	428.2	466.9	508.8	554.5	608.3	671.4	747.1	818.6	882.5	926.5	944.9
32.5°	418.3	457.5	494.6	542.5	599.9	670.8	752.7	827.4	883.2	912.5	908.9
35°	402.8	435.6	471.8	517.9	585.4	666.7	756.0	828.2	862.4	856.1	808.6
37.5°	380.4	408.1	443.6	494.1	568.7	658.1	749.4	803.6	801.4	750.2	681.3
40°	366.5	390.0	424.2	477.3	555.6	652.5	739.2	774.4	744.6	673.0	590.6
42.5°	348.2	369.9	404.1	458.7	541.3	641.2	719.6	729.8	671.5	589.2	513.6
45°	319.9	339.0	374.4	430.8	519.7	616.4	671.9	646.9	568.4	483.4	425.9
47.5°	289.4	309.3	343.3	401.3	488.6	579.2	605.6	552.6	472.0	403.0	350.2
50°	270.2	289.3	322.7	381.1	467.6	548.6	559.6	491.1	417.0	356.4	313.1
52.5°	250.9	268.8	301.6	360.3	443.0	513.2	506.5	436.7	368.6	316.9	282.9
55°	222.0	239.0	270.2	325.2	400.5	456.1	431.7	365.1	308.7	268.6	242.7
57.5°	196.2	212.5	239.4	289.1	354.5	392.8	361.7	305.5	260.7	229.8	210.6
60°	178.7	193.1	218.8	264.9	321.7	350.8	320.1	270.5	232.7	208.0	190.8
62.5°	162.1	174.7	198.4	240.3	289.7	314.1	283.0	241.0	208.9	187.0	172.3
65°	137.0	148.4	169.4	202.0	242.5	258.8	232.0	198.0	173.1	156.8	147.0
67.5°	114.1	123.8	141.9	167.5	197.4	209.2	188.8	162.5	143.7	130.6	122.9
70°	98.8	107.2	121.4	143.5	170.5	179.6	160.5	138.8	125.1	114.6	107.4
72.5°	85.9	92.1	105.0	122.1	144.6	151.8	138.5	119.5	106.7	98.8	93.0
75°	65.5	70.6	79.0	92.7	108.3	112.5	102.5	90.6	82.0	76.4	72.0
77.5°	47.2	51.0	57.0	65.5	76.3	80.1	73.8	65.8	59.5	55.8	53.3
80°	35.6	38.7	43.8	50.8	57.3	59.4	55.7	49.6	45.2	43.1	41.0
82.5°	26.3	28.0	31.1	35.9	40.3	42.8	39.7	36.0	33.6	31.7	30.9
85°	13.3	14.2	15.6	17.5	20.3	21.2	20.0	19.1	17.7	16.5	16.5
87.5°	5.6	6.1	7.2	8.1	9.4	10.6	11.1	11.4	11.9	11.9	12.0
90°	3.7	6.3	8.9	11.5	14.5	17.8	21.2	24.5	27.9	28.9	30.0
92.5°	29.9	31.6	33.4	35.1	37.0	38.9	40.8	42.7	44.6	45.4	46.3
95°	70.4	72.2	74.0	75.8	77.7	79.8	81.8	83.9	86.0	87.0	88.0
97.5°	123.1	124.5	125.8	127.1	128.6	130.1	131.6	133.0	134.5	135.7	136.9
100°	159.6	161.1	162.7	164.2	165.6	166.9	168.2	169.5	170.8	171.6	172.3
102.5°	200.8	201.7	202.6	203.6	204.9	206.6	208.3	210.0	211.7	212.5	213.2
105°	261.9	262.5	263.0	263.5	264.9	267.2	269.6	271.9	274.2	274.2	274.2
107.5°	333.3	333.6	333.9	334.2	334.9	335.8	336.7	337.6	338.6	339.4	340.2
110°	378.1	378.6	379.2	379.7	380.2	380.7	381.2	381.7	382.3	383.3	384.3





TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	424.4	424.7	425.0	425.3	425.5	425.6	425.7	425.8	425.9	427.2	428.4
115°	494.6	495.3	496.1	496.9	497.0	496.5	496.0	495.5	495.0	495.2	495.5
117.5°	564.5	565.0	565.5	566.0	566.0	565.3	564.6	564.0	563.3	563.2	563.2
120°	609.2	610.8	612.3	613.9	614.0	612.7	611.4	610.1	608.8	608.6	608.3
122.5°	654.3	655.5	656.6	657.8	658.0	657.3	656.6	656.0	655.3	654.6	654.0
125°	723.5	724.2	725.0	725.8	725.9	725.4	724.9	724.4	723.9	722.8	721.8
127.5°	788.5	790.1	791.8	793.4	794.0	793.4	792.8	792.3	791.7	790.3	788.8
130°	831.6	833.7	835.8	837.8	838.5	837.7	836.9	836.2	835.4	834.4	833.3
132.5°	874.4	876.5	878.5	880.6	881.4	880.8	880.2	879.6	879.1	877.8	876.6
135°	939.2	940.7	942.3	943.8	944.5	944.2	944.0	943.7	943.4	942.4	941.4
137.5°	999.3	1000.6	1001.9	1003.2	1004.2	1004.9	1005.5	1006.2	1006.9	1005.8	1004.7
140°	1041.2	1042.5	1043.8	1045.0	1045.8	1046.1	1046.3	1046.6	1046.9	1046.6	1046.3
142.5°	1079.3	1080.6	1081.9	1083.2	1084.0	1084.5	1085.0	1085.4	1085.9	1085.6	1085.4
145°	1138.0	1138.5	1139.0	1139.5	1140.2	1141.0	1141.7	1142.5	1143.3	1143.0	1142.8
147.5°	1190.5	1191.4	1192.3	1193.3	1194.1	1194.8	1195.5	1196.2	1197.0	1197.0	1197.0
150°	1226.3	1226.8	1227.3	1227.9	1228.4	1228.9	1229.4	1229.9	1230.4	1230.4	1230.4
152.5°	1256.3	1257.0	1257.7	1258.4	1258.9	1259.2	1259.6	1259.9	1260.2	1260.6	1261.0
155°	1302.5	1302.5	1302.5	1302.5	1302.6	1302.9	1303.1	1303.4	1303.6	1304.7	1305.7
157.5°	1342.1	1341.8	1341.5	1341.2	1341.1	1341.4	1341.6	1341.8	1342.0	1343.1	1344.1
160°	1367.0	1366.5	1366.0	1365.5	1365.2	1365.2	1365.2	1365.2	1365.2	1366.5	1367.8
162.5°	1389.1	1388.4	1387.7	1387.0	1386.7	1386.9	1387.1	1387.3	1387.5	1388.8	1390.1
165°	1417.9	1417.1	1416.3	1415.6	1415.2	1415.2	1415.2	1415.2	1415.2	1416.7	1418.3
167.5°	1440.6	1439.6	1438.6	1437.5	1437.1	1437.3	1437.5	1437.7	1437.9	1439.5	1441.1
170°	1453.6	1452.6	1451.6	1450.5	1450.0	1450.0	1450.0	1450.0	1450.0	1451.8	1453.6
172.5°	1463.9	1462.8	1461.8	1460.8	1460.3	1460.3	1460.3	1460.3	1460.3	1461.9	1463.5
175°	1474.6	1473.5	1472.5	1471.5	1470.9	1470.9	1470.9	1470.9	1470.9	1472.5	1474.0
177.5°	1479.2	1478.4	1477.5	1476.7	1476.3	1476.3	1476.3	1476.3	1476.3	1477.5	1478.8
180°	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	480.8	480.8	480.8	480.8	480.8	480.8	480.8
2.5°	506.0	506.2	508.2	509.7	509.0	509.9	510.3
5°	552.8	561.2	565.6	568.9	569.1	569.4	571.2
7.5°	619.2	628.2	634.8	644.8	647.7	651.1	650.2
10°	667.7	681.0	692.4	698.4	705.0	714.5	706.8
12.5°	713.0	736.5	753.9	763.3	769.4	771.3	767.6
15°	787.7	818.4	834.9	834.5	855.4	864.5	850.3
17.5°	856.1	884.5	907.3	918.9	936.4	940.2	938.5
20°	898.1	929.1	946.8	966.8	975.9	984.0	985.4
22.5°	934.2	962.1	981.1	997.7	1005.3	1009.2	1011.5
25°	971.5	993.4	1004.8	1010.6	1012.7	1012.2	1009.2
27.5°	968.9	970.6	958.0	945.7	934.6	922.2	917.9
30°	943.7	924.2	889.2	869.4	840.3	817.2	826.6
32.5°	877.6	838.6	799.4	756.1	720.3	710.1	699.8
35°	749.0	680.5	640.4	593.8	575.2	556.6	543.7
37.5°	605.9	553.0	505.4	475.0	456.3	444.5	438.2
40°	523.9	476.2	437.0	412.3	398.1	384.9	383.0
42.5°	458.5	414.1	384.7	365.0	351.4	345.7	341.6
45°	375.5	344.6	324.8	310.8	301.7	298.2	293.5
47.5°	317.9	296.0	281.1	271.6	264.7	262.1	261.8
50°	285.6	267.4	256.5	249.0	243.7	242.7	239.0
52.5°	261.4	245.6	237.1	230.6	226.7	224.1	223.0
55°	226.9	216.4	208.7	205.0	202.0	199.4	199.4
57.5°	198.5	189.8	184.7	181.5	180.6	178.8	177.6
60°	181.0	173.6	169.6	166.8	164.9	165.2	163.1
62.5°	163.9	159.0	155.2	152.5	150.2	150.3	150.4
65°	139.5	135.8	133.0	132.1	130.7	129.1	129.5
67.5°	118.3	114.8	112.6	111.0	110.5	109.6	111.0
70°	103.0	100.4	98.8	97.4	96.9	97.1	98.3
72.5°	89.0	87.2	86.1	85.5	84.4	84.5	85.3
75°	69.9	68.5	67.6	66.9	66.6	66.6	66.6
77.5°	51.3	51.0	50.6	49.6	49.6	49.9	49.9
80°	40.5	39.8	39.6	39.1	38.4	38.0	39.1
82.5°	30.3	29.6	29.4	29.3	28.2	28.1	29.1
85°	16.3	15.6	15.8	15.6	15.6	15.4	15.4
87.5°	12.0	12.0	12.0	12.3	12.2	12.1	12.6
90°	31.0	32.0	32.8	33.3	33.8	34.3	34.9
92.5°	47.1	47.9	48.2	47.9	47.6	47.2	46.9
95°	89.1	90.1	90.6	90.6	90.6	90.6	90.6
97.5°	138.1	139.3	139.8	139.7	139.6	139.5	139.4
100°	173.1	173.9	174.5	175.1	175.6	176.1	176.6
102.5°	214.0	214.8	215.1	215.0	214.9	214.8	214.7
105°	274.2	274.2	274.5	275.0	275.5	276.0	276.5
107.5°	341.1	341.9	342.1	341.8	341.5	341.2	340.9
110°	385.4	386.4	386.6	386.1	385.6	385.1	384.6



TEST NUMBER: P331902

CATALOG NUMBER: S123DIP-S340D1195U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	429.7	430.9	431.5	431.4	431.3	431.2	431.1
115°	495.7	496.0	496.0	495.7	495.5	495.2	495.0
117.5°	563.1	563.1	562.7	562.0	561.2	560.5	559.8
120°	608.1	607.8	607.4	606.9	606.4	605.9	605.3
122.5°	653.3	652.6	651.9	651.2	650.5	649.7	649.0
125°	720.8	719.7	718.7	717.7	716.6	715.6	714.6
127.5°	787.4	785.9	784.6	783.4	782.2	781.0	779.9
130°	832.3	831.3	829.8	828.0	826.2	824.4	822.6
132.5°	875.4	874.1	872.8	871.4	870.0	868.6	867.2
135°	940.3	939.3	938.5	938.0	937.5	937.0	936.5
137.5°	1003.6	1002.5	1001.5	1000.5	999.6	998.6	997.6
140°	1046.1	1045.8	1044.8	1043.0	1041.2	1039.4	1037.6
142.5°	1085.1	1084.9	1084.0	1082.6	1081.2	1079.9	1078.5
145°	1142.5	1142.3	1141.6	1140.6	1139.5	1138.5	1137.5
147.5°	1197.0	1197.0	1196.2	1194.6	1193.1	1191.5	1190.0
150°	1230.4	1230.4	1229.7	1228.1	1226.6	1225.0	1223.5
152.5°	1261.4	1261.8	1261.4	1260.0	1258.7	1257.3	1256.0
155°	1306.7	1307.8	1307.4	1305.6	1303.8	1302.0	1300.1
157.5°	1345.2	1346.3	1346.1	1344.7	1343.2	1341.8	1340.3
160°	1369.1	1370.4	1370.5	1369.5	1368.4	1367.4	1366.4
162.5°	1391.4	1392.7	1392.5	1390.8	1389.2	1387.5	1385.9
165°	1419.8	1421.4	1421.2	1419.4	1417.6	1415.8	1414.0
167.5°	1442.7	1444.3	1444.3	1442.7	1441.1	1439.5	1437.9
170°	1455.5	1457.3	1457.3	1455.5	1453.6	1451.8	1450.0
172.5°	1465.1	1466.7	1466.6	1464.7	1462.9	1461.1	1459.3
175°	1475.6	1477.1	1477.0	1475.2	1473.4	1471.6	1469.8
177.5°	1480.0	1481.2	1481.1	1479.7	1478.2	1476.8	1475.4
180°	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1	1479.1

(END OF REPORT)