

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P331889

Luminaire Tested: **S123DIP-S340D805U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331889
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S340D805U835-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4622.0 lumens
Efficiency: N/A
Efficacy: 148.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331889

CATALOG NUMBER: S123DIP-S340D805U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

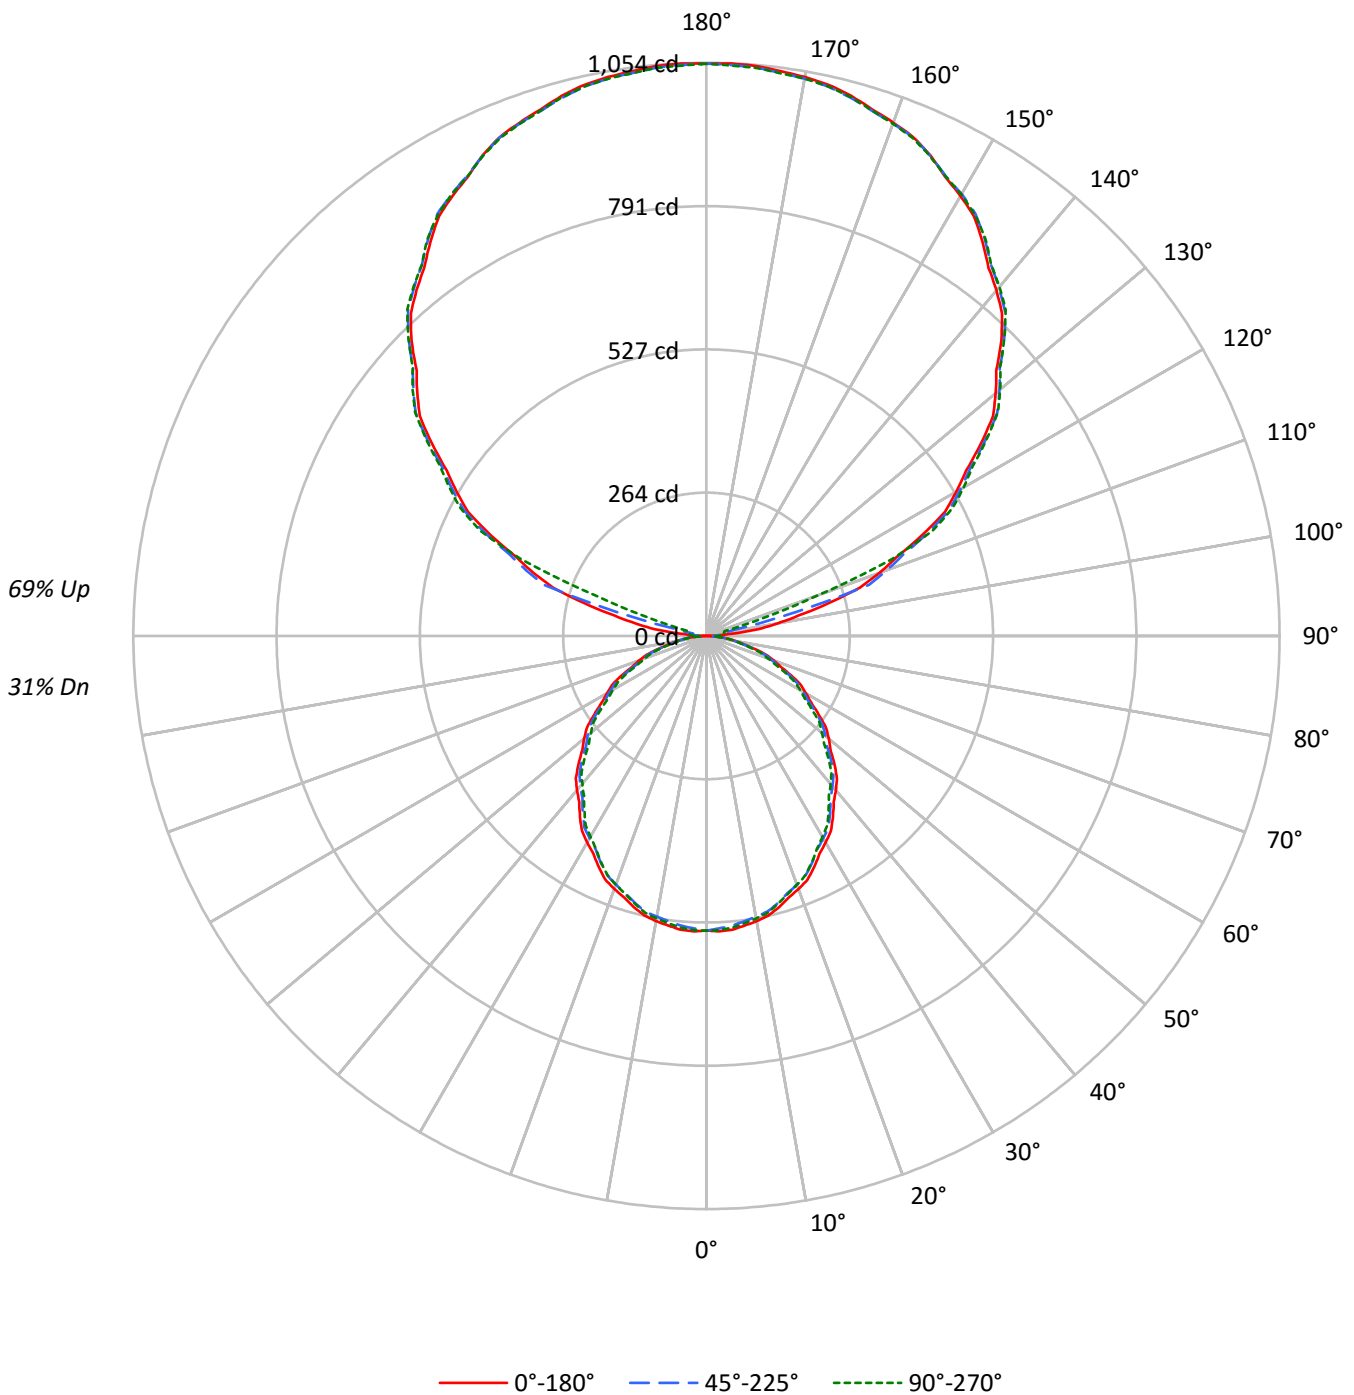



TEST NUMBER: P331889

CATALOG NUMBER: S123DIP-S340D805U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	38	38	38	31
1	93	89	85	82	84	80	77	74	63	61	59	48	47	45	34	33	32	26
2	85	78	72	67	76	70	65	61	55	52	49	42	40	38	30	28	27	21
3	77	68	61	56	69	62	56	51	49	45	41	37	34	32	26	24	23	18
4	71	60	53	47	63	54	48	43	43	39	35	33	30	27	23	21	20	16
5	65	54	46	40	58	48	42	37	39	34	30	30	26	23	21	19	17	13
6	60	48	40	34	53	43	37	32	35	30	26	27	23	20	19	17	15	12
7	55	43	35	30	49	39	32	28	31	26	23	24	21	18	17	15	13	10
8	51	39	32	26	46	35	29	24	29	24	20	22	19	16	16	14	12	9
9	47	36	28	23	42	32	26	22	26	21	18	20	17	14	15	12	11	8
10	44	32	25	21	40	30	23	19	24	19	16	19	15	13	14	11	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5833	5833	5833
5°	5861	5780	5820
10°	5821	5729	5766
15°	5753	5665	5675
20°	5674	5573	5577
25°	5567	5462	5451
30°	5450	5340	5299
35°	5327	5210	5143
40°	5199	5067	4990
45°	5057	4937	4816
50°	4915	4776	4642
55°	4731	4609	4468
60°	4545	4413	4273
65°	4378	4200	4070
70°	4135	3959	3783
75°	3780	3643	3489
80°	3409	3267	3236
85°	2989	2878	2766



TEST NUMBER: P331889

CATALOG NUMBER: S123DIP-S340D805U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.0	1.1
10°-20°	144.1	3.1
20°-30°	212.9	4.6
30°-40°	248.7	5.4
40°-50°	250.0	5.4
50°-60°	219.6	4.8
60°-70°	163.6	3.5
70°-80°	93.2	2.0
80°-90°	29.7	0.6
90°-100°	38.3	0.8
100°-110°	182.3	3.9
110°-120°	438.0	9.5
120°-130°	557.7	12.1
130°-140°	595.9	12.9
140°-150°	557.2	12.1
150°-160°	449.5	9.7
160°-170°	290.1	6.3
170°-180°	100.0	2.2
0°-30°	408.1	8.8
0°-40°	656.8	14.2
0°-60°	1126.5	24.4
0°-90°	1413.0	30.6
90°-120°	658.6	14.2
90°-150°	2369.4	51.3
90°-180°	3209.0	69.4
0°-180°	4622.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	542	542	542	542	542	
5°	542	540	535	539	539	51
15°	516	514	508	512	509	145
25°	469	466	460	460	459	216
35°	405	402	396	394	391	254
45°	332	330	324	319	316	256
55°	252	251	246	241	238	226
65°	172	170	165	161	160	170
75°	91	89	88	85	84	97
85°	24	23	23	22	22	27
90°	1	9	19	22	24	4
95°	48	18	24	29	30	59
105°	233	237	171	41	34	247
115°	437	442	449	456	460	431
125°	616	622	625	627	629	550
135°	767	772	775	777	775	590
145°	885	890	892	894	894	554
155°	975	973	974	978	973	449
165°	1028	1026	1025	1031	1026	290
175°	1052	1049	1049	1054	1048	100
180°	1052	1052	1052	1052	1052	



TEST NUMBER: P331889

CATALOG NUMBER: S123DIP-S340D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9
2.5°	543.8	543.4	543.1	542.8	542.4	541.8	540.9	540.0	539.1	538.2	539.0
5°	542.4	541.8	541.3	540.8	540.3	539.5	538.3	537.2	536.0	534.9	535.9
7.5°	537.1	536.5	536.0	535.5	535.0	534.1	533.0	531.8	530.6	529.4	530.3
10°	532.6	532.1	531.5	531.0	530.5	529.6	528.2	526.9	525.5	524.2	525.1
12.5°	526.6	526.2	525.7	525.3	524.9	524.0	522.8	521.5	520.2	519.0	519.7
15°	516.3	515.9	515.4	515.0	514.6	513.7	512.4	511.0	509.7	508.4	509.2
17.5°	504.2	503.7	503.2	502.6	502.1	501.2	499.8	498.5	497.1	495.8	496.3
20°	495.3	494.7	494.1	493.4	492.8	491.8	490.5	489.1	487.8	486.5	486.9
22.5°	485.2	484.6	484.0	483.4	482.8	481.8	480.4	479.1	477.7	476.4	476.7
25°	468.7	468.1	467.5	466.9	466.3	465.3	463.9	462.6	461.2	459.9	460.0
27.5°	451.1	450.5	449.9	449.3	448.7	447.7	446.3	444.8	443.4	441.9	442.0
30°	438.5	437.9	437.4	436.9	436.4	435.4	434.0	432.5	431.1	429.6	429.6
32.5°	425.8	425.1	424.4	423.7	423.1	422.1	421.0	419.9	418.8	417.7	417.1
35°	405.4	404.8	404.1	403.5	402.9	401.9	400.6	399.2	397.9	396.5	395.9
37.5°	384.5	383.7	382.9	382.1	381.4	380.3	378.9	377.5	376.2	374.8	374.1
40°	370.0	369.3	368.7	368.1	367.5	366.4	365.0	363.5	362.1	360.6	359.8
42.5°	355.4	354.7	354.0	353.3	352.6	351.5	350.1	348.6	347.2	345.7	344.9
45°	332.2	331.8	331.4	331.0	330.6	329.7	328.3	327.0	325.6	324.3	323.1
47.5°	309.2	308.6	308.0	307.4	306.8	305.9	304.6	303.3	302.1	300.8	299.6
50°	293.5	293.0	292.5	292.0	291.5	290.5	289.2	287.9	286.5	285.2	284.0
52.5°	277.1	276.8	276.4	276.1	275.7	274.8	273.4	272.0	270.6	269.1	268.2
55°	252.1	252.0	251.9	251.8	251.7	250.9	249.6	248.2	246.9	245.6	244.4
57.5°	228.2	227.9	227.5	227.2	226.8	226.1	225.0	223.9	222.9	221.8	220.8
60°	211.1	211.0	210.9	210.8	210.7	210.0	208.7	207.5	206.3	205.0	204.1
62.5°	195.8	195.5	195.3	195.0	194.7	194.0	192.7	191.5	190.2	189.0	188.1
65°	171.9	171.4	170.9	170.4	169.9	169.1	168.1	167.0	166.0	164.9	164.1
67.5°	146.7	146.2	145.8	145.3	144.9	144.2	143.5	142.7	141.9	141.1	140.4
70°	131.4	130.8	130.2	129.5	128.9	128.3	127.7	127.0	126.4	125.8	125.1
72.5°	115.4	114.9	114.5	114.0	113.5	113.0	112.3	111.6	110.9	110.2	109.5
75°	90.9	90.4	90.0	89.6	89.2	88.8	88.5	88.2	87.9	87.6	87.1
77.5°	69.1	68.9	68.7	68.5	68.2	67.9	67.6	67.2	66.8	66.4	66.1
80°	55.0	54.7	54.4	54.1	53.7	53.5	53.3	53.1	52.9	52.7	52.5
82.5°	41.2	41.1	41.1	41.0	40.9	40.9	40.8	40.8	40.8	40.7	40.5
85°	24.2	24.0	23.8	23.6	23.4	23.3	23.3	23.3	23.3	23.3	23.1
87.5°	9.8	9.9	10.0	10.1	10.2	10.5	10.8	11.2	11.6	12.0	12.0
90°	0.8	2.5	4.3	6.0	7.7	9.7	12.0	14.2	16.5	18.8	19.5
92.5°	14.5	14.1	13.6	13.1	12.6	13.2	14.9	16.6	18.3	20.0	21.1
95°	47.7	40.6	33.4	26.3	19.2	16.6	18.5	20.4	22.3	24.2	25.5
97.5°	95.8	92.7	89.5	86.3	83.1	75.2	62.7	50.2	37.7	25.2	26.6
100°	132.1	135.6	139.1	142.5	146.0	134.2	107.1	80.0	52.9	25.8	27.2
102.5°	173.4	175.9	178.4	180.9	183.4	169.9	140.3	110.6	81.0	51.4	47.1
105°	233.0	234.9	236.8	238.7	240.6	233.8	218.1	202.5	186.8	171.2	140.5
107.5°	295.8	297.4	298.9	300.4	301.9	303.9	306.4	308.9	311.3	313.8	291.3
110°	337.7	339.1	340.5	341.9	343.3	344.9	346.9	348.8	350.7	352.6	346.9



TEST NUMBER: P331889

CATALOG NUMBER: S123DIP-S340D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	377.8	379.0	380.3	381.5	382.8	384.3	386.3	388.2	390.1	392.0	392.1
115°	437.0	438.1	439.1	440.2	441.2	442.5	444.1	445.6	447.2	448.8	450.5
117.5°	494.4	495.7	497.0	498.3	499.5	500.6	501.4	502.2	503.0	503.8	505.2
120°	530.1	531.6	533.2	534.7	536.3	537.4	537.9	538.4	538.9	539.4	540.8
122.5°	566.3	567.6	568.9	570.2	571.5	572.4	573.1	573.8	574.4	575.1	576.1
125°	616.1	617.4	618.8	620.2	621.6	622.7	623.4	624.0	624.7	625.4	625.8
127.5°	664.2	665.6	667.0	668.4	669.8	670.9	671.7	672.6	673.4	674.2	674.8
130°	694.2	695.6	697.0	698.4	699.8	700.8	701.5	702.2	702.9	703.6	704.3
132.5°	723.0	724.4	725.8	727.2	728.6	729.5	730.1	730.6	731.2	731.8	732.5
135°	766.9	768.0	769.0	770.1	771.1	772.0	772.7	773.4	774.1	774.8	775.3
137.5°	804.5	805.8	807.1	808.4	809.7	810.6	811.0	811.4	811.7	812.1	813.0
140°	829.5	830.5	831.6	832.6	833.7	834.4	835.0	835.5	836.0	836.5	837.2
142.5°	852.6	853.7	854.7	855.8	856.8	857.6	858.1	858.6	859.1	859.7	860.2
145°	885.0	886.2	887.4	888.6	889.9	890.6	891.0	891.3	891.7	892.0	892.4
147.5°	915.5	916.3	917.1	917.9	918.7	919.3	919.6	919.9	920.3	920.6	921.0
150°	934.2	934.8	935.3	935.8	936.3	936.8	937.1	937.5	937.8	938.2	938.5
152.5°	951.1	951.4	951.6	951.9	952.1	952.3	952.5	952.7	953.0	953.2	953.8
155°	974.9	974.6	974.2	973.9	973.5	973.4	973.6	973.8	973.9	974.1	975.0
157.5°	993.3	993.3	993.3	993.2	993.2	993.1	992.9	992.8	992.6	992.4	993.5
160°	1004.6	1004.4	1004.3	1004.1	1003.9	1003.7	1003.6	1003.4	1003.2	1003.0	1004.1
162.5°	1015.2	1014.8	1014.3	1013.9	1013.4	1013.1	1012.9	1012.8	1012.6	1012.4	1013.6
165°	1028.1	1027.5	1027.0	1026.5	1026.0	1025.6	1025.5	1025.3	1025.1	1024.9	1026.3
167.5°	1038.1	1037.4	1036.7	1036.0	1035.3	1034.9	1034.9	1034.9	1034.9	1034.9	1036.3
170°	1043.7	1043.0	1042.3	1041.6	1040.9	1040.6	1040.6	1040.6	1040.6	1040.6	1042.0
172.5°	1047.4	1046.6	1045.8	1044.9	1044.1	1043.8	1043.9	1044.0	1044.2	1044.3	1045.7
175°	1052.3	1051.4	1050.6	1049.7	1048.8	1048.5	1048.6	1048.8	1049.0	1049.2	1050.4
177.5°	1053.5	1052.9	1052.2	1051.5	1050.8	1050.5	1050.6	1050.8	1050.9	1051.0	1052.2
180°	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3



TEST NUMBER: P331889

CATALOG NUMBER: S123DIP-S340D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	541.9	541.9	541.9	541.9	541.9	541.9	541.9	541.9
2.5°	539.8	540.7	541.5	541.9	541.8	541.7	541.6	541.5
5°	537.0	538.0	539.1	539.5	539.3	539.1	538.8	538.6
7.5°	531.3	532.2	533.1	533.5	533.4	533.3	533.2	533.0
10°	526.1	527.0	527.9	528.3	528.1	527.9	527.7	527.5
12.5°	520.3	521.0	521.7	522.0	521.9	521.7	521.6	521.5
15°	510.0	510.8	511.7	511.8	511.1	510.5	509.9	509.3
17.5°	496.9	497.5	498.1	498.3	498.0	497.8	497.6	497.4
20°	487.3	487.7	488.1	488.2	487.8	487.5	487.2	486.9
22.5°	477.0	477.4	477.7	477.7	477.3	476.9	476.5	476.1
25°	460.1	460.2	460.3	460.2	459.9	459.6	459.3	459.0
27.5°	442.1	442.2	442.2	442.1	441.7	441.3	440.9	440.5
30°	429.6	429.6	429.6	429.2	428.5	427.8	427.1	426.3
32.5°	416.5	415.9	415.4	414.9	414.5	414.1	413.7	413.3
35°	395.3	394.7	394.0	393.5	393.0	392.4	391.9	391.4
37.5°	373.3	372.6	371.8	371.3	371.0	370.6	370.3	370.0
40°	359.0	358.2	357.3	356.7	356.3	355.9	355.5	355.1
42.5°	344.1	343.2	342.4	341.8	341.4	341.0	340.6	340.1
45°	321.8	320.6	319.3	318.5	317.9	317.4	316.9	316.4
47.5°	298.4	297.2	295.9	295.1	294.6	294.2	293.7	293.3
50°	282.9	281.7	280.6	279.7	279.1	278.5	277.9	277.2
52.5°	267.2	266.2	265.2	264.4	263.8	263.2	262.6	262.0
55°	243.3	242.1	241.0	240.2	239.7	239.1	238.6	238.1
57.5°	219.8	218.7	217.7	216.9	216.3	215.7	215.1	214.5
60°	203.2	202.2	201.3	200.6	200.0	199.5	199.0	198.5
62.5°	187.1	186.2	185.3	184.6	184.3	183.9	183.6	183.2
65°	163.3	162.5	161.6	161.1	160.8	160.4	160.1	159.8
67.5°	139.6	138.9	138.2	137.6	137.2	136.7	136.3	135.9
70°	124.4	123.6	122.9	122.3	121.8	121.3	120.7	120.2
72.5°	108.9	108.2	107.6	107.1	106.9	106.6	106.3	106.0
75°	86.6	86.0	85.5	85.1	84.8	84.5	84.2	83.9
77.5°	65.7	65.4	65.0	64.9	64.9	64.9	64.9	64.9
80°	52.4	52.3	52.2	52.2	52.2	52.2	52.2	52.2
82.5°	40.4	40.2	40.0	39.8	39.8	39.7	39.6	39.5
85°	22.9	22.7	22.5	22.4	22.4	22.4	22.4	22.4
87.5°	12.1	12.1	12.2	12.2	12.3	12.4	12.4	12.5
90°	20.2	20.8	21.5	22.1	22.4	22.8	23.1	23.5
92.5°	22.2	23.3	24.5	25.1	25.3	25.5	25.7	26.0
95°	26.7	27.9	29.1	29.7	29.7	29.7	29.7	29.7
97.5°	28.0	29.3	30.7	31.5	31.7	31.9	32.0	32.2
100°	28.6	30.0	31.4	32.1	32.3	32.5	32.7	32.8
102.5°	42.8	38.5	34.2	32.2	32.5	32.8	33.1	33.5
105°	109.7	79.0	48.2	33.0	33.4	33.7	34.1	34.4
107.5°	268.7	246.2	223.6	200.7	177.6	154.4	131.2	108.0
110°	341.1	335.4	329.7	314.4	289.5	264.7	239.8	215.0



TEST NUMBER: P331889

CATALOG NUMBER: S123DIP-S340D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	392.2	392.3	392.4	389.8	384.6	379.3	374.1	368.9
115°	452.2	454.0	455.7	456.9	457.6	458.3	459.0	459.7
117.5°	506.6	508.0	509.3	510.1	510.3	510.4	510.5	510.7
120°	542.2	543.6	545.0	545.7	545.7	545.7	545.7	545.7
122.5°	577.0	578.0	579.0	579.5	579.7	579.8	580.0	580.1
125°	626.1	626.5	626.8	627.2	627.5	627.9	628.2	628.6
127.5°	675.3	675.9	676.4	676.5	676.2	675.9	675.5	675.2
130°	705.0	705.7	706.4	706.6	706.2	705.9	705.5	705.2
132.5°	733.1	733.8	734.5	734.6	734.2	733.7	733.2	732.7
135°	775.8	776.3	776.8	776.8	776.3	775.8	775.3	774.8
137.5°	813.8	814.6	815.5	815.7	815.4	815.0	814.7	814.3
140°	837.9	838.6	839.3	839.5	839.1	838.8	838.4	838.1
142.5°	860.8	861.3	861.9	861.9	861.4	860.9	860.5	860.0
145°	892.7	893.1	893.4	893.6	893.6	893.6	893.6	893.6
147.5°	921.3	921.7	922.0	921.8	921.0	920.2	919.4	918.6
150°	938.8	939.2	939.5	939.5	938.9	938.4	937.9	937.4
152.5°	954.4	955.0	955.7	955.6	954.8	954.0	953.2	952.4
155°	975.9	976.7	977.6	977.5	976.5	975.4	974.4	973.3
157.5°	994.5	995.5	996.6	996.4	995.1	993.7	992.4	991.0
160°	1005.1	1006.2	1007.2	1007.1	1005.9	1004.7	1003.5	1002.3
162.5°	1014.8	1016.0	1017.1	1017.2	1016.1	1015.0	1014.0	1012.9
165°	1027.7	1029.1	1030.5	1030.6	1029.4	1028.1	1026.9	1025.7
167.5°	1037.7	1039.1	1040.5	1040.5	1039.1	1037.7	1036.3	1034.9
170°	1043.3	1044.7	1046.1	1046.1	1044.7	1043.3	1042.0	1040.6
172.5°	1047.1	1048.5	1049.9	1049.8	1048.3	1046.8	1045.2	1043.7
175°	1051.6	1052.8	1054.0	1053.9	1052.6	1051.2	1049.8	1048.4
177.5°	1053.3	1054.4	1055.5	1055.4	1054.0	1052.6	1051.2	1049.8
180°	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3

(END OF REPORT)