

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P331910

Luminaire Tested: **S123DIP-S560D365U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331910
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D365U835-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3837.7 lumens
Efficiency: N/A
Efficacy: 139.6 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 27.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

Luminous Intensity Polar Plot

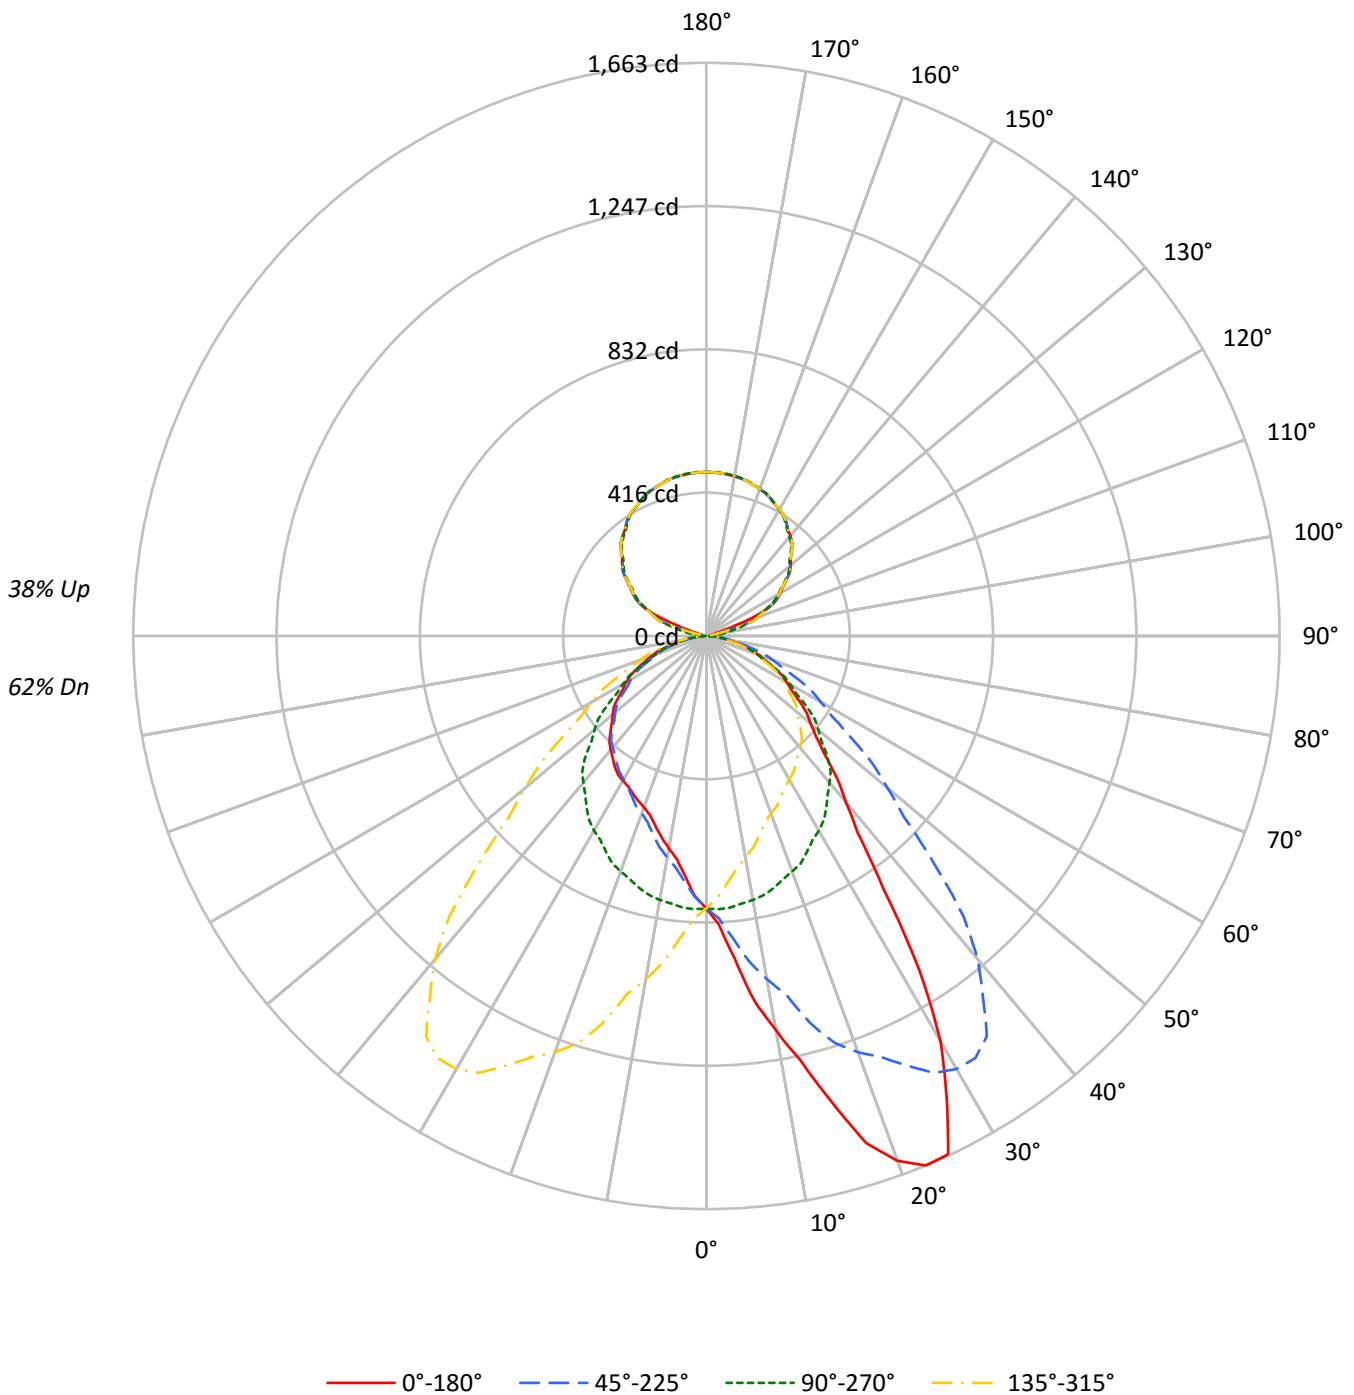



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	62
1	101	97	93	89	94	91	87	84	80	77	75	69	68	66	60	59	58	53
2	92	85	79	74	86	80	74	70	70	66	62	61	58	56	53	51	49	45
3	84	75	67	62	79	70	64	59	62	57	53	55	51	47	47	45	42	38
4	77	66	58	52	72	63	56	50	55	50	45	49	44	41	43	39	36	33
5	71	59	51	45	66	56	49	43	50	44	39	44	39	36	38	35	32	29
6	66	53	45	39	61	50	43	38	45	39	34	40	35	31	35	31	28	26
7	61	48	40	35	57	46	38	33	41	35	30	36	31	28	32	28	25	23
8	56	44	36	31	53	42	34	30	37	31	27	33	28	25	29	25	23	20
9	53	40	33	27	49	38	31	26	34	28	24	31	26	22	27	23	20	18
10	49	37	30	25	46	35	28	24	32	26	22	28	24	20	25	21	18	17

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8509	8509	8509	8509
5°	10147	8546	7573	8546
10°	12701	8502	6840	8502
15°	15578	8433	6367	8433
20°	18558	8326	6063	8326
25°	19705	8197	5995	8197
30°	16890	8103	6027	8103
35°	11746	7967	6089	7967
40°	8847	7808	6070	7808
45°	7346	7573	5993	7573
50°	6581	7093	5940	7093
55°	6152	6576	5864	6576
60°	5772	6036	5804	6036
65°	5422	5501	5619	5501
70°	5086	4894	5350	4894
75°	4554	4284	4907	4284
80°	3986	3515	4228	3515
85°	3125	2556	2841	2556



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.9	2.0
10°-20°	249.7	6.5
20°-30°	419.1	10.9
30°-40°	474.5	12.4
40°-50°	425.5	11.1
50°-60°	343.4	8.9
60°-70°	239.3	6.2
70°-80°	125.8	3.3
80°-90°	32.1	0.8
90°-100°	17.3	0.5
100°-110°	82.4	2.1
110°-120°	198.0	5.2
120°-130°	252.1	6.6
130°-140°	269.3	7.0
140°-150°	251.9	6.6
150°-160°	203.2	5.3
160°-170°	131.1	3.4
170°-180°	45.2	1.2
0°-30°	746.6	19.5
0°-40°	1221.1	31.8
0°-60°	1990.1	51.9
0°-90°	2387.2	62.2
90°-120°	297.7	7.8
90°-150°	1071.0	27.9
90°-180°	1450.0	37.8
0°-180°	3837.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	790	790	790	790	790	
5°	939	791	701	791	939	97
15°	1398	757	571	757	1398	404
25°	1659	690	505	690	1659	728
35°	894	606	463	606	894	581
45°	483	498	394	498	483	382
55°	328	350	312	350	328	294
65°	213	216	221	216	213	212
75°	110	103	118	103	110	117
85°	25	21	23	21	25	30
90°	11	0	11	0	11	6
95°	13	22	13	22	13	11
105°	16	105	16	105	16	36
115°	208	198	208	198	208	192
125°	284	278	284	278	284	254
135°	350	347	350	347	350	270
145°	404	400	404	400	404	252
155°	440	441	440	441	440	203
165°	464	465	464	465	464	131
175°	474	476	474	476	474	45
180°	476	476	476	476	476	



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5
2.5°	838.9	838.3	836.8	838.0	835.5	832.2	831.9	828.8	819.9	819.3	816.9
5°	939.1	936.0	935.7	935.3	929.9	922.6	908.8	907.7	889.3	880.1	869.0
7.5°	1068.9	1070.5	1064.9	1060.0	1043.6	1032.8	1018.0	999.1	976.5	953.6	938.3
10°	1162.0	1174.6	1158.9	1148.2	1138.3	1119.5	1097.7	1070.5	1043.3	1011.5	987.4
12.5°	1261.9	1268.1	1265.0	1254.8	1239.4	1210.8	1172.1	1142.2	1117.1	1064.2	1042.8
15°	1397.9	1421.3	1406.4	1371.9	1372.7	1345.5	1294.9	1239.4	1209.9	1163.5	1100.3
17.5°	1542.9	1545.8	1539.4	1510.7	1491.5	1454.2	1407.5	1354.3	1294.5	1238.5	1171.4
20°	1620.1	1617.8	1604.4	1589.4	1556.5	1527.4	1476.4	1417.1	1340.5	1285.3	1212.2
22.5°	1663.0	1659.1	1652.8	1640.3	1612.9	1581.6	1535.9	1471.0	1398.1	1322.1	1237.6
25°	1659.1	1664.1	1664.9	1661.4	1651.9	1633.1	1597.1	1545.4	1472.6	1375.0	1286.9
27.5°	1509.0	1516.0	1536.5	1554.7	1575.0	1595.6	1592.9	1567.2	1513.4	1429.0	1321.3
30°	1358.9	1343.5	1381.5	1429.3	1461.9	1519.3	1551.5	1553.4	1523.2	1450.8	1345.8
32.5°	1150.5	1167.4	1184.1	1243.0	1314.2	1378.7	1442.7	1494.3	1500.2	1452.0	1360.2
35°	893.9	915.0	945.6	976.3	1052.9	1118.7	1231.3	1329.4	1407.5	1417.8	1361.5
37.5°	720.3	730.8	750.1	780.8	830.9	909.1	996.2	1120.1	1233.3	1317.5	1321.2
40°	629.6	632.7	654.5	677.9	718.5	782.8	861.4	970.9	1106.5	1224.1	1273.1
42.5°	561.6	568.4	577.6	600.1	632.4	680.8	753.8	844.4	968.6	1103.9	1199.8
45°	482.6	490.2	496.0	510.9	533.9	566.4	617.4	700.1	794.7	934.5	1063.6
47.5°	430.3	430.9	435.2	446.5	462.1	486.6	522.6	575.7	662.6	775.9	908.5
50°	393.0	399.1	400.6	409.4	421.7	439.7	469.6	514.7	586.0	685.6	807.4
52.5°	366.6	368.4	372.7	379.1	389.8	403.8	429.7	465.1	521.0	605.9	717.9
55°	327.8	327.8	332.1	337.0	343.2	355.8	373.0	399.1	441.6	507.5	600.2
57.5°	292.0	293.9	296.9	298.4	303.6	312.0	326.4	346.2	377.9	428.6	502.3
60°	268.1	271.5	271.2	274.2	278.8	285.3	297.6	313.7	342.0	382.6	444.7
62.5°	247.3	247.0	247.0	250.6	255.2	261.4	269.4	283.3	307.4	343.4	396.2
65°	212.9	212.2	214.9	217.2	218.7	223.3	229.4	241.7	257.8	284.6	325.5
67.5°	182.5	180.2	181.7	182.5	185.1	188.7	194.4	202.0	214.8	236.3	267.2
70°	161.6	159.7	159.3	160.1	162.4	165.1	169.3	176.6	188.4	205.7	228.3
72.5°	140.2	138.9	138.8	140.5	141.6	143.3	146.3	153.0	162.4	175.3	196.4
75°	109.5	109.5	109.5	109.9	111.1	112.6	114.9	118.3	125.6	134.8	149.0
77.5°	82.1	82.0	81.6	81.5	83.2	83.9	84.4	87.6	91.7	97.9	108.2
80°	64.3	62.4	63.2	64.3	65.1	65.5	66.6	67.4	70.9	74.3	81.6
82.5°	47.8	46.2	46.3	48.1	48.3	48.6	49.8	50.9	52.2	55.3	59.2
85°	25.3	25.3	25.7	25.7	26.0	25.7	26.8	27.2	27.2	29.1	31.4
87.5°	11.3	10.7	10.9	11.2	10.9	11.1	11.4	11.6	11.9	12.1	12.2
90°	10.6	10.4	10.3	10.1	10.0	9.7	9.4	9.1	8.8	8.5	7.5
92.5°	11.7	11.6	11.5	11.4	11.4	11.1	10.6	10.1	9.5	9.0	8.3
95°	13.4	13.4	13.4	13.4	13.4	13.2	12.6	12.1	11.5	11.0	10.1
97.5°	14.6	14.5	14.4	14.3	14.2	13.9	13.3	12.6	12.0	11.4	17.0
100°	14.8	14.8	14.7	14.6	14.5	14.2	13.5	12.9	12.3	11.7	23.9
102.5°	15.1	15.0	14.8	14.7	14.6	15.5	17.4	19.4	21.3	23.3	36.6
105°	15.5	15.4	15.2	15.1	14.9	21.8	35.7	49.6	63.5	77.4	84.5
107.5°	48.8	59.3	69.8	80.3	90.7	101.1	111.3	121.5	131.6	141.8	140.7
110°	97.2	108.4	119.6	130.9	142.1	149.0	151.6	154.2	156.8	159.4	158.5



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	166.7	169.1	171.5	173.8	176.2	177.4	177.3	177.3	177.2	177.2	176.3
115°	207.8	207.5	207.2	206.8	206.5	206.0	205.2	204.4	203.6	202.8	202.1
117.5°	230.8	230.8	230.7	230.6	230.6	230.2	229.6	229.0	228.3	227.7	227.4
120°	246.7	246.7	246.7	246.7	246.7	246.3	245.7	245.1	244.5	243.8	243.6
122.5°	262.2	262.1	262.1	262.0	261.9	261.7	261.3	260.8	260.4	259.9	259.6
125°	284.1	284.0	283.8	283.6	283.5	283.3	283.2	283.0	282.9	282.7	282.4
127.5°	305.2	305.3	305.5	305.6	305.8	305.8	305.5	305.2	305.0	304.7	304.4
130°	318.7	318.9	319.1	319.2	319.4	319.3	319.0	318.7	318.3	318.0	317.7
132.5°	331.2	331.4	331.6	331.8	332.1	332.0	331.7	331.4	331.1	330.8	330.5
135°	350.2	350.4	350.7	350.9	351.1	351.1	350.9	350.7	350.4	350.2	349.9
137.5°	368.1	368.2	368.4	368.5	368.7	368.6	368.2	367.8	367.5	367.1	366.9
140°	378.8	379.0	379.1	379.3	379.4	379.4	379.0	378.7	378.4	378.1	377.9
142.5°	388.7	388.9	389.1	389.4	389.6	389.6	389.3	389.1	388.8	388.6	388.3
145°	403.9	403.9	403.9	403.9	403.9	403.8	403.7	403.5	403.4	403.2	403.0
147.5°	415.2	415.6	415.9	416.3	416.7	416.8	416.6	416.4	416.3	416.1	416.0
150°	423.7	423.9	424.2	424.4	424.6	424.7	424.5	424.4	424.2	424.0	423.9
152.5°	430.5	430.8	431.2	431.6	431.9	432.0	431.7	431.4	431.1	430.8	430.7
155°	439.9	440.4	440.9	441.4	441.8	441.9	441.5	441.1	440.7	440.3	440.2
157.5°	447.9	448.5	449.2	449.8	450.4	450.5	450.0	449.5	449.0	448.6	448.6
160°	453.0	453.6	454.1	454.7	455.2	455.3	454.8	454.3	453.8	453.4	453.5
162.5°	457.8	458.3	458.8	459.3	459.8	459.7	459.2	458.7	458.1	457.6	457.7
165°	463.6	464.2	464.7	465.3	465.8	465.8	465.2	464.5	463.9	463.3	463.3
167.5°	467.8	468.4	469.0	469.7	470.3	470.3	469.7	469.0	468.4	467.8	467.8
170°	470.3	471.0	471.6	472.2	472.8	472.8	472.2	471.6	471.0	470.3	470.3
172.5°	471.7	472.4	473.1	473.8	474.5	474.5	473.9	473.3	472.7	472.0	472.0
175°	473.9	474.5	475.1	475.8	476.4	476.4	475.9	475.3	474.8	474.2	474.1
177.5°	474.5	475.1	475.8	476.4	477.0	477.1	476.6	476.1	475.6	475.1	475.0
180°	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5
2.5°	815.0	812.6	810.1	805.8	802.1	796.9	795.4	793.6	788.1	783.1	779.5
5°	864.8	855.6	842.2	829.9	820.0	806.6	798.9	790.9	779.4	769.1	760.6
7.5°	916.9	898.8	878.0	855.5	834.5	814.2	797.9	783.4	767.3	752.0	740.2
10°	958.3	932.2	903.1	871.7	844.9	818.8	797.0	777.9	757.2	739.2	724.2
12.5°	1005.4	966.8	926.7	888.5	856.8	820.7	794.3	769.9	746.5	724.8	708.0
15°	1061.3	1012.3	964.8	912.3	864.0	818.8	787.4	756.8	729.6	707.4	685.9
17.5°	1112.1	1056.6	994.0	930.2	872.0	818.4	774.4	739.8	705.8	678.6	657.2
20°	1140.9	1077.7	1006.9	940.6	876.3	816.5	768.3	726.9	690.2	661.4	637.3
22.5°	1165.8	1091.8	1018.5	947.7	876.0	811.6	757.0	714.4	674.5	646.4	620.8
25°	1191.5	1103.0	1029.5	946.4	866.3	799.7	738.4	690.2	650.3	617.4	591.0
27.5°	1213.6	1102.3	1015.0	925.6	851.2	784.4	719.0	667.2	624.9	589.1	562.3
30°	1228.3	1103.8	1000.0	911.5	836.5	767.5	703.9	651.9	607.4	571.0	545.8
32.5°	1237.5	1102.9	986.2	891.9	813.2	752.2	687.7	633.8	588.1	552.4	528.0
35°	1242.8	1096.1	962.5	851.4	775.6	716.2	662.2	606.3	558.4	525.1	497.5
37.5°	1232.1	1082.0	934.9	812.3	729.3	670.9	625.4	577.8	532.0	495.3	471.5
40°	1215.2	1072.8	913.4	784.8	697.4	641.1	602.5	555.7	510.5	475.7	453.5
42.5°	1183.1	1054.1	889.9	754.1	664.3	608.0	572.4	533.4	490.6	457.9	435.7
45°	1104.6	1013.4	854.5	708.2	615.5	557.3	525.9	497.5	458.8	427.0	407.9
47.5°	995.6	952.2	803.3	659.7	564.5	508.5	475.8	453.0	424.7	399.1	380.7
50°	920.0	902.0	768.7	626.6	530.4	475.7	444.3	423.6	403.3	377.6	360.8
52.5°	832.6	843.7	728.2	592.3	495.8	442.0	412.4	396.0	377.6	356.5	341.8
55°	709.7	749.9	658.4	534.7	444.3	393.0	365.0	350.4	339.7	324.0	311.4
57.5°	594.6	645.7	582.8	475.3	393.6	349.4	322.6	306.7	299.8	291.6	281.7
60°	526.2	576.8	528.9	435.5	359.6	317.5	293.8	280.4	273.5	267.7	259.3
62.5°	465.3	516.4	476.2	395.0	326.2	287.2	266.5	253.4	248.0	245.0	237.8
65°	381.5	425.5	398.7	332.1	278.4	244.0	225.2	216.0	211.0	209.9	205.3
67.5°	310.5	344.0	324.5	275.4	233.2	203.4	187.5	179.7	175.9	175.5	172.0
70°	263.9	295.3	280.4	235.9	199.5	176.2	162.4	155.5	153.2	152.8	150.9
72.5°	227.7	249.6	237.8	200.7	172.6	151.4	141.2	134.0	131.4	132.0	130.7
75°	168.5	185.0	178.1	152.4	129.8	116.0	107.6	103.0	100.7	101.9	100.3
77.5°	121.3	131.7	125.5	107.7	93.8	83.8	77.6	74.8	72.7	72.6	71.9
80°	91.5	97.7	94.2	83.5	72.0	63.6	58.6	56.7	55.5	55.2	54.8
82.5°	65.2	70.4	66.3	59.0	51.2	46.1	43.3	40.8	39.9	40.1	39.8
85°	32.9	34.9	33.3	28.7	25.7	23.4	21.8	20.7	19.9	20.3	19.5
87.5°	12.6	12.7	11.6	10.2	9.4	8.4	8.2	7.4	7.0	7.1	7.0
90°	6.4	5.4	4.4	3.5	2.7	1.9	1.1	0.4	1.1	1.9	2.7
92.5°	7.5	6.7	6.0	5.7	5.9	6.1	6.4	6.6	6.4	6.1	5.9
95°	9.2	8.4	7.5	8.7	11.9	15.1	18.3	21.6	18.3	15.1	11.9
97.5°	22.7	28.3	34.0	37.5	39.0	40.4	41.9	43.3	41.9	40.4	39.0
100°	36.2	48.4	60.7	66.0	64.4	62.9	61.3	59.7	61.3	62.9	64.4
102.5°	50.0	63.4	76.8	82.9	81.8	80.6	79.5	78.4	79.5	80.6	81.8
105°	91.5	98.6	105.7	108.8	107.9	107.0	106.2	105.3	106.2	107.0	107.9
107.5°	139.6	138.5	137.4	136.5	135.8	135.1	134.4	133.7	134.4	135.1	135.8
110°	157.6	156.8	155.9	155.2	154.5	153.9	153.3	152.7	153.3	153.9	154.5



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	175.5	174.6	173.7	173.0	172.4	171.9	171.3	170.7	171.3	171.9	172.4
115°	201.4	200.7	200.0	199.4	198.9	198.5	198.0	197.5	198.0	198.5	198.9
117.5°	227.0	226.6	226.3	225.8	225.2	224.6	224.1	223.5	224.1	224.6	225.2
120°	243.4	243.1	242.9	242.4	241.7	241.0	240.3	239.6	240.3	241.0	241.7
122.5°	259.3	259.0	258.7	258.3	257.7	257.1	256.6	256.0	256.6	257.1	257.7
125°	282.1	281.8	281.4	281.0	280.3	279.7	279.1	278.5	279.1	279.7	280.3
127.5°	304.0	303.6	303.2	302.7	302.1	301.5	300.9	300.2	300.9	301.5	302.1
130°	317.4	317.1	316.8	316.3	315.7	315.0	314.4	313.8	314.4	315.0	315.7
132.5°	330.3	330.0	329.7	329.3	328.7	328.1	327.4	326.8	327.4	328.1	328.7
135°	349.6	349.2	348.9	348.5	348.1	347.6	347.1	346.7	347.1	347.6	348.1
137.5°	366.7	366.6	366.4	366.0	365.4	364.8	364.2	363.6	364.2	364.8	365.4
140°	377.6	377.4	377.2	376.8	376.3	375.9	375.4	374.9	375.4	375.9	376.3
142.5°	388.1	387.9	387.6	387.3	386.8	386.3	385.9	385.4	385.9	386.3	386.8
145°	402.9	402.7	402.6	402.2	401.7	401.1	400.6	400.0	400.6	401.1	401.7
147.5°	415.8	415.7	415.5	415.2	414.9	414.5	414.2	413.8	414.2	414.5	414.9
150°	423.7	423.6	423.4	423.2	423.0	422.7	422.5	422.3	422.5	422.7	423.0
152.5°	430.6	430.5	430.5	430.3	430.2	430.1	430.0	429.9	430.0	430.1	430.2
155°	440.1	440.1	440.0	440.0	440.2	440.3	440.5	440.7	440.5	440.3	440.2
157.5°	448.7	448.8	448.9	448.9	448.9	449.0	449.0	449.0	449.0	449.0	448.9
160°	453.5	453.6	453.7	453.8	453.8	453.9	454.0	454.1	454.0	453.9	453.8
162.5°	457.8	457.8	457.9	458.1	458.3	458.5	458.7	458.9	458.7	458.5	458.3
165°	463.4	463.5	463.6	463.7	464.0	464.2	464.4	464.7	464.4	464.2	464.0
167.5°	467.8	467.8	467.8	467.9	468.3	468.6	468.9	469.2	468.9	468.6	468.3
170°	470.3	470.3	470.3	470.5	470.8	471.1	471.4	471.7	471.4	471.1	470.8
172.5°	471.9	471.8	471.8	471.9	472.3	472.7	473.1	473.4	473.1	472.7	472.3
175°	474.1	474.0	473.9	474.1	474.5	474.8	475.2	475.6	475.2	474.8	474.5
177.5°	474.9	474.9	474.8	474.9	475.3	475.6	475.9	476.2	475.9	475.6	475.3
180°	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5
2.5°	777.3	775.2	772.1	767.5	763.8	758.0	758.0	758.9	758.9	758.6	758.0
5°	753.7	748.0	741.1	733.1	724.6	716.2	714.7	711.6	709.3	707.8	705.9
7.5°	728.8	718.7	708.6	697.4	687.1	678.6	672.7	667.8	664.6	661.3	658.8
10°	712.0	699.3	687.5	675.6	662.6	652.2	645.7	641.1	637.7	634.6	633.1
12.5°	692.1	677.6	664.5	653.2	639.0	628.3	622.1	620.0	615.9	609.5	606.1
15°	663.0	649.6	633.9	616.6	609.7	596.7	589.4	586.0	583.7	578.7	577.2
17.5°	638.1	620.5	602.9	590.0	577.2	566.7	562.6	558.3	555.3	551.2	550.0
20°	618.2	602.5	586.4	572.6	559.2	547.7	544.2	541.2	538.1	536.2	534.7
22.5°	597.9	582.2	568.9	556.0	541.7	534.2	530.4	527.1	524.9	523.6	522.1
25°	569.5	555.7	540.8	529.3	517.8	512.8	510.5	508.6	507.1	505.2	504.8
27.5°	544.1	529.1	517.0	506.2	498.0	493.8	491.6	490.7	491.0	491.7	492.1
30°	525.1	511.3	501.3	492.1	484.5	480.7	480.3	480.3	481.8	482.2	483.0
32.5°	507.6	496.3	486.3	477.4	471.6	469.0	470.5	470.5	471.7	472.7	474.1
35°	482.2	472.2	464.6	456.9	451.9	453.1	453.8	454.6	456.5	458.8	460.4
37.5°	457.9	449.3	441.3	435.3	433.0	435.1	436.9	438.5	440.8	442.5	444.0
40°	440.4	433.9	426.3	420.9	421.7	422.8	424.4	426.3	428.2	429.3	430.9
42.5°	424.2	417.4	411.6	407.1	408.2	409.7	410.6	411.6	413.8	415.9	416.8
45°	399.5	394.1	388.7	386.1	386.8	387.6	388.4	389.5	391.4	393.0	393.3
47.5°	371.7	367.9	364.3	361.7	362.9	362.6	363.6	366.1	366.7	367.6	369.7
50°	353.9	350.4	346.2	345.5	345.5	345.5	345.8	348.9	348.9	350.4	352.0
52.5°	334.3	332.1	329.4	328.0	327.4	327.4	329.0	330.5	331.1	333.3	334.8
55°	305.2	302.9	300.7	299.5	298.7	299.5	302.6	303.3	305.2	306.4	307.5
57.5°	275.0	273.2	271.4	270.8	270.6	271.6	273.3	275.6	276.1	279.6	281.3
60°	255.1	252.4	250.9	250.9	250.1	253.5	252.8	256.6	257.4	259.7	262.4
62.5°	234.5	230.9	230.3	230.3	231.4	232.4	233.5	235.2	237.2	240.1	242.1
65°	201.5	199.5	202.2	201.8	201.1	203.4	203.4	205.3	207.6	210.3	214.5
67.5°	170.1	169.1	169.4	169.4	170.5	171.8	172.9	174.6	177.3	180.2	182.9
70°	149.0	150.1	148.2	149.8	150.9	151.3	152.0	154.3	157.4	159.3	162.4
72.5°	128.5	128.4	128.6	129.2	130.4	131.1	131.8	134.4	137.8	139.4	141.9
75°	98.8	98.4	99.6	99.6	101.5	102.3	103.0	104.2	107.2	109.5	111.5
77.5°	72.2	72.6	72.4	73.7	73.2	73.3	75.7	76.8	77.1	81.7	82.7
80°	54.4	55.2	55.5	55.9	56.3	55.5	58.2	59.4	59.4	62.0	64.0
82.5°	39.1	39.5	40.5	40.9	41.0	41.7	42.0	42.8	43.7	44.9	47.4
85°	19.5	20.7	21.1	20.7	21.1	20.3	21.4	21.8	22.2	22.2	22.2
87.5°	6.8	7.3	7.2	7.7	7.6	8.1	8.2	7.6	7.7	8.7	7.5
90°	3.5	4.4	5.4	6.4	7.5	8.5	8.8	9.1	9.4	9.7	10.0
92.5°	5.7	6.0	6.7	7.5	8.3	9.0	9.5	10.1	10.6	11.1	11.4
95°	8.7	7.5	8.4	9.2	10.1	11.0	11.5	12.1	12.6	13.2	13.4
97.5°	37.5	34.0	28.3	22.7	17.0	11.4	12.0	12.6	13.3	13.9	14.2
100°	66.0	60.7	48.4	36.2	23.9	11.7	12.3	12.9	13.5	14.2	14.5
102.5°	82.9	76.8	63.4	50.0	36.6	23.3	21.3	19.4	17.4	15.5	14.6
105°	108.8	105.7	98.6	91.5	84.5	77.4	63.5	49.6	35.7	21.8	14.9
107.5°	136.5	137.4	138.5	139.6	140.7	141.8	131.6	121.5	111.3	101.1	90.7
110°	155.2	155.9	156.8	157.6	158.5	159.4	156.8	154.2	151.6	149.0	142.1



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	173.0	173.7	174.6	175.5	176.3	177.2	177.2	177.3	177.3	177.4	176.2
115°	199.4	200.0	200.7	201.4	202.1	202.8	203.6	204.4	205.2	206.0	206.5
117.5°	225.8	226.3	226.6	227.0	227.4	227.7	228.3	229.0	229.6	230.2	230.6
120°	242.4	242.9	243.1	243.4	243.6	243.8	244.5	245.1	245.7	246.3	246.7
122.5°	258.3	258.7	259.0	259.3	259.6	259.9	260.4	260.8	261.3	261.7	261.9
125°	281.0	281.4	281.8	282.1	282.4	282.7	282.9	283.0	283.2	283.3	283.5
127.5°	302.7	303.2	303.6	304.0	304.4	304.7	305.0	305.2	305.5	305.8	305.8
130°	316.3	316.8	317.1	317.4	317.7	318.0	318.3	318.7	319.0	319.3	319.4
132.5°	329.3	329.7	330.0	330.3	330.5	330.8	331.1	331.4	331.7	332.0	332.1
135°	348.5	348.9	349.2	349.6	349.9	350.2	350.4	350.7	350.9	351.1	351.1
137.5°	366.0	366.4	366.6	366.7	366.9	367.1	367.5	367.8	368.2	368.6	368.7
140°	376.8	377.2	377.4	377.6	377.9	378.1	378.4	378.7	379.0	379.4	379.4
142.5°	387.3	387.6	387.9	388.1	388.3	388.6	388.8	389.1	389.3	389.6	389.6
145°	402.2	402.6	402.7	402.9	403.0	403.2	403.4	403.5	403.7	403.8	403.9
147.5°	415.2	415.5	415.7	415.8	416.0	416.1	416.3	416.4	416.6	416.8	416.7
150°	423.2	423.4	423.6	423.7	423.9	424.0	424.2	424.4	424.5	424.7	424.6
152.5°	430.3	430.5	430.5	430.6	430.7	430.8	431.1	431.4	431.7	432.0	431.9
155°	440.0	440.0	440.1	440.1	440.2	440.3	440.7	441.1	441.5	441.9	441.8
157.5°	448.9	448.9	448.8	448.7	448.6	448.6	449.0	449.5	450.0	450.5	450.4
160°	453.8	453.7	453.6	453.5	453.5	453.4	453.8	454.3	454.8	455.3	455.2
162.5°	458.1	457.9	457.8	457.8	457.7	457.6	458.1	458.7	459.2	459.7	459.8
165°	463.7	463.6	463.5	463.4	463.3	463.3	463.9	464.5	465.2	465.8	465.8
167.5°	467.9	467.8	467.8	467.8	467.8	467.8	468.4	469.0	469.7	470.3	470.3
170°	470.5	470.3	470.3	470.3	470.3	470.3	471.0	471.6	472.2	472.8	472.8
172.5°	471.9	471.8	471.8	471.9	472.0	472.0	472.7	473.3	473.9	474.5	474.5
175°	474.1	473.9	474.0	474.1	474.1	474.2	474.8	475.3	475.9	476.4	476.4
177.5°	474.9	474.8	474.9	474.9	475.0	475.1	475.6	476.1	476.6	477.1	477.0
180°	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5
2.5°	755.9	755.6	757.7	756.2	757.7	755.6	755.9	758.0	758.6	758.9	758.9
5°	703.6	704.7	700.9	700.9	700.9	704.7	703.6	705.9	707.8	709.3	711.6
7.5°	657.0	655.3	655.5	653.4	655.5	655.3	657.0	658.8	661.3	664.6	667.8
10°	628.5	626.2	625.4	625.8	625.4	626.2	628.5	633.1	634.6	637.7	641.1
12.5°	604.9	604.4	599.4	599.5	599.4	604.4	604.9	606.1	609.5	615.9	620.0
15°	577.2	569.9	569.1	571.4	569.1	569.9	577.2	577.2	578.7	583.7	586.0
17.5°	549.4	545.5	545.8	544.6	545.8	545.5	549.4	550.0	551.2	555.3	558.3
20°	534.7	532.4	532.0	529.3	532.0	532.4	534.7	534.7	536.2	538.1	541.2
22.5°	521.2	520.4	520.6	517.7	520.6	520.4	521.2	522.1	523.6	524.9	527.1
25°	504.4	506.3	504.8	504.8	504.8	506.3	504.4	504.8	505.2	507.1	508.6
27.5°	493.1	493.0	492.2	492.2	492.2	493.0	493.1	492.1	491.7	491.0	490.7
30°	484.5	484.1	484.9	484.9	484.9	484.1	484.5	483.0	482.2	481.8	480.3
32.5°	475.9	476.4	476.6	476.9	476.6	476.4	475.9	474.1	472.7	471.7	470.5
35°	462.7	463.0	464.2	463.4	464.2	463.0	462.7	460.4	458.8	456.5	454.6
37.5°	444.7	446.5	446.1	446.7	446.1	446.5	444.7	444.0	442.5	440.8	438.5
40°	431.3	432.4	432.0	432.0	432.0	432.4	431.3	430.9	429.3	428.2	426.3
42.5°	417.5	418.3	417.3	416.7	417.3	418.3	417.5	416.8	415.9	413.8	411.6
45°	394.9	394.1	395.3	393.7	395.3	394.1	394.9	393.3	393.0	391.4	389.5
47.5°	369.6	370.4	370.7	371.8	370.7	370.4	369.6	369.7	367.6	366.7	366.1
50°	352.7	355.0	355.0	354.7	355.0	355.0	352.7	352.0	350.4	348.9	348.9
52.5°	336.2	337.3	338.8	338.7	338.8	337.3	336.2	334.8	333.3	331.1	330.5
55°	310.6	311.4	312.1	312.5	312.1	311.4	310.6	307.5	306.4	305.2	303.3
57.5°	284.1	283.8	285.6	286.2	285.6	283.8	284.1	281.3	279.6	276.1	275.6
60°	265.4	265.4	268.5	269.6	268.5	265.4	265.4	262.4	259.7	257.4	256.6
62.5°	245.5	246.7	249.8	248.2	249.8	246.7	245.5	242.1	240.1	237.2	235.2
65°	216.4	219.5	219.1	220.6	219.1	219.5	216.4	214.5	210.3	207.6	205.3
67.5°	186.0	187.9	190.7	190.9	190.7	187.9	186.0	182.9	180.2	177.3	174.6
70°	165.5	167.4	168.9	170.0	168.9	167.4	165.5	162.4	159.3	157.4	154.3
72.5°	145.5	146.5	150.2	148.6	150.2	146.5	145.5	141.9	139.4	137.8	134.4
75°	114.1	116.8	119.1	118.0	119.1	116.8	114.1	111.5	109.5	107.2	104.2
77.5°	84.4	87.1	88.2	87.2	88.2	87.1	84.4	82.7	81.7	77.1	76.8
80°	66.6	66.3	68.6	68.2	68.6	66.3	66.6	64.0	62.0	59.4	59.4
82.5°	48.9	48.5	49.6	49.8	49.6	48.5	48.9	47.4	44.9	43.7	42.8
85°	23.7	24.9	23.4	23.0	23.4	24.9	23.7	22.2	22.2	22.2	21.8
87.5°	7.5	7.6	7.3	7.0	7.3	7.6	7.5	7.5	8.7	7.7	7.6
90°	10.1	10.3	10.4	10.6	10.4	10.3	10.1	10.0	9.7	9.4	9.1
92.5°	11.4	11.5	11.6	11.7	11.6	11.5	11.4	11.4	11.1	10.6	10.1
95°	13.4	13.4	13.4	13.4	13.4	13.4	13.4	13.4	13.2	12.6	12.1
97.5°	14.3	14.4	14.5	14.6	14.5	14.4	14.3	14.2	13.9	13.3	12.6
100°	14.6	14.7	14.8	14.8	14.8	14.7	14.6	14.5	14.2	13.5	12.9
102.5°	14.7	14.8	15.0	15.1	15.0	14.8	14.7	14.6	15.5	17.4	19.4
105°	15.1	15.2	15.4	15.5	15.4	15.2	15.1	14.9	21.8	35.7	49.6
107.5°	80.3	69.8	59.3	48.8	59.3	69.8	80.3	90.7	101.1	111.3	121.5
110°	130.9	119.6	108.4	97.2	108.4	119.6	130.9	142.1	149.0	151.6	154.2



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	173.8	171.5	169.1	166.7	169.1	171.5	173.8	176.2	177.4	177.3	177.3
115°	206.8	207.2	207.5	207.8	207.5	207.2	206.8	206.5	206.0	205.2	204.4
117.5°	230.6	230.7	230.8	230.8	230.8	230.7	230.6	230.6	230.2	229.6	229.0
120°	246.7	246.7	246.7	246.7	246.7	246.7	246.7	246.7	246.3	245.7	245.1
122.5°	262.0	262.1	262.1	262.2	262.1	262.1	262.0	261.9	261.7	261.3	260.8
125°	283.6	283.8	284.0	284.1	284.0	283.8	283.6	283.5	283.3	283.2	283.0
127.5°	305.6	305.5	305.3	305.2	305.3	305.5	305.6	305.8	305.8	305.5	305.2
130°	319.2	319.1	318.9	318.7	318.9	319.1	319.2	319.4	319.3	319.0	318.7
132.5°	331.8	331.6	331.4	331.2	331.4	331.6	331.8	332.1	332.0	331.7	331.4
135°	350.9	350.7	350.4	350.2	350.4	350.7	350.9	351.1	351.1	350.9	350.7
137.5°	368.5	368.4	368.2	368.1	368.2	368.4	368.5	368.7	368.6	368.2	367.8
140°	379.3	379.1	379.0	378.8	379.0	379.1	379.3	379.4	379.4	379.0	378.7
142.5°	389.4	389.1	388.9	388.7	388.9	389.1	389.4	389.6	389.6	389.3	389.1
145°	403.9	403.9	403.9	403.9	403.9	403.9	403.9	403.9	403.8	403.7	403.5
147.5°	416.3	415.9	415.6	415.2	415.6	415.9	416.3	416.7	416.8	416.6	416.4
150°	424.4	424.2	423.9	423.7	423.9	424.2	424.4	424.6	424.7	424.5	424.4
152.5°	431.6	431.2	430.8	430.5	430.8	431.2	431.6	431.9	432.0	431.7	431.4
155°	441.4	440.9	440.4	439.9	440.4	440.9	441.4	441.8	441.9	441.5	441.1
157.5°	449.8	449.2	448.5	447.9	448.5	449.2	449.8	450.4	450.5	450.0	449.5
160°	454.7	454.1	453.6	453.0	453.6	454.1	454.7	455.2	455.3	454.8	454.3
162.5°	459.3	458.8	458.3	457.8	458.3	458.8	459.3	459.8	459.7	459.2	458.7
165°	465.3	464.7	464.2	463.6	464.2	464.7	465.3	465.8	465.8	465.2	464.5
167.5°	469.7	469.0	468.4	467.8	468.4	469.0	469.7	470.3	470.3	469.7	469.0
170°	472.2	471.6	471.0	470.3	471.0	471.6	472.2	472.8	472.8	472.2	471.6
172.5°	473.8	473.1	472.4	471.7	472.4	473.1	473.8	474.5	474.5	473.9	473.3
175°	475.8	475.1	474.5	473.9	474.5	475.1	475.8	476.4	476.4	475.9	475.3
177.5°	476.4	475.8	475.1	474.5	475.1	475.8	476.4	477.0	477.1	476.6	476.1
180°	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5
2.5°	758.0	758.0	763.8	767.5	772.1	775.2	777.3	779.5	783.1	788.1	793.6
5°	714.7	716.2	724.6	733.1	741.1	748.0	753.7	760.6	769.1	779.4	790.9
7.5°	672.7	678.6	687.1	697.4	708.6	718.7	728.8	740.2	752.0	767.3	783.4
10°	645.7	652.2	662.6	675.6	687.5	699.3	712.0	724.2	739.2	757.2	777.9
12.5°	622.1	628.3	639.0	653.2	664.5	677.6	692.1	708.0	724.8	746.5	769.9
15°	589.4	596.7	609.7	616.6	633.9	649.6	663.0	685.9	707.4	729.6	756.8
17.5°	562.6	566.7	577.2	590.0	602.9	620.5	638.1	657.2	678.6	705.8	739.8
20°	544.2	547.7	559.2	572.6	586.4	602.5	618.2	637.3	661.4	690.2	726.9
22.5°	530.4	534.2	541.7	556.0	568.9	582.2	597.9	620.8	646.4	674.5	714.4
25°	510.5	512.8	517.8	529.3	540.8	555.7	569.5	591.0	617.4	650.3	690.2
27.5°	491.6	493.8	498.0	506.2	517.0	529.1	544.1	562.3	589.1	624.9	667.2
30°	480.3	480.7	484.5	492.1	501.3	511.3	525.1	545.8	571.0	607.4	651.9
32.5°	470.5	469.0	471.6	477.4	486.3	496.3	507.6	528.0	552.4	588.1	633.8
35°	453.8	453.1	451.9	456.9	464.6	472.2	482.2	497.5	525.1	558.4	606.3
37.5°	436.9	435.1	433.0	435.3	441.3	449.3	457.9	471.5	495.3	532.0	577.8
40°	424.4	422.8	421.7	420.9	426.3	433.9	440.4	453.5	475.7	510.5	555.7
42.5°	410.6	409.7	408.2	407.1	411.6	417.4	424.2	435.7	457.9	490.6	533.4
45°	388.4	387.6	386.8	386.1	388.7	394.1	399.5	407.9	427.0	458.8	497.5
47.5°	363.6	362.6	362.9	361.7	364.3	367.9	371.7	380.7	399.1	424.7	453.0
50°	345.8	345.5	345.5	345.5	346.2	350.4	353.9	360.8	377.6	403.3	423.6
52.5°	329.0	327.4	327.4	328.0	329.4	332.1	334.3	341.8	356.5	377.6	396.0
55°	302.6	299.5	298.7	299.5	300.7	302.9	305.2	311.4	324.0	339.7	350.4
57.5°	273.3	271.6	270.6	270.8	271.4	273.2	275.0	281.7	291.6	299.8	306.7
60°	252.8	253.5	250.1	250.9	250.9	252.4	255.1	259.3	267.7	273.5	280.4
62.5°	233.5	232.4	231.4	230.3	230.3	230.9	234.5	237.8	245.0	248.0	253.4
65°	203.4	203.4	201.1	201.8	202.2	199.5	201.5	205.3	209.9	211.0	216.0
67.5°	172.9	171.8	170.5	169.4	169.4	169.1	170.1	172.0	175.5	175.9	179.7
70°	152.0	151.3	150.9	149.8	148.2	150.1	149.0	150.9	152.8	153.2	155.5
72.5°	131.8	131.1	130.4	129.2	128.6	128.4	128.5	130.7	132.0	131.4	134.0
75°	103.0	102.3	101.5	99.6	99.6	98.4	98.8	100.3	101.9	100.7	103.0
77.5°	75.7	73.3	73.2	73.7	72.4	72.6	72.2	71.9	72.6	72.7	74.8
80°	58.2	55.5	56.3	55.9	55.5	55.2	54.4	54.8	55.2	55.5	56.7
82.5°	42.0	41.7	41.0	40.9	40.5	39.5	39.1	39.8	40.1	39.9	40.8
85°	21.4	20.3	21.1	20.7	21.1	20.7	19.5	19.5	20.3	19.9	20.7
87.5°	8.2	8.1	7.6	7.7	7.2	7.3	6.8	7.0	7.1	7.0	7.4
90°	8.8	8.5	7.5	6.4	5.4	4.4	3.5	2.7	1.9	1.1	0.4
92.5°	9.5	9.0	8.3	7.5	6.7	6.0	5.7	5.9	6.1	6.4	6.6
95°	11.5	11.0	10.1	9.2	8.4	7.5	8.7	11.9	15.1	18.3	21.6
97.5°	12.0	11.4	17.0	22.7	28.3	34.0	37.5	39.0	40.4	41.9	43.3
100°	12.3	11.7	23.9	36.2	48.4	60.7	66.0	64.4	62.9	61.3	59.7
102.5°	21.3	23.3	36.6	50.0	63.4	76.8	82.9	81.8	80.6	79.5	78.4
105°	63.5	77.4	84.5	91.5	98.6	105.7	108.8	107.9	107.0	106.2	105.3
107.5°	131.6	141.8	140.7	139.6	138.5	137.4	136.5	135.8	135.1	134.4	133.7
110°	156.8	159.4	158.5	157.6	156.8	155.9	155.2	154.5	153.9	153.3	152.7



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	177.2	177.2	176.3	175.5	174.6	173.7	173.0	172.4	171.9	171.3	170.7
115°	203.6	202.8	202.1	201.4	200.7	200.0	199.4	198.9	198.5	198.0	197.5
117.5°	228.3	227.7	227.4	227.0	226.6	226.3	225.8	225.2	224.6	224.1	223.5
120°	244.5	243.8	243.6	243.4	243.1	242.9	242.4	241.7	241.0	240.3	239.6
122.5°	260.4	259.9	259.6	259.3	259.0	258.7	258.3	257.7	257.1	256.6	256.0
125°	282.9	282.7	282.4	282.1	281.8	281.4	281.0	280.3	279.7	279.1	278.5
127.5°	305.0	304.7	304.4	304.0	303.6	303.2	302.7	302.1	301.5	300.9	300.2
130°	318.3	318.0	317.7	317.4	317.1	316.8	316.3	315.7	315.0	314.4	313.8
132.5°	331.1	330.8	330.5	330.3	330.0	329.7	329.3	328.7	328.1	327.4	326.8
135°	350.4	350.2	349.9	349.6	349.2	348.9	348.5	348.1	347.6	347.1	346.7
137.5°	367.5	367.1	366.9	366.7	366.6	366.4	366.0	365.4	364.8	364.2	363.6
140°	378.4	378.1	377.9	377.6	377.4	377.2	376.8	376.3	375.9	375.4	374.9
142.5°	388.8	388.6	388.3	388.1	387.9	387.6	387.3	386.8	386.3	385.9	385.4
145°	403.4	403.2	403.0	402.9	402.7	402.6	402.2	401.7	401.1	400.6	400.0
147.5°	416.3	416.1	416.0	415.8	415.7	415.5	415.2	414.9	414.5	414.2	413.8
150°	424.2	424.0	423.9	423.7	423.6	423.4	423.2	423.0	422.7	422.5	422.3
152.5°	431.1	430.8	430.7	430.6	430.5	430.5	430.3	430.2	430.1	430.0	429.9
155°	440.7	440.3	440.2	440.1	440.1	440.0	440.0	440.2	440.3	440.5	440.7
157.5°	449.0	448.6	448.6	448.7	448.8	448.9	448.9	448.9	449.0	449.0	449.0
160°	453.8	453.4	453.5	453.5	453.6	453.7	453.8	453.8	453.9	454.0	454.1
162.5°	458.1	457.6	457.7	457.8	457.8	457.9	458.1	458.3	458.5	458.7	458.9
165°	463.9	463.3	463.3	463.4	463.5	463.6	463.7	464.0	464.2	464.4	464.7
167.5°	468.4	467.8	467.8	467.8	467.8	467.8	467.9	468.3	468.6	468.9	469.2
170°	471.0	470.3	470.3	470.3	470.3	470.3	470.5	470.8	471.1	471.4	471.7
172.5°	472.7	472.0	472.0	471.9	471.8	471.8	471.9	472.3	472.7	473.1	473.4
175°	474.8	474.2	474.1	474.1	474.0	473.9	474.1	474.5	474.8	475.2	475.6
177.5°	475.6	475.1	475.0	474.9	474.9	474.8	474.9	475.3	475.6	475.9	476.2
180°	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5	790.5
2.5°	795.4	796.9	802.1	805.8	810.1	812.6	815.0	816.9	819.3	819.9	828.8
5°	798.9	806.6	820.0	829.9	842.2	855.6	864.8	869.0	880.1	889.3	907.7
7.5°	797.9	814.2	834.5	855.5	878.0	898.8	916.9	938.3	953.6	976.5	999.1
10°	797.0	818.8	844.9	871.7	903.1	932.2	958.3	987.4	1011.5	1043.3	1070.5
12.5°	794.3	820.7	856.8	888.5	926.7	966.8	1005.4	1042.8	1064.2	1117.1	1142.2
15°	787.4	818.8	864.0	912.3	964.8	1012.3	1061.3	1100.3	1163.5	1209.9	1239.4
17.5°	774.4	818.4	872.0	930.2	994.0	1056.6	1112.1	1171.4	1238.5	1294.5	1354.3
20°	768.3	816.5	876.3	940.6	1006.9	1077.7	1140.9	1212.2	1285.3	1340.5	1417.1
22.5°	757.0	811.6	876.0	947.7	1018.5	1091.8	1165.8	1237.6	1322.1	1398.1	1471.0
25°	738.4	799.7	866.3	946.4	1029.5	1103.0	1191.5	1286.9	1375.0	1472.6	1545.4
27.5°	719.0	784.4	851.2	925.6	1015.0	1102.3	1213.6	1321.3	1429.0	1513.4	1567.2
30°	703.9	767.5	836.5	911.5	1000.0	1103.8	1228.3	1345.8	1450.8	1523.2	1553.4
32.5°	687.7	752.2	813.2	891.9	986.2	1102.9	1237.5	1360.2	1452.0	1500.2	1494.3
35°	662.2	716.2	775.6	851.4	962.5	1096.1	1242.8	1361.5	1417.8	1407.5	1329.4
37.5°	625.4	670.9	729.3	812.3	934.9	1082.0	1232.1	1321.2	1317.5	1233.3	1120.1
40°	602.5	641.1	697.4	784.8	913.4	1072.8	1215.2	1273.1	1224.1	1106.5	970.9
42.5°	572.4	608.0	664.3	754.1	889.9	1054.1	1183.1	1199.8	1103.9	968.6	844.4
45°	525.9	557.3	615.5	708.2	854.5	1013.4	1104.6	1063.6	934.5	794.7	700.1
47.5°	475.8	508.5	564.5	659.7	803.3	952.2	995.6	908.5	775.9	662.6	575.7
50°	444.3	475.7	530.4	626.6	768.7	902.0	920.0	807.4	685.6	586.0	514.7
52.5°	412.4	442.0	495.8	592.3	728.2	843.7	832.6	717.9	605.9	521.0	465.1
55°	365.0	393.0	444.3	534.7	658.4	749.9	709.7	600.2	507.5	441.6	399.1
57.5°	322.6	349.4	393.6	475.3	582.8	645.7	594.6	502.3	428.6	377.9	346.2
60°	293.8	317.5	359.6	435.5	528.9	576.8	526.2	444.7	382.6	342.0	313.7
62.5°	266.5	287.2	326.2	395.0	476.2	516.4	465.3	396.2	343.4	307.4	283.3
65°	225.2	244.0	278.4	332.1	398.7	425.5	381.5	325.5	284.6	257.8	241.7
67.5°	187.5	203.4	233.2	275.4	324.5	344.0	310.5	267.2	236.3	214.8	202.0
70°	162.4	176.2	199.5	235.9	280.4	295.3	263.9	228.3	205.7	188.4	176.6
72.5°	141.2	151.4	172.6	200.7	237.8	249.6	227.7	196.4	175.3	162.4	153.0
75°	107.6	116.0	129.8	152.4	178.1	185.0	168.5	149.0	134.8	125.6	118.3
77.5°	77.6	83.8	93.8	107.7	125.5	131.7	121.3	108.2	97.9	91.7	87.6
80°	58.6	63.6	72.0	83.5	94.2	97.7	91.5	81.6	74.3	70.9	67.4
82.5°	43.3	46.1	51.2	59.0	66.3	70.4	65.2	59.2	55.3	52.2	50.9
85°	21.8	23.4	25.7	28.7	33.3	34.9	32.9	31.4	29.1	27.2	27.2
87.5°	8.2	8.4	9.4	10.2	11.6	12.7	12.6	12.2	12.1	11.9	11.6
90°	1.1	1.9	2.7	3.5	4.4	5.4	6.4	7.5	8.5	8.8	9.1
92.5°	6.4	6.1	5.9	5.7	6.0	6.7	7.5	8.3	9.0	9.5	10.1
95°	18.3	15.1	11.9	8.7	7.5	8.4	9.2	10.1	11.0	11.5	12.1
97.5°	41.9	40.4	39.0	37.5	34.0	28.3	22.7	17.0	11.4	12.0	12.6
100°	61.3	62.9	64.4	66.0	60.7	48.4	36.2	23.9	11.7	12.3	12.9
102.5°	79.5	80.6	81.8	82.9	76.8	63.4	50.0	36.6	23.3	21.3	19.4
105°	106.2	107.0	107.9	108.8	105.7	98.6	91.5	84.5	77.4	63.5	49.6
107.5°	134.4	135.1	135.8	136.5	137.4	138.5	139.6	140.7	141.8	131.6	121.5
110°	153.3	153.9	154.5	155.2	155.9	156.8	157.6	158.5	159.4	156.8	154.2



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	171.3	171.9	172.4	173.0	173.7	174.6	175.5	176.3	177.2	177.2	177.3
115°	198.0	198.5	198.9	199.4	200.0	200.7	201.4	202.1	202.8	203.6	204.4
117.5°	224.1	224.6	225.2	225.8	226.3	226.6	227.0	227.4	227.7	228.3	229.0
120°	240.3	241.0	241.7	242.4	242.9	243.1	243.4	243.6	243.8	244.5	245.1
122.5°	256.6	257.1	257.7	258.3	258.7	259.0	259.3	259.6	259.9	260.4	260.8
125°	279.1	279.7	280.3	281.0	281.4	281.8	282.1	282.4	282.7	282.9	283.0
127.5°	300.9	301.5	302.1	302.7	303.2	303.6	304.0	304.4	304.7	305.0	305.2
130°	314.4	315.0	315.7	316.3	316.8	317.1	317.4	317.7	318.0	318.3	318.7
132.5°	327.4	328.1	328.7	329.3	329.7	330.0	330.3	330.5	330.8	331.1	331.4
135°	347.1	347.6	348.1	348.5	348.9	349.2	349.6	349.9	350.2	350.4	350.7
137.5°	364.2	364.8	365.4	366.0	366.4	366.6	366.7	366.9	367.1	367.5	367.8
140°	375.4	375.9	376.3	376.8	377.2	377.4	377.6	377.9	378.1	378.4	378.7
142.5°	385.9	386.3	386.8	387.3	387.6	387.9	388.1	388.3	388.6	388.8	389.1
145°	400.6	401.1	401.7	402.2	402.6	402.7	402.9	403.0	403.2	403.4	403.5
147.5°	414.2	414.5	414.9	415.2	415.5	415.7	415.8	416.0	416.1	416.3	416.4
150°	422.5	422.7	423.0	423.2	423.4	423.6	423.7	423.9	424.0	424.2	424.4
152.5°	430.0	430.1	430.2	430.3	430.5	430.5	430.6	430.7	430.8	431.1	431.4
155°	440.5	440.3	440.2	440.0	440.0	440.1	440.1	440.2	440.3	440.7	441.1
157.5°	449.0	449.0	448.9	448.9	448.9	448.8	448.7	448.6	448.6	449.0	449.5
160°	454.0	453.9	453.8	453.8	453.7	453.6	453.5	453.5	453.4	453.8	454.3
162.5°	458.7	458.5	458.3	458.1	457.9	457.8	457.8	457.7	457.6	458.1	458.7
165°	464.4	464.2	464.0	463.7	463.6	463.5	463.4	463.3	463.3	463.9	464.5
167.5°	468.9	468.6	468.3	467.9	467.8	467.8	467.8	467.8	467.8	468.4	469.0
170°	471.4	471.1	470.8	470.5	470.3	470.3	470.3	470.3	470.3	471.0	471.6
172.5°	473.1	472.7	472.3	471.9	471.8	471.8	471.9	472.0	472.0	472.7	473.3
175°	475.2	474.8	474.5	474.1	473.9	474.0	474.1	474.1	474.2	474.8	475.3
177.5°	475.9	475.6	475.3	474.9	474.8	474.9	474.9	475.0	475.1	475.6	476.1
180°	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6	475.6



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	790.5	790.5	790.5	790.5	790.5	790.5	790.5
2.5°	831.9	832.2	835.5	838.0	836.8	838.3	838.9
5°	908.8	922.6	929.9	935.3	935.7	936.0	939.1
7.5°	1018.0	1032.8	1043.6	1060.0	1064.9	1070.5	1068.9
10°	1097.7	1119.5	1138.3	1148.2	1158.9	1174.6	1162.0
12.5°	1172.1	1210.8	1239.4	1254.8	1265.0	1268.1	1261.9
15°	1294.9	1345.5	1372.7	1371.9	1406.4	1421.3	1397.9
17.5°	1407.5	1454.2	1491.5	1510.7	1539.4	1545.8	1542.9
20°	1476.4	1527.4	1556.5	1589.4	1604.4	1617.8	1620.1
22.5°	1535.9	1581.6	1612.9	1640.3	1652.8	1659.1	1663.0
25°	1597.1	1633.1	1651.9	1661.4	1664.9	1664.1	1659.1
27.5°	1592.9	1595.6	1575.0	1554.7	1536.5	1516.0	1509.0
30°	1551.5	1519.3	1461.9	1429.3	1381.5	1343.5	1358.9
32.5°	1442.7	1378.7	1314.2	1243.0	1184.1	1167.4	1150.5
35°	1231.3	1118.7	1052.9	976.3	945.6	915.0	893.9
37.5°	996.2	909.1	830.9	780.8	750.1	730.8	720.3
40°	861.4	782.8	718.5	677.9	654.5	632.7	629.6
42.5°	753.8	680.8	632.4	600.1	577.6	568.4	561.6
45°	617.4	566.4	533.9	510.9	496.0	490.2	482.6
47.5°	522.6	486.6	462.1	446.5	435.2	430.9	430.3
50°	469.6	439.7	421.7	409.4	400.6	399.1	393.0
52.5°	429.7	403.8	389.8	379.1	372.7	368.4	366.6
55°	373.0	355.8	343.2	337.0	332.1	327.8	327.8
57.5°	326.4	312.0	303.6	298.4	296.9	293.9	292.0
60°	297.6	285.3	278.8	274.2	271.2	271.5	268.1
62.5°	269.4	261.4	255.2	250.6	247.0	247.0	247.3
65°	229.4	223.3	218.7	217.2	214.9	212.2	212.9
67.5°	194.4	188.7	185.1	182.5	181.7	180.2	182.5
70°	169.3	165.1	162.4	160.1	159.3	159.7	161.6
72.5°	146.3	143.3	141.6	140.5	138.8	138.9	140.2
75°	114.9	112.6	111.1	109.9	109.5	109.5	109.5
77.5°	84.4	83.9	83.2	81.5	81.6	82.0	82.1
80°	66.6	65.5	65.1	64.3	63.2	62.4	64.3
82.5°	49.8	48.6	48.3	48.1	46.3	46.2	47.8
85°	26.8	25.7	26.0	25.7	25.7	25.3	25.3
87.5°	11.4	11.1	10.9	11.2	10.9	10.7	11.3
90°	9.4	9.7	10.0	10.1	10.3	10.4	10.6
92.5°	10.6	11.1	11.4	11.4	11.5	11.6	11.7
95°	12.6	13.2	13.4	13.4	13.4	13.4	13.4
97.5°	13.3	13.9	14.2	14.3	14.4	14.5	14.6
100°	13.5	14.2	14.5	14.6	14.7	14.8	14.8
102.5°	17.4	15.5	14.6	14.7	14.8	15.0	15.1
105°	35.7	21.8	14.9	15.1	15.2	15.4	15.5
107.5°	111.3	101.1	90.7	80.3	69.8	59.3	48.8
110°	151.6	149.0	142.1	130.9	119.6	108.4	97.2



TEST NUMBER: P331910

CATALOG NUMBER: S123DIP-S560D365U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	177.3	177.4	176.2	173.8	171.5	169.1	166.7
115°	205.2	206.0	206.5	206.8	207.2	207.5	207.8
117.5°	229.6	230.2	230.6	230.6	230.7	230.8	230.8
120°	245.7	246.3	246.7	246.7	246.7	246.7	246.7
122.5°	261.3	261.7	261.9	262.0	262.1	262.1	262.2
125°	283.2	283.3	283.5	283.6	283.8	284.0	284.1
127.5°	305.5	305.8	305.8	305.6	305.5	305.3	305.2
130°	319.0	319.3	319.4	319.2	319.1	318.9	318.7
132.5°	331.7	332.0	332.1	331.8	331.6	331.4	331.2
135°	350.9	351.1	351.1	350.9	350.7	350.4	350.2
137.5°	368.2	368.6	368.7	368.5	368.4	368.2	368.1
140°	379.0	379.4	379.4	379.3	379.1	379.0	378.8
142.5°	389.3	389.6	389.6	389.4	389.1	388.9	388.7
145°	403.7	403.8	403.9	403.9	403.9	403.9	403.9
147.5°	416.6	416.8	416.7	416.3	415.9	415.6	415.2
150°	424.5	424.7	424.6	424.4	424.2	423.9	423.7
152.5°	431.7	432.0	431.9	431.6	431.2	430.8	430.5
155°	441.5	441.9	441.8	441.4	440.9	440.4	439.9
157.5°	450.0	450.5	450.4	449.8	449.2	448.5	447.9
160°	454.8	455.3	455.2	454.7	454.1	453.6	453.0
162.5°	459.2	459.7	459.8	459.3	458.8	458.3	457.8
165°	465.2	465.8	465.8	465.3	464.7	464.2	463.6
167.5°	469.7	470.3	470.3	469.7	469.0	468.4	467.8
170°	472.2	472.8	472.8	472.2	471.6	471.0	470.3
172.5°	473.9	474.5	474.5	473.8	473.1	472.4	471.7
175°	475.9	476.4	476.4	475.8	475.1	474.5	473.9
177.5°	476.6	477.1	477.0	476.4	475.8	475.1	474.5
180°	475.6	475.6	475.6	475.6	475.6	475.6	475.6

(END OF REPORT)