

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332375

Luminaire Tested: **S123RDIP-S1165D805U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332375
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D805U835-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7590.4 lumens
Efficiency: N/A
Efficacy: 125.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332375

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

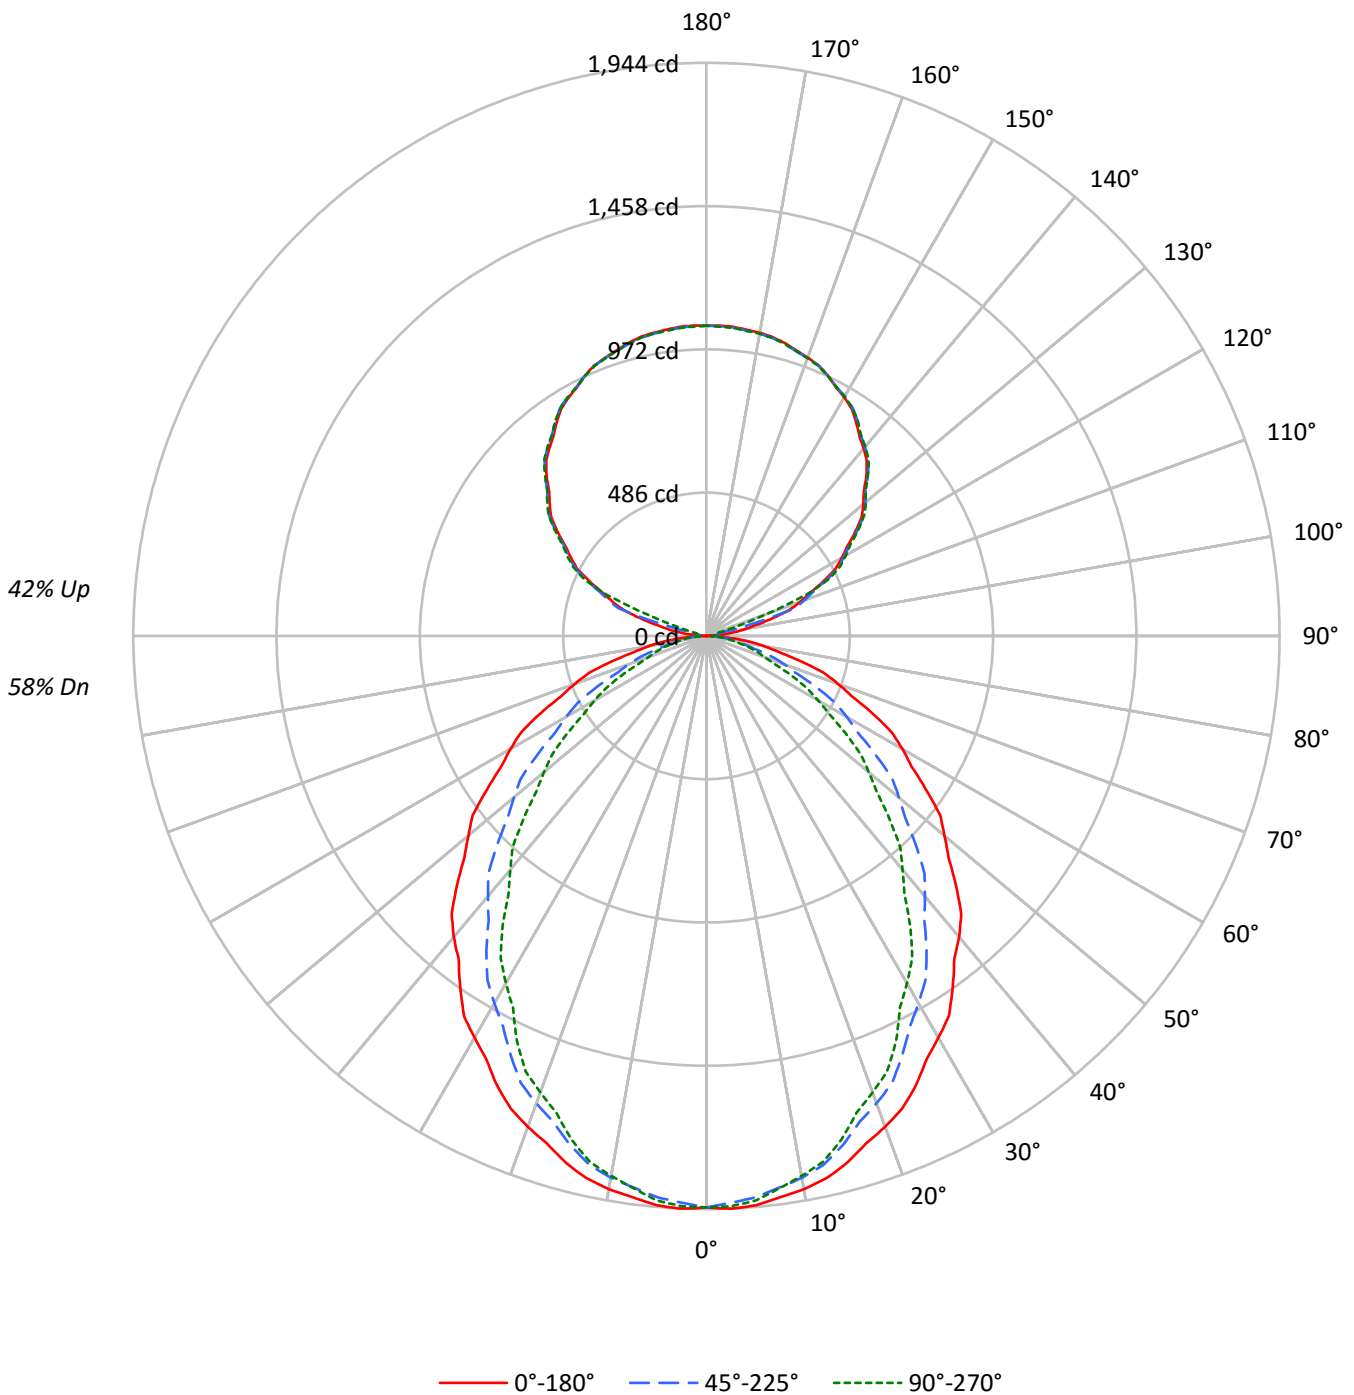



TEST NUMBER: P332375

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63	58
1	100	96	92	88	93	89	86	83	77	75	73	67	65	63	56	55	54	49
2	91	84	78	73	85	79	73	69	68	64	61	59	56	53	50	48	46	42
3	83	74	67	61	78	69	63	58	61	56	52	52	49	46	45	42	40	36
4	77	66	58	52	71	62	55	49	54	49	44	47	43	39	40	37	34	31
5	70	59	51	45	65	55	48	43	49	43	38	42	38	34	36	33	30	27
6	65	53	45	39	60	50	43	37	44	38	34	38	34	30	33	30	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	27	24	21
8	56	44	36	31	52	41	34	29	37	31	27	32	28	24	28	24	22	19
9	52	40	33	27	49	38	31	26	34	28	24	30	25	22	26	22	20	17
10	49	37	30	25	46	35	28	24	31	26	22	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	20863	20863	20863
5°	20942	20653	20772
10°	20824	20394	20325
15°	20600	19917	19706
20°	20292	19321	18871
25°	19975	18650	18053
30°	19557	17877	16900
35°	19127	17102	15843
40°	18730	16190	14533
45°	18209	15289	13352
50°	17637	14267	12030
55°	17051	13097	10796
60°	16514	11845	9442
65°	15814	10488	8087
70°	14940	8806	6530
75°	13662	6929	6147
80°	12180	6137	5653
85°	10288	5434	5051



TEST NUMBER: P332375

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.0	2.4
10°-20°	506.4	6.7
20°-30°	729.2	9.6
30°-40°	821.3	10.8
40°-50°	785.8	10.4
50°-60°	643.5	8.5
60°-70°	434.1	5.7
70°-80°	218.4	2.9
80°-90°	60.7	0.8
90°-100°	38.3	0.5
100°-110°	182.3	2.4
110°-120°	438.0	5.8
120°-130°	557.7	7.3
130°-140°	595.9	7.9
140°-150°	557.2	7.3
150°-160°	449.5	5.9
160°-170°	290.1	3.8
170°-180°	100.0	1.3
0°-30°	1417.6	18.7
0°-40°	2238.9	29.5
0°-60°	3668.1	48.3
0°-90°	4381.4	57.7
90°-120°	658.6	8.7
90°-150°	2369.4	31.2
90°-180°	3209.0	42.3
0°-180°	7590.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1938	1938	1938	1938	1938	
5°	1938	1930	1911	1925	1922	184
15°	1849	1830	1787	1779	1768	521
25°	1682	1641	1570	1538	1520	773
35°	1456	1397	1302	1236	1206	911
45°	1196	1123	1004	918	877	923
55°	909	828	698	610	575	814
65°	621	532	412	338	318	614
75°	328	252	167	152	148	350
85°	83	50	44	41	41	94
90°	1	9	19	22	24	6
95°	48	18	24	29	30	59
105°	233	237	171	41	34	247
115°	437	442	449	456	460	431
125°	616	622	625	627	629	550
135°	767	772	775	777	775	590
145°	885	890	892	894	894	554
155°	975	973	974	978	973	449
165°	1028	1026	1025	1031	1026	290
175°	1052	1049	1049	1054	1048	100
180°	1052	1052	1052	1052	1052	



TEST NUMBER: P332375

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2
2.5°	1944.5	1943.3	1942.2	1941.1	1940.0	1937.7	1934.4	1931.0	1927.7	1924.3	1927.4
5°	1938.2	1936.4	1934.7	1932.9	1931.2	1928.2	1924.0	1919.8	1915.6	1911.4	1914.6
7.5°	1920.2	1918.4	1916.5	1914.6	1912.7	1909.0	1903.6	1898.1	1892.7	1887.2	1889.0
10°	1905.2	1902.7	1900.3	1897.8	1895.4	1891.0	1884.7	1878.4	1872.1	1865.9	1866.2
12.5°	1883.8	1881.1	1878.3	1875.6	1872.9	1867.7	1860.0	1852.3	1844.6	1836.9	1836.7
15°	1848.6	1844.7	1840.9	1837.0	1833.2	1826.4	1816.6	1806.8	1797.0	1787.3	1785.5
17.5°	1804.2	1799.8	1795.3	1790.8	1786.4	1777.9	1765.5	1753.0	1740.6	1728.2	1724.5
20°	1771.5	1766.0	1760.4	1754.8	1749.2	1739.8	1726.5	1713.2	1699.9	1686.7	1682.1
22.5°	1735.1	1728.6	1722.2	1715.8	1709.4	1699.1	1685.0	1670.9	1656.8	1642.6	1637.0
25°	1681.9	1673.2	1664.5	1655.7	1647.0	1634.6	1618.5	1602.5	1586.4	1570.3	1563.0
27.5°	1617.5	1607.9	1598.2	1588.6	1578.9	1565.2	1547.3	1529.4	1511.5	1493.6	1483.4
30°	1573.5	1563.0	1552.5	1542.0	1531.6	1516.5	1497.0	1477.4	1457.9	1438.3	1426.4
32.5°	1529.5	1517.6	1505.7	1493.8	1482.0	1465.7	1445.0	1424.3	1403.6	1383.0	1370.0
35°	1455.6	1443.0	1430.4	1417.9	1405.3	1388.2	1366.5	1344.9	1323.2	1301.5	1286.5
37.5°	1380.8	1366.8	1352.8	1338.8	1324.9	1306.3	1283.2	1260.1	1237.0	1213.8	1196.8
40°	1333.0	1317.6	1302.2	1286.9	1271.5	1251.4	1226.6	1201.8	1177.0	1152.2	1134.0
42.5°	1278.9	1263.5	1248.2	1232.8	1217.4	1196.9	1171.3	1145.6	1120.0	1094.4	1074.5
45°	1196.2	1180.5	1164.8	1149.1	1133.3	1112.0	1085.1	1058.2	1031.3	1004.4	984.5
47.5°	1113.5	1096.3	1079.0	1061.8	1044.5	1022.4	995.5	968.6	941.7	914.9	893.2
50°	1053.2	1036.8	1020.3	1003.9	987.5	965.2	936.9	908.6	880.3	852.0	830.3
52.5°	999.1	981.3	963.5	945.7	927.8	904.9	876.9	848.9	820.9	792.9	770.4
55°	908.6	891.4	874.3	857.2	840.1	816.7	787.0	757.3	727.6	697.9	677.7
57.5°	824.9	806.3	787.6	769.0	750.3	726.1	696.3	666.4	636.6	606.8	587.6
60°	767.1	747.9	728.7	709.5	690.2	666.1	637.1	608.2	579.2	550.2	531.3
62.5°	709.2	690.0	670.8	651.6	632.4	608.3	579.3	550.3	521.3	492.3	474.6
65°	620.9	601.7	582.5	563.3	544.1	520.8	493.6	466.3	439.1	411.8	394.7
67.5°	532.6	513.1	493.7	474.3	454.9	432.1	406.0	379.8	353.7	327.6	314.8
70°	474.7	455.9	437.0	418.1	399.3	377.6	353.2	328.7	304.3	279.8	267.6
72.5°	416.9	398.3	379.7	361.1	342.5	322.1	299.9	277.7	255.5	233.3	223.3
75°	328.5	311.8	295.0	278.2	261.5	243.5	224.3	205.0	185.8	166.6	163.1
77.5°	248.0	232.9	217.7	202.6	187.4	173.6	161.3	148.9	136.5	124.2	122.3
80°	196.5	182.2	167.8	153.5	139.2	128.4	121.0	113.7	106.4	99.0	98.0
82.5°	147.4	135.1	122.7	110.3	98.0	90.1	86.7	83.2	79.8	76.4	75.3
85°	83.3	75.6	67.9	60.3	52.6	48.2	47.2	46.1	45.1	44.0	43.3
87.5°	30.3	27.6	24.9	22.2	19.4	18.3	18.7	19.2	19.6	20.1	20.0
90°	0.8	2.5	4.3	6.0	7.7	9.7	12.0	14.2	16.5	18.8	19.5
92.5°	14.5	14.1	13.6	13.1	12.6	13.2	14.9	16.6	18.3	20.0	21.1
95°	47.7	40.6	33.4	26.3	19.2	16.6	18.5	20.4	22.3	24.2	25.5
97.5°	95.8	92.7	89.5	86.3	83.1	75.2	62.7	50.2	37.7	25.2	26.6
100°	132.1	135.6	139.1	142.5	146.0	134.2	107.1	80.0	52.9	25.8	27.2
102.5°	173.4	175.9	178.4	180.9	183.4	169.9	140.3	110.6	81.0	51.4	47.1
105°	233.0	234.9	236.8	238.7	240.6	233.8	218.1	202.5	186.8	171.2	140.5
107.5°	295.8	297.4	298.9	300.4	301.9	303.9	306.4	308.9	311.3	313.8	291.3
110°	337.7	339.1	340.5	341.9	343.3	344.9	346.9	348.8	350.7	352.6	346.9



TEST NUMBER: P332375

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	377.8	379.0	380.3	381.5	382.8	384.3	386.3	388.2	390.1	392.0	392.1
115°	437.0	438.1	439.1	440.2	441.2	442.5	444.1	445.6	447.2	448.8	450.5
117.5°	494.4	495.7	497.0	498.3	499.5	500.6	501.4	502.2	503.0	503.8	505.2
120°	530.1	531.6	533.2	534.7	536.3	537.4	537.9	538.4	538.9	539.4	540.8
122.5°	566.3	567.6	568.9	570.2	571.5	572.4	573.1	573.8	574.4	575.1	576.1
125°	616.1	617.4	618.8	620.2	621.6	622.7	623.4	624.0	624.7	625.4	625.8
127.5°	664.2	665.6	667.0	668.4	669.8	670.9	671.7	672.6	673.4	674.2	674.8
130°	694.2	695.6	697.0	698.4	699.8	700.8	701.5	702.2	702.9	703.6	704.3
132.5°	723.0	724.4	725.8	727.2	728.6	729.5	730.1	730.6	731.2	731.8	732.5
135°	766.9	768.0	769.0	770.1	771.1	772.0	772.7	773.4	774.1	774.8	775.3
137.5°	804.5	805.8	807.1	808.4	809.7	810.6	811.0	811.4	811.7	812.1	813.0
140°	829.5	830.5	831.6	832.6	833.7	834.4	835.0	835.5	836.0	836.5	837.2
142.5°	852.6	853.7	854.7	855.8	856.8	857.6	858.1	858.6	859.1	859.7	860.2
145°	885.0	886.2	887.4	888.6	889.9	890.6	891.0	891.3	891.7	892.0	892.4
147.5°	915.5	916.3	917.1	917.9	918.7	919.3	919.6	919.9	920.3	920.6	921.0
150°	934.2	934.8	935.3	935.8	936.3	936.8	937.1	937.5	937.8	938.2	938.5
152.5°	951.1	951.4	951.6	951.9	952.1	952.3	952.5	952.7	953.0	953.2	953.8
155°	974.9	974.6	974.2	973.9	973.5	973.4	973.6	973.8	973.9	974.1	975.0
157.5°	993.3	993.3	993.3	993.2	993.2	993.1	992.9	992.8	992.6	992.4	993.5
160°	1004.6	1004.4	1004.3	1004.1	1003.9	1003.7	1003.6	1003.4	1003.2	1003.0	1004.1
162.5°	1015.2	1014.8	1014.3	1013.9	1013.4	1013.1	1012.9	1012.8	1012.6	1012.4	1013.6
165°	1028.1	1027.5	1027.0	1026.5	1026.0	1025.6	1025.5	1025.3	1025.1	1024.9	1026.3
167.5°	1038.1	1037.4	1036.7	1036.0	1035.3	1034.9	1034.9	1034.9	1034.9	1034.9	1036.3
170°	1043.7	1043.0	1042.3	1041.6	1040.9	1040.6	1040.6	1040.6	1040.6	1040.6	1042.0
172.5°	1047.4	1046.6	1045.8	1044.9	1044.1	1043.8	1043.9	1044.0	1044.2	1044.3	1045.7
175°	1052.3	1051.4	1050.6	1049.7	1048.8	1048.5	1048.6	1048.8	1049.0	1049.2	1050.4
177.5°	1053.5	1052.9	1052.2	1051.5	1050.8	1050.5	1050.6	1050.8	1050.9	1051.0	1052.2
180°	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3



TEST NUMBER: P332375

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2
2.5°	1930.5	1933.6	1936.6	1937.9	1937.3	1936.8	1936.2	1935.6
5°	1917.7	1920.9	1924.0	1925.2	1924.5	1923.8	1923.1	1922.4
7.5°	1890.7	1892.5	1894.2	1894.5	1893.3	1892.1	1890.9	1889.7
10°	1866.6	1866.9	1867.3	1866.6	1864.8	1863.1	1861.3	1859.6
12.5°	1836.5	1836.3	1836.1	1835.0	1833.0	1830.9	1828.9	1826.9
15°	1783.8	1782.0	1780.3	1778.2	1775.7	1773.3	1770.8	1768.4
17.5°	1720.8	1717.0	1713.3	1709.7	1706.0	1702.4	1698.8	1695.1
20°	1677.6	1673.0	1668.5	1664.1	1659.9	1655.7	1651.6	1647.4
22.5°	1631.3	1625.7	1620.0	1615.2	1611.3	1607.4	1603.5	1599.6
25°	1555.7	1548.3	1541.0	1535.4	1531.6	1527.7	1523.9	1520.0
27.5°	1473.2	1463.0	1452.8	1444.8	1438.9	1433.1	1427.2	1421.3
30°	1414.5	1402.7	1390.8	1382.1	1376.5	1370.9	1365.3	1359.7
32.5°	1357.0	1344.0	1331.0	1321.6	1315.7	1309.8	1304.0	1298.1
35°	1271.5	1256.5	1241.5	1230.8	1224.5	1218.2	1211.9	1205.7
37.5°	1179.7	1162.7	1145.6	1133.2	1125.5	1117.7	1110.0	1102.2
40°	1115.9	1097.7	1079.6	1066.5	1058.4	1050.4	1042.4	1034.3
42.5°	1054.7	1034.8	1015.0	1001.5	994.3	987.1	979.9	972.7
45°	964.6	944.7	924.8	910.7	902.3	893.9	885.5	877.1
47.5°	871.5	849.9	828.2	813.7	806.2	798.7	791.2	783.8
50°	808.7	787.0	765.3	750.5	742.5	734.4	726.4	718.4
52.5°	747.9	725.4	702.9	688.0	680.8	673.7	666.5	659.3
55°	657.4	637.1	616.9	603.3	596.3	589.3	582.3	575.3
57.5°	568.5	549.3	530.2	517.6	511.7	505.8	499.8	493.9
60°	512.4	493.6	474.7	462.3	456.4	450.4	444.5	438.6
62.5°	456.8	439.1	421.3	409.4	403.1	396.9	390.7	384.5
65°	377.6	360.5	343.4	332.9	329.1	325.2	321.4	317.5
67.5°	302.0	289.2	276.4	268.0	263.9	259.7	255.6	251.5
70°	255.3	243.1	230.9	222.9	219.0	215.2	211.3	207.5
72.5°	213.3	203.3	193.3	187.5	185.9	184.3	182.7	181.1
75°	159.6	156.1	152.6	150.6	149.9	149.2	148.5	147.8
77.5°	120.4	118.5	116.6	115.3	114.6	113.9	113.2	112.5
80°	96.9	95.9	94.8	94.0	93.3	92.6	91.9	91.2
82.5°	74.3	73.3	72.2	71.6	71.5	71.3	71.2	71.1
85°	42.6	41.9	41.2	40.9	40.9	40.9	40.9	40.9
87.5°	19.8	19.7	19.5	19.4	19.2	18.9	18.7	18.5
90°	20.2	20.8	21.5	22.1	22.4	22.8	23.1	23.5
92.5°	22.2	23.3	24.5	25.1	25.3	25.5	25.7	26.0
95°	26.7	27.9	29.1	29.7	29.7	29.7	29.7	29.7
97.5°	28.0	29.3	30.7	31.5	31.7	31.9	32.0	32.2
100°	28.6	30.0	31.4	32.1	32.3	32.5	32.7	32.8
102.5°	42.8	38.5	34.2	32.2	32.5	32.8	33.1	33.5
105°	109.7	79.0	48.2	33.0	33.4	33.7	34.1	34.4
107.5°	268.7	246.2	223.6	200.7	177.6	154.4	131.2	108.0
110°	341.1	335.4	329.7	314.4	289.5	264.7	239.8	215.0



TEST NUMBER: P332375

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	392.2	392.3	392.4	389.8	384.6	379.3	374.1	368.9
115°	452.2	454.0	455.7	456.9	457.6	458.3	459.0	459.7
117.5°	506.6	508.0	509.3	510.1	510.3	510.4	510.5	510.7
120°	542.2	543.6	545.0	545.7	545.7	545.7	545.7	545.7
122.5°	577.0	578.0	579.0	579.5	579.7	579.8	580.0	580.1
125°	626.1	626.5	626.8	627.2	627.5	627.9	628.2	628.6
127.5°	675.3	675.9	676.4	676.5	676.2	675.9	675.5	675.2
130°	705.0	705.7	706.4	706.6	706.2	705.9	705.5	705.2
132.5°	733.1	733.8	734.5	734.6	734.2	733.7	733.2	732.7
135°	775.8	776.3	776.8	776.8	776.3	775.8	775.3	774.8
137.5°	813.8	814.6	815.5	815.7	815.4	815.0	814.7	814.3
140°	837.9	838.6	839.3	839.5	839.1	838.8	838.4	838.1
142.5°	860.8	861.3	861.9	861.9	861.4	860.9	860.5	860.0
145°	892.7	893.1	893.4	893.6	893.6	893.6	893.6	893.6
147.5°	921.3	921.7	922.0	921.8	921.0	920.2	919.4	918.6
150°	938.8	939.2	939.5	939.5	938.9	938.4	937.9	937.4
152.5°	954.4	955.0	955.7	955.6	954.8	954.0	953.2	952.4
155°	975.9	976.7	977.6	977.5	976.5	975.4	974.4	973.3
157.5°	994.5	995.5	996.6	996.4	995.1	993.7	992.4	991.0
160°	1005.1	1006.2	1007.2	1007.1	1005.9	1004.7	1003.5	1002.3
162.5°	1014.8	1016.0	1017.1	1017.2	1016.1	1015.0	1014.0	1012.9
165°	1027.7	1029.1	1030.5	1030.6	1029.4	1028.1	1026.9	1025.7
167.5°	1037.7	1039.1	1040.5	1040.5	1039.1	1037.7	1036.3	1034.9
170°	1043.3	1044.7	1046.1	1046.1	1044.7	1043.3	1042.0	1040.6
172.5°	1047.1	1048.5	1049.9	1049.8	1048.3	1046.8	1045.2	1043.7
175°	1051.6	1052.8	1054.0	1053.9	1052.6	1051.2	1049.8	1048.4
177.5°	1053.3	1054.4	1055.5	1055.4	1054.0	1052.6	1051.2	1049.8
180°	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3

(END OF REPORT)