

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332377

Luminaire Tested: **S123RDIP-S1165D805U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332377
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D805U835-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7287.2 lumens
Efficiency: N/A
Efficacy: 120.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332377

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

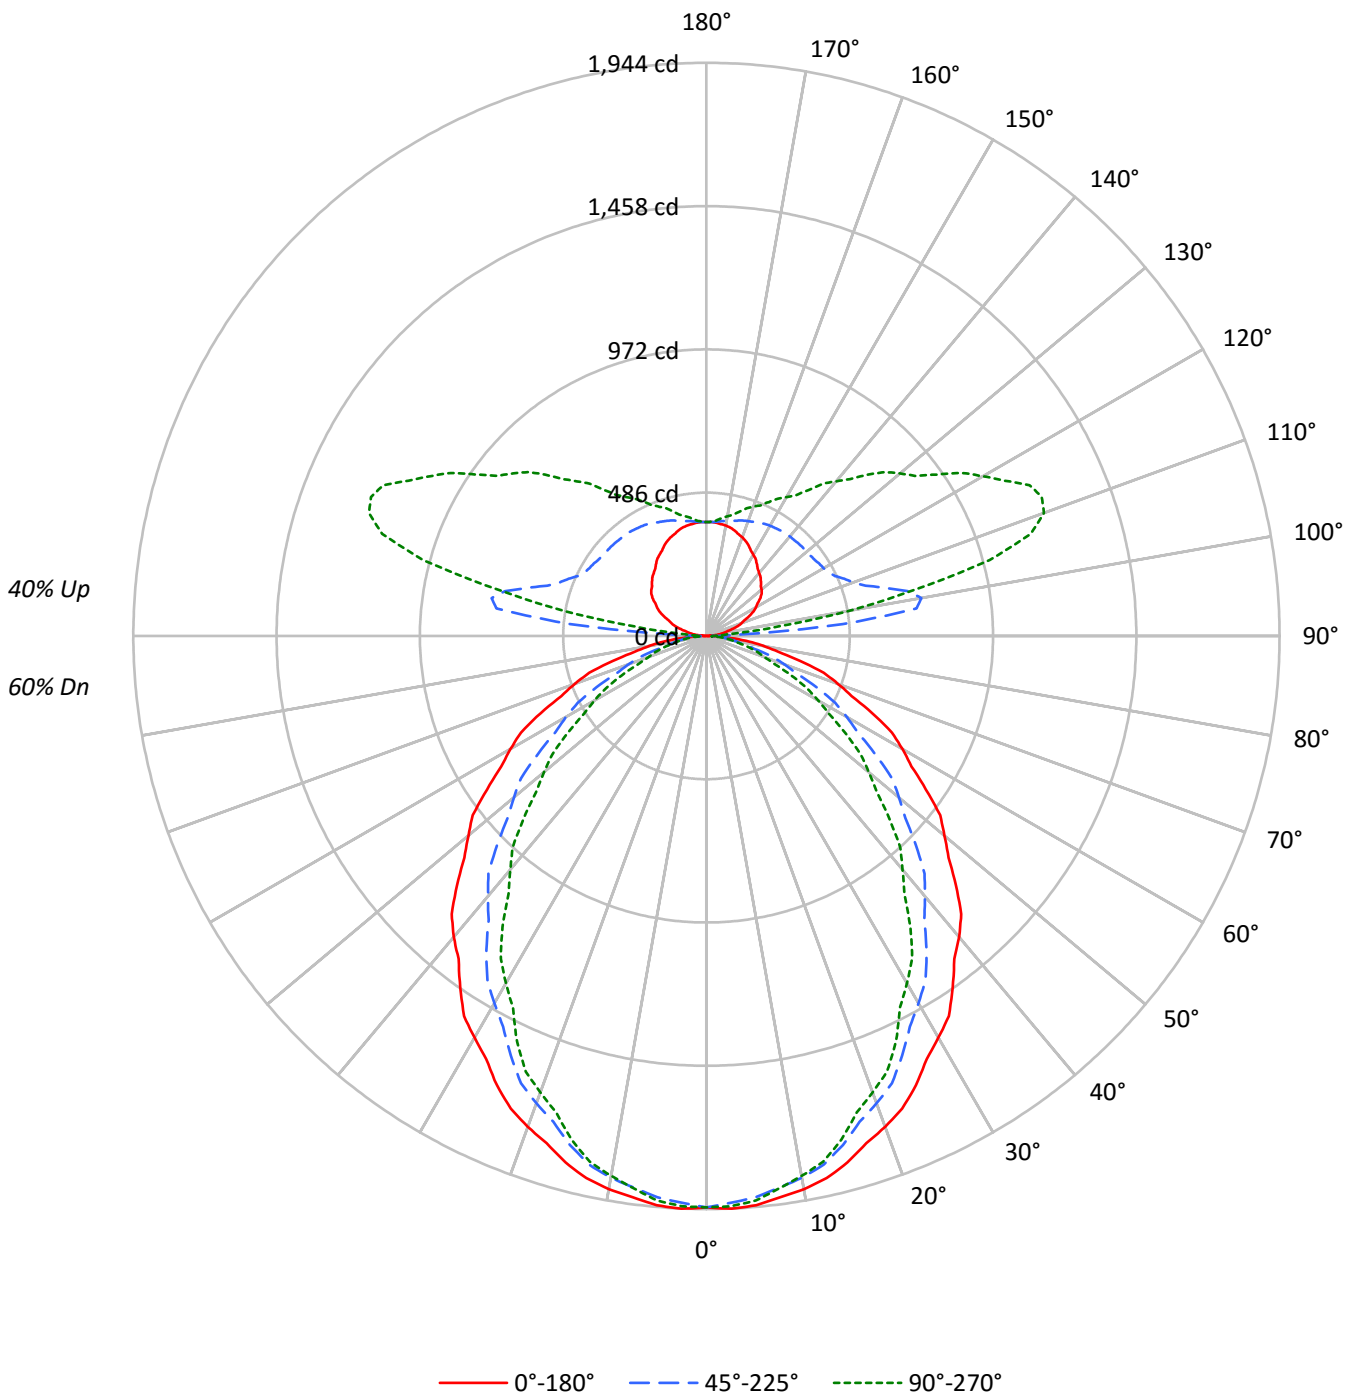



TEST NUMBER: P332377

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65	60
1	100	96	92	89	94	90	87	84	79	76	74	68	66	65	58	57	56	51
2	92	84	78	73	86	79	74	69	69	65	62	60	57	55	52	50	48	44
3	84	75	67	62	78	70	64	58	62	57	52	54	50	47	46	44	41	37
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	38	36	32
5	71	59	51	45	66	56	49	43	49	44	39	43	39	35	38	34	31	28
6	65	53	45	39	61	50	43	38	45	39	34	39	35	31	34	31	28	25
7	61	48	40	35	57	46	38	33	41	35	30	36	31	28	31	28	25	22
8	56	44	36	31	53	42	35	30	37	31	27	33	28	25	29	25	22	20
9	53	40	33	28	49	38	31	27	34	29	25	30	26	22	27	23	20	18
10	49	37	30	25	46	35	29	24	32	26	22	28	24	20	25	21	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	20863	20863	20863
5°	20942	20653	20772
10°	20824	20394	20325
15°	20600	19917	19706
20°	20292	19321	18871
25°	19975	18650	18053
30°	19557	17877	16900
35°	19127	17102	15843
40°	18730	16190	14533
45°	18209	15289	13352
50°	17637	14267	12030
55°	17051	13097	10796
60°	16514	11845	9442
65°	15814	10488	8087
70°	14940	8806	6530
75°	13662	6929	6147
80°	12180	6137	5653
85°	10288	5434	5051



TEST NUMBER: P332377

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.0	2.5
10°-20°	506.4	6.9
20°-30°	729.2	10.0
30°-40°	821.3	11.3
40°-50°	785.8	10.8
50°-60°	643.5	8.8
60°-70°	434.1	6.0
70°-80°	218.4	3.0
80°-90°	60.8	0.8
90°-100°	214.9	2.9
100°-110°	608.6	8.4
110°-120°	598.7	8.2
120°-130°	477.5	6.6
130°-140°	376.5	5.2
140°-150°	281.0	3.9
150°-160°	195.9	2.7
160°-170°	115.1	1.6
170°-180°	37.4	0.5
0°-30°	1417.6	19.5
0°-40°	2238.9	30.7
0°-60°	3668.1	50.3
0°-90°	4381.5	60.1
90°-120°	1422.2	19.5
90°-150°	2557.3	35.1
90°-180°	2906.0	39.9
0°-180°	7287.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1938	1938	1938	1938	1938	
5°	1938	1930	1911	1925	1922	184
15°	1849	1830	1787	1779	1768	521
25°	1682	1641	1570	1538	1520	773
35°	1456	1397	1302	1236	1206	911
45°	1196	1123	1004	918	877	923
55°	909	828	698	610	575	814
65°	621	532	412	338	318	614
75°	328	252	167	152	148	350
85°	83	50	44	41	41	94
90°	2	9	20	22	23	6
95°	27	86	464	135	91	29
105°	91	134	629	1099	994	96
115°	160	200	481	1054	1210	159
125°	223	263	449	813	954	198
135°	261	312	442	670	773	202
145°	298	341	437	549	604	187
155°	338	365	423	481	501	156
165°	370	380	405	430	437	104
175°	385	386	389	394	393	37
180°	386	386	386	386	386	



TEST NUMBER: P332377

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2
2.5°	1944.5	1943.3	1942.2	1941.1	1940.0	1937.7	1934.4	1931.0	1927.7	1924.3	1927.4
5°	1938.2	1936.4	1934.7	1932.9	1931.2	1928.2	1924.0	1919.8	1915.6	1911.4	1914.6
7.5°	1920.2	1918.4	1916.5	1914.6	1912.7	1909.0	1903.6	1898.1	1892.7	1887.2	1889.0
10°	1905.2	1902.7	1900.3	1897.8	1895.4	1891.0	1884.7	1878.4	1872.1	1865.9	1866.2
12.5°	1883.8	1881.1	1878.3	1875.6	1872.9	1867.7	1860.0	1852.3	1844.6	1836.9	1836.7
15°	1848.6	1844.7	1840.9	1837.0	1833.2	1826.4	1816.6	1806.8	1797.0	1787.3	1785.5
17.5°	1804.2	1799.8	1795.3	1790.8	1786.4	1777.9	1765.5	1753.0	1740.6	1728.2	1724.5
20°	1771.5	1766.0	1760.4	1754.8	1749.2	1739.8	1726.5	1713.2	1699.9	1686.7	1682.1
22.5°	1735.1	1728.6	1722.2	1715.8	1709.4	1699.1	1685.0	1670.9	1656.8	1642.6	1637.0
25°	1681.9	1673.2	1664.5	1655.7	1647.0	1634.6	1618.5	1602.5	1586.4	1570.3	1563.0
27.5°	1617.5	1607.9	1598.2	1588.6	1578.9	1565.2	1547.3	1529.4	1511.5	1493.6	1483.4
30°	1573.5	1563.0	1552.5	1542.0	1531.6	1516.5	1497.0	1477.4	1457.9	1438.3	1426.4
32.5°	1529.5	1517.6	1505.7	1493.8	1482.0	1465.7	1445.0	1424.3	1403.6	1383.0	1370.0
35°	1455.6	1443.0	1430.4	1417.9	1405.3	1388.2	1366.5	1344.9	1323.2	1301.5	1286.5
37.5°	1380.8	1366.8	1352.8	1338.8	1324.9	1306.3	1283.2	1260.1	1237.0	1213.8	1196.8
40°	1333.0	1317.6	1302.2	1286.9	1271.5	1251.4	1226.6	1201.8	1177.0	1152.2	1134.0
42.5°	1278.9	1263.5	1248.2	1232.8	1217.4	1196.9	1171.3	1145.6	1120.0	1094.4	1074.5
45°	1196.2	1180.5	1164.8	1149.1	1133.3	1112.0	1085.1	1058.2	1031.3	1004.4	984.5
47.5°	1113.5	1096.3	1079.0	1061.8	1044.5	1022.4	995.5	968.6	941.7	914.9	893.2
50°	1053.2	1036.8	1020.3	1003.9	987.5	965.2	936.9	908.6	880.3	852.0	830.3
52.5°	999.1	981.3	963.5	945.7	927.8	904.9	876.9	848.9	820.9	792.9	770.4
55°	908.6	891.4	874.3	857.2	840.1	816.7	787.0	757.3	727.6	697.9	677.7
57.5°	824.9	806.3	787.6	769.0	750.3	726.1	696.3	666.4	636.6	606.8	587.6
60°	767.1	747.9	728.7	709.5	690.2	666.1	637.1	608.2	579.2	550.2	531.3
62.5°	709.2	690.0	670.8	651.6	632.4	608.3	579.3	550.3	521.3	492.3	474.6
65°	620.9	601.7	582.5	563.3	544.1	520.8	493.6	466.3	439.1	411.8	394.7
67.5°	532.6	513.1	493.7	474.3	454.9	432.1	406.0	379.8	353.7	327.6	314.8
70°	474.7	455.9	437.0	418.1	399.3	377.6	353.2	328.7	304.3	279.8	267.6
72.5°	416.9	398.3	379.7	361.1	342.5	322.1	299.9	277.7	255.5	233.3	223.3
75°	328.5	311.8	295.0	278.2	261.5	243.5	224.3	205.0	185.8	166.6	163.1
77.5°	248.0	232.9	217.7	202.6	187.4	173.6	161.3	148.9	136.5	124.2	122.3
80°	196.5	182.2	167.8	153.5	139.2	128.4	121.0	113.7	106.4	99.0	98.0
82.5°	147.4	135.1	122.7	110.3	98.0	90.1	86.7	83.2	79.8	76.4	75.3
85°	83.3	75.6	67.9	60.3	52.6	48.2	47.2	46.1	45.1	44.0	43.3
87.5°	30.5	27.7	25.0	22.4	19.6	18.4	18.8	19.3	19.8	20.3	19.8
90°	1.6	3.1	4.7	7.0	8.6	10.2	12.5	14.9	17.2	19.5	18.8
92.5°	9.7	14.4	21.0	27.1	33.6	45.2	65.7	99.3	132.3	120.2	90.7
95°	26.6	28.9	37.5	50.8	71.1	101.6	168.1	284.6	412.8	463.6	376.1
97.5°	45.3	46.1	52.9	64.4	84.4	117.4	180.9	312.3	526.0	718.5	768.7
100°	57.9	58.6	64.1	75.1	93.8	124.3	179.0	294.7	500.4	740.4	894.4
102.5°	71.0	72.4	77.2	87.6	104.5	132.4	181.5	279.7	462.8	699.7	900.7
105°	90.7	93.0	97.7	107.1	122.0	146.2	188.4	268.9	416.7	628.6	853.0
107.5°	111.6	114.0	118.5	127.7	141.7	164.2	201.2	268.2	387.3	565.7	769.5
110°	126.7	129.0	132.9	141.5	154.8	176.7	211.9	271.3	376.1	530.1	716.9



TEST NUMBER: P332377

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	140.4	142.8	146.7	155.3	168.6	189.8	222.5	277.5	369.8	506.3	671.3
115°	160.3	163.4	168.1	175.9	189.2	210.3	240.0	287.7	367.5	480.8	616.1
117.5°	180.1	183.7	187.6	194.8	209.7	229.2	258.6	301.2	368.9	465.8	582.8
120°	193.9	196.2	200.1	208.0	222.8	242.4	270.5	311.2	371.4	458.9	565.3
122.5°	205.8	208.1	212.0	220.5	234.7	255.5	283.0	320.5	375.7	454.6	550.9
125°	222.8	224.4	229.1	237.7	252.5	273.6	301.0	335.4	382.3	448.8	532.4
127.5°	235.8	238.1	243.9	252.7	269.1	290.2	316.6	347.6	389.8	446.0	516.2
130°	243.9	246.3	253.3	262.7	279.1	300.2	326.0	355.7	394.8	444.1	507.4
132.5°	250.2	253.2	260.8	272.1	288.5	309.0	334.1	363.2	398.6	443.4	499.3
135°	261.1	264.3	272.9	284.6	301.0	322.1	346.3	372.9	404.2	442.5	488.6
137.5°	271.4	274.7	283.2	295.7	311.9	331.5	354.8	380.1	408.0	440.8	479.4
140°	278.3	282.2	290.1	302.6	318.2	337.7	360.4	383.9	410.5	440.2	473.8
142.5°	285.8	289.1	297.6	308.8	324.5	342.7	364.8	387.6	412.3	438.9	468.8
145°	297.9	300.2	307.3	319.0	332.3	350.3	370.6	391.7	413.6	437.0	462.1
147.5°	310.1	311.5	318.4	328.5	341.3	356.7	375.3	394.2	413.6	434.1	455.5
150°	318.2	319.0	325.2	335.4	346.3	360.4	378.4	394.8	413.6	431.6	451.1
152.5°	326.3	326.5	332.7	341.7	351.3	364.8	380.3	396.1	411.7	428.4	446.1
155°	338.5	338.5	343.2	351.0	359.6	370.6	383.9	396.4	409.7	423.0	438.6
157.5°	348.2	348.8	352.6	359.5	366.8	375.3	385.9	397.2	407.0	418.1	430.2
160°	355.7	355.7	358.9	365.1	370.6	378.4	387.8	397.2	405.8	414.4	424.5
162.5°	361.4	361.4	363.9	368.9	373.7	380.3	388.4	396.5	403.3	410.6	418.9
165°	369.8	369.0	370.6	374.5	377.6	383.1	389.3	394.8	399.5	405.0	411.2
167.5°	376.2	375.3	376.1	379.0	381.2	384.7	389.2	393.6	395.8	399.4	403.9
170°	380.0	378.4	379.2	381.5	383.1	384.7	388.6	391.7	393.3	395.6	399.5
172.5°	382.5	381.5	381.7	383.4	384.3	385.3	388.6	391.1	391.4	392.5	395.1
175°	385.4	384.7	383.9	385.4	385.4	386.2	387.8	389.3	388.6	388.6	390.1
177.5°	386.8	386.2	385.6	386.2	386.2	386.2	386.8	388.1	386.8	386.2	386.8
180°	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2



TEST NUMBER: P332377

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2	1938.2
2.5°	1930.5	1933.6	1936.6	1937.9	1937.3	1936.8	1936.2	1935.6
5°	1917.7	1920.9	1924.0	1925.2	1924.5	1923.8	1923.1	1922.4
7.5°	1890.7	1892.5	1894.2	1894.5	1893.3	1892.1	1890.9	1889.7
10°	1866.6	1866.9	1867.3	1866.6	1864.8	1863.1	1861.3	1859.6
12.5°	1836.5	1836.3	1836.1	1835.0	1833.0	1830.9	1828.9	1826.9
15°	1783.8	1782.0	1780.3	1778.2	1775.7	1773.3	1770.8	1768.4
17.5°	1720.8	1717.0	1713.3	1709.7	1706.0	1702.4	1698.8	1695.1
20°	1677.6	1673.0	1668.5	1664.1	1659.9	1655.7	1651.6	1647.4
22.5°	1631.3	1625.7	1620.0	1615.2	1611.3	1607.4	1603.5	1599.6
25°	1555.7	1548.3	1541.0	1535.4	1531.6	1527.7	1523.9	1520.0
27.5°	1473.2	1463.0	1452.8	1444.8	1438.9	1433.1	1427.2	1421.3
30°	1414.5	1402.7	1390.8	1382.1	1376.5	1370.9	1365.3	1359.7
32.5°	1357.0	1344.0	1331.0	1321.6	1315.7	1309.8	1304.0	1298.1
35°	1271.5	1256.5	1241.5	1230.8	1224.5	1218.2	1211.9	1205.7
37.5°	1179.7	1162.7	1145.6	1133.2	1125.5	1117.7	1110.0	1102.2
40°	1115.9	1097.7	1079.6	1066.5	1058.4	1050.4	1042.4	1034.3
42.5°	1054.7	1034.8	1015.0	1001.5	994.3	987.1	979.9	972.7
45°	964.6	944.7	924.8	910.7	902.3	893.9	885.5	877.1
47.5°	871.5	849.9	828.2	813.7	806.2	798.7	791.2	783.8
50°	808.7	787.0	765.3	750.5	742.5	734.4	726.4	718.4
52.5°	747.9	725.4	702.9	688.0	680.8	673.7	666.5	659.3
55°	657.4	637.1	616.9	603.3	596.3	589.3	582.3	575.3
57.5°	568.5	549.3	530.2	517.6	511.7	505.8	499.8	493.9
60°	512.4	493.6	474.7	462.3	456.4	450.4	444.5	438.6
62.5°	456.8	439.1	421.3	409.4	403.1	396.9	390.7	384.5
65°	377.6	360.5	343.4	332.9	329.1	325.2	321.4	317.5
67.5°	302.0	289.2	276.4	268.0	263.9	259.7	255.6	251.5
70°	255.3	243.1	230.9	222.9	219.0	215.2	211.3	207.5
72.5°	213.3	203.3	193.3	187.5	185.9	184.3	182.7	181.1
75°	159.6	156.1	152.6	150.6	149.9	149.2	148.5	147.8
77.5°	120.4	118.5	116.6	115.3	114.6	113.9	113.2	112.5
80°	96.9	95.9	94.8	94.0	93.3	92.6	91.9	91.2
82.5°	74.3	73.3	72.2	71.6	71.5	71.3	71.2	71.1
85°	42.6	41.9	41.2	40.9	40.9	40.9	40.9	40.9
87.5°	19.7	19.6	19.5	19.5	19.0	18.9	18.8	18.4
90°	19.5	20.3	21.1	22.7	21.9	22.7	23.5	22.7
92.5°	65.8	52.2	46.1	42.1	40.7	38.3	39.1	37.7
95°	281.5	190.8	149.3	121.2	106.3	99.3	93.8	90.7
97.5°	701.6	562.0	461.1	367.6	309.9	274.7	253.6	246.9
100°	921.8	858.4	767.0	655.9	577.0	519.9	489.4	490.2
102.5°	994.9	992.9	939.6	869.2	807.8	762.6	737.1	719.1
105°	1016.4	1094.5	1109.4	1089.1	1053.1	1023.4	998.4	994.5
107.5°	954.8	1081.7	1150.2	1178.0	1178.7	1168.7	1160.2	1153.0
110°	896.0	1039.8	1138.3	1193.1	1214.9	1221.2	1219.6	1218.1



TEST NUMBER: P332377

CATALOG NUMBER: S123RDIP-S1165D805U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	837.8	984.8	1095.2	1165.5	1205.6	1225.0	1230.9	1231.2
115°	760.7	896.7	1011.7	1096.9	1155.5	1189.9	1205.6	1209.5
117.5°	704.9	822.3	925.5	1012.0	1073.1	1112.5	1135.0	1140.4
120°	675.5	781.0	874.9	953.8	1015.6	1059.4	1078.1	1082.8
122.5°	652.4	747.9	834.8	908.2	963.0	1002.4	1023.1	1029.0
125°	621.5	706.8	781.8	844.4	894.4	928.8	948.3	953.8
127.5°	594.7	670.6	738.4	795.3	839.8	869.2	886.9	891.9
130°	577.8	648.1	711.5	764.6	806.1	834.2	850.6	856.9
132.5°	562.1	626.9	685.8	736.5	775.4	803.6	818.1	822.5
135°	541.0	596.5	647.3	691.9	730.2	753.7	767.7	773.2
137.5°	521.8	567.3	611.1	649.7	681.9	705.7	717.6	721.2
140°	510.5	550.4	587.9	621.5	651.3	673.1	685.7	684.9
142.5°	499.9	534.1	566.7	595.9	621.2	640.6	651.9	651.1
145°	487.1	512.9	537.9	560.6	580.1	596.5	602.8	604.3
147.5°	476.6	497.1	517.3	533.4	548.2	559.3	565.3	565.9
150°	469.1	487.1	503.5	518.3	530.1	538.7	543.4	543.4
152.5°	462.2	477.7	492.2	504.6	513.8	521.8	524.6	524.6
155°	451.9	464.4	476.1	485.5	492.5	498.8	500.4	501.1
157.5°	440.9	451.4	460.5	467.8	473.9	478.6	479.9	479.7
160°	434.7	443.3	451.1	456.6	462.1	466.7	466.7	466.0
162.5°	427.2	434.5	441.7	446.6	450.2	454.2	454.2	453.5
165°	417.5	422.2	427.7	431.6	434.7	437.8	437.0	437.0
167.5°	409.0	412.6	415.8	418.6	420.0	422.2	421.4	421.4
170°	403.4	405.8	408.9	410.5	411.2	412.8	412.0	412.0
172.5°	398.4	400.1	402.6	403.6	403.7	405.3	403.9	403.3
175°	391.7	392.5	394.0	394.0	394.0	394.8	394.0	393.3
177.5°	387.5	388.1	388.7	388.7	388.1	388.7	387.5	387.5
180°	386.2	386.2	386.2	386.2	386.2	386.2	386.2	386.2

(END OF REPORT)