

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P332258

Luminaire Tested: **S123RDIP-S340D1025U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332258
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S340D1025U835-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1025 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5455.9 lumens
Efficiency: N/A
Efficacy: 146.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

Luminous Intensity Polar Plot

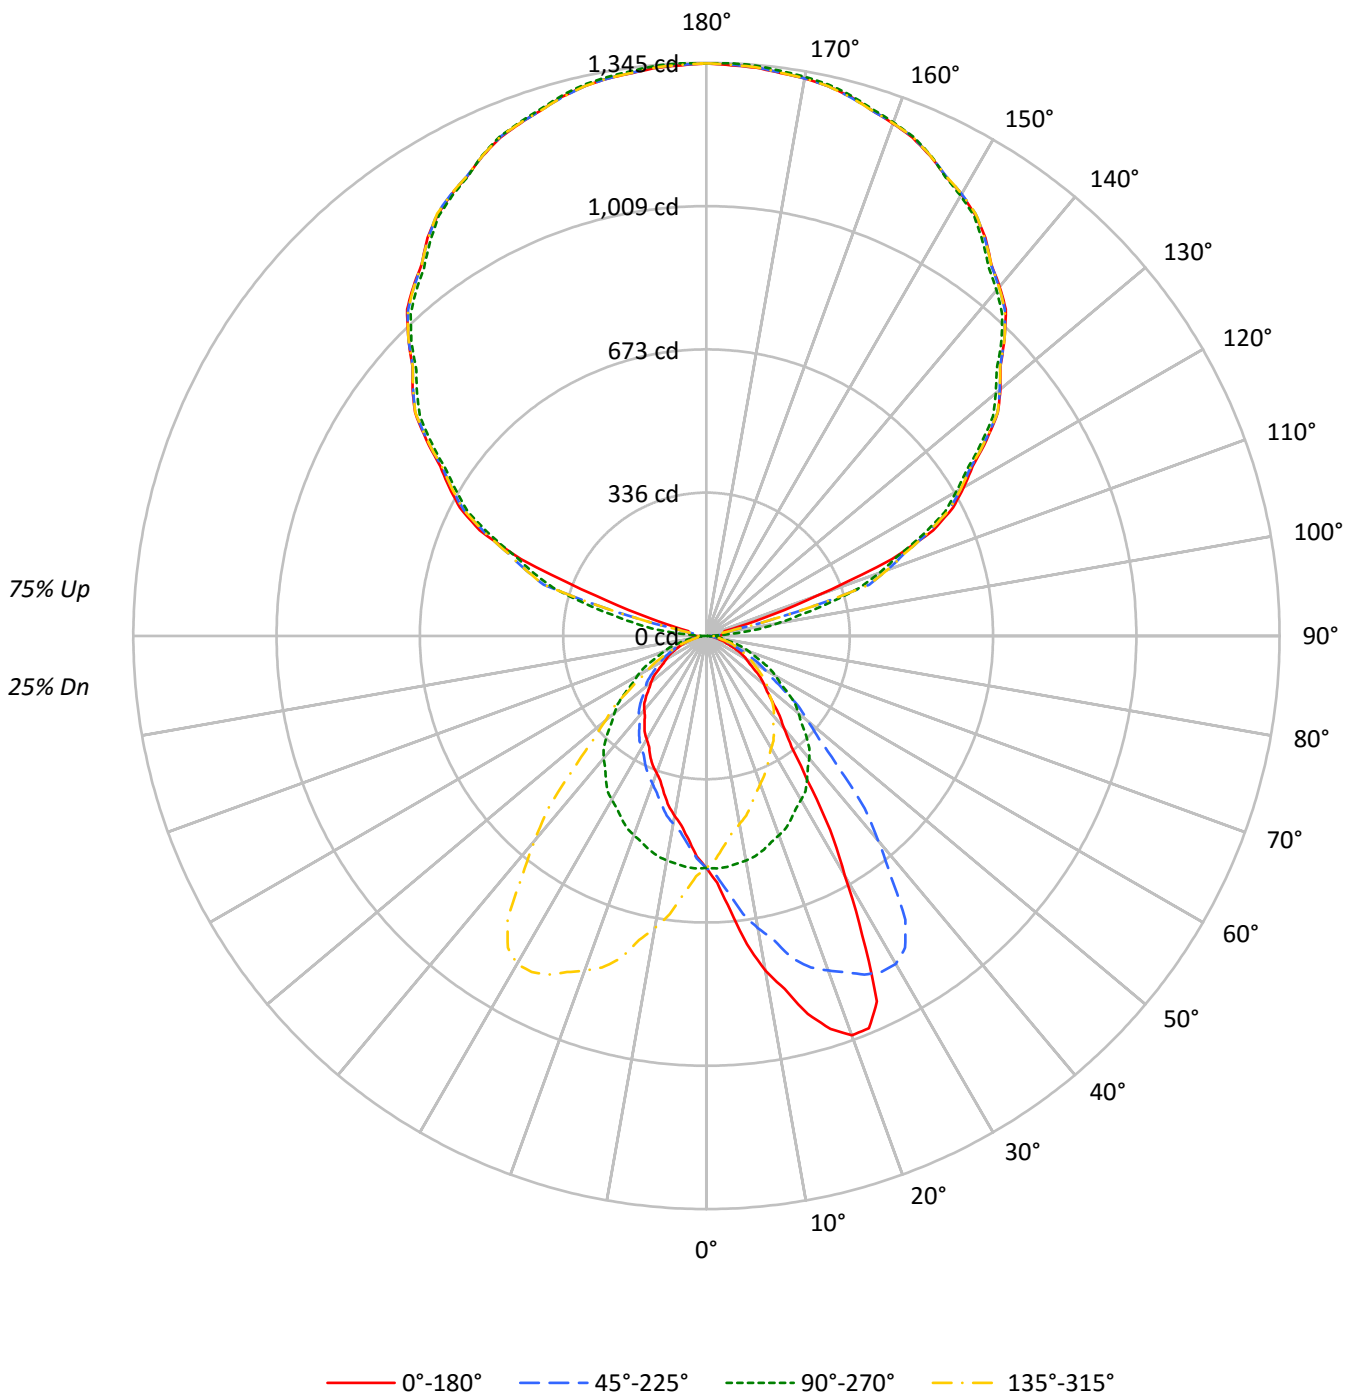



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33	25				
1	92	88	85	81	82	79	76	73	61	59	57	45	43	42	30	29	28	22				
2	84	77	72	67	75	69	64	60	54	51	48	40	38	36	26	25	24	18				
3	77	68	61	56	68	61	55	51	48	44	40	35	33	31	24	22	21	16				
4	71	60	53	47	63	54	48	43	42	38	35	31	29	26	21	20	18	14				
5	65	54	46	41	57	48	42	37	38	33	30	28	25	23	19	17	16	12				
6	60	48	41	35	53	43	37	32	34	29	26	26	22	20	18	16	14	11				
7	55	43	36	31	49	39	33	28	31	26	23	23	20	18	16	14	13	10				
8	51	39	32	27	45	35	29	25	28	24	20	21	18	16	15	13	11	9				
9	47	36	29	24	42	32	26	22	26	21	18	19	16	14	14	12	10	8				
10	44	33	26	21	39	30	24	20	24	19	16	18	15	13	13	11	9	7				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	5858	5858	5858	5858
5°	6983	5883	5181	5883
10°	8719	5850	4680	5850
15°	10234	5789	4268	5789
20°	11423	5700	3918	5700
25°	11240	5606	3702	5606
30°	8079	5520	3480	5520
35°	5394	5406	3336	5406
40°	3974	5271	3188	5271
45°	3334	5033	3043	5033
50°	2942	4721	2840	4721
55°	2580	4363	2562	4363
60°	2297	4021	2347	4021
65°	2017	3655	2183	3655
70°	1583	3330	1995	3330
75°	1393	2907	1822	2907
80°	1215	2467	1791	2467
85°	976	1988	1902	1988



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.5	1.0
10°-20°	167.2	3.1
20°-30°	262.7	4.8
30°-40°	274.1	5.0
40°-50°	234.5	4.3
50°-60°	178.8	3.3
60°-70°	114.6	2.1
70°-80°	55.1	1.0
80°-90°	18.3	0.3
90°-100°	48.8	0.9
100°-110°	232.8	4.3
110°-120°	559.2	10.2
120°-130°	712.1	13.1
130°-140°	760.8	13.9
140°-150°	711.5	13.0
150°-160°	573.9	10.5
160°-170°	370.4	6.8
170°-180°	127.6	2.3
0°-30°	483.4	8.9
0°-40°	757.5	13.9
0°-60°	1170.8	21.5
0°-90°	1358.8	24.9
90°-120°	840.8	15.4
90°-150°	3025.2	55.4
90°-180°	4097.0	75.1
0°-180°	5455.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	544	544	544	544	544	
5°	646	544	480	544	646	67
15°	918	520	383	520	918	260
25°	946	472	312	472	946	407
35°	410	411	254	411	410	269
45°	219	331	200	331	219	172
55°	138	232	136	232	138	124
65°	79	144	86	144	79	78
75°	34	70	44	70	34	36
85°	8	16	15	16	8	10
90°	30	1	30	1	30	14
95°	38	61	38	61	38	32
105°	44	297	44	297	44	100
115°	587	558	587	558	587	542
125°	802	786	802	786	802	717
135°	989	979	989	979	989	763
145°	1141	1130	1141	1130	1141	712
155°	1243	1245	1243	1245	1243	573
165°	1310	1313	1310	1313	1310	370
175°	1338	1344	1338	1344	1338	127
180°	1344	1344	1344	1344	1344	



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	579.7	580.4	578.0	577.6	574.8	574.1	574.1	570.1	567.7	564.6	562.7
5°	646.3	650.0	648.1	644.0	637.0	635.3	630.9	623.9	616.0	606.2	601.6
7.5°	729.5	734.6	732.6	726.2	718.8	712.9	700.4	688.8	672.6	658.3	646.1
10°	797.7	792.4	788.2	781.9	775.1	764.2	751.1	733.2	712.5	696.1	678.0
12.5°	848.8	847.9	842.6	836.1	826.6	816.2	800.1	778.3	754.2	730.6	709.8
15°	918.4	919.8	916.3	909.6	896.0	877.6	853.4	844.3	809.8	784.2	758.6
17.5°	966.6	966.3	965.8	956.5	942.7	929.6	907.1	883.2	852.0	815.9	781.4
20°	997.2	994.8	995.3	984.8	974.6	959.4	937.5	902.8	877.2	835.5	799.8
22.5°	996.4	995.9	997.7	994.1	986.7	975.1	957.8	928.5	895.8	853.7	813.6
25°	946.4	944.5	955.4	958.5	970.4	972.5	967.3	951.3	920.3	876.9	827.3
27.5°	792.0	791.0	811.3	836.8	869.0	894.1	918.3	930.0	920.3	889.2	839.5
30°	650.0	671.9	682.2	719.0	760.0	808.9	851.8	892.5	902.6	889.0	848.3
32.5°	539.7	558.8	567.4	598.9	637.2	694.5	758.8	816.5	857.3	867.6	843.1
35°	410.5	410.7	430.3	444.3	479.7	538.6	601.1	678.4	755.3	813.6	819.6
37.5°	327.6	328.7	340.6	354.5	381.1	412.2	467.2	531.5	620.3	709.7	762.2
40°	282.8	284.9	293.8	307.5	326.6	350.2	393.0	453.6	527.7	627.2	708.5
42.5°	254.1	257.5	262.1	272.7	284.5	306.6	341.2	388.0	455.4	549.5	643.3
45°	219.0	220.9	224.4	229.3	240.0	255.3	278.6	310.1	366.0	441.7	535.6
47.5°	193.2	192.2	195.9	199.8	207.0	217.5	233.1	258.7	298.6	359.4	439.0
50°	175.7	175.4	178.0	181.0	187.8	195.5	208.3	227.6	259.3	309.6	382.6
52.5°	159.3	160.1	162.0	165.7	170.6	176.8	188.3	202.3	229.5	272.9	333.7
55°	137.5	138.2	140.7	142.8	146.3	152.6	159.8	171.5	190.1	220.4	270.5
57.5°	119.0	118.7	121.1	121.7	125.6	130.7	136.3	145.4	158.9	181.4	215.1
60°	106.7	106.0	108.1	109.7	111.8	116.0	120.7	129.5	140.3	156.8	185.7
62.5°	95.5	95.2	96.7	98.4	100.1	103.9	107.8	114.6	123.1	137.0	160.0
65°	79.2	79.9	80.6	81.3	82.2	84.6	88.3	93.0	98.8	108.6	125.1
67.5°	62.3	63.0	63.2	64.6	66.6	68.1	70.4	74.5	78.6	86.8	96.2
70°	50.3	50.1	50.3	51.0	53.6	56.1	59.2	62.2	64.8	70.6	78.5
72.5°	43.2	42.8	43.4	43.6	44.8	45.5	47.4	50.3	53.6	57.5	63.2
75°	33.5	33.5	33.5	33.5	34.5	34.9	35.6	36.3	37.5	39.4	43.6
77.5°	24.8	24.8	25.2	25.4	25.6	25.9	26.3	27.0	27.4	28.4	30.2
80°	19.6	19.8	19.6	19.8	19.8	20.3	20.5	21.2	21.4	22.6	23.3
82.5°	14.7	14.6	14.7	15.0	15.0	15.4	15.5	16.0	16.0	16.6	17.3
85°	7.9	7.5	7.9	7.7	8.2	7.7	7.9	8.4	8.4	8.6	9.6
87.5°	7.9	8.1	7.7	7.8	7.7	7.7	7.6	7.4	7.6	7.2	6.8
90°	29.9	29.5	29.1	28.6	28.2	27.5	26.6	25.7	24.8	24.0	21.1
92.5°	33.1	32.9	32.6	32.3	32.1	31.2	29.8	28.4	27.0	25.6	23.4
95°	37.9	37.9	37.9	37.9	37.9	37.2	35.6	34.0	32.5	30.9	28.5
97.5°	41.1	40.9	40.7	40.5	40.2	39.2	37.5	35.7	33.9	32.1	48.1
100°	41.9	41.7	41.5	41.3	41.0	40.0	38.3	36.5	34.7	32.9	67.5
102.5°	42.7	42.3	41.9	41.5	41.1	43.7	49.2	54.7	60.2	65.7	103.5
105°	43.9	43.5	43.0	42.6	42.1	61.6	100.8	140.1	179.3	218.6	238.6
107.5°	137.9	167.5	197.1	226.7	256.3	285.5	314.3	343.1	371.9	400.7	397.5
110°	274.5	306.2	337.9	369.6	401.4	420.9	428.2	435.5	442.8	450.2	447.7



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	470.9	477.6	484.3	491.0	497.7	501.0	500.9	500.7	500.6	500.5	498.0
115°	586.9	586.0	585.1	584.2	583.4	581.8	579.6	577.4	575.2	572.9	570.9
117.5°	652.0	651.8	651.6	651.5	651.3	650.3	648.5	646.8	645.0	643.2	642.2
120°	696.7	696.7	696.7	696.7	696.7	695.8	694.0	692.3	690.5	688.7	688.1
122.5°	740.6	740.4	740.3	740.1	739.9	739.2	738.0	736.7	735.5	734.2	733.4
125°	802.5	802.1	801.6	801.2	800.7	800.3	799.8	799.4	799.0	798.5	797.6
127.5°	862.0	862.4	862.9	863.3	863.8	863.6	862.9	862.2	861.5	860.8	859.7
130°	900.3	900.8	901.2	901.7	902.1	901.9	901.0	900.1	899.2	898.3	897.4
132.5°	935.5	936.1	936.7	937.3	937.9	937.8	936.9	936.0	935.2	934.3	933.6
135°	989.2	989.8	990.5	991.2	991.8	991.8	991.2	990.5	989.8	989.2	988.3
137.5°	1039.7	1040.1	1040.6	1041.0	1041.4	1041.1	1040.1	1039.0	1037.9	1036.9	1036.4
140°	1070.0	1070.5	1070.9	1071.3	1071.8	1071.6	1070.7	1069.8	1068.9	1068.0	1067.4
142.5°	1098.0	1098.6	1099.2	1099.8	1100.4	1100.4	1099.7	1099.0	1098.3	1097.6	1096.9
145°	1140.9	1140.9	1140.9	1140.9	1140.9	1140.7	1140.2	1139.8	1139.3	1138.9	1138.4
147.5°	1172.8	1173.8	1174.9	1175.9	1176.9	1177.2	1176.7	1176.3	1175.9	1175.4	1175.0
150°	1196.8	1197.4	1198.1	1198.8	1199.4	1199.6	1199.1	1198.7	1198.2	1197.8	1197.3
152.5°	1215.9	1217.0	1218.0	1219.0	1220.0	1220.1	1219.3	1218.5	1217.7	1216.9	1216.7
155°	1242.7	1244.0	1245.4	1246.7	1248.0	1248.1	1247.0	1245.9	1244.8	1243.7	1243.5
157.5°	1265.3	1267.0	1268.7	1270.4	1272.2	1272.4	1271.0	1269.7	1268.4	1267.0	1267.3
160°	1279.6	1281.2	1282.7	1284.3	1285.8	1285.9	1284.6	1283.3	1282.0	1280.6	1280.8
162.5°	1293.2	1294.6	1295.9	1297.3	1298.7	1298.6	1297.1	1295.6	1294.1	1292.6	1292.8
165°	1309.6	1311.1	1312.7	1314.2	1315.8	1315.7	1313.9	1312.1	1310.3	1308.6	1308.8
167.5°	1321.3	1323.1	1324.9	1326.7	1328.4	1328.4	1326.7	1324.9	1323.1	1321.3	1321.3
170°	1328.5	1330.3	1332.1	1333.9	1335.6	1335.6	1333.9	1332.1	1330.3	1328.5	1328.5
172.5°	1332.5	1334.5	1336.4	1338.4	1340.3	1340.4	1338.6	1336.9	1335.1	1333.3	1333.1
175°	1338.5	1340.3	1342.1	1343.8	1345.6	1345.7	1344.2	1342.6	1341.1	1339.5	1339.3
177.5°	1340.3	1342.1	1343.9	1345.6	1347.4	1347.6	1346.2	1344.7	1343.3	1341.9	1341.7
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	561.9	561.4	558.8	555.8	551.9	549.3	547.2	546.1	542.7	538.6	535.9
5°	596.7	589.7	582.2	573.1	564.7	556.1	550.8	544.5	536.8	528.2	522.1
7.5°	633.8	620.1	605.4	590.1	575.1	561.6	549.6	539.4	527.2	514.8	506.2
10°	662.4	642.3	621.6	600.4	581.1	562.9	548.9	535.2	520.5	506.3	495.5
12.5°	688.3	661.9	638.0	611.9	587.2	565.5	545.4	529.2	511.5	496.4	484.2
15°	721.1	694.0	665.2	625.5	592.7	565.2	540.7	519.5	498.1	479.5	467.6
17.5°	751.7	711.1	672.2	639.2	596.5	562.2	532.3	507.0	483.4	463.7	449.0
20°	764.4	725.0	682.9	640.7	598.8	560.3	525.6	497.6	473.2	450.8	437.3
22.5°	772.0	727.5	683.0	637.7	593.2	553.2	518.9	488.1	461.6	440.4	423.7
25°	780.9	727.8	678.9	634.2	588.7	545.4	504.6	472.0	443.4	420.8	403.1
27.5°	786.8	724.3	666.5	616.8	570.7	527.6	490.2	455.6	426.5	402.6	383.6
30°	787.9	721.5	657.0	603.2	556.4	516.7	477.1	444.1	413.3	387.9	370.2
32.5°	789.4	714.6	644.1	587.0	539.0	499.8	463.9	432.3	400.8	375.8	357.7
35°	783.3	710.8	624.6	558.9	510.9	472.9	440.6	411.4	380.5	356.2	337.8
37.5°	756.8	695.7	604.4	527.3	477.1	442.0	415.6	390.2	361.8	335.6	318.3
40°	730.2	680.8	588.7	508.1	455.7	419.6	395.8	375.1	347.6	323.1	304.5
42.5°	690.5	660.4	573.8	488.0	431.5	396.7	376.6	357.2	333.1	308.2	290.7
45°	617.6	621.6	543.3	455.9	397.9	363.0	344.1	330.6	309.2	288.7	270.7
47.5°	526.3	563.3	507.5	421.8	362.6	329.8	313.3	301.5	287.0	266.9	250.5
50°	466.7	519.5	478.8	398.9	340.4	307.8	291.5	281.9	269.3	253.5	237.9
52.5°	411.7	468.5	444.1	373.3	316.3	286.5	270.6	262.7	252.7	237.8	223.7
55°	335.7	393.3	387.7	334.8	280.3	253.5	241.4	232.5	225.8	214.6	203.4
57.5°	271.6	326.1	329.0	291.9	248.5	222.0	211.6	204.9	200.5	192.1	181.7
60°	231.1	281.2	291.0	263.0	225.8	202.5	192.2	186.8	183.4	176.6	168.7
62.5°	197.6	240.2	251.3	231.2	204.0	182.1	174.1	169.0	166.6	160.8	153.8
65°	151.2	186.6	197.3	186.2	171.9	154.5	147.9	143.5	141.4	138.2	133.0
67.5°	113.7	139.5	151.3	143.4	138.2	127.2	123.1	120.7	118.8	116.6	112.3
70°	91.3	110.4	122.5	120.5	116.3	110.4	107.4	105.8	103.9	102.0	98.3
72.5°	73.4	86.6	97.9	99.0	95.6	94.4	91.7	91.0	89.9	87.7	85.6
75°	48.7	57.8	65.7	68.7	70.1	71.3	70.1	69.9	69.7	67.8	66.6
77.5°	31.9	36.8	41.8	47.0	49.2	50.7	51.1	52.0	51.3	50.4	49.8
80°	24.5	25.6	29.1	33.5	37.0	38.4	39.4	39.8	39.6	39.4	38.4
82.5°	17.8	18.7	20.4	23.5	26.4	28.7	29.3	29.2	29.7	29.9	29.1
85°	9.6	9.8	10.3	10.7	12.3	14.9	15.6	16.1	16.5	16.5	15.1
87.5°	6.6	5.9	5.7	5.1	5.3	5.0	5.7	6.2	6.8	6.5	6.9
90°	18.2	15.3	12.4	9.9	7.7	5.4	3.2	1.0	3.2	5.4	7.7
92.5°	21.2	19.0	16.9	16.1	16.7	17.3	17.9	18.6	17.9	17.3	16.7
95°	26.1	23.6	21.2	24.5	33.6	42.7	51.8	60.9	51.8	42.7	33.6
97.5°	64.1	80.1	96.0	106.0	110.1	114.2	118.3	122.4	118.3	114.2	110.1
100°	102.1	136.7	171.3	186.4	182.0	177.6	173.1	168.7	173.1	177.6	182.0
102.5°	141.3	179.1	216.9	234.2	231.0	227.8	224.6	221.4	224.6	227.8	231.0
105°	258.5	278.5	298.4	307.2	304.8	302.3	299.9	297.4	299.9	302.3	304.8
107.5°	394.4	391.2	388.1	385.5	383.6	381.6	379.7	377.7	379.7	381.6	383.6
110°	445.3	442.8	440.4	438.3	436.5	434.7	433.0	431.2	433.0	434.7	436.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	495.6	493.2	490.7	488.7	487.1	485.5	483.9	482.3	483.9	485.5	487.1
115°	568.9	566.9	565.0	563.3	562.0	560.6	559.3	558.0	559.3	560.6	562.0
117.5°	641.2	640.1	639.1	637.8	636.2	634.5	632.9	631.2	632.9	634.5	636.2
120°	687.4	686.7	686.1	684.7	682.7	680.7	678.7	676.7	678.7	680.7	682.7
122.5°	732.6	731.7	730.9	729.6	728.0	726.3	724.7	723.1	724.7	726.3	728.0
125°	796.7	795.9	795.0	793.6	791.9	790.1	788.3	786.5	788.3	790.1	791.9
127.5°	858.7	857.6	856.5	855.1	853.3	851.6	849.8	848.0	849.8	851.6	853.3
130°	896.6	895.7	894.8	893.5	891.7	889.9	888.1	886.4	888.1	889.9	891.7
132.5°	932.8	932.1	931.4	930.2	928.4	926.6	924.9	923.1	924.9	926.6	928.4
135°	987.4	986.5	985.6	984.5	983.2	981.8	980.5	979.2	980.5	981.8	983.2
137.5°	1035.9	1035.4	1034.9	1033.8	1032.2	1030.5	1028.8	1027.1	1028.8	1030.5	1032.2
140°	1066.7	1066.0	1065.4	1064.4	1063.0	1061.7	1060.4	1059.0	1060.4	1061.7	1063.0
142.5°	1096.2	1095.6	1094.9	1093.9	1092.6	1091.2	1089.9	1088.6	1089.9	1091.2	1092.6
145°	1138.0	1137.6	1137.1	1136.1	1134.6	1133.0	1131.5	1129.9	1131.5	1133.0	1134.6
147.5°	1174.5	1174.1	1173.6	1172.9	1171.9	1170.9	1169.9	1168.8	1169.9	1170.9	1171.9
150°	1196.9	1196.4	1196.0	1195.4	1194.8	1194.1	1193.5	1192.8	1193.5	1194.1	1194.8
152.5°	1216.4	1216.1	1215.9	1215.6	1215.3	1215.0	1214.7	1214.3	1214.7	1215.0	1215.3
155°	1243.2	1243.0	1242.8	1242.9	1243.4	1243.8	1244.2	1244.7	1244.2	1243.8	1243.4
157.5°	1267.5	1267.7	1267.9	1268.1	1268.1	1268.2	1268.2	1268.2	1268.2	1268.2	1268.1
160°	1281.1	1281.3	1281.5	1281.7	1282.0	1282.2	1282.4	1282.6	1282.4	1282.2	1282.0
162.5°	1293.0	1293.3	1293.5	1293.9	1294.5	1295.0	1295.6	1296.2	1295.6	1295.0	1294.5
165°	1309.0	1309.2	1309.5	1309.9	1310.6	1311.2	1311.9	1312.6	1311.9	1311.2	1310.6
167.5°	1321.3	1321.3	1321.3	1321.8	1322.7	1323.6	1324.5	1325.3	1324.5	1323.6	1322.7
170°	1328.5	1328.5	1328.5	1329.0	1329.9	1330.8	1331.6	1332.5	1331.6	1330.8	1329.9
172.5°	1333.0	1332.8	1332.6	1333.1	1334.1	1335.2	1336.3	1337.3	1336.3	1335.2	1334.1
175°	1339.1	1338.8	1338.6	1339.1	1340.2	1341.3	1342.4	1343.5	1342.4	1341.3	1340.2
177.5°	1341.6	1341.4	1341.2	1341.6	1342.4	1343.3	1344.2	1345.1	1344.2	1343.3	1342.4
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	534.9	532.5	530.8	527.1	524.7	522.1	519.5	521.1	520.9	520.8	520.8
5°	517.0	511.6	506.7	500.4	496.5	491.6	487.9	487.4	488.3	485.1	483.2
7.5°	499.2	491.9	484.9	478.0	470.6	464.7	461.1	459.3	457.0	455.0	452.9
10°	486.7	478.1	471.3	462.7	454.8	447.8	443.4	440.3	438.7	437.1	434.0
12.5°	473.8	465.4	456.8	447.0	439.5	431.4	428.1	424.7	421.6	419.7	415.6
15°	455.0	444.1	435.0	424.7	416.3	408.4	403.8	397.0	396.1	393.7	389.5
17.5°	436.1	424.3	411.7	404.1	394.7	386.4	379.3	377.1	370.4	367.9	364.2
20°	421.2	410.3	400.7	390.7	377.0	369.3	363.7	360.7	355.3	352.0	349.7
22.5°	408.4	397.2	386.2	374.5	363.2	354.5	350.4	345.7	342.8	338.2	335.7
25°	390.0	377.9	364.6	352.0	343.9	337.4	330.8	326.6	322.4	320.3	315.7
27.5°	368.7	356.0	343.6	334.0	324.0	317.6	311.7	308.0	302.9	299.4	296.8
30°	356.9	342.0	331.3	322.7	309.9	303.8	299.4	294.7	291.0	287.3	284.7
32.5°	343.3	329.7	319.6	308.9	299.1	292.4	286.7	282.6	279.4	275.9	273.3
35°	322.0	310.6	300.1	289.4	282.1	275.4	268.6	265.1	262.1	258.8	256.5
37.5°	302.7	292.0	282.0	271.9	262.9	257.4	252.0	249.3	245.2	243.0	240.7
40°	290.8	280.3	269.6	259.8	250.5	246.3	241.4	237.4	233.7	232.0	229.5
42.5°	277.7	267.2	258.2	247.7	240.0	234.3	229.8	225.5	222.7	220.3	218.9
45°	258.4	249.1	240.2	229.7	222.5	217.6	212.5	208.5	206.0	204.3	201.8
47.5°	239.6	230.3	221.3	212.2	205.2	199.6	194.4	191.7	188.3	186.3	184.6
50°	226.0	217.6	208.1	199.7	192.7	187.1	182.9	179.4	176.4	173.8	172.6
52.5°	213.5	204.6	196.3	188.5	181.1	174.8	171.0	167.3	165.0	162.1	160.7
55°	192.9	184.3	177.3	169.6	162.4	157.0	152.4	149.1	146.8	143.5	141.7
57.5°	173.6	165.8	157.5	150.8	143.4	138.9	135.0	130.6	127.7	125.2	123.3
60°	160.5	151.7	144.4	138.2	131.6	125.8	122.3	118.8	115.8	113.2	111.6
62.5°	146.9	139.2	132.3	125.5	119.5	114.4	110.4	107.5	104.8	103.2	101.5
65°	126.0	120.0	113.0	107.4	101.8	98.1	94.8	92.3	90.4	89.2	87.8
67.5°	106.8	101.0	94.9	89.4	85.6	82.8	80.7	78.5	77.5	76.0	75.1
70°	94.4	88.3	82.9	78.7	75.0	72.9	71.5	69.9	69.0	67.1	66.2
72.5°	80.8	76.4	72.5	69.1	66.1	64.2	62.4	60.4	58.9	56.8	55.9
75°	63.6	59.6	56.6	54.3	52.4	49.9	47.3	45.2	44.5	43.8	43.6
77.5°	47.1	44.6	42.4	40.4	38.1	36.3	35.7	35.2	35.1	34.7	34.7
80°	37.0	34.7	33.1	30.8	29.4	29.4	29.4	28.9	29.1	29.1	29.1
82.5°	27.5	25.4	24.5	23.7	23.4	23.6	23.6	23.7	23.5	23.9	23.7
85°	14.2	14.4	14.9	14.7	14.9	14.9	15.4	15.1	15.4	14.9	15.4
87.5°	7.2	8.3	9.0	9.8	10.6	10.9	11.3	11.5	11.8	12.0	12.2
90°	9.9	12.4	15.3	18.2	21.1	24.0	24.8	25.7	26.6	27.5	28.2
92.5°	16.1	16.9	19.0	21.2	23.4	25.6	27.0	28.4	29.8	31.2	32.1
95°	24.5	21.2	23.6	26.1	28.5	30.9	32.5	34.0	35.6	37.2	37.9
97.5°	106.0	96.0	80.1	64.1	48.1	32.1	33.9	35.7	37.5	39.2	40.2
100°	186.4	171.3	136.7	102.1	67.5	32.9	34.7	36.5	38.3	40.0	41.0
102.5°	234.2	216.9	179.1	141.3	103.5	65.7	60.2	54.7	49.2	43.7	41.1
105°	307.2	298.4	278.5	258.5	238.6	218.6	179.3	140.1	100.8	61.6	42.1
107.5°	385.5	388.1	391.2	394.4	397.5	400.7	371.9	343.1	314.3	285.5	256.3
110°	438.3	440.4	442.8	445.3	447.7	450.2	442.8	435.5	428.2	420.9	401.4



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	488.7	490.7	493.2	495.6	498.0	500.5	500.6	500.7	500.9	501.0	497.7
115°	563.3	565.0	566.9	568.9	570.9	572.9	575.2	577.4	579.6	581.8	583.4
117.5°	637.8	639.1	640.1	641.2	642.2	643.2	645.0	646.8	648.5	650.3	651.3
120°	684.7	686.1	686.7	687.4	688.1	688.7	690.5	692.3	694.0	695.8	696.7
122.5°	729.6	730.9	731.7	732.6	733.4	734.2	735.5	736.7	738.0	739.2	739.9
125°	793.6	795.0	795.9	796.7	797.6	798.5	799.0	799.4	799.8	800.3	800.7
127.5°	855.1	856.5	857.6	858.7	859.7	860.8	861.5	862.2	862.9	863.6	863.8
130°	893.5	894.8	895.7	896.6	897.4	898.3	899.2	900.1	901.0	901.9	902.1
132.5°	930.2	931.4	932.1	932.8	933.6	934.3	935.2	936.0	936.9	937.8	937.9
135°	984.5	985.6	986.5	987.4	988.3	989.2	989.8	990.5	991.2	991.8	991.8
137.5°	1033.8	1034.9	1035.4	1035.9	1036.4	1036.9	1037.9	1039.0	1040.1	1041.1	1041.4
140°	1064.4	1065.4	1066.0	1066.7	1067.4	1068.0	1068.9	1069.8	1070.7	1071.6	1071.8
142.5°	1093.9	1094.9	1095.6	1096.2	1096.9	1097.6	1098.3	1099.0	1099.7	1100.4	1100.4
145°	1136.1	1137.1	1137.6	1138.0	1138.4	1138.9	1139.3	1139.8	1140.2	1140.7	1140.9
147.5°	1172.9	1173.6	1174.1	1174.5	1175.0	1175.4	1175.9	1176.3	1176.7	1177.2	1176.9
150°	1195.4	1196.0	1196.4	1196.9	1197.3	1197.8	1198.2	1198.7	1199.1	1199.6	1199.4
152.5°	1215.6	1215.9	1216.1	1216.4	1216.7	1216.9	1217.7	1218.5	1219.3	1220.1	1220.0
155°	1242.9	1242.8	1243.0	1243.2	1243.5	1243.7	1244.8	1245.9	1247.0	1248.1	1248.0
157.5°	1268.1	1267.9	1267.7	1267.5	1267.3	1267.0	1268.4	1269.7	1271.0	1272.4	1272.2
160°	1281.7	1281.5	1281.3	1281.1	1280.8	1280.6	1282.0	1283.3	1284.6	1285.9	1285.8
162.5°	1293.9	1293.5	1293.3	1293.0	1292.8	1292.6	1294.1	1295.6	1297.1	1298.6	1298.7
165°	1309.9	1309.5	1309.2	1309.0	1308.8	1308.6	1310.3	1312.1	1313.9	1315.7	1315.8
167.5°	1321.8	1321.3	1321.3	1321.3	1321.3	1321.3	1323.1	1324.9	1326.7	1328.4	1328.4
170°	1329.0	1328.5	1328.5	1328.5	1328.5	1328.5	1330.3	1332.1	1333.9	1335.6	1335.6
172.5°	1333.1	1332.6	1332.8	1333.0	1333.1	1333.3	1335.1	1336.9	1338.6	1340.4	1340.3
175°	1339.1	1338.6	1338.8	1339.1	1339.3	1339.5	1341.1	1342.6	1344.2	1345.7	1345.6
177.5°	1341.6	1341.2	1341.4	1341.6	1341.7	1341.9	1343.3	1344.7	1346.2	1347.6	1347.4
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	518.5	518.3	518.5	517.8	518.5	518.3	518.5	520.8	520.8	520.9	521.1
5°	482.5	482.3	481.6	479.5	481.6	482.3	482.5	483.2	485.1	488.3	487.4
7.5°	451.0	450.7	448.7	448.7	448.7	450.7	451.0	452.9	455.0	457.0	459.3
10°	432.4	432.6	429.8	428.2	429.8	432.6	432.4	434.0	437.1	438.7	440.3
12.5°	414.3	413.3	411.0	409.2	411.0	413.3	414.3	415.6	419.7	421.6	424.7
15°	390.5	388.1	382.6	383.0	382.6	388.1	390.5	389.5	393.7	396.1	397.0
17.5°	362.4	360.7	360.6	357.3	360.6	360.7	362.4	364.2	367.9	370.4	377.1
20°	346.0	344.8	345.3	342.0	345.3	344.8	346.0	349.7	352.0	355.3	360.7
22.5°	333.1	331.9	330.0	329.0	330.0	331.9	333.1	335.7	338.2	342.8	345.7
25°	314.3	312.4	310.6	311.7	310.6	312.4	314.3	315.7	320.3	322.4	326.6
27.5°	295.5	294.1	292.2	292.0	292.2	294.1	295.5	296.8	299.4	302.9	308.0
30°	283.5	282.1	281.2	280.0	281.2	282.1	283.5	284.7	287.3	291.0	294.7
32.5°	271.4	271.1	269.5	269.2	269.5	271.1	271.4	273.3	275.9	279.4	282.6
35°	255.6	254.2	253.7	253.9	253.7	254.2	255.6	256.5	258.8	262.1	265.1
37.5°	240.5	238.7	237.8	237.0	237.8	238.7	240.5	240.7	243.0	245.2	249.3
40°	229.7	227.9	227.4	226.9	227.4	227.9	229.7	229.5	232.0	233.7	237.4
42.5°	217.6	216.9	216.6	215.7	216.6	216.9	217.6	218.9	220.3	222.7	225.5
45°	201.1	200.8	199.4	199.9	199.4	200.8	201.1	201.8	204.3	206.0	208.5
47.5°	183.6	182.6	181.6	182.3	181.6	182.6	183.6	184.6	186.3	188.3	191.7
50°	171.7	171.2	169.1	169.6	169.1	171.2	171.7	172.6	173.8	176.4	179.4
52.5°	159.8	158.0	157.2	156.9	157.2	158.0	159.8	160.7	162.1	165.0	167.3
55°	140.0	137.9	137.0	136.5	137.0	137.9	140.0	141.7	143.5	146.8	149.1
57.5°	120.6	120.1	119.3	119.8	119.3	120.1	120.6	123.3	125.2	127.7	130.6
60°	109.3	109.3	109.3	109.0	109.3	109.3	109.3	111.6	113.2	115.8	118.8
62.5°	100.5	99.9	99.8	100.1	99.8	99.9	100.5	101.5	103.2	104.8	107.5
65°	87.1	86.9	86.0	85.7	86.0	86.9	87.1	87.8	89.2	90.4	92.3
67.5°	74.5	73.7	73.4	73.1	73.4	73.7	74.5	75.1	76.0	77.5	78.5
70°	65.0	64.5	63.1	63.4	63.1	64.5	65.0	66.2	67.1	69.0	69.9
72.5°	54.8	54.3	54.0	53.7	54.0	54.3	54.8	55.9	56.8	58.9	60.4
75°	43.3	43.1	42.9	43.8	42.9	43.1	43.3	43.6	43.8	44.5	45.2
77.5°	34.7	34.7	34.9	34.5	34.9	34.7	34.7	34.7	34.7	35.1	35.2
80°	29.1	29.1	28.9	28.9	28.9	29.1	29.1	29.1	29.1	29.1	28.9
82.5°	23.3	23.5	23.7	23.3	23.7	23.5	23.3	23.7	23.9	23.5	23.7
85°	15.4	15.1	15.6	15.4	15.6	15.1	15.4	15.4	14.9	15.4	15.1
87.5°	12.6	12.3	12.4	12.7	12.4	12.3	12.6	12.2	12.0	11.8	11.5
90°	28.6	29.1	29.5	29.9	29.5	29.1	28.6	28.2	27.5	26.6	25.7
92.5°	32.3	32.6	32.9	33.1	32.9	32.6	32.3	32.1	31.2	29.8	28.4
95°	37.9	37.9	37.9	37.9	37.9	37.9	37.9	37.9	37.2	35.6	34.0
97.5°	40.5	40.7	40.9	41.1	40.9	40.7	40.5	40.2	39.2	37.5	35.7
100°	41.3	41.5	41.7	41.9	41.7	41.5	41.3	41.0	40.0	38.3	36.5
102.5°	41.5	41.9	42.3	42.7	42.3	41.9	41.5	41.1	43.7	49.2	54.7
105°	42.6	43.0	43.5	43.9	43.5	43.0	42.6	42.1	61.6	100.8	140.1
107.5°	226.7	197.1	167.5	137.9	167.5	197.1	226.7	256.3	285.5	314.3	343.1
110°	369.6	337.9	306.2	274.5	306.2	337.9	369.6	401.4	420.9	428.2	435.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	491.0	484.3	477.6	470.9	477.6	484.3	491.0	497.7	501.0	500.9	500.7
115°	584.2	585.1	586.0	586.9	586.0	585.1	584.2	583.4	581.8	579.6	577.4
117.5°	651.5	651.6	651.8	652.0	651.8	651.6	651.5	651.3	650.3	648.5	646.8
120°	696.7	696.7	696.7	696.7	696.7	696.7	696.7	696.7	695.8	694.0	692.3
122.5°	740.1	740.3	740.4	740.6	740.4	740.3	740.1	739.9	739.2	738.0	736.7
125°	801.2	801.6	802.1	802.5	802.1	801.6	801.2	800.7	800.3	799.8	799.4
127.5°	863.3	862.9	862.4	862.0	862.4	862.9	863.3	863.8	863.6	862.9	862.2
130°	901.7	901.2	900.8	900.3	900.8	901.2	901.7	902.1	901.9	901.0	900.1
132.5°	937.3	936.7	936.1	935.5	936.1	936.7	937.3	937.9	937.8	936.9	936.0
135°	991.2	990.5	989.8	989.2	989.8	990.5	991.2	991.8	991.8	991.2	990.5
137.5°	1041.0	1040.6	1040.1	1039.7	1040.1	1040.6	1041.0	1041.4	1041.1	1040.1	1039.0
140°	1071.3	1070.9	1070.5	1070.0	1070.5	1070.9	1071.3	1071.8	1071.6	1070.7	1069.8
142.5°	1099.8	1099.2	1098.6	1098.0	1098.6	1099.2	1099.8	1100.4	1100.4	1099.7	1099.0
145°	1140.9	1140.9	1140.9	1140.9	1140.9	1140.9	1140.9	1140.9	1140.7	1140.2	1139.8
147.5°	1175.9	1174.9	1173.8	1172.8	1173.8	1174.9	1175.9	1176.9	1177.2	1176.7	1176.3
150°	1198.8	1198.1	1197.4	1196.8	1197.4	1198.1	1198.8	1199.4	1199.6	1199.1	1198.7
152.5°	1219.0	1218.0	1217.0	1215.9	1217.0	1218.0	1219.0	1220.0	1220.1	1219.3	1218.5
155°	1246.7	1245.4	1244.0	1242.7	1244.0	1245.4	1246.7	1248.0	1248.1	1247.0	1245.9
157.5°	1270.4	1268.7	1267.0	1265.3	1267.0	1268.7	1270.4	1272.2	1272.4	1271.0	1269.7
160°	1284.3	1282.7	1281.2	1279.6	1281.2	1282.7	1284.3	1285.8	1285.9	1284.6	1283.3
162.5°	1297.3	1295.9	1294.6	1293.2	1294.6	1295.9	1297.3	1298.7	1298.6	1297.1	1295.6
165°	1314.2	1312.7	1311.1	1309.6	1311.1	1312.7	1314.2	1315.8	1315.7	1313.9	1312.1
167.5°	1326.7	1324.9	1323.1	1321.3	1323.1	1324.9	1326.7	1328.4	1328.4	1326.7	1324.9
170°	1333.9	1332.1	1330.3	1328.5	1330.3	1332.1	1333.9	1335.6	1335.6	1333.9	1332.1
172.5°	1338.4	1336.4	1334.5	1332.5	1334.5	1336.4	1338.4	1340.3	1340.4	1338.6	1336.9
175°	1343.8	1342.1	1340.3	1338.5	1340.3	1342.1	1343.8	1345.6	1345.7	1344.2	1342.6
177.5°	1345.6	1343.9	1342.1	1340.3	1342.1	1343.9	1345.6	1347.4	1347.6	1346.2	1344.7
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	519.5	522.1	524.7	527.1	530.8	532.5	534.9	535.9	538.6	542.7	546.1
5°	487.9	491.6	496.5	500.4	506.7	511.6	517.0	522.1	528.2	536.8	544.5
7.5°	461.1	464.7	470.6	478.0	484.9	491.9	499.2	506.2	514.8	527.2	539.4
10°	443.4	447.8	454.8	462.7	471.3	478.1	486.7	495.5	506.3	520.5	535.2
12.5°	428.1	431.4	439.5	447.0	456.8	465.4	473.8	484.2	496.4	511.5	529.2
15°	403.8	408.4	416.3	424.7	435.0	444.1	455.0	467.6	479.5	498.1	519.5
17.5°	379.3	386.4	394.7	404.1	411.7	424.3	436.1	449.0	463.7	483.4	507.0
20°	363.7	369.3	377.0	390.7	400.7	410.3	421.2	437.3	450.8	473.2	497.6
22.5°	350.4	354.5	363.2	374.5	386.2	397.2	408.4	423.7	440.4	461.6	488.1
25°	330.8	337.4	343.9	352.0	364.6	377.9	390.0	403.1	420.8	443.4	472.0
27.5°	311.7	317.6	324.0	334.0	343.6	356.0	368.7	383.6	402.6	426.5	455.6
30°	299.4	303.8	309.9	322.7	331.3	342.0	356.9	370.2	387.9	413.3	444.1
32.5°	286.7	292.4	299.1	308.9	319.6	329.7	343.3	357.7	375.8	400.8	432.3
35°	268.6	275.4	282.1	289.4	300.1	310.6	322.0	337.8	356.2	380.5	411.4
37.5°	252.0	257.4	262.9	271.9	282.0	292.0	302.7	318.3	335.6	361.8	390.2
40°	241.4	246.3	250.5	259.8	269.6	280.3	290.8	304.5	323.1	347.6	375.1
42.5°	229.8	234.3	240.0	247.7	258.2	267.2	277.7	290.7	308.2	333.1	357.2
45°	212.5	217.6	222.5	229.7	240.2	249.1	258.4	270.7	288.7	309.2	330.6
47.5°	194.4	199.6	205.2	212.2	221.3	230.3	239.6	250.5	266.9	287.0	301.5
50°	182.9	187.1	192.7	199.7	208.1	217.6	226.0	237.9	253.5	269.3	281.9
52.5°	171.0	174.8	181.1	188.5	196.3	204.6	213.5	223.7	237.8	252.7	262.7
55°	152.4	157.0	162.4	169.6	177.3	184.3	192.9	203.4	214.6	225.8	232.5
57.5°	135.0	138.9	143.4	150.8	157.5	165.8	173.6	181.7	192.1	200.5	204.9
60°	122.3	125.8	131.6	138.2	144.4	151.7	160.5	168.7	176.6	183.4	186.8
62.5°	110.4	114.4	119.5	125.5	132.3	139.2	146.9	153.8	160.8	166.6	169.0
65°	94.8	98.1	101.8	107.4	113.0	120.0	126.0	133.0	138.2	141.4	143.5
67.5°	80.7	82.8	85.6	89.4	94.9	101.0	106.8	112.3	116.6	118.8	120.7
70°	71.5	72.9	75.0	78.7	82.9	88.3	94.4	98.3	102.0	103.9	105.8
72.5°	62.4	64.2	66.1	69.1	72.5	76.4	80.8	85.6	87.7	89.9	91.0
75°	47.3	49.9	52.4	54.3	56.6	59.6	63.6	66.6	67.8	69.7	69.9
77.5°	35.7	36.3	38.1	40.4	42.4	44.6	47.1	49.8	50.4	51.3	52.0
80°	29.4	29.4	29.4	30.8	33.1	34.7	37.0	38.4	39.4	39.6	39.8
82.5°	23.6	23.6	23.4	23.7	24.5	25.4	27.5	29.1	29.9	29.7	29.2
85°	15.4	14.9	14.9	14.7	14.9	14.4	14.2	15.1	16.5	16.5	16.1
87.5°	11.3	10.9	10.6	9.8	9.0	8.3	7.2	6.9	6.5	6.8	6.2
90°	24.8	24.0	21.1	18.2	15.3	12.4	9.9	7.7	5.4	3.2	1.0
92.5°	27.0	25.6	23.4	21.2	19.0	16.9	16.1	16.7	17.3	17.9	18.6
95°	32.5	30.9	28.5	26.1	23.6	21.2	24.5	33.6	42.7	51.8	60.9
97.5°	33.9	32.1	48.1	64.1	80.1	96.0	106.0	110.1	114.2	118.3	122.4
100°	34.7	32.9	67.5	102.1	136.7	171.3	186.4	182.0	177.6	173.1	168.7
102.5°	60.2	65.7	103.5	141.3	179.1	216.9	234.2	231.0	227.8	224.6	221.4
105°	179.3	218.6	238.6	258.5	278.5	298.4	307.2	304.8	302.3	299.9	297.4
107.5°	371.9	400.7	397.5	394.4	391.2	388.1	385.5	383.6	381.6	379.7	377.7
110°	442.8	450.2	447.7	445.3	442.8	440.4	438.3	436.5	434.7	433.0	431.2



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	500.6	500.5	498.0	495.6	493.2	490.7	488.7	487.1	485.5	483.9	482.3
115°	575.2	572.9	570.9	568.9	566.9	565.0	563.3	562.0	560.6	559.3	558.0
117.5°	645.0	643.2	642.2	641.2	640.1	639.1	637.8	636.2	634.5	632.9	631.2
120°	690.5	688.7	688.1	687.4	686.7	686.1	684.7	682.7	680.7	678.7	676.7
122.5°	735.5	734.2	733.4	732.6	731.7	730.9	729.6	728.0	726.3	724.7	723.1
125°	799.0	798.5	797.6	796.7	795.9	795.0	793.6	791.9	790.1	788.3	786.5
127.5°	861.5	860.8	859.7	858.7	857.6	856.5	855.1	853.3	851.6	849.8	848.0
130°	899.2	898.3	897.4	896.6	895.7	894.8	893.5	891.7	889.9	888.1	886.4
132.5°	935.2	934.3	933.6	932.8	932.1	931.4	930.2	928.4	926.6	924.9	923.1
135°	989.8	989.2	988.3	987.4	986.5	985.6	984.5	983.2	981.8	980.5	979.2
137.5°	1037.9	1036.9	1036.4	1035.9	1035.4	1034.9	1033.8	1032.2	1030.5	1028.8	1027.1
140°	1068.9	1068.0	1067.4	1066.7	1066.0	1065.4	1064.4	1063.0	1061.7	1060.4	1059.0
142.5°	1098.3	1097.6	1096.9	1096.2	1095.6	1094.9	1093.9	1092.6	1091.2	1089.9	1088.6
145°	1139.3	1138.9	1138.4	1138.0	1137.6	1137.1	1136.1	1134.6	1133.0	1131.5	1129.9
147.5°	1175.9	1175.4	1175.0	1174.5	1174.1	1173.6	1172.9	1171.9	1170.9	1169.9	1168.8
150°	1198.2	1197.8	1197.3	1196.9	1196.4	1196.0	1195.4	1194.8	1194.1	1193.5	1192.8
152.5°	1217.7	1216.9	1216.7	1216.4	1216.1	1215.9	1215.6	1215.3	1215.0	1214.7	1214.3
155°	1244.8	1243.7	1243.5	1243.2	1243.0	1242.8	1242.9	1243.4	1243.8	1244.2	1244.7
157.5°	1268.4	1267.0	1267.3	1267.5	1267.7	1267.9	1268.1	1268.1	1268.2	1268.2	1268.2
160°	1282.0	1280.6	1280.8	1281.1	1281.3	1281.5	1281.7	1282.0	1282.2	1282.4	1282.6
162.5°	1294.1	1292.6	1292.8	1293.0	1293.3	1293.5	1293.9	1294.5	1295.0	1295.6	1296.2
165°	1310.3	1308.6	1308.8	1309.0	1309.2	1309.5	1309.9	1310.6	1311.2	1311.9	1312.6
167.5°	1323.1	1321.3	1321.3	1321.3	1321.3	1321.3	1321.8	1322.7	1323.6	1324.5	1325.3
170°	1330.3	1328.5	1328.5	1328.5	1328.5	1328.5	1329.0	1329.9	1330.8	1331.6	1332.5
172.5°	1335.1	1333.3	1333.1	1333.0	1332.8	1332.6	1333.1	1334.1	1335.2	1336.3	1337.3
175°	1341.1	1339.5	1339.3	1339.1	1338.8	1338.6	1339.1	1340.2	1341.3	1342.4	1343.5
177.5°	1343.3	1341.9	1341.7	1341.6	1341.4	1341.2	1341.6	1342.4	1343.3	1344.2	1345.1
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	547.2	549.3	551.9	555.8	558.8	561.4	561.9	562.7	564.6	567.7	570.1
5°	550.8	556.1	564.7	573.1	582.2	589.7	596.7	601.6	606.2	616.0	623.9
7.5°	549.6	561.6	575.1	590.1	605.4	620.1	633.8	646.1	658.3	672.6	688.8
10°	548.9	562.9	581.1	600.4	621.6	642.3	662.4	678.0	696.1	712.5	733.2
12.5°	545.4	565.5	587.2	611.9	638.0	661.9	688.3	709.8	730.6	754.2	778.3
15°	540.7	565.2	592.7	625.5	665.2	694.0	721.1	758.6	784.2	809.8	844.3
17.5°	532.3	562.2	596.5	639.2	672.2	711.1	751.7	781.4	815.9	852.0	883.2
20°	525.6	560.3	598.8	640.7	682.9	725.0	764.4	799.8	835.5	877.2	902.8
22.5°	518.9	553.2	593.2	637.7	683.0	727.5	772.0	813.6	853.7	895.8	928.5
25°	504.6	545.4	588.7	634.2	678.9	727.8	780.9	827.3	876.9	920.3	951.3
27.5°	490.2	527.6	570.7	616.8	666.5	724.3	786.8	839.5	889.2	920.3	930.0
30°	477.1	516.7	556.4	603.2	657.0	721.5	787.9	848.3	889.0	902.6	892.5
32.5°	463.9	499.8	539.0	587.0	644.1	714.6	789.4	843.1	867.6	857.3	816.5
35°	440.6	472.9	510.9	558.9	624.6	710.8	783.3	819.6	813.6	755.3	678.4
37.5°	415.6	442.0	477.1	527.3	604.4	695.7	756.8	762.2	709.7	620.3	531.5
40°	395.8	419.6	455.7	508.1	588.7	680.8	730.2	708.5	627.2	527.7	453.6
42.5°	376.6	396.7	431.5	488.0	573.8	660.4	690.5	643.3	549.5	455.4	388.0
45°	344.1	363.0	397.9	455.9	543.3	621.6	617.6	535.6	441.7	366.0	310.1
47.5°	313.3	329.8	362.6	421.8	507.5	563.3	526.3	439.0	359.4	298.6	258.7
50°	291.5	307.8	340.4	398.9	478.8	519.5	466.7	382.6	309.6	259.3	227.6
52.5°	270.6	286.5	316.3	373.3	444.1	468.5	411.7	333.7	272.9	229.5	202.3
55°	241.4	253.5	280.3	334.8	387.7	393.3	335.7	270.5	220.4	190.1	171.5
57.5°	211.6	222.0	248.5	291.9	329.0	326.1	271.6	215.1	181.4	158.9	145.4
60°	192.2	202.5	225.8	263.0	291.0	281.2	231.1	185.7	156.8	140.3	129.5
62.5°	174.1	182.1	204.0	231.2	251.3	240.2	197.6	160.0	137.0	123.1	114.6
65°	147.9	154.5	171.9	186.2	197.3	186.6	151.2	125.1	108.6	98.8	93.0
67.5°	123.1	127.2	138.2	143.4	151.3	139.5	113.7	96.2	86.8	78.6	74.5
70°	107.4	110.4	116.3	120.5	122.5	110.4	91.3	78.5	70.6	64.8	62.2
72.5°	91.7	94.4	95.6	99.0	97.9	86.6	73.4	63.2	57.5	53.6	50.3
75°	70.1	71.3	70.1	68.7	65.7	57.8	48.7	43.6	39.4	37.5	36.3
77.5°	51.1	50.7	49.2	47.0	41.8	36.8	31.9	30.2	28.4	27.4	27.0
80°	39.4	38.4	37.0	33.5	29.1	25.6	24.5	23.3	22.6	21.4	21.2
82.5°	29.3	28.7	26.4	23.5	20.4	18.7	17.8	17.3	16.6	16.0	16.0
85°	15.6	14.9	12.3	10.7	10.3	9.8	9.6	9.6	8.6	8.4	8.4
87.5°	5.7	5.0	5.3	5.1	5.7	5.9	6.6	6.8	7.2	7.6	7.4
90°	3.2	5.4	7.7	9.9	12.4	15.3	18.2	21.1	24.0	24.8	25.7
92.5°	17.9	17.3	16.7	16.1	16.9	19.0	21.2	23.4	25.6	27.0	28.4
95°	51.8	42.7	33.6	24.5	21.2	23.6	26.1	28.5	30.9	32.5	34.0
97.5°	118.3	114.2	110.1	106.0	96.0	80.1	64.1	48.1	32.1	33.9	35.7
100°	173.1	177.6	182.0	186.4	171.3	136.7	102.1	67.5	32.9	34.7	36.5
102.5°	224.6	227.8	231.0	234.2	216.9	179.1	141.3	103.5	65.7	60.2	54.7
105°	299.9	302.3	304.8	307.2	298.4	278.5	258.5	238.6	218.6	179.3	140.1
107.5°	379.7	381.6	383.6	385.5	388.1	391.2	394.4	397.5	400.7	371.9	343.1
110°	433.0	434.7	436.5	438.3	440.4	442.8	445.3	447.7	450.2	442.8	435.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	483.9	485.5	487.1	488.7	490.7	493.2	495.6	498.0	500.5	500.6	500.7
115°	559.3	560.6	562.0	563.3	565.0	566.9	568.9	570.9	572.9	575.2	577.4
117.5°	632.9	634.5	636.2	637.8	639.1	640.1	641.2	642.2	643.2	645.0	646.8
120°	678.7	680.7	682.7	684.7	686.1	686.7	687.4	688.1	688.7	690.5	692.3
122.5°	724.7	726.3	728.0	729.6	730.9	731.7	732.6	733.4	734.2	735.5	736.7
125°	788.3	790.1	791.9	793.6	795.0	795.9	796.7	797.6	798.5	799.0	799.4
127.5°	849.8	851.6	853.3	855.1	856.5	857.6	858.7	859.7	860.8	861.5	862.2
130°	888.1	889.9	891.7	893.5	894.8	895.7	896.6	897.4	898.3	899.2	900.1
132.5°	924.9	926.6	928.4	930.2	931.4	932.1	932.8	933.6	934.3	935.2	936.0
135°	980.5	981.8	983.2	984.5	985.6	986.5	987.4	988.3	989.2	989.8	990.5
137.5°	1028.8	1030.5	1032.2	1033.8	1034.9	1035.4	1035.9	1036.4	1036.9	1037.9	1039.0
140°	1060.4	1061.7	1063.0	1064.4	1065.4	1066.0	1066.7	1067.4	1068.0	1068.9	1069.8
142.5°	1089.9	1091.2	1092.6	1093.9	1094.9	1095.6	1096.2	1096.9	1097.6	1098.3	1099.0
145°	1131.5	1133.0	1134.6	1136.1	1137.1	1137.6	1138.0	1138.4	1138.9	1139.3	1139.8
147.5°	1169.9	1170.9	1171.9	1172.9	1173.6	1174.1	1174.5	1175.0	1175.4	1175.9	1176.3
150°	1193.5	1194.1	1194.8	1195.4	1196.0	1196.4	1196.9	1197.3	1197.8	1198.2	1198.7
152.5°	1214.7	1215.0	1215.3	1215.6	1215.9	1216.1	1216.4	1216.7	1216.9	1217.7	1218.5
155°	1244.2	1243.8	1243.4	1242.9	1242.8	1243.0	1243.2	1243.5	1243.7	1244.8	1245.9
157.5°	1268.2	1268.2	1268.1	1268.1	1267.9	1267.7	1267.5	1267.3	1267.0	1268.4	1269.7
160°	1282.4	1282.2	1282.0	1281.7	1281.5	1281.3	1281.1	1280.8	1280.6	1282.0	1283.3
162.5°	1295.6	1295.0	1294.5	1293.9	1293.5	1293.3	1293.0	1292.8	1292.6	1294.1	1295.6
165°	1311.9	1311.2	1310.6	1309.9	1309.5	1309.2	1309.0	1308.8	1308.6	1310.3	1312.1
167.5°	1324.5	1323.6	1322.7	1321.8	1321.3	1321.3	1321.3	1321.3	1321.3	1323.1	1324.9
170°	1331.6	1330.8	1329.9	1329.0	1328.5	1328.5	1328.5	1328.5	1328.5	1330.3	1332.1
172.5°	1336.3	1335.2	1334.1	1333.1	1332.6	1332.8	1333.0	1333.1	1333.3	1335.1	1336.9
175°	1342.4	1341.3	1340.2	1339.1	1338.6	1338.8	1339.1	1339.3	1339.5	1341.1	1342.6
177.5°	1344.2	1343.3	1342.4	1341.6	1341.2	1341.4	1341.6	1341.7	1341.9	1343.3	1344.7
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	544.2	544.2	544.2	544.2	544.2	544.2	544.2
2.5°	574.1	574.1	574.8	577.6	578.0	580.4	579.7
5°	630.9	635.3	637.0	644.0	648.1	650.0	646.3
7.5°	700.4	712.9	718.8	726.2	732.6	734.6	729.5
10°	751.1	764.2	775.1	781.9	788.2	792.4	797.7
12.5°	800.1	816.2	826.6	836.1	842.6	847.9	848.8
15°	853.4	877.6	896.0	909.6	916.3	919.8	918.4
17.5°	907.1	929.6	942.7	956.5	965.8	966.3	966.6
20°	937.5	959.4	974.6	984.8	995.3	994.8	997.2
22.5°	957.8	975.1	986.7	994.1	997.7	995.9	996.4
25°	967.3	972.5	970.4	958.5	955.4	944.5	946.4
27.5°	918.3	894.1	869.0	836.8	811.3	791.0	792.0
30°	851.8	808.9	760.0	719.0	682.2	671.9	650.0
32.5°	758.8	694.5	637.2	598.9	567.4	558.8	539.7
35°	601.1	538.6	479.7	444.3	430.3	410.7	410.5
37.5°	467.2	412.2	381.1	354.5	340.6	328.7	327.6
40°	393.0	350.2	326.6	307.5	293.8	284.9	282.8
42.5°	341.2	306.6	284.5	272.7	262.1	257.5	254.1
45°	278.6	255.3	240.0	229.3	224.4	220.9	219.0
47.5°	233.1	217.5	207.0	199.8	195.9	192.2	193.2
50°	208.3	195.5	187.8	181.0	178.0	175.4	175.7
52.5°	188.3	176.8	170.6	165.7	162.0	160.1	159.3
55°	159.8	152.6	146.3	142.8	140.7	138.2	137.5
57.5°	136.3	130.7	125.6	121.7	121.1	118.7	119.0
60°	120.7	116.0	111.8	109.7	108.1	106.0	106.7
62.5°	107.8	103.9	100.1	98.4	96.7	95.2	95.5
65°	88.3	84.6	82.2	81.3	80.6	79.9	79.2
67.5°	70.4	68.1	66.6	64.6	63.2	63.0	62.3
70°	59.2	56.1	53.6	51.0	50.3	50.1	50.3
72.5°	47.4	45.5	44.8	43.6	43.4	42.8	43.2
75°	35.6	34.9	34.5	33.5	33.5	33.5	33.5
77.5°	26.3	25.9	25.6	25.4	25.2	24.8	24.8
80°	20.5	20.3	19.8	19.8	19.6	19.8	19.6
82.5°	15.5	15.4	15.0	15.0	14.7	14.6	14.7
85°	7.9	7.7	8.2	7.7	7.9	7.5	7.9
87.5°	7.6	7.7	7.7	7.8	7.7	8.1	7.9
90°	26.6	27.5	28.2	28.6	29.1	29.5	29.9
92.5°	29.8	31.2	32.1	32.3	32.6	32.9	33.1
95°	35.6	37.2	37.9	37.9	37.9	37.9	37.9
97.5°	37.5	39.2	40.2	40.5	40.7	40.9	41.1
100°	38.3	40.0	41.0	41.3	41.5	41.7	41.9
102.5°	49.2	43.7	41.1	41.5	41.9	42.3	42.7
105°	100.8	61.6	42.1	42.6	43.0	43.5	43.9
107.5°	314.3	285.5	256.3	226.7	197.1	167.5	137.9
110°	428.2	420.9	401.4	369.6	337.9	306.2	274.5



TEST NUMBER: P332258

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	500.9	501.0	497.7	491.0	484.3	477.6	470.9
115°	579.6	581.8	583.4	584.2	585.1	586.0	586.9
117.5°	648.5	650.3	651.3	651.5	651.6	651.8	652.0
120°	694.0	695.8	696.7	696.7	696.7	696.7	696.7
122.5°	738.0	739.2	739.9	740.1	740.3	740.4	740.6
125°	799.8	800.3	800.7	801.2	801.6	802.1	802.5
127.5°	862.9	863.6	863.8	863.3	862.9	862.4	862.0
130°	901.0	901.9	902.1	901.7	901.2	900.8	900.3
132.5°	936.9	937.8	937.9	937.3	936.7	936.1	935.5
135°	991.2	991.8	991.8	991.2	990.5	989.8	989.2
137.5°	1040.1	1041.1	1041.4	1041.0	1040.6	1040.1	1039.7
140°	1070.7	1071.6	1071.8	1071.3	1070.9	1070.5	1070.0
142.5°	1099.7	1100.4	1100.4	1099.8	1099.2	1098.6	1098.0
145°	1140.2	1140.7	1140.9	1140.9	1140.9	1140.9	1140.9
147.5°	1176.7	1177.2	1176.9	1175.9	1174.9	1173.8	1172.8
150°	1199.1	1199.6	1199.4	1198.8	1198.1	1197.4	1196.8
152.5°	1219.3	1220.1	1220.0	1219.0	1218.0	1217.0	1215.9
155°	1247.0	1248.1	1248.0	1246.7	1245.4	1244.0	1242.7
157.5°	1271.0	1272.4	1272.2	1270.4	1268.7	1267.0	1265.3
160°	1284.6	1285.9	1285.8	1284.3	1282.7	1281.2	1279.6
162.5°	1297.1	1298.6	1298.7	1297.3	1295.9	1294.6	1293.2
165°	1313.9	1315.7	1315.8	1314.2	1312.7	1311.1	1309.6
167.5°	1326.7	1328.4	1328.4	1326.7	1324.9	1323.1	1321.3
170°	1333.9	1335.6	1335.6	1333.9	1332.1	1330.3	1328.5
172.5°	1338.6	1340.4	1340.3	1338.4	1336.4	1334.5	1332.5
175°	1344.2	1345.7	1345.6	1343.8	1342.1	1340.3	1338.5
177.5°	1346.2	1347.6	1347.4	1345.6	1343.9	1342.1	1340.3
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5

(END OF REPORT)