

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332261

Luminaire Tested: **S123RDIP-S340D1025U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332261  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S340D1025U835-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1025 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5398.7 lumens  
Efficiency: N/A  
Efficacy: 144.7 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 37.3  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332261

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

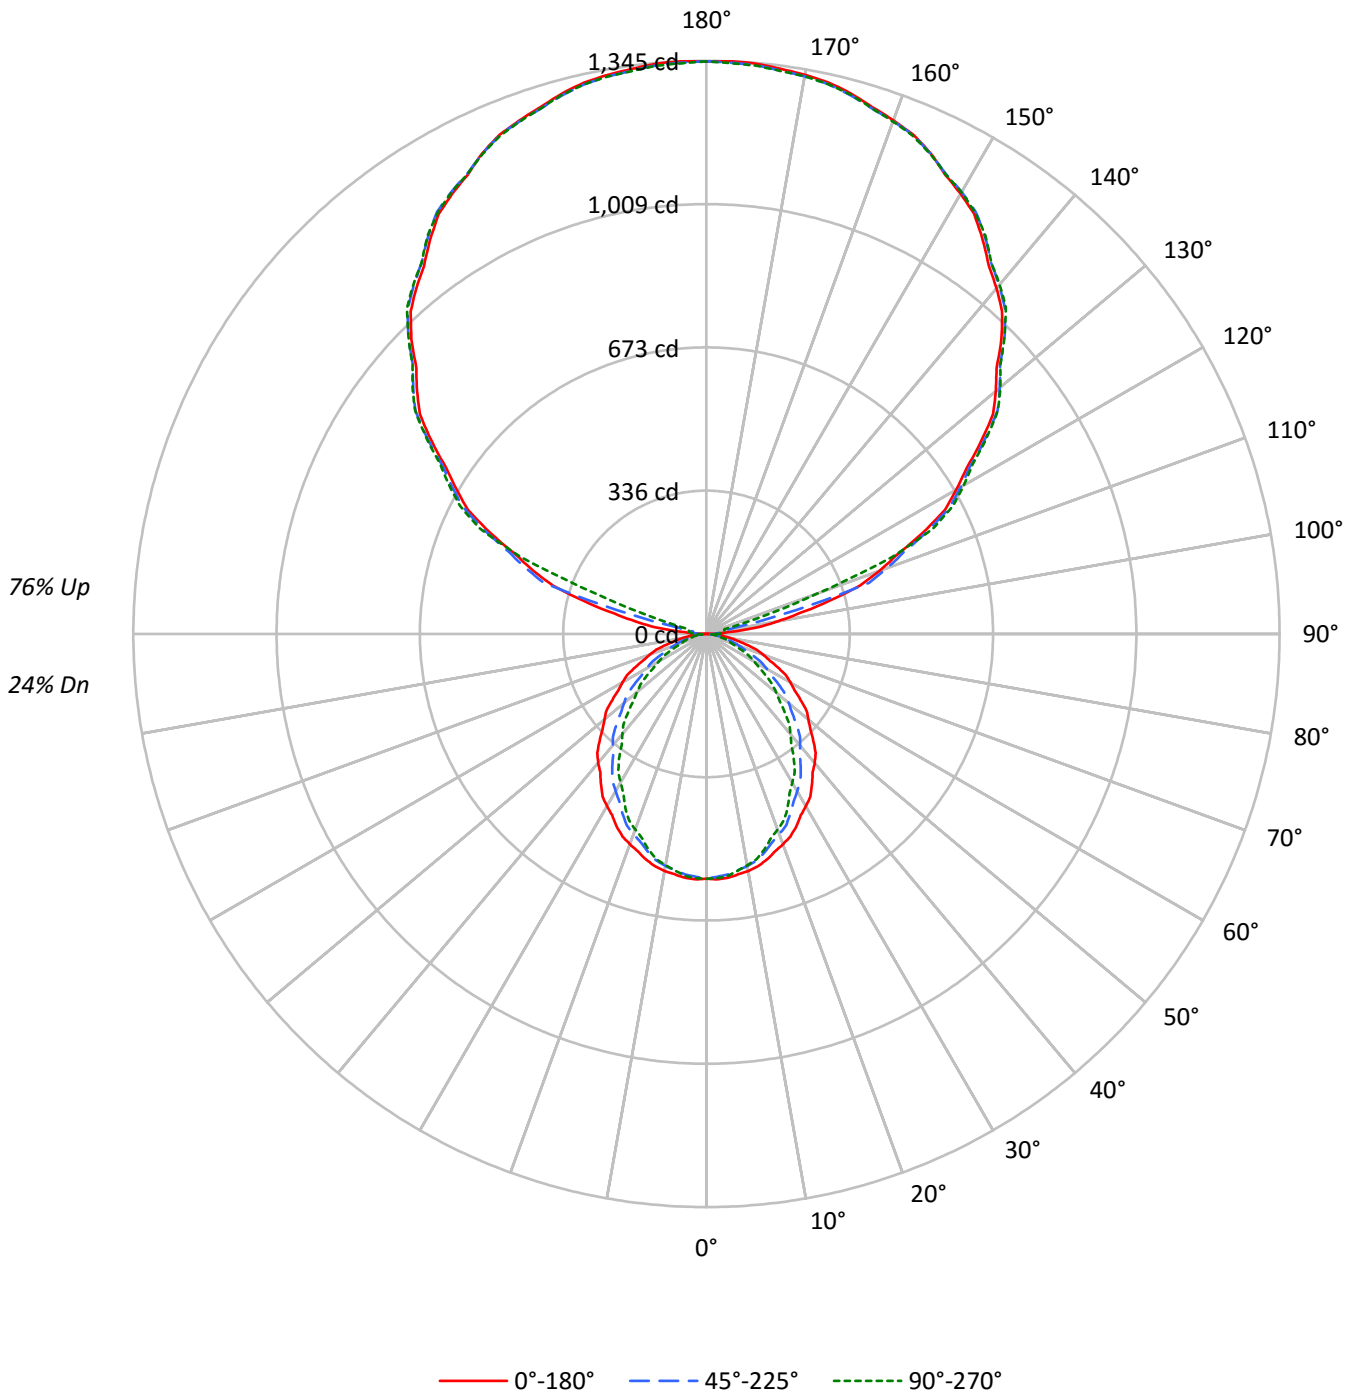



TEST NUMBER: P332261

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	82	78	75	73	60	58	57	44	43	42	29	28	28	21
2	84	77	71	66	74	69	64	60	53	50	47	39	37	35	25	24	23	17
3	77	68	61	55	68	61	55	50	47	43	40	34	32	30	23	21	20	15
4	70	60	52	47	62	54	47	42	42	37	34	31	28	25	20	19	17	13
5	64	53	46	40	57	48	41	36	37	33	29	27	24	22	18	17	15	11
6	59	48	40	34	52	43	36	31	33	29	25	25	22	19	17	15	13	10
7	55	43	35	30	48	39	32	27	30	26	22	22	19	17	15	13	12	9
8	50	39	31	26	45	35	29	24	27	23	20	21	17	15	14	12	11	8
9	47	35	28	23	42	32	26	21	25	21	17	19	16	13	13	11	10	7
10	44	32	25	21	39	29	23	19	23	19	16	17	14	12	12	10	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6184	6184	6184
5°	6207	6122	6158
10°	6172	6045	6025
15°	6107	5904	5841
20°	6015	5727	5593
25°	5922	5529	5352
30°	5797	5299	5009
35°	5670	5070	4696
40°	5552	4799	4308
45°	5398	4532	3958
50°	5228	4228	3565
55°	5054	3883	3200
60°	4895	3511	2799
65°	4689	3110	2397
70°	4428	2609	1936
75°	4051	2054	1822
80°	3608	1822	1674
85°	3051	1606	1494



TEST NUMBER: P332261

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	54.0	1.0
10°-20°	150.1	2.8
20°-30°	216.1	4.0
30°-40°	243.5	4.5
40°-50°	232.9	4.3
50°-60°	190.7	3.5
60°-70°	128.7	2.4
70°-80°	64.7	1.2
80°-90°	20.9	0.4
90°-100°	48.8	0.9
100°-110°	232.8	4.3
110°-120°	559.2	10.4
120°-130°	712.1	13.2
130°-140°	760.8	14.1
140°-150°	711.5	13.2
150°-160°	573.9	10.6
160°-170°	370.4	6.9
170°-180°	127.6	2.4
0°-30°	420.2	7.8
0°-40°	663.7	12.3
0°-60°	1087.3	20.1
0°-90°	1301.6	24.1
90°-120°	840.8	15.6
90°-150°	3025.2	56.0
90°-180°	4097.0	75.9
0°-180°	5398.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	574	574	574	574	574	
5°	574	572	567	570	570	54
15°	548	542	530	527	524	154
25°	499	486	466	456	451	229
35°	432	414	386	366	357	270
45°	355	333	298	272	260	273
55°	269	246	207	181	170	241
65°	184	158	122	100	94	182
75°	97	75	49	45	44	104
85°	25	15	13	12	12	28
90°	1	11	24	28	30	4
95°	61	23	31	38	38	75
105°	297	303	219	52	44	315
115°	558	564	573	583	587	551
125°	786	794	798	800	802	702
135°	979	985	989	992	989	754
145°	1130	1137	1139	1141	1141	707
155°	1245	1243	1244	1248	1243	573
165°	1313	1310	1309	1316	1310	371
175°	1344	1339	1340	1346	1338	128
180°	1344	1344	1344	1344	1344	



TEST NUMBER: P332261

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5
2.5°	576.4	576.0	575.7	575.4	575.1	574.4	573.4	572.4	571.4	570.4	571.3
5°	574.5	574.0	573.5	573.0	572.4	571.6	570.3	569.1	567.8	566.6	567.5
7.5°	569.2	568.6	568.1	567.5	567.0	565.9	564.3	562.7	561.0	559.4	559.9
10°	564.7	564.0	563.3	562.6	561.8	560.5	558.7	556.8	554.9	553.1	553.2
12.5°	558.4	557.6	556.8	556.0	555.2	553.6	551.3	549.1	546.8	544.5	544.4
15°	548.0	546.8	545.7	544.5	543.4	541.4	538.5	535.6	532.7	529.8	529.3
17.5°	534.8	533.5	532.2	530.8	529.5	527.0	523.3	519.6	516.0	512.3	511.2
20°	525.1	523.5	521.8	520.2	518.5	515.7	511.8	507.8	503.9	500.0	498.6
22.5°	514.3	512.4	510.5	508.6	506.7	503.7	499.5	495.3	491.1	486.9	485.2
25°	498.6	496.0	493.4	490.8	488.2	484.5	479.8	475.0	470.2	465.5	463.3
27.5°	479.5	476.6	473.7	470.9	468.0	464.0	458.7	453.3	448.0	442.7	439.7
30°	466.4	463.3	460.2	457.1	454.0	449.5	443.7	437.9	432.1	426.3	422.8
32.5°	453.4	449.8	446.3	442.8	439.3	434.5	428.3	422.2	416.1	409.9	406.1
35°	431.5	427.7	424.0	420.3	416.6	411.5	405.1	398.6	392.2	385.8	381.4
37.5°	409.3	405.1	401.0	396.9	392.7	387.2	380.4	373.5	366.7	359.8	354.8
40°	395.1	390.6	386.0	381.5	376.9	370.9	363.6	356.2	348.9	341.5	336.2
42.5°	379.1	374.5	370.0	365.4	360.9	354.8	347.2	339.6	332.0	324.4	318.5
45°	354.6	349.9	345.3	340.6	335.9	329.6	321.7	313.7	305.7	297.7	291.8
47.5°	330.1	325.0	319.8	314.7	309.6	303.1	295.1	287.1	279.2	271.2	264.8
50°	312.2	307.3	302.5	297.6	292.7	286.1	277.7	269.3	260.9	252.5	246.1
52.5°	296.2	290.9	285.6	280.3	275.0	268.2	259.9	251.6	243.3	235.0	228.4
55°	269.3	264.2	259.2	254.1	249.0	242.1	233.3	224.5	215.7	206.9	200.9
57.5°	244.5	239.0	233.5	227.9	222.4	215.2	206.4	197.5	188.7	179.9	174.2
60°	227.4	221.7	216.0	210.3	204.6	197.5	188.9	180.3	171.7	163.1	157.5
62.5°	210.2	204.5	198.8	193.2	187.5	180.3	171.7	163.1	154.5	145.9	140.7
65°	184.1	178.4	172.7	167.0	161.3	154.4	146.3	138.2	130.2	122.1	117.0
67.5°	157.9	152.1	146.3	140.6	134.8	128.1	120.3	112.6	104.8	97.1	93.3
70°	140.7	135.1	129.5	123.9	118.4	111.9	104.7	97.4	90.2	82.9	79.3
72.5°	123.6	118.1	112.6	107.0	101.5	95.5	88.9	82.3	75.7	69.1	66.2
75°	97.4	92.4	87.4	82.5	77.5	72.2	66.5	60.8	55.1	49.4	48.4
77.5°	73.5	69.0	64.5	60.0	55.6	51.5	47.8	44.1	40.5	36.8	36.3
80°	58.2	54.0	49.8	45.5	41.3	38.1	35.9	33.7	31.5	29.4	29.0
82.5°	43.7	40.0	36.4	32.7	29.0	26.7	25.7	24.7	23.7	22.6	22.3
85°	24.7	22.4	20.1	17.9	15.6	14.3	14.0	13.7	13.4	13.0	12.8
87.5°	9.1	8.7	8.2	7.7	7.3	7.3	7.9	8.5	9.1	9.6	9.7
90°	1.0	3.2	5.4	7.7	9.9	12.4	15.3	18.2	21.1	24.0	24.8
92.5°	18.6	17.9	17.3	16.7	16.1	16.9	19.0	21.2	23.4	25.6	27.0
95°	60.9	51.8	42.7	33.6	24.5	21.2	23.6	26.1	28.5	30.9	32.5
97.5°	122.4	118.3	114.2	110.1	106.0	96.0	80.1	64.1	48.1	32.1	33.9
100°	168.7	173.1	177.6	182.0	186.4	171.3	136.7	102.1	67.5	32.9	34.7
102.5°	221.4	224.6	227.8	231.0	234.2	216.9	179.1	141.3	103.5	65.7	60.2
105°	297.4	299.9	302.3	304.8	307.2	298.4	278.5	258.5	238.6	218.6	179.3
107.5°	377.7	379.7	381.6	383.6	385.5	388.1	391.2	394.4	397.5	400.7	371.9
110°	431.2	433.0	434.7	436.5	438.3	440.4	442.8	445.3	447.7	450.2	442.8



TEST NUMBER: P332261

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	482.3	483.9	485.5	487.1	488.7	490.7	493.2	495.6	498.0	500.5	500.6
115°	558.0	559.3	560.6	562.0	563.3	565.0	566.9	568.9	570.9	572.9	575.2
117.5°	631.2	632.9	634.5	636.2	637.8	639.1	640.1	641.2	642.2	643.2	645.0
120°	676.7	678.7	680.7	682.7	684.7	686.1	686.7	687.4	688.1	688.7	690.5
122.5°	723.1	724.7	726.3	728.0	729.6	730.9	731.7	732.6	733.4	734.2	735.5
125°	786.5	788.3	790.1	791.9	793.6	795.0	795.9	796.7	797.6	798.5	799.0
127.5°	848.0	849.8	851.6	853.3	855.1	856.5	857.6	858.7	859.7	860.8	861.5
130°	886.4	888.1	889.9	891.7	893.5	894.8	895.7	896.6	897.4	898.3	899.2
132.5°	923.1	924.9	926.6	928.4	930.2	931.4	932.1	932.8	933.6	934.3	935.2
135°	979.2	980.5	981.8	983.2	984.5	985.6	986.5	987.4	988.3	989.2	989.8
137.5°	1027.1	1028.8	1030.5	1032.2	1033.8	1034.9	1035.4	1035.9	1036.4	1036.9	1037.9
140°	1059.0	1060.4	1061.7	1063.0	1064.4	1065.4	1066.0	1066.7	1067.4	1068.0	1068.9
142.5°	1088.6	1089.9	1091.2	1092.6	1093.9	1094.9	1095.6	1096.2	1096.9	1097.6	1098.3
145°	1129.9	1131.5	1133.0	1134.6	1136.1	1137.1	1137.6	1138.0	1138.4	1138.9	1139.3
147.5°	1168.8	1169.9	1170.9	1171.9	1172.9	1173.6	1174.1	1174.5	1175.0	1175.4	1175.9
150°	1192.8	1193.5	1194.1	1194.8	1195.4	1196.0	1196.4	1196.9	1197.3	1197.8	1198.2
152.5°	1214.3	1214.7	1215.0	1215.3	1215.6	1215.9	1216.1	1216.4	1216.7	1216.9	1217.7
155°	1244.7	1244.2	1243.8	1243.4	1242.9	1242.8	1243.0	1243.2	1243.5	1243.7	1244.8
157.5°	1268.2	1268.2	1268.2	1268.1	1268.1	1267.9	1267.7	1267.5	1267.3	1267.0	1268.4
160°	1282.6	1282.4	1282.2	1282.0	1281.7	1281.5	1281.3	1281.1	1280.8	1280.6	1282.0
162.5°	1296.2	1295.6	1295.0	1294.5	1293.9	1293.5	1293.3	1293.0	1292.8	1292.6	1294.1
165°	1312.6	1311.9	1311.2	1310.6	1309.9	1309.5	1309.2	1309.0	1308.8	1308.6	1310.3
167.5°	1325.3	1324.5	1323.6	1322.7	1321.8	1321.3	1321.3	1321.3	1321.3	1321.3	1323.1
170°	1332.5	1331.6	1330.8	1329.9	1329.0	1328.5	1328.5	1328.5	1328.5	1328.5	1330.3
172.5°	1337.3	1336.3	1335.2	1334.1	1333.1	1332.6	1332.8	1333.0	1333.1	1333.3	1335.1
175°	1343.5	1342.4	1341.3	1340.2	1339.1	1338.6	1338.8	1339.1	1339.3	1339.5	1341.1
177.5°	1345.1	1344.2	1343.3	1342.4	1341.6	1341.2	1341.4	1341.6	1341.7	1341.9	1343.3
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5



TEST NUMBER: P332261

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5
2.5°	572.2	573.1	574.1	574.4	574.3	574.1	573.9	573.8
5°	568.5	569.4	570.3	570.7	570.5	570.3	570.1	569.9
7.5°	560.5	561.0	561.5	561.6	561.2	560.9	560.5	560.2
10°	553.3	553.4	553.5	553.3	552.8	552.3	551.7	551.2
12.5°	544.4	544.3	544.3	543.9	543.3	542.7	542.1	541.5
15°	528.7	528.2	527.7	527.1	526.4	525.6	524.9	524.2
17.5°	510.1	509.0	507.9	506.8	505.7	504.6	503.6	502.5
20°	497.3	495.9	494.6	493.3	492.0	490.8	489.6	488.3
22.5°	483.6	481.9	480.2	478.8	477.6	476.5	475.3	474.2
25°	461.1	459.0	456.8	455.1	454.0	452.9	451.7	450.6
27.5°	436.7	433.7	430.7	428.3	426.5	424.8	423.1	421.3
30°	419.3	415.8	412.3	409.7	408.0	406.4	404.7	403.0
32.5°	402.2	398.4	394.5	391.7	390.0	388.3	386.5	384.8
35°	376.9	372.4	368.0	364.8	363.0	361.1	359.2	357.4
37.5°	349.7	344.6	339.6	335.9	333.6	331.3	329.0	326.7
40°	330.8	325.4	320.0	316.1	313.7	311.4	309.0	306.6
42.5°	312.6	306.8	300.9	296.9	294.7	292.6	290.5	288.3
45°	285.9	280.0	274.1	269.9	267.5	265.0	262.5	260.0
47.5°	258.3	251.9	245.5	241.2	239.0	236.8	234.5	232.3
50°	239.7	233.3	226.9	222.5	220.1	217.7	215.3	212.9
52.5°	221.7	215.0	208.4	204.0	201.8	199.7	197.6	195.4
55°	194.9	188.9	182.9	178.8	176.8	174.7	172.6	170.5
57.5°	168.5	162.8	157.2	153.4	151.7	149.9	148.2	146.4
60°	151.9	146.3	140.7	137.0	135.3	133.5	131.8	130.0
62.5°	135.4	130.2	124.9	121.3	119.5	117.7	115.8	114.0
65°	111.9	106.9	101.8	98.7	97.5	96.4	95.3	94.1
67.5°	89.5	85.7	81.9	79.4	78.2	77.0	75.8	74.6
70°	75.7	72.1	68.4	66.1	64.9	63.8	62.6	61.5
72.5°	63.2	60.3	57.3	55.6	55.1	54.6	54.2	53.7
75°	47.3	46.3	45.2	44.6	44.4	44.2	44.0	43.8
77.5°	35.7	35.1	34.6	34.2	34.0	33.8	33.6	33.4
80°	28.7	28.4	28.1	27.9	27.6	27.4	27.2	27.0
82.5°	22.0	21.7	21.4	21.2	21.2	21.1	21.1	21.1
85°	12.6	12.4	12.2	12.1	12.1	12.1	12.1	12.1
87.5°	9.8	9.9	10.0	10.1	10.1	10.1	10.1	10.1
90°	25.7	26.6	27.5	28.2	28.6	29.1	29.5	29.9
92.5°	28.4	29.8	31.2	32.1	32.3	32.6	32.9	33.1
95°	34.0	35.6	37.2	37.9	37.9	37.9	37.9	37.9
97.5°	35.7	37.5	39.2	40.2	40.5	40.7	40.9	41.1
100°	36.5	38.3	40.0	41.0	41.3	41.5	41.7	41.9
102.5°	54.7	49.2	43.7	41.1	41.5	41.9	42.3	42.7
105°	140.1	100.8	61.6	42.1	42.6	43.0	43.5	43.9
107.5°	343.1	314.3	285.5	256.3	226.7	197.1	167.5	137.9
110°	435.5	428.2	420.9	401.4	369.6	337.9	306.2	274.5





TEST NUMBER: P332261

CATALOG NUMBER: S123RDIP-S340D1025U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	500.7	500.9	501.0	497.7	491.0	484.3	477.6	470.9
115°	577.4	579.6	581.8	583.4	584.2	585.1	586.0	586.9
117.5°	646.8	648.5	650.3	651.3	651.5	651.6	651.8	652.0
120°	692.3	694.0	695.8	696.7	696.7	696.7	696.7	696.7
122.5°	736.7	738.0	739.2	739.9	740.1	740.3	740.4	740.6
125°	799.4	799.8	800.3	800.7	801.2	801.6	802.1	802.5
127.5°	862.2	862.9	863.6	863.8	863.3	862.9	862.4	862.0
130°	900.1	901.0	901.9	902.1	901.7	901.2	900.8	900.3
132.5°	936.0	936.9	937.8	937.9	937.3	936.7	936.1	935.5
135°	990.5	991.2	991.8	991.8	991.2	990.5	989.8	989.2
137.5°	1039.0	1040.1	1041.1	1041.4	1041.0	1040.6	1040.1	1039.7
140°	1069.8	1070.7	1071.6	1071.8	1071.3	1070.9	1070.5	1070.0
142.5°	1099.0	1099.7	1100.4	1100.4	1099.8	1099.2	1098.6	1098.0
145°	1139.8	1140.2	1140.7	1140.9	1140.9	1140.9	1140.9	1140.9
147.5°	1176.3	1176.7	1177.2	1176.9	1175.9	1174.9	1173.8	1172.8
150°	1198.7	1199.1	1199.6	1199.4	1198.8	1198.1	1197.4	1196.8
152.5°	1218.5	1219.3	1220.1	1220.0	1219.0	1218.0	1217.0	1215.9
155°	1245.9	1247.0	1248.1	1248.0	1246.7	1245.4	1244.0	1242.7
157.5°	1269.7	1271.0	1272.4	1272.2	1270.4	1268.7	1267.0	1265.3
160°	1283.3	1284.6	1285.9	1285.8	1284.3	1282.7	1281.2	1279.6
162.5°	1295.6	1297.1	1298.6	1298.7	1297.3	1295.9	1294.6	1293.2
165°	1312.1	1313.9	1315.7	1315.8	1314.2	1312.7	1311.1	1309.6
167.5°	1324.9	1326.7	1328.4	1328.4	1326.7	1324.9	1323.1	1321.3
170°	1332.1	1333.9	1335.6	1335.6	1333.9	1332.1	1330.3	1328.5
172.5°	1336.9	1338.6	1340.4	1340.3	1338.4	1336.4	1334.5	1332.5
175°	1342.6	1344.2	1345.7	1345.6	1343.8	1342.1	1340.3	1338.5
177.5°	1344.7	1346.2	1347.6	1347.4	1345.6	1343.9	1342.1	1340.3
180°	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5	1343.5

(END OF REPORT)