

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332255

Luminaire Tested: **S123RDIP-S340D805U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332255
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S340D805U835-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4509.8 lumens
Efficiency: N/A
Efficacy: 144.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332255

CATALOG NUMBER: S123RDIP-S340D805U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

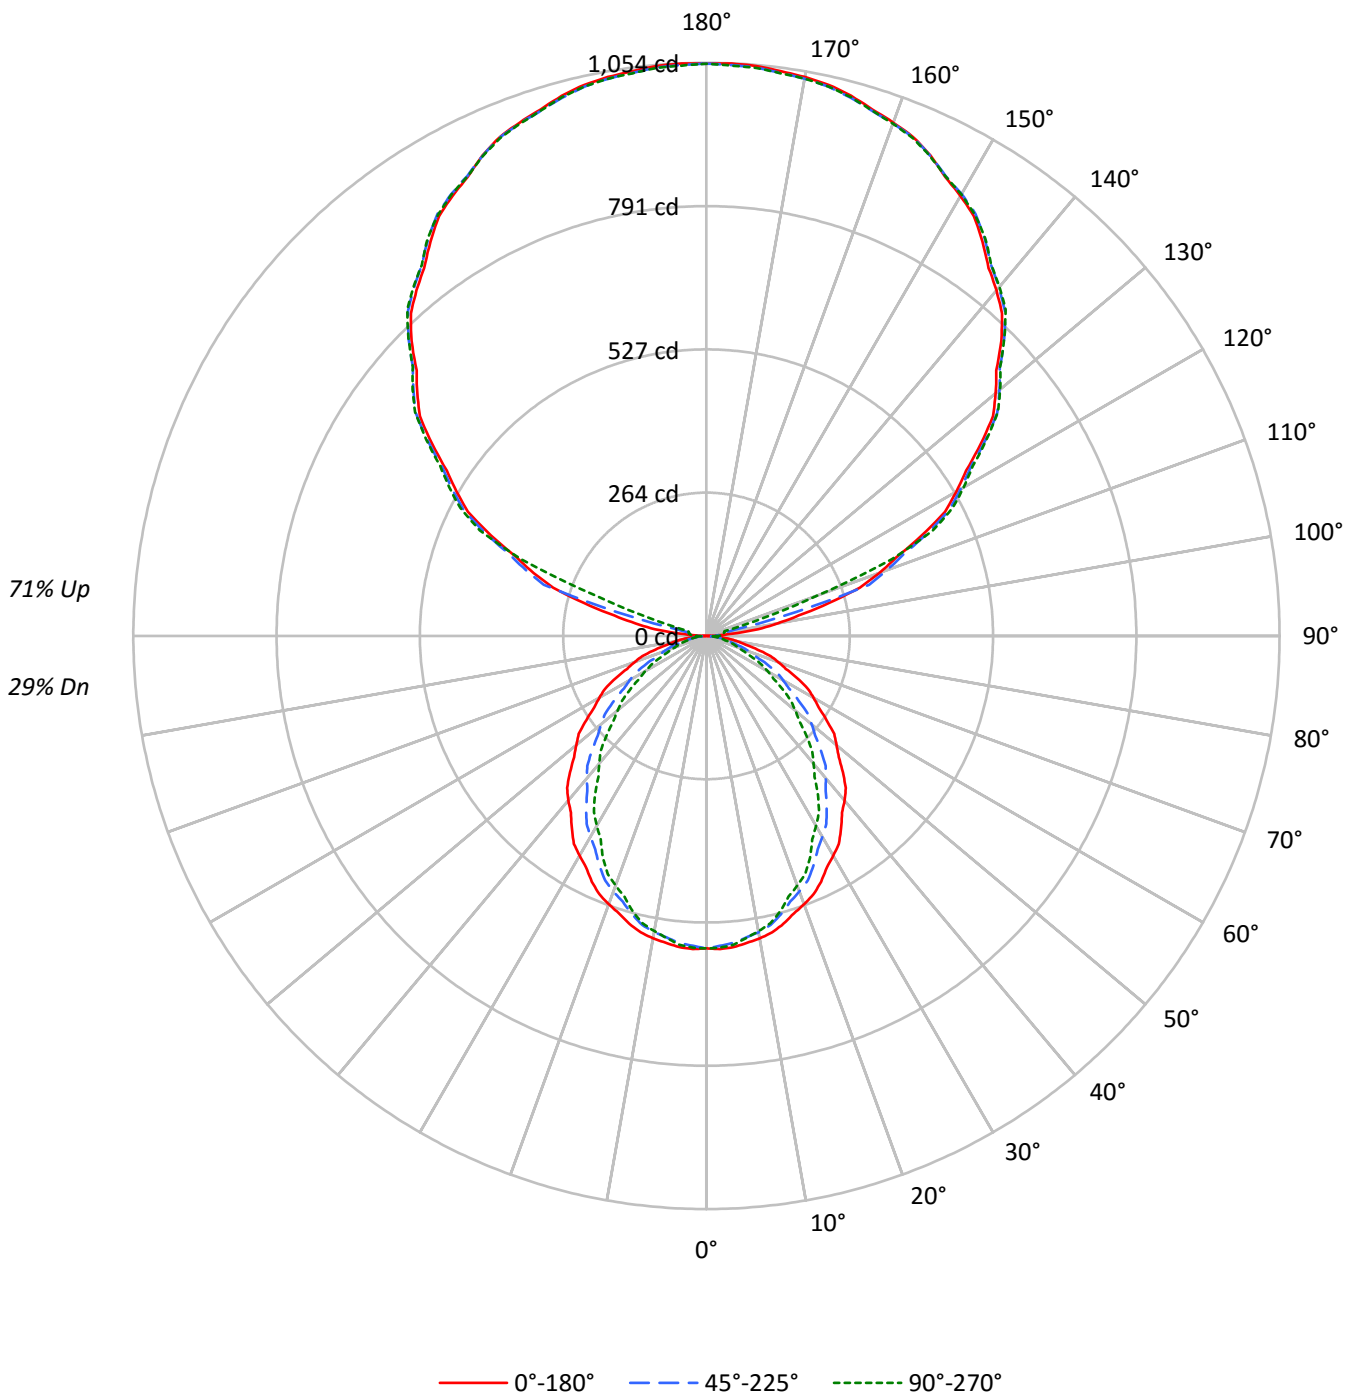



TEST NUMBER: P332255

CATALOG NUMBER: S123RDIP-S340D805U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	72	72	72	53	53	53	37	37	37	29
1	93	89	85	82	83	80	77	74	63	61	59	47	46	45	33	32	31	25
2	85	78	72	67	76	70	65	61	55	52	49	42	39	38	29	28	27	21
3	78	69	62	56	69	62	56	51	49	45	41	37	34	32	26	24	23	18
4	71	61	53	47	63	55	48	43	43	39	35	33	30	27	23	21	20	16
5	65	54	46	41	58	49	42	37	39	34	30	30	26	24	21	19	17	14
6	60	48	41	35	54	44	37	32	35	30	26	27	23	21	19	17	15	12
7	55	44	36	31	49	39	33	28	32	27	23	24	21	18	17	15	14	11
8	51	39	32	27	46	36	29	25	29	24	21	22	19	16	16	14	12	10
9	48	36	29	24	43	33	26	22	26	22	18	20	17	15	15	13	11	9
10	44	33	26	21	40	30	24	20	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6184	6184	6184
5°	6207	6122	6158
10°	6172	6045	6025
15°	6107	5904	5841
20°	6015	5727	5593
25°	5922	5529	5352
30°	5797	5299	5009
35°	5670	5070	4696
40°	5552	4799	4308
45°	5398	4532	3958
50°	5228	4228	3565
55°	5054	3883	3200
60°	4895	3511	2799
65°	4689	3110	2397
70°	4428	2609	1936
75°	4051	2054	1822
80°	3608	1822	1674
85°	3051	1606	1494



TEST NUMBER: P332255

CATALOG NUMBER: S123RDIP-S340D805U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.0	1.2
10°-20°	150.1	3.3
20°-30°	216.1	4.8
30°-40°	243.5	5.4
40°-50°	232.9	5.2
50°-60°	190.7	4.2
60°-70°	128.7	2.9
70°-80°	64.7	1.4
80°-90°	20.1	0.4
90°-100°	38.3	0.8
100°-110°	182.3	4.0
110°-120°	438.0	9.7
120°-130°	557.7	12.4
130°-140°	595.9	13.2
140°-150°	557.2	12.4
150°-160°	449.5	10.0
160°-170°	290.1	6.4
170°-180°	100.0	2.2
0°-30°	420.2	9.3
0°-40°	663.7	14.7
0°-60°	1087.3	24.1
0°-90°	1300.8	28.8
90°-120°	658.6	14.6
90°-150°	2369.4	52.5
90°-180°	3209.0	71.2
0°-180°	4509.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	574	574	574	574	574	
5°	574	572	567	570	570	54
15°	548	542	530	527	524	154
25°	499	486	466	456	451	229
35°	432	414	386	366	357	270
45°	355	333	298	272	260	273
55°	269	246	207	181	170	241
65°	184	158	122	100	94	182
75°	97	75	49	45	44	104
85°	25	15	13	12	12	28
90°	1	9	19	22	24	3
95°	48	18	24	29	30	59
105°	233	237	171	41	34	247
115°	437	442	449	456	460	431
125°	616	622	625	627	629	550
135°	767	772	775	777	775	590
145°	885	890	892	894	894	554
155°	975	973	974	978	973	449
165°	1028	1026	1025	1031	1026	290
175°	1052	1049	1049	1054	1048	100
180°	1052	1052	1052	1052	1052	



TEST NUMBER: P332255

CATALOG NUMBER: S123RDIP-S340D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5
2.5°	576.4	576.0	575.7	575.4	575.1	574.4	573.4	572.4	571.4	570.4	571.3
5°	574.5	574.0	573.5	573.0	572.4	571.6	570.3	569.1	567.8	566.6	567.5
7.5°	569.2	568.6	568.1	567.5	567.0	565.9	564.3	562.7	561.0	559.4	559.9
10°	564.7	564.0	563.3	562.6	561.8	560.5	558.7	556.8	554.9	553.1	553.2
12.5°	558.4	557.6	556.8	556.0	555.2	553.6	551.3	549.1	546.8	544.5	544.4
15°	548.0	546.8	545.7	544.5	543.4	541.4	538.5	535.6	532.7	529.8	529.3
17.5°	534.8	533.5	532.2	530.8	529.5	527.0	523.3	519.6	516.0	512.3	511.2
20°	525.1	523.5	521.8	520.2	518.5	515.7	511.8	507.8	503.9	500.0	498.6
22.5°	514.3	512.4	510.5	508.6	506.7	503.7	499.5	495.3	491.1	486.9	485.2
25°	498.6	496.0	493.4	490.8	488.2	484.5	479.8	475.0	470.2	465.5	463.3
27.5°	479.5	476.6	473.7	470.9	468.0	464.0	458.7	453.3	448.0	442.7	439.7
30°	466.4	463.3	460.2	457.1	454.0	449.5	443.7	437.9	432.1	426.3	422.8
32.5°	453.4	449.8	446.3	442.8	439.3	434.5	428.3	422.2	416.1	409.9	406.1
35°	431.5	427.7	424.0	420.3	416.6	411.5	405.1	398.6	392.2	385.8	381.4
37.5°	409.3	405.1	401.0	396.9	392.7	387.2	380.4	373.5	366.7	359.8	354.8
40°	395.1	390.6	386.0	381.5	376.9	370.9	363.6	356.2	348.9	341.5	336.2
42.5°	379.1	374.5	370.0	365.4	360.9	354.8	347.2	339.6	332.0	324.4	318.5
45°	354.6	349.9	345.3	340.6	335.9	329.6	321.7	313.7	305.7	297.7	291.8
47.5°	330.1	325.0	319.8	314.7	309.6	303.1	295.1	287.1	279.2	271.2	264.8
50°	312.2	307.3	302.5	297.6	292.7	286.1	277.7	269.3	260.9	252.5	246.1
52.5°	296.2	290.9	285.6	280.3	275.0	268.2	259.9	251.6	243.3	235.0	228.4
55°	269.3	264.2	259.2	254.1	249.0	242.1	233.3	224.5	215.7	206.9	200.9
57.5°	244.5	239.0	233.5	227.9	222.4	215.2	206.4	197.5	188.7	179.9	174.2
60°	227.4	221.7	216.0	210.3	204.6	197.5	188.9	180.3	171.7	163.1	157.5
62.5°	210.2	204.5	198.8	193.2	187.5	180.3	171.7	163.1	154.5	145.9	140.7
65°	184.1	178.4	172.7	167.0	161.3	154.4	146.3	138.2	130.2	122.1	117.0
67.5°	157.9	152.1	146.3	140.6	134.8	128.1	120.3	112.6	104.8	97.1	93.3
70°	140.7	135.1	129.5	123.9	118.4	111.9	104.7	97.4	90.2	82.9	79.3
72.5°	123.6	118.1	112.6	107.0	101.5	95.5	88.9	82.3	75.7	69.1	66.2
75°	97.4	92.4	87.4	82.5	77.5	72.2	66.5	60.8	55.1	49.4	48.4
77.5°	73.5	69.0	64.5	60.0	55.6	51.5	47.8	44.1	40.5	36.8	36.3
80°	58.2	54.0	49.8	45.5	41.3	38.1	35.9	33.7	31.5	29.4	29.0
82.5°	43.7	40.0	36.4	32.7	29.0	26.7	25.7	24.7	23.7	22.6	22.3
85°	24.7	22.4	20.1	17.9	15.6	14.3	14.0	13.7	13.4	13.0	12.8
87.5°	9.1	8.5	8.0	7.4	6.8	6.8	7.2	7.7	8.1	8.6	8.7
90°	0.8	2.5	4.3	6.0	7.7	9.7	12.0	14.2	16.5	18.8	19.5
92.5°	14.5	14.1	13.6	13.1	12.6	13.2	14.9	16.6	18.3	20.0	21.1
95°	47.7	40.6	33.4	26.3	19.2	16.6	18.5	20.4	22.3	24.2	25.5
97.5°	95.8	92.7	89.5	86.3	83.1	75.2	62.7	50.2	37.7	25.2	26.6
100°	132.1	135.6	139.1	142.5	146.0	134.2	107.1	80.0	52.9	25.8	27.2
102.5°	173.4	175.9	178.4	180.9	183.4	169.9	140.3	110.6	81.0	51.4	47.1
105°	233.0	234.9	236.8	238.7	240.6	233.8	218.1	202.5	186.8	171.2	140.5
107.5°	295.8	297.4	298.9	300.4	301.9	303.9	306.4	308.9	311.3	313.8	291.3
110°	337.7	339.1	340.5	341.9	343.3	344.9	346.9	348.8	350.7	352.6	346.9



TEST NUMBER: P332255

CATALOG NUMBER: S123RDIP-S340D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	377.8	379.0	380.3	381.5	382.8	384.3	386.3	388.2	390.1	392.0	392.1
115°	437.0	438.1	439.1	440.2	441.2	442.5	444.1	445.6	447.2	448.8	450.5
117.5°	494.4	495.7	497.0	498.3	499.5	500.6	501.4	502.2	503.0	503.8	505.2
120°	530.1	531.6	533.2	534.7	536.3	537.4	537.9	538.4	538.9	539.4	540.8
122.5°	566.3	567.6	568.9	570.2	571.5	572.4	573.1	573.8	574.4	575.1	576.1
125°	616.1	617.4	618.8	620.2	621.6	622.7	623.4	624.0	624.7	625.4	625.8
127.5°	664.2	665.6	667.0	668.4	669.8	670.9	671.7	672.6	673.4	674.2	674.8
130°	694.2	695.6	697.0	698.4	699.8	700.8	701.5	702.2	702.9	703.6	704.3
132.5°	723.0	724.4	725.8	727.2	728.6	729.5	730.1	730.6	731.2	731.8	732.5
135°	766.9	768.0	769.0	770.1	771.1	772.0	772.7	773.4	774.1	774.8	775.3
137.5°	804.5	805.8	807.1	808.4	809.7	810.6	811.0	811.4	811.7	812.1	813.0
140°	829.5	830.5	831.6	832.6	833.7	834.4	835.0	835.5	836.0	836.5	837.2
142.5°	852.6	853.7	854.7	855.8	856.8	857.6	858.1	858.6	859.1	859.7	860.2
145°	885.0	886.2	887.4	888.6	889.9	890.6	891.0	891.3	891.7	892.0	892.4
147.5°	915.5	916.3	917.1	917.9	918.7	919.3	919.6	919.9	920.3	920.6	921.0
150°	934.2	934.8	935.3	935.8	936.3	936.8	937.1	937.5	937.8	938.2	938.5
152.5°	951.1	951.4	951.6	951.9	952.1	952.3	952.5	952.7	953.0	953.2	953.8
155°	974.9	974.6	974.2	973.9	973.5	973.4	973.6	973.8	973.9	974.1	975.0
157.5°	993.3	993.3	993.3	993.2	993.2	993.1	992.9	992.8	992.6	992.4	993.5
160°	1004.6	1004.4	1004.3	1004.1	1003.9	1003.7	1003.6	1003.4	1003.2	1003.0	1004.1
162.5°	1015.2	1014.8	1014.3	1013.9	1013.4	1013.1	1012.9	1012.8	1012.6	1012.4	1013.6
165°	1028.1	1027.5	1027.0	1026.5	1026.0	1025.6	1025.5	1025.3	1025.1	1024.9	1026.3
167.5°	1038.1	1037.4	1036.7	1036.0	1035.3	1034.9	1034.9	1034.9	1034.9	1034.9	1036.3
170°	1043.7	1043.0	1042.3	1041.6	1040.9	1040.6	1040.6	1040.6	1040.6	1040.6	1042.0
172.5°	1047.4	1046.6	1045.8	1044.9	1044.1	1043.8	1043.9	1044.0	1044.2	1044.3	1045.7
175°	1052.3	1051.4	1050.6	1049.7	1048.8	1048.5	1048.6	1048.8	1049.0	1049.2	1050.4
177.5°	1053.5	1052.9	1052.2	1051.5	1050.8	1050.5	1050.6	1050.8	1050.9	1051.0	1052.2
180°	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3



TEST NUMBER: P332255

CATALOG NUMBER: S123RDIP-S340D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	574.5	574.5	574.5	574.5	574.5	574.5	574.5	574.5
2.5°	572.2	573.1	574.1	574.4	574.3	574.1	573.9	573.8
5°	568.5	569.4	570.3	570.7	570.5	570.3	570.1	569.9
7.5°	560.5	561.0	561.5	561.6	561.2	560.9	560.5	560.2
10°	553.3	553.4	553.5	553.3	552.8	552.3	551.7	551.2
12.5°	544.4	544.3	544.3	543.9	543.3	542.7	542.1	541.5
15°	528.7	528.2	527.7	527.1	526.4	525.6	524.9	524.2
17.5°	510.1	509.0	507.9	506.8	505.7	504.6	503.6	502.5
20°	497.3	495.9	494.6	493.3	492.0	490.8	489.6	488.3
22.5°	483.6	481.9	480.2	478.8	477.6	476.5	475.3	474.2
25°	461.1	459.0	456.8	455.1	454.0	452.9	451.7	450.6
27.5°	436.7	433.7	430.7	428.3	426.5	424.8	423.1	421.3
30°	419.3	415.8	412.3	409.7	408.0	406.4	404.7	403.0
32.5°	402.2	398.4	394.5	391.7	390.0	388.3	386.5	384.8
35°	376.9	372.4	368.0	364.8	363.0	361.1	359.2	357.4
37.5°	349.7	344.6	339.6	335.9	333.6	331.3	329.0	326.7
40°	330.8	325.4	320.0	316.1	313.7	311.4	309.0	306.6
42.5°	312.6	306.8	300.9	296.9	294.7	292.6	290.5	288.3
45°	285.9	280.0	274.1	269.9	267.5	265.0	262.5	260.0
47.5°	258.3	251.9	245.5	241.2	239.0	236.8	234.5	232.3
50°	239.7	233.3	226.9	222.5	220.1	217.7	215.3	212.9
52.5°	221.7	215.0	208.4	204.0	201.8	199.7	197.6	195.4
55°	194.9	188.9	182.9	178.8	176.8	174.7	172.6	170.5
57.5°	168.5	162.8	157.2	153.4	151.7	149.9	148.2	146.4
60°	151.9	146.3	140.7	137.0	135.3	133.5	131.8	130.0
62.5°	135.4	130.2	124.9	121.3	119.5	117.7	115.8	114.0
65°	111.9	106.9	101.8	98.7	97.5	96.4	95.3	94.1
67.5°	89.5	85.7	81.9	79.4	78.2	77.0	75.8	74.6
70°	75.7	72.1	68.4	66.1	64.9	63.8	62.6	61.5
72.5°	63.2	60.3	57.3	55.6	55.1	54.6	54.2	53.7
75°	47.3	46.3	45.2	44.6	44.4	44.2	44.0	43.8
77.5°	35.7	35.1	34.6	34.2	34.0	33.8	33.6	33.4
80°	28.7	28.4	28.1	27.9	27.6	27.4	27.2	27.0
82.5°	22.0	21.7	21.4	21.2	21.2	21.1	21.1	21.1
85°	12.6	12.4	12.2	12.1	12.1	12.1	12.1	12.1
87.5°	8.7	8.8	8.8	8.8	8.8	8.8	8.8	8.8
90°	20.2	20.8	21.5	22.1	22.4	22.8	23.1	23.5
92.5°	22.2	23.3	24.5	25.1	25.3	25.5	25.7	26.0
95°	26.7	27.9	29.1	29.7	29.7	29.7	29.7	29.7
97.5°	28.0	29.3	30.7	31.5	31.7	31.9	32.0	32.2
100°	28.6	30.0	31.4	32.1	32.3	32.5	32.7	32.8
102.5°	42.8	38.5	34.2	32.2	32.5	32.8	33.1	33.5
105°	109.7	79.0	48.2	33.0	33.4	33.7	34.1	34.4
107.5°	268.7	246.2	223.6	200.7	177.6	154.4	131.2	108.0
110°	341.1	335.4	329.7	314.4	289.5	264.7	239.8	215.0



TEST NUMBER: P332255

CATALOG NUMBER: S123RDIP-S340D805U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	392.2	392.3	392.4	389.8	384.6	379.3	374.1	368.9
115°	452.2	454.0	455.7	456.9	457.6	458.3	459.0	459.7
117.5°	506.6	508.0	509.3	510.1	510.3	510.4	510.5	510.7
120°	542.2	543.6	545.0	545.7	545.7	545.7	545.7	545.7
122.5°	577.0	578.0	579.0	579.5	579.7	579.8	580.0	580.1
125°	626.1	626.5	626.8	627.2	627.5	627.9	628.2	628.6
127.5°	675.3	675.9	676.4	676.5	676.2	675.9	675.5	675.2
130°	705.0	705.7	706.4	706.6	706.2	705.9	705.5	705.2
132.5°	733.1	733.8	734.5	734.6	734.2	733.7	733.2	732.7
135°	775.8	776.3	776.8	776.8	776.3	775.8	775.3	774.8
137.5°	813.8	814.6	815.5	815.7	815.4	815.0	814.7	814.3
140°	837.9	838.6	839.3	839.5	839.1	838.8	838.4	838.1
142.5°	860.8	861.3	861.9	861.9	861.4	860.9	860.5	860.0
145°	892.7	893.1	893.4	893.6	893.6	893.6	893.6	893.6
147.5°	921.3	921.7	922.0	921.8	921.0	920.2	919.4	918.6
150°	938.8	939.2	939.5	939.5	938.9	938.4	937.9	937.4
152.5°	954.4	955.0	955.7	955.6	954.8	954.0	953.2	952.4
155°	975.9	976.7	977.6	977.5	976.5	975.4	974.4	973.3
157.5°	994.5	995.5	996.6	996.4	995.1	993.7	992.4	991.0
160°	1005.1	1006.2	1007.2	1007.1	1005.9	1004.7	1003.5	1002.3
162.5°	1014.8	1016.0	1017.1	1017.2	1016.1	1015.0	1014.0	1012.9
165°	1027.7	1029.1	1030.5	1030.6	1029.4	1028.1	1026.9	1025.7
167.5°	1037.7	1039.1	1040.5	1040.5	1039.1	1037.7	1036.3	1034.9
170°	1043.3	1044.7	1046.1	1046.1	1044.7	1043.3	1042.0	1040.6
172.5°	1047.1	1048.5	1049.9	1049.8	1048.3	1046.8	1045.2	1043.7
175°	1051.6	1052.8	1054.0	1053.9	1052.6	1051.2	1049.8	1048.4
177.5°	1053.3	1054.4	1055.5	1055.4	1054.0	1052.6	1051.2	1049.8
180°	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3	1052.3

(END OF REPORT)