

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332299

Luminaire Tested: **S123RDIP-S560D1195U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332299
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S560D1195U835-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6456.3 lumens
Efficiency: N/A
Efficacy: 130.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332299

CATALOG NUMBER: S123RDIP-S560D1195U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

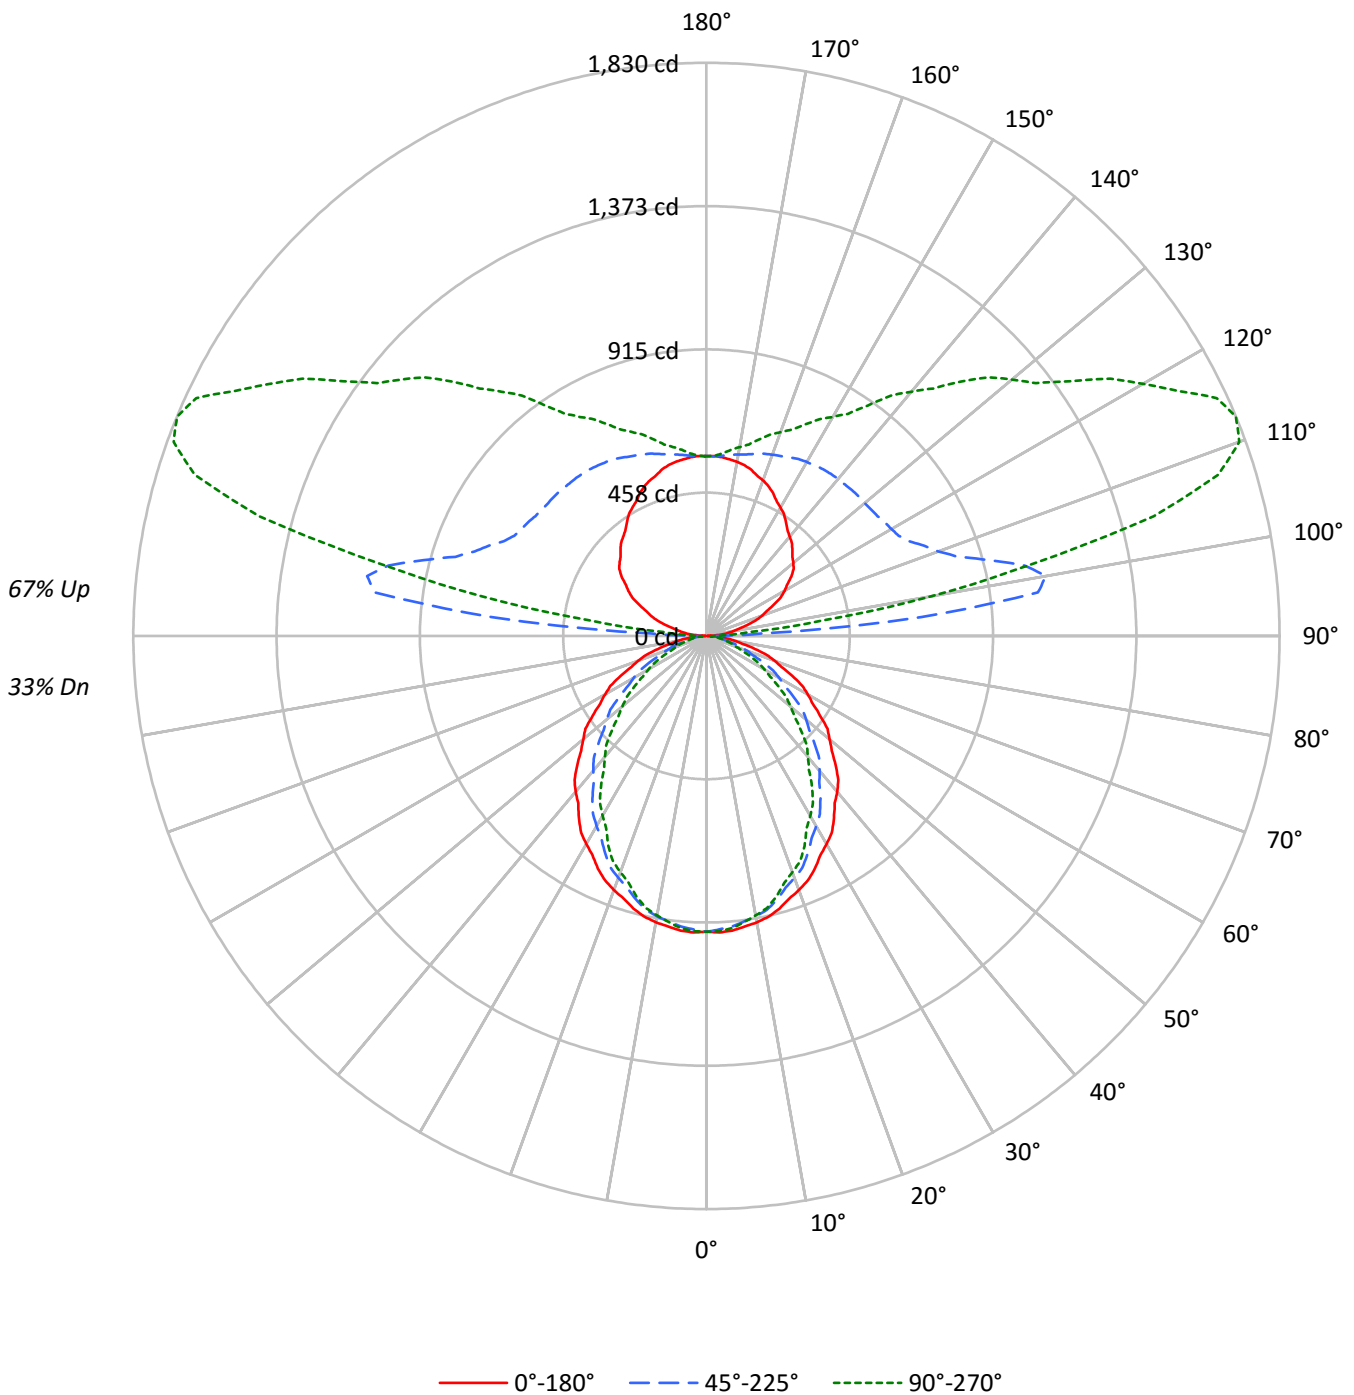



TEST NUMBER: P332299

CATALOG NUMBER: S123RDIP-S560D1195U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	36	35	35	28
2	86	79	73	68	77	71	66	62	57	54	51	44	42	40	32	31	29	24
3	78	69	62	57	70	63	57	52	51	46	43	39	36	34	29	27	25	21
4	72	61	54	48	65	56	49	44	45	40	37	35	32	29	26	24	22	18
5	66	55	47	41	59	50	43	38	40	35	32	31	28	25	23	21	19	16
6	61	49	41	36	55	45	38	33	36	31	28	28	25	22	21	19	17	14
7	56	44	37	31	50	40	34	29	33	28	24	26	22	20	19	17	15	12
8	52	40	33	28	47	37	30	25	30	25	21	24	20	18	18	15	14	11
9	48	37	29	24	44	33	27	23	27	23	19	22	18	16	16	14	12	10
10	45	33	26	22	41	31	24	20	25	20	17	20	17	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10167	10167	10167
5°	10205	10065	10122
10°	10147	9939	9905
15°	10038	9706	9604
20°	9889	9415	9196
25°	9734	9089	8797
30°	9531	8712	8236
35°	9320	8335	7720
40°	9128	7890	7082
45°	8873	7451	6506
50°	8594	6953	5863
55°	8310	6382	5262
60°	8047	5772	4600
65°	7707	5112	3940
70°	7279	4293	3182
75°	6658	3377	2994
80°	5938	2994	2752
85°	5014	2643	2458



TEST NUMBER: P332299

CATALOG NUMBER: S123RDIP-S560D1195U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	88.7	1.4
10°-20°	246.8	3.8
20°-30°	355.3	5.5
30°-40°	400.3	6.2
40°-50°	382.9	5.9
50°-60°	313.6	4.9
60°-70°	211.6	3.3
70°-80°	106.4	1.6
80°-90°	32.6	0.5
90°-100°	319.4	4.9
100°-110°	904.4	14.0
110°-120°	889.7	13.8
120°-130°	709.7	11.0
130°-140°	559.5	8.7
140°-150°	417.6	6.5
150°-160°	291.1	4.5
160°-170°	171.0	2.6
170°-180°	55.6	0.9
0°-30°	690.8	10.7
0°-40°	1091.1	16.9
0°-60°	1787.6	27.7
0°-90°	2138.2	33.1
90°-120°	2113.6	32.7
90°-150°	3800.4	58.9
90°-180°	4318.0	66.9
0°-180°	6456.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	944	944	944	944	944	
5°	944	940	932	938	937	90
15°	901	892	871	867	862	254
25°	820	800	765	750	741	377
35°	709	681	634	602	588	444
45°	583	547	490	447	427	450
55°	443	404	340	297	280	397
65°	303	259	201	165	155	299
75°	160	123	81	74	72	171
85°	41	25	21	20	20	46
90°	2	14	29	33	34	5
95°	40	128	689	201	135	43
105°	135	199	934	1634	1478	143
115°	238	297	714	1567	1797	236
125°	331	391	667	1208	1418	294
135°	388	463	658	995	1149	300
145°	443	507	650	816	898	277
155°	503	543	629	715	745	231
165°	550	565	602	638	650	155
175°	573	573	577	586	584	54
180°	574	574	574	574	574	



TEST NUMBER: P332299

CATALOG NUMBER: S123RDIP-S560D1195U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5
2.5°	947.6	947.0	946.5	945.9	945.4	944.3	942.7	941.0	939.4	937.8	939.3
5°	944.5	943.7	942.8	942.0	941.1	939.7	937.6	935.6	933.5	931.5	933.0
7.5°	935.8	934.9	933.9	933.0	932.1	930.3	927.7	925.0	922.3	919.7	920.5
10°	928.4	927.2	926.0	924.8	923.7	921.5	918.5	915.4	912.3	909.3	909.4
12.5°	918.0	916.7	915.3	914.0	912.7	910.2	906.4	902.7	898.9	895.2	895.1
15°	900.8	899.0	897.1	895.2	893.4	890.0	885.3	880.5	875.7	871.0	870.1
17.5°	879.2	877.1	874.9	872.7	870.5	866.4	860.3	854.3	848.2	842.2	840.4
20°	863.3	860.6	857.9	855.1	852.4	847.8	841.3	834.9	828.4	821.9	819.7
22.5°	845.5	842.4	839.3	836.1	833.0	828.0	821.1	814.2	807.4	800.5	797.7
25°	819.6	815.4	811.1	806.9	802.6	796.6	788.7	780.9	773.1	765.3	761.7
27.5°	788.2	783.5	778.8	774.1	769.4	762.7	754.0	745.3	736.6	727.9	722.9
30°	766.8	761.7	756.6	751.5	746.4	739.0	729.5	720.0	710.4	700.9	695.1
32.5°	745.3	739.6	733.8	728.0	722.2	714.3	704.2	694.1	684.0	673.9	667.6
35°	709.3	703.2	697.1	691.0	684.8	676.5	665.9	655.4	644.8	634.3	626.9
37.5°	672.9	666.1	659.3	652.4	645.6	636.6	625.3	614.1	602.8	591.5	583.2
40°	649.6	642.1	634.6	627.1	619.6	609.8	597.8	585.7	573.6	561.5	552.6
42.5°	623.2	615.7	608.3	600.8	593.3	583.3	570.8	558.3	545.8	533.3	523.6
45°	582.9	575.3	567.6	560.0	552.3	541.9	528.8	515.7	502.6	489.5	479.8
47.5°	542.6	534.2	525.8	517.4	509.0	498.3	485.1	472.0	458.9	445.8	435.3
50°	513.2	505.2	497.2	489.2	481.2	470.3	456.5	442.8	429.0	415.2	404.6
52.5°	486.9	478.2	469.5	460.8	452.2	441.0	427.3	413.7	400.0	386.4	375.4
55°	442.8	434.4	426.1	417.7	409.4	398.0	383.5	369.1	354.6	340.1	330.2
57.5°	402.0	392.9	383.8	374.7	365.6	353.8	339.3	324.8	310.2	295.7	286.4
60°	373.8	364.5	355.1	345.7	336.4	324.6	310.5	296.4	282.2	268.1	258.9
62.5°	345.6	336.3	326.9	317.5	308.2	296.4	282.3	268.2	254.0	239.9	231.3
65°	302.6	293.2	283.9	274.5	265.1	253.8	240.5	227.3	214.0	200.7	192.4
67.5°	259.5	250.1	240.6	231.1	221.7	210.6	197.8	185.1	172.4	159.6	153.4
70°	231.3	222.1	213.0	203.8	194.6	184.0	172.1	160.2	148.3	136.4	130.4
72.5°	203.1	194.1	185.0	176.0	166.9	157.0	146.2	135.3	124.5	113.7	108.8
75°	160.1	151.9	143.8	135.6	127.4	118.6	109.3	99.9	90.6	81.2	79.5
77.5°	120.9	113.5	106.1	98.7	91.3	84.6	78.6	72.6	66.5	60.5	59.6
80°	95.8	88.8	81.8	74.8	67.8	62.6	59.0	55.4	51.8	48.3	47.7
82.5°	71.9	65.8	59.8	53.8	47.7	43.9	42.2	40.6	38.9	37.2	36.7
85°	40.6	36.9	33.1	29.4	25.6	23.5	23.0	22.5	22.0	21.4	21.1
87.5°	15.2	14.1	13.1	12.3	11.3	11.0	11.7	12.4	13.1	13.8	13.4
90°	2.3	4.6	7.0	10.5	12.8	15.1	18.6	22.1	25.6	29.0	27.9
92.5°	14.4	21.4	31.1	40.2	50.0	67.2	97.6	147.6	196.6	178.7	134.8
95°	39.5	43.0	55.8	75.5	105.7	151.0	249.8	422.9	613.5	689.0	558.8
97.5°	67.4	68.5	78.5	95.7	125.5	174.5	268.9	464.0	781.7	1067.7	1142.3
100°	86.0	87.1	95.3	111.5	139.4	184.7	266.1	438.0	743.6	1100.3	1329.2
102.5°	105.5	107.6	114.8	130.1	155.2	196.8	269.8	415.7	687.8	1039.9	1338.4
105°	134.8	138.3	145.2	159.2	181.2	217.3	280.0	399.7	619.3	934.1	1267.6
107.5°	165.9	169.4	176.1	189.8	210.5	244.0	299.1	398.5	575.6	840.7	1143.5
110°	188.2	191.7	197.5	210.3	230.0	262.6	314.9	403.2	558.8	787.7	1065.4



TEST NUMBER: P332299

CATALOG NUMBER: S123RDIP-S560D1195U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	208.7	212.2	218.0	230.7	250.5	282.1	330.7	412.5	549.6	752.4	997.6
115°	238.2	242.8	249.8	261.4	281.2	312.5	356.7	427.6	546.1	714.5	915.5
117.5°	267.7	273.0	278.8	289.5	311.6	340.7	384.3	447.5	548.2	692.2	866.0
120°	288.1	291.6	297.4	309.1	331.1	360.2	402.0	462.4	551.9	682.0	840.0
122.5°	305.8	309.3	315.1	327.6	348.8	379.7	420.6	476.4	558.4	675.5	818.6
125°	331.1	333.5	340.4	353.2	375.3	406.6	447.3	498.4	568.1	666.9	791.2
127.5°	350.4	353.9	362.5	375.5	399.9	431.3	470.5	516.6	579.3	662.7	767.1
130°	362.5	366.0	376.4	390.4	414.8	446.1	484.5	528.6	586.7	659.9	754.0
132.5°	371.8	376.2	387.6	404.3	428.7	459.2	496.6	539.8	592.3	659.0	742.0
135°	388.1	392.7	405.5	422.9	447.3	478.7	514.7	554.2	600.7	657.6	726.2
137.5°	403.4	408.3	420.8	439.4	463.6	492.6	527.2	564.9	606.3	655.0	712.4
140°	413.6	419.4	431.0	449.6	472.9	501.9	535.6	570.5	610.0	654.1	704.1
142.5°	424.8	429.7	442.2	458.9	482.2	509.4	542.1	576.0	612.8	652.3	696.6
145°	442.7	446.1	456.6	474.0	493.8	520.5	550.7	582.1	614.6	649.5	686.7
147.5°	460.8	462.9	473.1	488.2	507.3	530.0	557.7	585.8	614.6	645.1	676.9
150°	472.9	474.0	483.3	498.4	514.7	535.6	562.3	586.7	614.6	641.3	670.4
152.5°	485.0	485.2	494.5	507.7	522.1	542.1	565.1	588.6	611.8	636.7	663.0
155°	503.1	503.1	510.1	521.7	534.4	550.7	570.5	589.1	608.8	628.6	651.8
157.5°	517.5	518.4	524.0	534.2	545.1	557.7	573.5	590.2	604.9	621.4	639.2
160°	528.6	528.6	533.3	542.6	550.7	562.3	576.3	590.2	603.0	615.8	630.9
162.5°	537.0	537.0	540.7	548.2	555.4	565.1	577.2	589.3	599.3	610.2	622.5
165°	549.6	548.4	550.7	556.5	561.2	569.3	578.6	586.7	593.7	601.8	611.1
167.5°	559.1	557.7	558.8	563.3	566.5	571.6	578.4	584.9	588.1	593.5	600.2
170°	564.7	562.3	563.5	567.0	569.3	571.6	577.4	582.1	584.4	587.9	593.7
172.5°	568.4	567.0	567.2	569.8	571.2	572.6	577.4	581.2	581.6	583.2	587.2
175°	572.8	571.6	570.5	572.8	572.8	574.0	576.3	578.6	577.4	577.4	579.8
177.5°	574.9	574.0	573.0	574.0	574.0	574.0	574.9	576.7	574.9	574.0	574.9
180°	574.0	574.0	574.0	574.0	574.0	574.0	574.0	574.0	574.0	574.0	574.0



TEST NUMBER: P332299

CATALOG NUMBER: S123RDIP-S560D1195U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	944.5	944.5	944.5	944.5	944.5	944.5	944.5	944.5
2.5°	940.8	942.3	943.8	944.4	944.1	943.8	943.6	943.3
5°	934.5	936.1	937.6	938.2	937.9	937.5	937.2	936.8
7.5°	921.4	922.2	923.1	923.2	922.6	922.1	921.5	920.9
10°	909.6	909.8	909.9	909.6	908.8	907.9	907.1	906.2
12.5°	895.0	894.9	894.8	894.2	893.2	892.2	891.3	890.3
15°	869.3	868.4	867.6	866.5	865.3	864.2	863.0	861.8
17.5°	838.6	836.8	834.9	833.2	831.4	829.6	827.8	826.1
20°	817.5	815.3	813.1	811.0	808.9	806.9	804.8	802.8
22.5°	795.0	792.2	789.5	787.1	785.2	783.3	781.4	779.5
25°	758.1	754.5	751.0	748.2	746.4	744.5	742.6	740.7
27.5°	717.9	713.0	708.0	704.1	701.2	698.4	695.5	692.6
30°	689.3	683.5	677.8	673.5	670.8	668.1	665.3	662.6
32.5°	661.3	654.9	648.6	644.0	641.2	638.3	635.4	632.6
35°	619.6	612.3	605.0	599.8	596.7	593.7	590.6	587.5
37.5°	574.9	566.6	558.3	552.3	548.5	544.7	540.9	537.1
40°	543.8	534.9	526.1	519.7	515.8	511.9	508.0	504.0
42.5°	514.0	504.3	494.6	488.0	484.5	481.0	477.5	474.0
45°	470.1	460.4	450.7	443.8	439.7	435.6	431.5	427.4
47.5°	424.7	414.2	403.6	396.5	392.9	389.2	385.6	381.9
50°	394.1	383.5	373.0	365.7	361.8	357.9	354.0	350.1
52.5°	364.5	353.5	342.5	335.3	331.8	328.3	324.8	321.3
55°	320.4	310.5	300.6	294.0	290.6	287.2	283.8	280.4
57.5°	277.0	267.7	258.4	252.3	249.4	246.5	243.6	240.7
60°	249.7	240.5	231.3	225.3	222.4	219.5	216.6	213.7
62.5°	222.6	214.0	205.3	199.5	196.5	193.4	190.4	187.4
65°	184.0	175.7	167.3	162.2	160.4	158.5	156.6	154.7
67.5°	147.2	140.9	134.7	130.6	128.6	126.6	124.6	122.6
70°	124.4	118.5	112.5	108.6	106.7	104.9	103.0	101.1
72.5°	103.9	99.1	94.2	91.4	90.6	89.8	89.0	88.2
75°	77.8	76.1	74.4	73.4	73.0	72.7	72.3	72.0
77.5°	58.7	57.8	56.8	56.2	55.9	55.5	55.2	54.8
80°	47.2	46.7	46.2	45.8	45.5	45.1	44.8	44.4
82.5°	36.2	35.7	35.2	34.9	34.8	34.8	34.7	34.6
85°	20.8	20.4	20.1	19.9	19.9	19.9	19.9	19.9
87.5°	13.5	13.6	13.7	14.0	13.7	13.8	13.8	13.5
90°	29.0	30.2	31.4	33.7	32.5	33.7	34.9	33.7
92.5°	97.8	77.6	68.5	62.5	60.4	56.9	58.1	56.0
95°	418.3	283.5	221.9	180.1	158.0	147.6	139.4	134.8
97.5°	1042.6	835.1	685.3	546.3	460.6	408.3	376.9	366.9
100°	1369.8	1275.7	1139.8	974.8	857.4	772.6	727.3	728.5
102.5°	1478.6	1475.5	1396.3	1291.7	1200.4	1133.3	1095.4	1068.7
105°	1510.4	1626.6	1648.7	1618.5	1565.0	1520.9	1483.7	1477.9
107.5°	1418.8	1607.5	1709.3	1750.7	1751.6	1736.7	1724.2	1713.5
110°	1331.5	1545.3	1691.7	1773.0	1805.5	1814.8	1812.5	1810.2



TEST NUMBER: P332299

CATALOG NUMBER: S123RDIP-S560D1195U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1245.0	1463.5	1627.5	1732.1	1791.6	1820.4	1829.2	1829.7
115°	1130.5	1332.6	1503.4	1630.1	1717.2	1768.3	1791.6	1797.4
117.5°	1047.5	1222.0	1375.4	1503.9	1594.8	1653.3	1686.8	1694.7
120°	1003.8	1160.7	1300.1	1417.5	1509.2	1574.3	1602.2	1609.2
122.5°	969.4	1111.4	1240.6	1349.6	1431.2	1489.7	1520.4	1529.2
125°	923.7	1050.3	1161.8	1254.8	1329.2	1380.3	1409.3	1417.5
127.5°	883.7	996.6	1097.2	1181.8	1248.1	1291.7	1318.0	1325.4
130°	858.6	963.2	1057.3	1136.3	1197.9	1239.7	1264.1	1273.4
132.5°	835.4	931.6	1019.2	1094.5	1152.3	1194.1	1215.8	1222.3
135°	804.0	886.5	962.0	1028.2	1085.2	1120.0	1140.9	1149.1
137.5°	775.4	843.0	908.1	965.5	1013.4	1048.7	1066.3	1071.7
140°	758.7	817.9	873.7	923.7	967.8	1000.4	1018.9	1017.8
142.5°	742.9	793.8	842.1	885.6	923.2	952.0	968.7	967.6
145°	723.8	762.2	799.4	833.0	862.1	886.5	895.8	898.1
147.5°	708.3	738.7	768.7	792.6	814.7	831.2	840.0	840.9
150°	697.1	723.8	748.2	770.3	787.7	800.5	807.5	807.5
152.5°	686.9	709.9	731.5	749.9	763.6	775.4	779.6	779.6
155°	671.5	690.1	707.6	721.5	732.0	741.3	743.6	744.7
157.5°	655.3	670.9	684.3	695.2	704.3	711.3	713.1	712.9
160°	646.0	658.8	670.4	678.5	686.7	693.6	693.6	692.5
162.5°	634.8	645.8	656.4	663.6	669.0	675.0	675.0	673.9
165°	620.4	627.4	635.5	641.3	646.0	650.6	649.5	649.5
167.5°	607.9	613.2	617.9	622.1	624.1	627.4	626.2	626.2
170°	599.5	603.0	607.6	610.0	611.1	613.5	612.3	612.3
172.5°	592.1	594.6	598.4	599.7	600.0	602.3	600.2	599.3
175°	582.1	583.2	585.6	585.6	585.6	586.7	585.6	584.4
177.5°	575.8	576.7	577.7	577.7	576.7	577.7	575.8	575.8
180°	574.0	574.0	574.0	574.0	574.0	574.0	574.0	574.0

(END OF REPORT)