

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332309

Luminaire Tested: **S123RDIP-S775D585U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332309
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S775D585U835-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 585 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5259.8 lumens
Efficiency: N/A
Efficacy: 130.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332309

CATALOG NUMBER: S123RDIP-S775D585U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

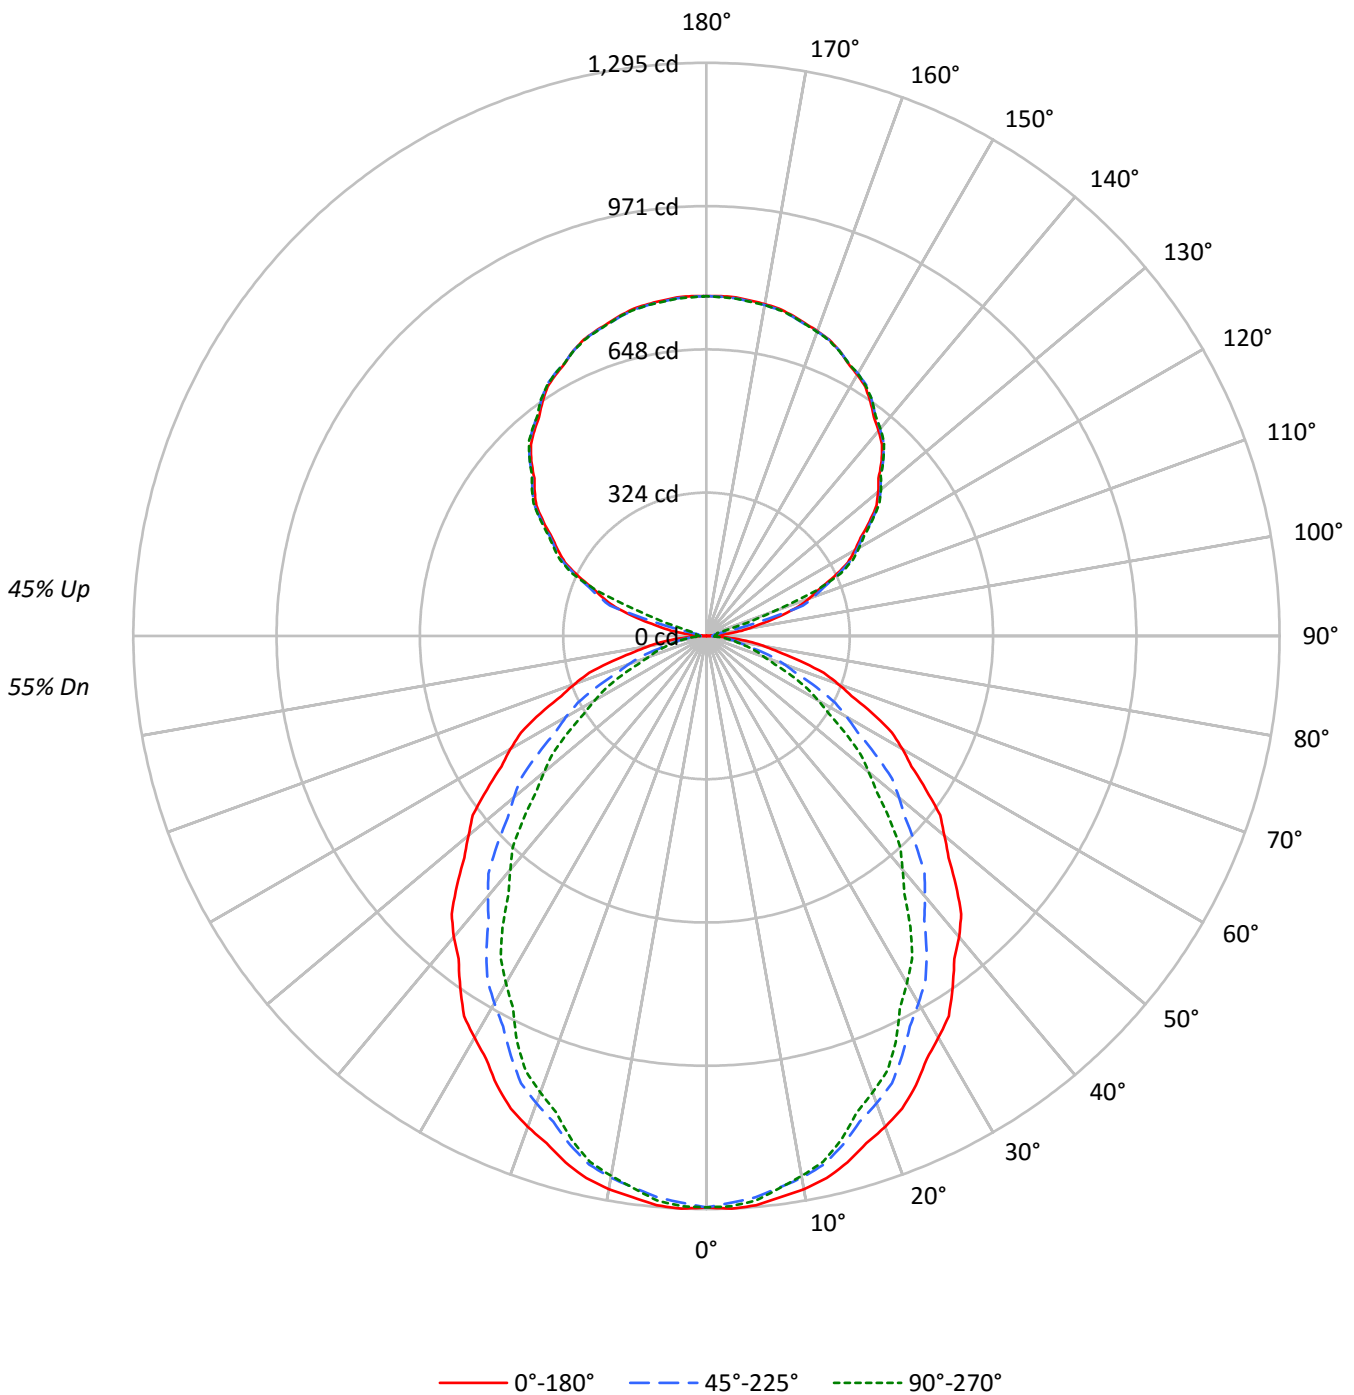



TEST NUMBER: P332309

CATALOG NUMBER: S123RDIP-S775D585U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	55	53	52	47
2	91	84	77	72	84	78	73	68	67	63	60	58	55	52	49	46	45	40
3	83	74	67	61	77	69	62	57	60	55	51	51	48	44	43	41	38	35
4	76	65	58	52	71	61	54	49	53	48	44	46	42	38	39	36	33	30
5	70	59	50	45	65	55	48	42	48	42	38	41	37	34	35	32	29	26
6	65	53	45	39	60	49	42	37	43	37	33	37	33	30	32	29	26	23
7	60	48	40	34	56	45	38	33	39	34	29	34	30	26	29	26	23	21
8	56	43	36	30	52	41	34	29	36	30	26	31	27	24	27	23	21	19
9	52	40	32	27	48	37	31	26	33	27	24	29	24	21	25	21	19	17
10	49	36	29	25	45	34	28	23	30	25	21	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13897	13897	13897
5°	13950	13758	13837
10°	13871	13585	13539
15°	13722	13266	13127
20°	13518	12869	12569
25°	13307	12423	12025
30°	13027	11908	11257
35°	12741	11393	10553
40°	12476	10784	9681
45°	12129	10185	8894
50°	11747	9503	8013
55°	11357	8724	7191
60°	11001	7890	6288
65°	10534	6986	5387
70°	9951	5866	4349
75°	9100	4616	4092
80°	8114	4091	3763
85°	6854	3619	3359



TEST NUMBER: P332309

CATALOG NUMBER: S123RDIP-S775D585U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.2	2.3
10°-20°	337.3	6.4
20°-30°	485.7	9.2
30°-40°	547.1	10.4
40°-50°	523.4	10.0
50°-60°	428.6	8.1
60°-70°	289.2	5.5
70°-80°	145.5	2.8
80°-90°	40.6	0.8
90°-100°	27.9	0.5
100°-110°	133.0	2.5
110°-120°	319.5	6.1
120°-130°	406.9	7.7
130°-140°	434.7	8.3
140°-150°	406.5	7.7
150°-160°	327.9	6.2
160°-170°	211.6	4.0
170°-180°	72.9	1.4
0°-30°	944.3	18.0
0°-40°	1491.4	28.4
0°-60°	2443.4	46.5
0°-90°	2918.7	55.5
90°-120°	480.5	9.1
90°-150°	1728.6	32.9
90°-180°	2341.0	44.5
0°-180°	5259.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1291	1291	1291	1291	1291	
5°	1291	1285	1273	1282	1281	122
15°	1231	1219	1190	1185	1178	347
25°	1120	1093	1046	1025	1012	515
35°	970	930	867	823	803	607
45°	797	748	669	611	584	615
55°	605	552	465	406	383	542
65°	414	355	274	225	212	409
75°	219	168	111	101	98	233
85°	56	34	29	27	27	62
90°	1	6	14	16	17	4
95°	35	13	18	21	22	43
105°	170	173	125	30	25	180
115°	319	322	327	333	335	315
125°	449	454	456	457	459	401
135°	560	563	565	567	565	431
145°	646	650	651	652	652	404
155°	711	710	711	713	710	328
165°	750	748	748	752	748	212
175°	768	765	765	769	765	73
180°	768	768	768	768	768	



TEST NUMBER: P332309

CATALOG NUMBER: S123RDIP-S775D585U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1291.1	1291.1	1291.1	1291.1	1291.1	1291.1	1291.1	1291.1	1291.1	1291.1	1291.1
2.5°	1295.2	1294.5	1293.7	1293.0	1292.3	1290.8	1288.5	1286.3	1284.1	1281.8	1283.9
5°	1291.1	1289.9	1288.7	1287.6	1286.4	1284.4	1281.6	1278.8	1276.0	1273.3	1275.3
7.5°	1279.1	1277.9	1276.6	1275.3	1274.1	1271.6	1268.0	1264.4	1260.8	1257.1	1258.3
10°	1269.1	1267.4	1265.8	1264.2	1262.5	1259.6	1255.4	1251.3	1247.1	1242.9	1243.1
12.5°	1254.8	1253.0	1251.2	1249.4	1247.6	1244.1	1239.0	1233.9	1228.7	1223.6	1223.5
15°	1231.4	1228.8	1226.2	1223.7	1221.1	1216.6	1210.1	1203.6	1197.0	1190.5	1189.4
17.5°	1201.8	1198.9	1195.9	1192.9	1189.9	1184.3	1176.0	1167.7	1159.4	1151.2	1148.7
20°	1180.1	1176.3	1172.6	1168.9	1165.2	1158.9	1150.0	1141.2	1132.4	1123.5	1120.5
22.5°	1155.8	1151.5	1147.2	1142.9	1138.6	1131.8	1122.4	1113.0	1103.6	1094.2	1090.4
25°	1120.4	1114.6	1108.7	1102.9	1097.1	1088.8	1078.1	1067.4	1056.7	1046.0	1041.1
27.5°	1077.4	1071.0	1064.6	1058.2	1051.8	1042.6	1030.7	1018.8	1006.8	994.9	988.1
30°	1048.1	1041.1	1034.2	1027.2	1020.2	1010.2	997.2	984.1	971.1	958.1	950.2
32.5°	1018.8	1010.9	1003.0	995.1	987.2	976.3	962.5	948.8	935.0	921.2	912.6
35°	969.6	961.2	952.8	944.5	936.1	924.7	910.3	895.8	881.4	867.0	857.0
37.5°	919.8	910.4	901.1	891.8	882.5	870.2	854.8	839.4	824.0	808.6	797.2
40°	887.9	877.7	867.4	857.2	847.0	833.6	817.1	800.6	784.0	767.5	755.4
42.5°	851.9	841.7	831.4	821.2	811.0	797.3	780.2	763.1	746.1	729.0	715.8
45°	796.8	786.4	775.9	765.4	754.9	740.8	722.8	704.9	687.0	669.1	655.8
47.5°	741.8	730.3	718.8	707.3	695.8	681.1	663.2	645.2	627.3	609.4	595.0
50°	701.5	690.6	679.7	668.7	657.8	642.9	624.1	605.2	586.4	567.5	553.1
52.5°	665.5	653.7	641.8	629.9	618.1	602.8	584.1	565.5	546.8	528.1	513.2
55°	605.2	593.8	582.4	571.0	559.6	544.0	524.2	504.5	484.7	464.9	451.4
57.5°	549.5	537.1	524.7	512.2	499.8	483.7	463.8	443.9	424.0	404.2	391.4
60°	511.0	498.2	485.4	472.6	459.8	443.7	424.4	405.1	385.8	366.5	353.9
62.5°	472.4	459.6	446.8	434.0	421.3	405.2	385.9	366.6	347.3	327.9	316.1
65°	413.6	400.8	388.0	375.2	362.4	346.9	328.8	310.6	292.5	274.3	262.9
67.5°	354.8	341.8	328.9	315.9	303.0	287.8	270.4	253.0	235.6	218.2	209.7
70°	316.2	303.7	291.1	278.5	266.0	251.5	235.2	219.0	202.7	186.4	178.2
72.5°	277.7	265.3	252.9	240.5	228.2	214.6	199.8	185.0	170.2	155.4	148.7
75°	218.8	207.7	196.5	185.3	174.2	162.2	149.4	136.6	123.8	111.0	108.7
77.5°	165.2	155.1	145.0	134.9	124.8	115.7	107.4	99.2	91.0	82.7	81.5
80°	130.9	121.3	111.8	102.3	92.7	85.5	80.6	75.7	70.9	66.0	65.3
82.5°	98.2	90.0	81.7	73.5	65.3	60.0	57.7	55.4	53.2	50.9	50.2
85°	55.5	50.4	45.3	40.1	35.0	32.1	31.4	30.7	30.0	29.3	28.9
87.5°	20.2	18.4	16.6	14.8	13.0	12.3	12.6	13.0	13.3	13.6	13.5
90°	0.6	1.8	3.1	4.4	5.6	7.1	8.7	10.4	12.0	13.7	14.2
92.5°	10.6	10.3	9.9	9.5	9.2	9.6	10.9	12.1	13.4	14.6	15.4
95°	34.8	29.6	24.4	19.2	14.0	12.1	13.5	14.9	16.3	17.7	18.6
97.5°	69.9	67.6	65.3	62.9	60.6	54.9	45.7	36.6	27.5	18.4	19.4
100°	96.4	98.9	101.5	104.0	106.5	97.9	78.1	58.4	38.6	18.8	19.8
102.5°	126.5	128.3	130.2	132.0	133.8	123.9	102.3	80.7	59.1	37.5	34.4
105°	170.0	171.4	172.8	174.1	175.5	170.5	159.1	147.7	136.3	124.9	102.5
107.5°	215.8	216.9	218.1	219.2	220.3	221.7	223.5	225.3	227.1	228.9	212.5
110°	246.4	247.4	248.4	249.4	250.4	251.7	253.0	254.4	255.8	257.2	253.0



TEST NUMBER: P332309

CATALOG NUMBER: S123RDIP-S775D585U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	275.6	276.5	277.4	278.3	279.2	280.4	281.8	283.2	284.6	286.0	286.1
115°	318.8	319.6	320.3	321.1	321.9	322.8	324.0	325.1	326.2	327.4	328.7
117.5°	360.7	361.6	362.6	363.5	364.4	365.2	365.8	366.4	367.0	367.5	368.6
120°	386.7	387.8	389.0	390.1	391.3	392.0	392.4	392.8	393.2	393.5	394.6
122.5°	413.2	414.1	415.0	416.0	416.9	417.6	418.1	418.6	419.1	419.6	420.3
125°	449.4	450.5	451.5	452.5	453.5	454.3	454.8	455.3	455.8	456.3	456.5
127.5°	484.6	485.6	486.6	487.6	488.6	489.4	490.0	490.7	491.3	491.9	492.3
130°	506.5	507.5	508.5	509.5	510.5	511.3	511.8	512.3	512.8	513.3	513.8
132.5°	527.5	528.5	529.5	530.5	531.5	532.2	532.6	533.0	533.4	533.9	534.4
135°	559.5	560.3	561.0	561.8	562.6	563.2	563.7	564.2	564.7	565.2	565.6
137.5°	586.9	587.9	588.8	589.8	590.7	591.4	591.6	591.9	592.2	592.5	593.1
140°	605.1	605.9	606.7	607.4	608.2	608.8	609.1	609.5	609.9	610.3	610.8
142.5°	622.0	622.8	623.6	624.3	625.1	625.6	626.0	626.4	626.8	627.2	627.6
145°	645.6	646.5	647.4	648.3	649.2	649.8	650.0	650.3	650.5	650.8	651.0
147.5°	667.9	668.5	669.1	669.6	670.2	670.6	670.9	671.1	671.4	671.7	671.9
150°	681.6	682.0	682.3	682.7	683.1	683.4	683.7	683.9	684.2	684.4	684.7
152.5°	693.9	694.1	694.2	694.4	694.6	694.8	694.9	695.1	695.2	695.4	695.8
155°	711.2	711.0	710.7	710.5	710.2	710.2	710.3	710.4	710.5	710.7	711.3
157.5°	724.7	724.7	724.6	724.6	724.6	724.5	724.4	724.3	724.1	724.0	724.8
160°	732.9	732.8	732.7	732.5	732.4	732.3	732.1	732.0	731.9	731.8	732.5
162.5°	740.7	740.3	740.0	739.7	739.3	739.1	739.0	738.9	738.7	738.6	739.5
165°	750.0	749.6	749.3	748.9	748.5	748.2	748.1	748.0	747.9	747.7	748.8
167.5°	757.3	756.8	756.3	755.8	755.3	755.0	755.0	755.0	755.0	755.0	756.1
170°	761.4	760.9	760.4	759.9	759.4	759.1	759.1	759.1	759.1	759.1	760.2
172.5°	764.2	763.6	762.9	762.3	761.7	761.5	761.6	761.7	761.8	761.9	762.9
175°	767.7	767.1	766.4	765.8	765.2	764.9	765.0	765.2	765.3	765.4	766.3
177.5°	768.6	768.1	767.6	767.1	766.6	766.4	766.5	766.6	766.7	766.8	767.6
180°	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7



TEST NUMBER: P332309

CATALOG NUMBER: S123RDIP-S775D585U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1291.1	1291.1	1291.1	1291.1	1291.1	1291.1	1291.1	1291.1
2.5°	1285.9	1288.0	1290.0	1290.9	1290.5	1290.1	1289.7	1289.4
5°	1277.4	1279.5	1281.6	1282.4	1282.0	1281.5	1281.0	1280.6
7.5°	1259.5	1260.6	1261.8	1262.0	1261.2	1260.4	1259.6	1258.8
10°	1243.4	1243.6	1243.8	1243.4	1242.2	1241.0	1239.9	1238.7
12.5°	1223.3	1223.2	1223.1	1222.3	1221.0	1219.6	1218.3	1216.9
15°	1188.2	1187.0	1185.9	1184.5	1182.9	1181.2	1179.6	1178.0
17.5°	1146.2	1143.8	1141.3	1138.9	1136.4	1134.0	1131.6	1129.2
20°	1117.5	1114.4	1111.4	1108.5	1105.7	1102.9	1100.1	1097.3
22.5°	1086.7	1082.9	1079.1	1075.9	1073.3	1070.7	1068.1	1065.5
25°	1036.3	1031.4	1026.5	1022.8	1020.2	1017.6	1015.1	1012.5
27.5°	981.3	974.6	967.8	962.4	958.5	954.6	950.7	946.8
30°	942.3	934.3	926.4	920.6	916.9	913.2	909.4	905.7
32.5°	903.9	895.3	886.6	880.3	876.4	872.5	868.6	864.7
35°	847.0	837.0	827.0	819.9	815.7	811.5	807.3	803.1
37.5°	785.8	774.5	763.1	754.9	749.7	744.5	739.4	734.2
40°	743.3	731.2	719.1	710.4	705.0	699.7	694.3	689.0
42.5°	702.5	689.3	676.1	667.1	662.3	657.5	652.7	647.9
45°	642.6	629.3	616.0	606.6	601.0	595.4	589.9	584.3
47.5°	580.5	566.1	551.7	542.0	537.0	532.0	527.1	522.1
50°	538.7	524.2	509.8	499.9	494.6	489.2	483.9	478.5
52.5°	498.2	483.2	468.2	458.3	453.5	448.7	443.9	439.1
55°	437.9	424.4	410.9	401.8	397.2	392.5	387.9	383.2
57.5°	378.7	365.9	353.2	344.8	340.9	336.9	332.9	329.0
60°	341.3	328.8	316.2	308.0	304.0	300.0	296.1	292.1
62.5°	304.3	292.5	280.7	272.7	268.5	264.4	260.3	256.1
65°	251.5	240.1	228.7	221.7	219.2	216.6	214.1	211.5
67.5°	201.2	192.7	184.1	178.5	175.8	173.0	170.3	167.5
70°	170.1	161.9	153.8	148.5	145.9	143.3	140.8	138.2
72.5°	142.1	135.4	128.8	124.9	123.8	122.8	121.7	120.6
75°	106.3	104.0	101.7	100.3	99.8	99.4	98.9	98.4
77.5°	80.2	78.9	77.7	76.8	76.4	75.9	75.4	75.0
80°	64.6	63.9	63.2	62.6	62.1	61.7	61.2	60.7
82.5°	49.5	48.8	48.1	47.7	47.6	47.5	47.4	47.3
85°	28.4	27.9	27.5	27.2	27.2	27.2	27.2	27.2
87.5°	13.5	13.4	13.3	13.2	13.0	12.9	12.8	12.6
90°	14.7	15.2	15.7	16.1	16.4	16.6	16.9	17.1
92.5°	16.2	17.0	17.8	18.3	18.5	18.6	18.8	18.9
95°	19.5	20.3	21.2	21.7	21.7	21.7	21.7	21.7
97.5°	20.4	21.4	22.4	23.0	23.1	23.2	23.4	23.5
100°	20.8	21.9	22.9	23.4	23.6	23.7	23.8	24.0
102.5°	31.2	28.1	25.0	23.5	23.7	24.0	24.2	24.4
105°	80.0	57.6	35.2	24.1	24.3	24.6	24.8	25.1
107.5°	196.0	179.6	163.1	146.5	129.5	112.6	95.7	78.8
110°	248.9	244.7	240.5	229.3	211.2	193.1	175.0	156.8



TEST NUMBER: P332309

CATALOG NUMBER: S123RDIP-S775D585U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	286.1	286.2	286.3	284.4	280.6	276.7	272.9	269.1
115°	329.9	331.2	332.5	333.3	333.8	334.4	334.9	335.4
117.5°	369.6	370.6	371.6	372.2	372.3	372.4	372.5	372.6
120°	395.6	396.6	397.6	398.1	398.1	398.1	398.1	398.1
122.5°	421.0	421.7	422.4	422.8	422.9	423.0	423.1	423.2
125°	456.8	457.0	457.3	457.6	457.8	458.1	458.3	458.6
127.5°	492.7	493.1	493.5	493.6	493.3	493.1	492.8	492.6
130°	514.3	514.8	515.3	515.5	515.2	515.0	514.7	514.5
132.5°	534.9	535.4	535.9	536.0	535.6	535.2	534.9	534.5
135°	566.0	566.4	566.7	566.7	566.4	566.0	565.6	565.2
137.5°	593.7	594.3	594.9	595.1	594.8	594.6	594.3	594.1
140°	611.3	611.8	612.3	612.4	612.2	611.9	611.7	611.4
142.5°	628.0	628.4	628.8	628.8	628.5	628.1	627.7	627.4
145°	651.3	651.5	651.8	651.9	651.9	651.9	651.9	651.9
147.5°	672.2	672.4	672.7	672.5	671.9	671.3	670.8	670.2
150°	684.9	685.2	685.4	685.4	685.0	684.6	684.2	683.9
152.5°	696.3	696.7	697.2	697.1	696.6	696.0	695.4	694.8
155°	711.9	712.6	713.2	713.1	712.4	711.6	710.9	710.1
157.5°	725.5	726.3	727.1	726.9	725.9	725.0	724.0	723.0
160°	733.3	734.0	734.8	734.7	733.9	733.0	732.1	731.2
162.5°	740.3	741.2	742.1	742.1	741.3	740.5	739.7	739.0
165°	749.8	750.8	751.8	751.9	751.0	750.1	749.2	748.3
167.5°	757.1	758.1	759.1	759.1	758.1	757.1	756.1	755.0
170°	761.2	762.2	763.2	763.2	762.2	761.2	760.2	759.1
172.5°	763.9	764.9	765.9	765.9	764.8	763.7	762.5	761.4
175°	767.2	768.1	769.0	768.9	767.9	766.9	765.9	764.8
177.5°	768.4	769.2	770.0	769.9	768.9	767.9	766.9	765.9
180°	767.7	767.7	767.7	767.7	767.7	767.7	767.7	767.7

(END OF REPORT)