

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332008-935

Luminaire Tested: **S123DIP-S1000D365U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332008-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1000D365U935-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4678.3 lumens
Efficiency: N/A
Efficacy: 107.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 43.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332008-935

CATALOG NUMBER: S123DIP-S1000D365U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

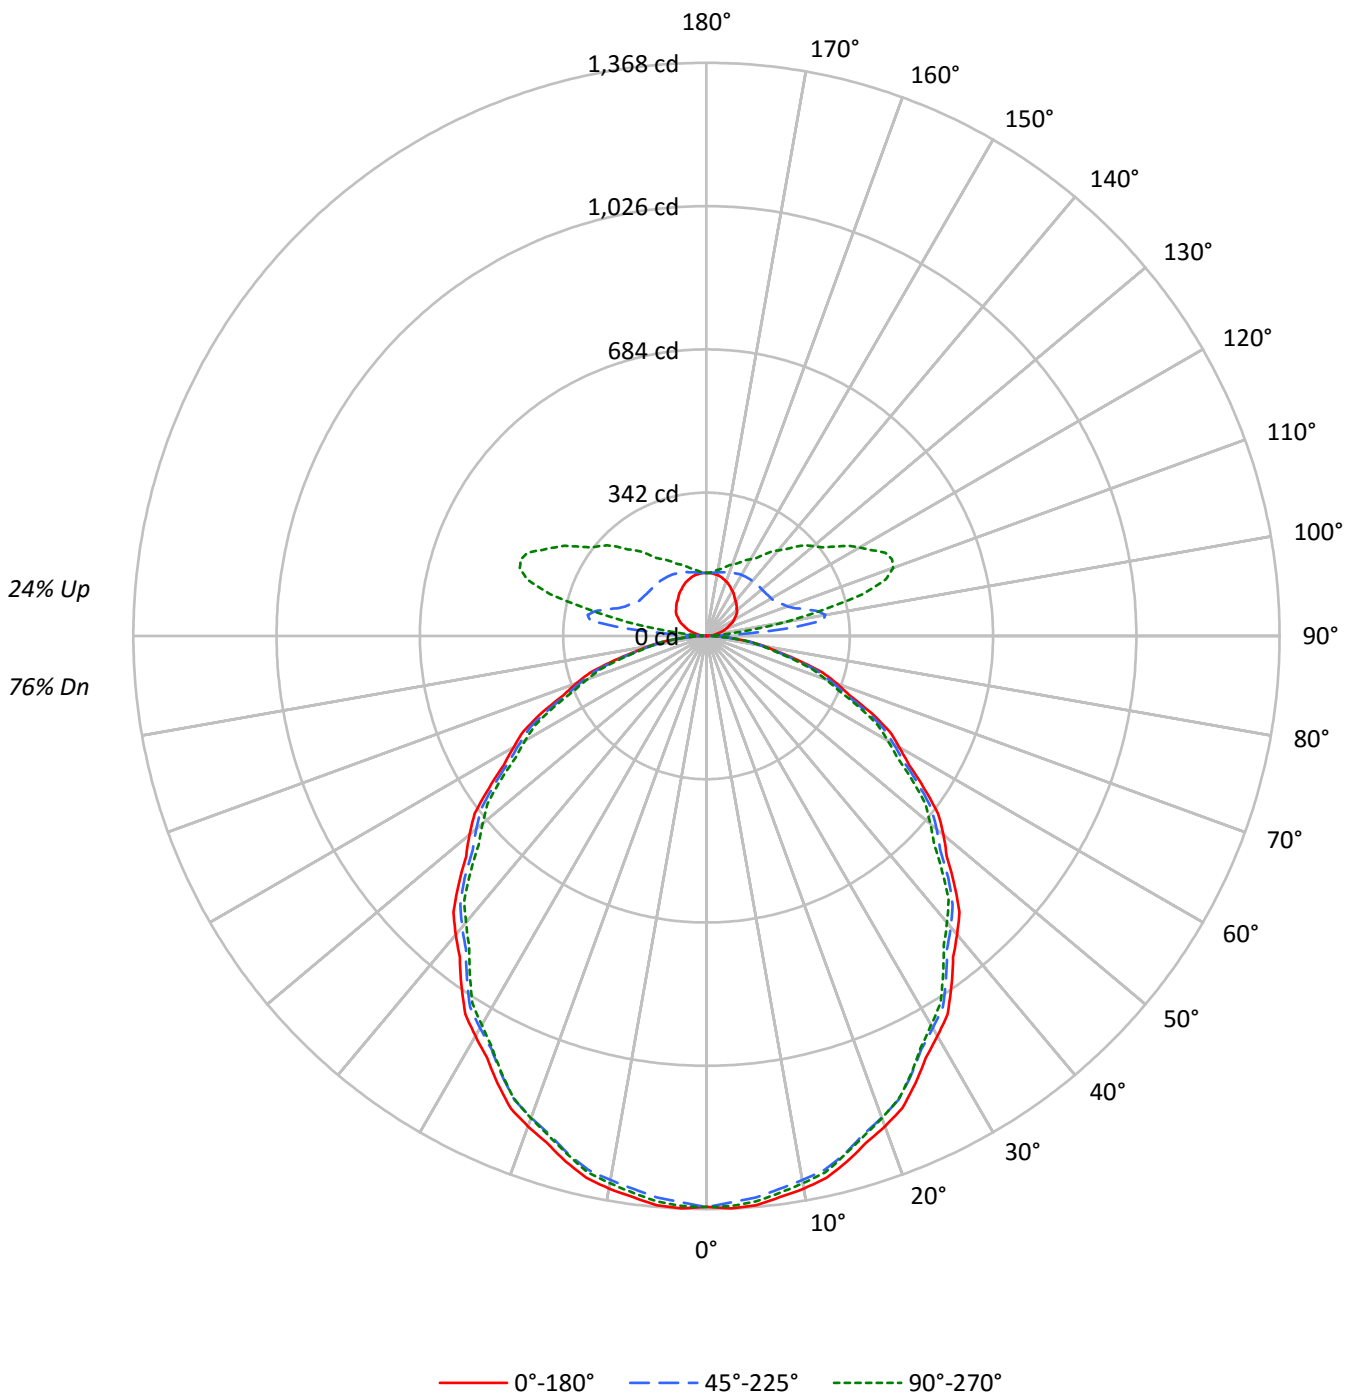



TEST NUMBER: P332008-935

CATALOG NUMBER: S123DIP-S1000D365U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	98	98	98	88	88	88	80	80	80	76
1	103	99	95	91	98	94	91	87	86	83	80	78	76	74	70	69	67	64
2	94	86	80	74	89	82	77	72	75	70	66	68	65	61	62	59	57	53
3	86	76	68	62	82	73	66	60	66	61	56	60	56	52	55	51	48	45
4	79	67	59	53	75	64	57	51	59	53	48	54	49	45	49	45	42	39
5	72	60	52	45	69	58	50	44	53	46	41	48	43	39	44	40	36	34
6	67	54	46	39	63	52	44	38	48	41	36	44	38	34	40	36	32	29
7	62	49	41	35	59	47	39	34	43	37	32	40	34	30	37	32	28	26
8	58	45	37	31	55	43	35	30	40	33	29	37	31	27	34	29	25	23
9	54	41	33	28	51	39	32	27	36	30	26	34	28	24	31	26	23	21
10	50	38	30	25	48	36	29	24	34	28	23	31	26	22	29	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14670	14670	14670
5°	14738	14536	14638
10°	14641	14410	14499
15°	14469	14247	14273
20°	14269	14014	14027
25°	14001	13737	13709
30°	13706	13430	13326
35°	13397	13104	12935
40°	13075	12745	12546
45°	12718	12415	12113
50°	12363	12010	11675
55°	11898	11590	11237
60°	11427	11102	10747
65°	11013	10565	10236
70°	10401	9958	9514
75°	9503	9162	8771
80°	8573	8207	8133
85°	7534	7237	6941



TEST NUMBER: P332008-935

CATALOG NUMBER: S123DIP-S1000D365U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	128.4	2.7
10°-20°	362.5	7.7
20°-30°	535.5	11.4
30°-40°	625.5	13.4
40°-50°	628.8	13.4
50°-60°	552.4	11.8
60°-70°	411.5	8.8
70°-80°	234.5	5.0
80°-90°	68.5	1.5
90°-100°	83.7	1.8
100°-110°	236.9	5.1
110°-120°	233.0	5.0
120°-130°	185.8	4.0
130°-140°	146.5	3.1
140°-150°	109.4	2.3
150°-160°	76.2	1.6
160°-170°	44.8	1.0
170°-180°	14.6	0.3
0°-30°	1026.3	21.9
0°-40°	1651.8	35.3
0°-60°	2833.0	60.6
0°-90°	3547.4	75.8
90°-120°	553.5	11.8
90°-150°	995.3	21.3
90°-180°	1131.0	24.2
0°-180°	4678.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1363	1363	1363	1363	1363	
5°	1364	1358	1345	1356	1355	129
15°	1298	1293	1278	1287	1281	366
25°	1179	1171	1157	1158	1154	543
35°	1020	1012	997	990	984	638
45°	836	830	816	802	796	645
55°	634	632	618	605	599	568
65°	432	426	415	406	402	427
75°	228	224	220	215	211	244
85°	61	59	59	56	56	67
90°	1	4	8	8	9	4
95°	10	34	180	53	35	11
105°	35	52	245	428	387	38
115°	62	78	187	410	471	62
125°	87	102	175	316	371	77
135°	102	121	172	261	301	79
145°	116	133	170	214	235	73
155°	132	142	165	187	195	61
165°	144	148	158	167	170	41
175°	150	150	151	153	153	14
180°	150	150	150	150	150	



TEST NUMBER: P332008-935

CATALOG NUMBER: S123DIP-S1000D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9
2.5°	1367.5	1366.8	1365.9	1365.0	1364.3	1362.6	1360.4	1358.1	1355.8	1353.5	1355.6
5°	1364.0	1362.7	1361.4	1360.1	1358.8	1356.8	1353.9	1351.0	1348.2	1345.3	1347.9
7.5°	1350.7	1349.4	1348.1	1346.8	1345.5	1343.3	1340.4	1337.4	1334.5	1331.5	1333.8
10°	1339.5	1338.2	1336.8	1335.5	1334.2	1331.9	1328.5	1325.1	1321.7	1318.4	1320.7
12.5°	1324.4	1323.4	1322.2	1321.1	1320.1	1317.9	1314.7	1311.6	1308.4	1305.2	1306.9
15°	1298.4	1297.4	1296.3	1295.3	1294.3	1292.0	1288.7	1285.3	1281.9	1278.5	1280.6
17.5°	1268.2	1266.8	1265.5	1264.1	1262.7	1260.4	1257.0	1253.6	1250.3	1246.8	1248.3
20°	1245.7	1244.1	1242.6	1241.0	1239.4	1236.9	1233.6	1230.2	1226.8	1223.4	1224.4
22.5°	1220.4	1218.8	1217.3	1215.6	1214.1	1211.7	1208.2	1204.9	1201.5	1198.1	1198.9
25°	1178.9	1177.3	1175.8	1174.2	1172.6	1170.2	1166.7	1163.4	1160.0	1156.6	1156.8
27.5°	1134.6	1133.1	1131.5	1130.1	1128.5	1125.9	1122.3	1118.7	1115.0	1111.4	1111.6
30°	1102.7	1101.4	1100.1	1098.8	1097.5	1095.0	1091.4	1087.7	1084.1	1080.5	1080.5
32.5°	1070.8	1069.1	1067.4	1065.7	1063.9	1061.7	1058.9	1056.1	1053.3	1050.4	1049.0
35°	1019.5	1018.0	1016.4	1014.9	1013.2	1010.8	1007.4	1004.0	1000.7	997.2	995.7
37.5°	967.0	965.0	963.0	961.0	959.1	956.4	953.0	949.5	946.1	942.6	940.7
40°	930.5	928.8	927.3	925.7	924.2	921.6	917.9	914.3	910.7	907.0	904.9
42.5°	893.9	892.1	890.4	888.6	886.8	884.1	880.5	876.8	873.1	869.5	867.5
45°	835.5	834.5	833.4	832.4	831.4	829.1	825.8	822.3	819.0	815.6	812.5
47.5°	777.7	776.1	774.6	773.1	771.6	769.2	766.1	762.9	759.7	756.6	753.5
50°	738.3	736.9	735.6	734.3	733.1	730.7	727.3	723.9	720.6	717.2	714.3
52.5°	697.0	696.1	695.3	694.4	693.4	691.2	687.7	684.1	680.4	676.8	674.4
55°	634.0	633.7	633.4	633.2	632.9	631.1	627.8	624.3	621.0	617.6	614.7
57.5°	573.9	573.1	572.2	571.4	570.4	568.6	565.9	563.2	560.5	557.8	555.3
60°	530.8	530.5	530.3	530.0	529.8	528.1	525.0	521.9	518.8	515.7	513.2
62.5°	492.4	491.7	491.0	490.3	489.7	487.8	484.7	481.6	478.5	475.3	472.9
65°	432.4	431.1	429.8	428.5	427.2	425.2	422.7	420.1	417.4	414.8	412.8
67.5°	368.9	367.7	366.6	365.5	364.3	362.7	360.8	358.8	356.8	354.8	353.0
70°	330.5	328.9	327.4	325.8	324.3	322.6	321.1	319.5	318.0	316.4	314.6
72.5°	290.2	289.0	287.8	286.7	285.6	284.1	282.3	280.6	278.8	277.0	275.4
75°	228.5	227.5	226.4	225.4	224.4	223.4	222.7	221.9	221.1	220.3	219.0
77.5°	173.9	173.3	172.7	172.2	171.6	170.8	170.0	169.0	168.1	167.1	166.3
80°	138.3	137.5	136.7	136.0	135.2	134.5	134.0	133.5	132.9	132.4	132.2
82.5°	103.6	103.4	103.3	103.1	103.0	102.8	102.7	102.6	102.5	102.5	101.9
85°	61.0	60.4	59.9	59.4	58.9	58.6	58.6	58.6	58.6	58.6	58.0
87.5°	24.5	24.0	23.5	23.1	22.6	22.2	22.2	22.2	22.2	22.1	21.9
90°	0.6	1.2	1.8	2.8	3.4	4.0	4.9	5.8	6.7	7.6	7.3
92.5°	3.8	5.6	8.2	10.5	13.1	17.6	25.6	38.7	51.5	46.8	35.3
95°	10.3	11.3	14.6	19.8	27.7	39.5	65.4	110.7	160.7	180.5	146.4
97.5°	17.7	17.9	20.6	25.1	32.9	45.7	70.4	121.5	204.7	279.7	299.1
100°	22.6	22.8	25.0	29.2	36.5	48.4	69.7	114.7	194.8	288.2	348.1
102.5°	27.6	28.2	30.0	34.1	40.6	51.6	70.7	108.8	180.1	272.3	350.5
105°	35.3	36.2	38.1	41.7	47.4	56.9	73.4	104.7	162.2	244.6	331.9
107.5°	43.5	44.3	46.1	49.7	55.1	63.9	78.4	104.4	150.8	220.2	299.5
110°	49.2	50.2	51.7	55.1	60.3	68.8	82.5	105.6	146.4	206.3	279.1



TEST NUMBER: P332008-935

CATALOG NUMBER: S123DIP-S1000D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	54.7	55.5	57.1	60.4	65.6	73.9	86.6	108.1	143.9	197.0	261.2
115°	62.3	63.6	65.4	68.4	73.6	81.9	93.4	111.9	143.0	187.1	239.8
117.5°	70.1	71.5	73.0	75.9	81.6	89.2	100.7	117.2	143.5	181.2	226.8
120°	75.4	76.4	77.9	80.9	86.7	94.3	105.3	121.1	144.6	178.6	220.0
122.5°	80.1	81.0	82.5	85.8	91.4	99.4	110.1	124.8	146.2	176.9	214.4
125°	86.7	87.3	89.1	92.5	98.2	106.5	117.2	130.5	148.8	174.6	207.2
127.5°	91.8	92.6	95.0	98.3	104.7	113.0	123.2	135.3	151.7	173.6	200.9
130°	95.0	95.8	98.6	102.2	108.7	116.8	126.9	138.4	153.7	172.8	197.4
132.5°	97.4	98.5	101.5	105.9	112.3	120.3	130.0	141.4	155.2	172.5	194.3
135°	101.6	102.8	106.2	110.7	117.2	125.4	134.7	145.2	157.3	172.2	190.2
137.5°	105.6	106.9	110.2	115.0	121.4	129.0	138.1	147.9	158.8	171.5	186.6
140°	108.3	109.9	112.9	117.8	123.8	131.5	140.3	149.4	159.7	171.3	184.3
142.5°	111.2	112.5	115.8	120.2	126.3	133.4	142.0	150.8	160.5	170.8	182.4
145°	115.9	116.8	119.6	124.2	129.3	136.3	144.2	152.4	160.9	170.0	179.8
147.5°	120.7	121.2	123.9	127.9	132.9	138.8	146.0	153.4	160.9	168.9	177.3
150°	123.8	124.2	126.6	130.5	134.7	140.3	147.2	153.7	160.9	168.0	175.6
152.5°	127.0	127.1	129.5	132.9	136.7	142.0	148.0	154.1	160.2	166.8	173.6
155°	131.7	131.7	133.5	136.6	140.0	144.2	149.4	154.3	159.5	164.6	170.7
157.5°	135.5	135.8	137.2	139.9	142.8	146.0	150.2	154.5	158.4	162.7	167.4
160°	138.4	138.4	139.7	142.1	144.2	147.2	150.9	154.5	157.9	161.3	165.2
162.5°	140.6	140.6	141.6	143.5	145.4	148.0	151.2	154.3	157.0	159.8	163.0
165°	143.9	143.6	144.2	145.8	147.0	149.1	151.5	153.7	155.5	157.6	160.1
167.5°	146.4	146.0	146.4	147.5	148.4	149.7	151.4	153.2	154.0	155.4	157.2
170°	147.8	147.2	147.6	148.4	149.1	149.7	151.2	152.4	153.1	153.9	155.5
172.5°	148.9	148.4	148.5	149.2	149.6	149.9	151.2	152.2	152.3	152.7	153.8
175°	150.0	149.7	149.4	150.0	150.0	150.3	150.9	151.5	151.2	151.2	151.8
177.5°	150.6	150.3	150.1	150.3	150.3	150.3	150.6	151.0	150.6	150.3	150.6
180°	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3



TEST NUMBER: P332008-935

CATALOG NUMBER: S123DIP-S1000D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9	1362.9
2.5°	1357.6	1359.8	1361.8	1362.8	1362.5	1362.4	1362.1	1361.9
5°	1350.5	1353.1	1355.7	1356.8	1356.2	1355.7	1355.2	1354.7
7.5°	1336.2	1338.5	1340.8	1341.9	1341.5	1341.3	1340.9	1340.6
10°	1323.0	1325.3	1327.7	1328.6	1328.1	1327.6	1327.1	1326.5
12.5°	1308.6	1310.4	1312.1	1312.8	1312.5	1312.2	1311.8	1311.6
15°	1282.6	1284.7	1286.9	1287.1	1285.6	1283.9	1282.4	1280.8
17.5°	1249.7	1251.2	1252.7	1253.1	1252.6	1252.0	1251.4	1250.9
20°	1225.5	1226.6	1227.6	1227.7	1226.9	1226.2	1225.4	1224.6
22.5°	1199.8	1200.6	1201.4	1201.4	1200.4	1199.4	1198.4	1197.4
25°	1157.1	1157.4	1157.7	1157.4	1156.6	1155.8	1155.0	1154.3
27.5°	1111.8	1112.0	1112.2	1111.8	1110.9	1109.8	1108.9	1107.8
30°	1080.5	1080.5	1080.5	1079.5	1077.7	1075.9	1074.1	1072.2
32.5°	1047.5	1046.1	1044.7	1043.4	1042.4	1041.4	1040.4	1039.4
35°	994.1	992.6	991.0	989.5	988.3	987.0	985.7	984.4
37.5°	938.9	937.0	935.1	933.8	933.0	932.1	931.3	930.5
40°	902.8	900.8	898.7	897.1	896.0	895.0	894.0	892.9
42.5°	865.3	863.2	861.2	859.6	858.6	857.6	856.5	855.5
45°	809.3	806.2	803.1	800.9	799.6	798.3	797.0	795.7
47.5°	750.4	747.3	744.2	742.2	741.0	739.9	738.7	737.5
50°	711.4	708.6	705.7	703.5	702.0	700.3	698.8	697.2
52.5°	671.9	669.5	667.1	665.0	663.5	661.9	660.4	658.8
55°	611.8	609.0	606.1	604.0	602.7	601.4	600.1	598.8
57.5°	552.7	550.2	547.6	545.5	544.1	542.5	541.1	539.5
60°	510.9	508.6	506.3	504.5	503.1	501.8	500.5	499.2
62.5°	470.6	468.3	465.9	464.3	463.4	462.5	461.7	460.8
65°	410.7	408.5	406.5	405.1	404.3	403.6	402.7	401.9
67.5°	351.2	349.4	347.6	346.1	345.0	343.9	342.8	341.7
70°	312.7	310.9	309.1	307.5	306.3	305.0	303.7	302.3
72.5°	273.8	272.2	270.5	269.4	268.7	268.0	267.4	266.7
75°	217.7	216.4	215.1	214.0	213.3	212.5	211.7	210.9
77.5°	165.3	164.5	163.6	163.2	163.2	163.2	163.2	163.2
80°	131.9	131.6	131.4	131.2	131.2	131.2	131.2	131.2
82.5°	101.5	101.0	100.6	100.2	100.0	99.8	99.6	99.4
85°	57.5	57.0	56.5	56.2	56.2	56.2	56.2	56.2
87.5°	21.7	21.6	21.4	21.4	21.4	21.4	21.5	21.4
90°	7.6	7.9	8.2	8.8	8.5	8.8	9.1	8.8
92.5°	25.7	20.3	17.9	16.4	15.8	14.9	15.2	14.6
95°	109.5	74.2	58.1	47.2	41.4	38.7	36.5	35.3
97.5°	273.0	218.7	179.4	143.1	120.6	106.9	98.7	96.1
100°	358.7	334.1	298.5	255.3	224.5	202.3	190.5	190.8
102.5°	387.2	386.4	365.7	338.3	314.4	296.8	286.9	279.8
105°	395.5	425.9	431.7	423.9	409.8	398.3	388.6	387.0
107.5°	371.5	420.9	447.6	458.5	458.7	454.8	451.5	448.8
110°	348.7	404.7	443.0	464.3	472.9	475.3	474.7	474.1



TEST NUMBER: P332008-935

CATALOG NUMBER: S123DIP-S1000D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	326.1	383.2	426.2	453.6	469.2	476.7	479.1	479.1
115°	296.0	349.0	393.7	426.9	449.7	463.0	469.2	470.7
117.5°	274.3	320.0	360.2	393.8	417.7	433.0	441.7	443.8
120°	262.9	303.9	340.4	371.2	395.2	412.2	419.6	421.4
122.5°	253.9	291.0	324.9	353.4	374.8	390.1	398.1	400.5
125°	241.9	275.1	304.3	328.6	348.1	361.4	369.1	371.2
127.5°	231.4	261.0	287.3	309.5	326.8	338.3	345.2	347.1
130°	224.8	252.3	276.9	297.6	313.7	324.7	331.1	333.5
132.5°	218.8	243.9	266.9	286.6	301.8	312.7	318.4	320.1
135°	210.5	232.1	251.9	269.2	284.2	293.3	298.8	300.9
137.5°	203.0	220.8	237.8	252.9	265.4	274.7	279.2	280.7
140°	198.7	214.2	228.8	241.9	253.5	262.0	266.8	266.6
142.5°	194.6	207.8	220.5	231.9	241.8	249.3	253.7	253.4
145°	189.6	199.6	209.3	218.2	225.8	232.1	234.6	235.2
147.5°	185.5	193.5	201.3	207.6	213.4	217.7	220.0	220.2
150°	182.5	189.6	196.0	201.7	206.3	209.7	211.5	211.5
152.5°	179.9	185.9	191.6	196.4	199.9	203.0	204.1	204.1
155°	175.9	180.7	185.3	188.9	191.7	194.2	194.8	195.0
157.5°	171.6	175.6	179.2	182.1	184.4	186.2	186.8	186.7
160°	169.2	172.5	175.6	177.7	179.8	181.7	181.7	181.3
162.5°	166.3	169.1	171.9	173.8	175.2	176.8	176.8	176.5
165°	162.5	164.3	166.4	168.0	169.2	170.4	170.0	170.0
167.5°	159.2	160.6	161.8	162.9	163.4	164.3	164.0	164.0
170°	157.0	157.9	159.1	159.7	160.1	160.7	160.3	160.3
172.5°	155.1	155.8	156.7	157.0	157.1	157.7	157.2	157.0
175°	152.4	152.7	153.3	153.3	153.3	153.7	153.3	153.1
177.5°	150.8	151.0	151.3	151.3	151.0	151.3	150.8	150.8
180°	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3

(END OF REPORT)