

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331902-935

Luminaire Tested: **S123DIP-S340D1195U935-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331902-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S340D1195U935-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4781.7 lumens
Efficiency: N/A
Efficacy: 113.3 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

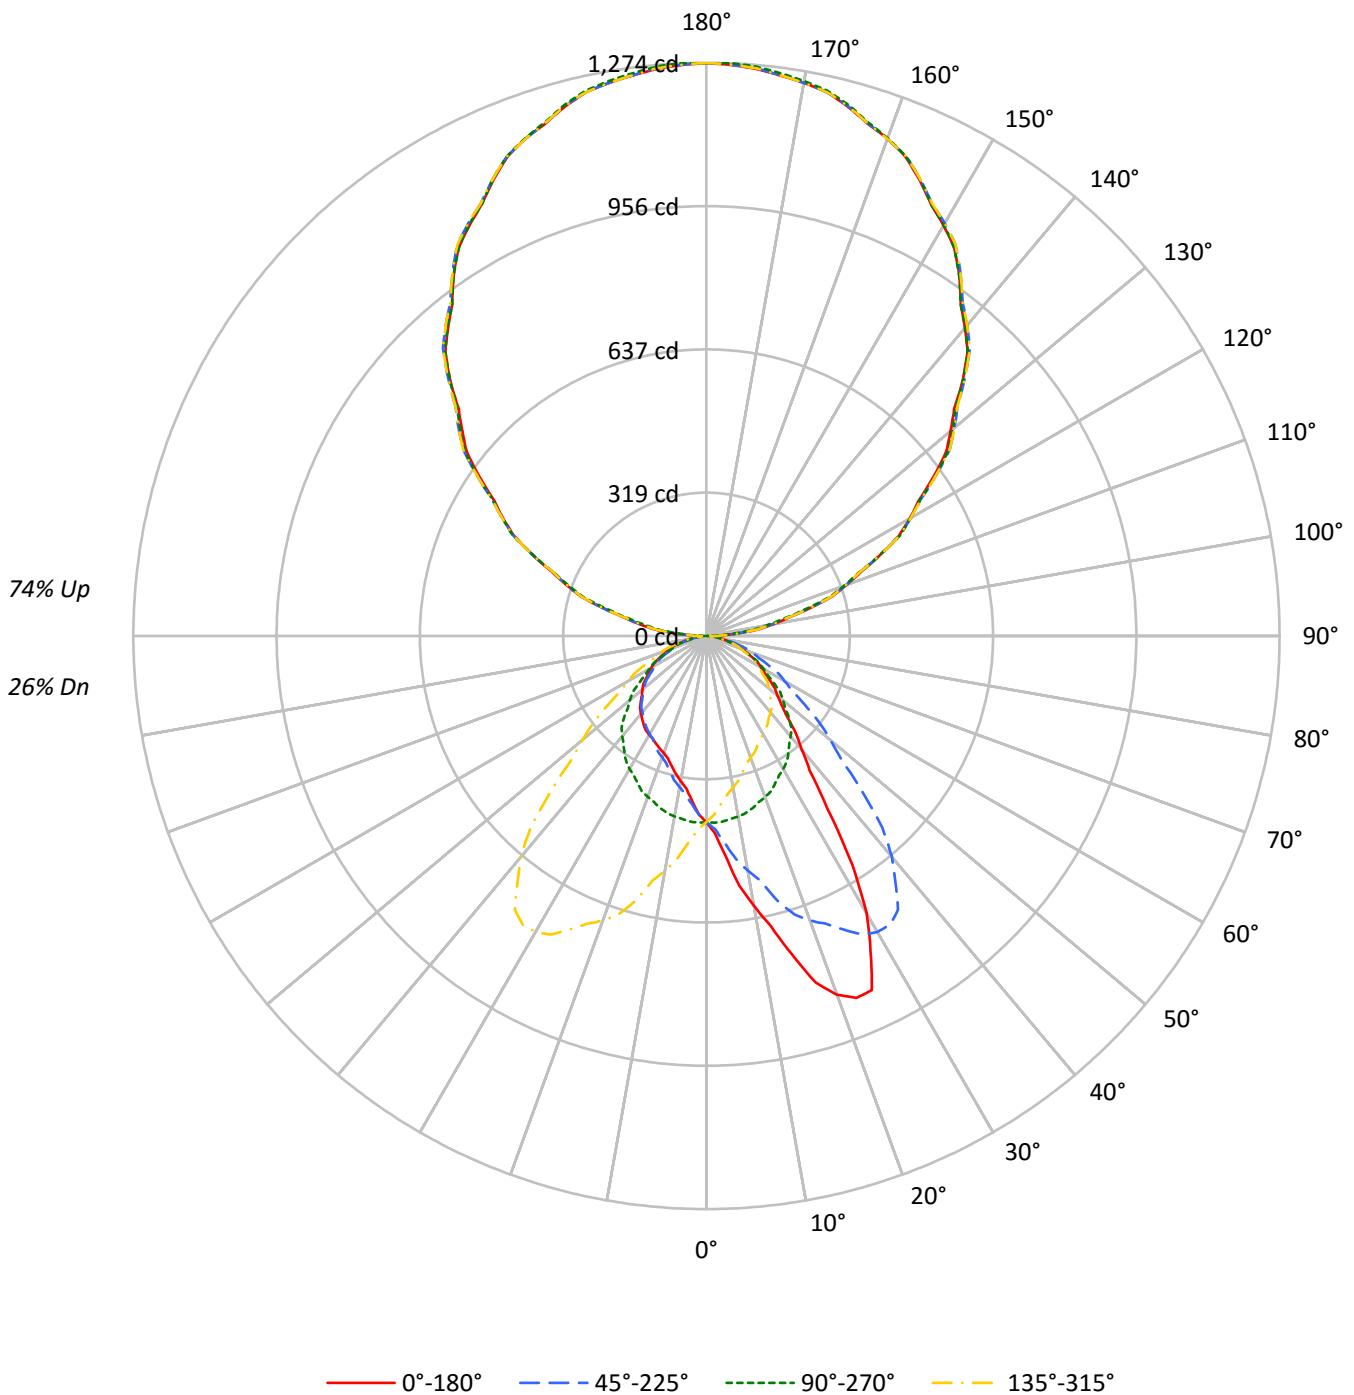



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	91	91	91	91	70	70	70	51	51	51	34	34	34	26
1	93	88	85	81	82	79	76	73	61	59	58	45	44	43	30	30	29	22
2	84	77	72	67	75	69	64	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	56	68	61	55	50	48	44	40	35	33	31	24	22	21	16
4	70	60	53	47	63	54	48	43	42	38	34	32	29	26	21	20	18	14
5	65	53	46	40	57	48	41	36	38	33	29	28	25	23	19	17	16	12
6	59	48	40	35	53	43	36	32	34	29	26	25	22	20	18	16	14	11
7	55	43	35	30	49	39	32	28	31	26	22	23	20	17	16	14	12	10
8	51	39	32	26	45	35	29	24	28	23	20	21	18	15	15	13	11	9
9	47	35	28	23	42	32	26	21	25	21	18	19	16	14	13	11	10	8
10	44	32	25	21	39	29	23	19	23	19	16	18	15	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	4456	4456	4456	4456
5°	5314	4475	3965	4475
10°	6652	4453	3583	4453
15°	8158	4416	3335	4416
20°	9718	4361	3175	4361
25°	10320	4292	3139	4292
30°	8846	4243	3156	4243
35°	6151	4172	3189	4172
40°	4634	4089	3180	4089
45°	3847	3965	3139	3965
50°	3446	3716	3110	3716
55°	3222	3445	3072	3445
60°	3023	3160	3040	3160
65°	2840	2881	2942	2881
70°	2662	2565	2801	2565
75°	2383	2246	2570	2246
80°	2089	1841	2213	1841
85°	1643	1334	1494	1334



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	40.8	0.9
10°-20°	130.8	2.7
20°-30°	219.5	4.6
30°-40°	248.5	5.2
40°-50°	222.9	4.7
50°-60°	179.8	3.8
60°-70°	125.3	2.6
70°-80°	65.9	1.4
80°-90°	19.9	0.4
90°-100°	83.0	1.7
100°-110°	248.3	5.2
110°-120°	422.3	8.8
120°-130°	555.5	11.6
130°-140°	624.4	13.1
140°-150°	613.8	12.8
150°-160°	516.7	10.8
160°-170°	343.9	7.2
170°-180°	120.4	2.5
0°-30°	391.0	8.2
0°-40°	639.5	13.4
0°-60°	1042.2	21.8
0°-90°	1253.3	26.2
90°-120°	753.6	15.8
90°-150°	2547.3	53.3
90°-180°	3528.0	73.8
0°-180°	4781.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	414	414	414	414	414	
5°	492	414	367	414	492	51
15°	732	396	299	396	732	211
25°	869	361	264	361	869	381
35°	468	318	243	318	468	304
45°	253	260	206	260	253	200
55°	172	184	164	184	172	154
65°	112	113	116	113	112	111
75°	57	54	62	54	57	61
85°	13	11	12	11	13	16
90°	30	1	30	1	30	15
95°	78	59	78	59	78	80
105°	238	225	238	225	238	253
115°	426	425	426	425	426	422
125°	615	622	615	622	615	550
135°	806	807	806	807	806	620
145°	979	979	979	979	979	611
155°	1119	1122	1119	1122	1119	515
165°	1218	1222	1218	1222	1218	343
175°	1266	1270	1266	1270	1266	120
180°	1274	1274	1274	1274	1274	



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0
2.5°	439.4	439.0	438.2	438.9	437.6	435.8	435.7	434.0	429.4	429.1	427.8
5°	491.8	490.3	490.0	489.8	487.0	483.2	476.0	475.4	465.7	461.0	455.1
7.5°	559.8	560.6	557.7	555.2	546.6	540.9	533.1	523.2	511.4	499.4	491.5
10°	608.6	615.2	607.0	601.3	596.2	586.3	574.9	560.6	546.4	529.8	517.1
12.5°	660.9	664.1	662.5	657.2	649.1	634.1	613.9	598.1	585.0	557.3	546.1
15°	732.1	744.3	736.5	718.5	718.8	704.6	678.2	649.1	633.6	609.3	576.3
17.5°	808.0	809.5	806.2	791.2	781.2	761.6	737.1	709.3	678.0	648.6	613.5
20°	848.4	847.2	840.2	832.4	815.2	800.0	773.3	742.2	702.1	673.1	634.8
22.5°	870.9	868.9	865.6	859.0	844.7	828.4	804.3	770.4	732.2	692.4	648.2
25°	868.9	871.5	871.9	870.1	865.1	855.3	836.5	809.3	771.3	720.1	674.0
27.5°	790.3	794.0	804.7	814.2	824.8	835.7	834.2	820.8	792.6	748.4	692.0
30°	711.7	703.6	723.5	748.6	765.6	795.7	812.5	813.6	797.7	759.8	704.8
32.5°	602.5	611.4	620.2	651.0	688.3	722.0	755.6	782.6	785.7	760.4	712.4
35°	468.1	479.2	495.2	511.3	551.4	585.9	644.9	696.2	737.1	742.5	713.1
37.5°	377.3	382.7	392.9	409.0	435.1	476.1	521.7	586.6	645.9	690.0	691.9
40°	329.8	331.4	342.8	355.0	376.3	410.0	451.1	508.5	579.5	641.1	666.8
42.5°	294.1	297.6	302.6	314.3	331.2	356.5	394.8	442.2	507.3	578.2	628.4
45°	252.7	256.8	259.8	267.6	279.7	296.7	323.3	366.7	416.2	489.4	557.0
47.5°	225.4	225.7	227.9	233.8	242.0	254.9	273.7	301.5	347.0	406.4	475.8
50°	205.8	209.0	209.8	214.4	220.8	230.2	245.9	269.6	306.9	359.0	422.8
52.5°	192.0	193.0	195.2	198.5	204.1	211.5	225.1	243.6	272.9	317.4	376.0
55°	171.7	171.7	173.9	176.5	179.7	186.3	195.4	209.0	231.3	265.8	314.4
57.5°	152.9	153.9	155.5	156.3	159.0	163.4	170.9	181.3	197.9	224.5	263.0
60°	140.4	142.2	142.0	143.6	146.0	149.5	155.8	164.3	179.1	200.4	232.9
62.5°	129.5	129.4	129.3	131.3	133.6	136.9	141.1	148.4	161.0	179.9	207.5
65°	111.5	111.2	112.5	113.7	114.5	116.9	120.1	126.6	135.0	149.0	170.5
67.5°	95.6	94.4	95.1	95.6	96.9	98.8	101.9	105.8	112.4	123.7	139.9
70°	84.6	83.6	83.4	83.9	85.1	86.4	88.7	92.5	98.7	107.7	119.5
72.5°	73.4	72.8	72.7	73.6	74.1	75.1	76.6	80.1	85.1	91.9	102.9
75°	57.3	57.3	57.3	57.6	58.2	59.0	60.2	62.0	65.8	70.6	78.0
77.5°	43.0	43.0	42.7	42.7	43.6	43.9	44.2	45.9	48.0	51.2	56.7
80°	33.7	32.7	33.1	33.7	34.1	34.3	34.9	35.3	37.1	38.9	42.7
82.5°	25.1	24.2	24.3	25.2	25.3	25.5	26.1	26.6	27.3	28.9	31.0
85°	13.3	13.3	13.4	13.4	13.6	13.4	14.0	14.2	14.2	15.2	16.4
87.5°	10.8	10.4	10.5	10.6	10.3	10.3	10.3	10.3	10.2	10.2	9.8
90°	30.0	29.5	29.1	28.7	28.2	27.6	26.7	25.8	24.9	24.0	21.1
92.5°	40.4	40.6	41.0	41.2	41.5	41.2	40.6	39.9	39.1	38.4	36.8
95°	78.0	78.0	78.0	78.0	78.0	77.6	76.7	75.8	74.9	74.0	72.2
97.5°	120.0	120.1	120.2	120.3	120.4	119.9	118.9	117.9	116.8	115.8	114.5
100°	152.1	151.6	151.2	150.8	150.2	149.7	149.0	148.4	147.7	147.1	145.9
102.5°	184.9	184.9	185.0	185.1	185.2	184.9	184.3	183.6	183.0	182.3	180.8
105°	238.1	237.6	237.2	236.8	236.3	236.1	236.1	236.1	236.1	236.1	234.1
107.5°	293.5	293.8	294.0	294.3	294.5	294.4	293.7	292.9	292.2	291.5	290.7
110°	331.1	331.6	332.0	332.4	332.9	332.7	331.8	330.9	330.0	329.2	328.6



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	371.2	371.3	371.3	371.4	371.5	371.0	370.0	368.9	367.8	366.7	366.6
115°	426.2	426.4	426.6	426.8	427.1	427.1	426.8	426.6	426.4	426.2	426.6
117.5°	482.0	482.6	483.2	483.9	484.5	484.8	484.8	484.9	484.9	485.0	485.6
120°	521.2	521.7	522.1	522.5	523.0	523.3	523.6	523.7	524.0	524.2	525.3
122.5°	558.8	559.4	560.1	560.7	561.3	561.9	562.5	563.1	563.6	564.2	564.8
125°	615.3	616.1	617.0	617.9	618.8	619.7	620.6	621.5	622.3	623.3	623.7
127.5°	671.5	672.4	673.5	674.5	675.5	676.7	678.0	679.2	680.4	681.7	682.2
130°	708.3	709.8	711.4	712.9	714.5	715.7	716.6	717.5	718.4	719.3	720.0
132.5°	746.7	747.9	749.1	750.3	751.5	752.6	753.7	754.8	755.8	756.9	757.3
135°	806.3	806.8	807.2	807.6	808.0	808.7	809.6	810.5	811.4	812.3	812.5
137.5°	858.9	859.8	860.7	861.4	862.3	863.2	864.1	865.0	866.0	866.9	866.3
140°	893.4	894.9	896.5	898.0	899.6	900.4	900.7	900.9	901.1	901.4	901.1
142.5°	928.6	929.8	930.9	932.1	933.3	934.1	934.3	934.5	934.7	935.0	934.5
145°	979.4	980.2	981.1	982.1	982.9	983.5	983.7	984.0	984.1	984.4	983.7
147.5°	1024.6	1025.9	1027.3	1028.6	1029.9	1030.6	1030.6	1030.6	1030.6	1030.6	1029.9
150°	1053.4	1054.7	1056.1	1057.4	1058.8	1059.4	1059.4	1059.4	1059.4	1059.4	1058.9
152.5°	1081.4	1082.5	1083.7	1084.9	1086.1	1086.4	1086.1	1085.7	1085.4	1085.0	1084.8
155°	1119.4	1121.0	1122.6	1124.1	1125.7	1126.0	1125.1	1124.2	1123.3	1122.4	1122.2
157.5°	1154.0	1155.3	1156.5	1157.8	1159.0	1159.2	1158.2	1157.3	1156.4	1155.5	1155.3
160°	1176.5	1177.3	1178.2	1179.1	1180.0	1179.9	1178.8	1177.7	1176.6	1175.4	1175.4
162.5°	1193.3	1194.6	1196.1	1197.5	1198.9	1199.1	1198.0	1196.9	1195.8	1194.6	1194.5
165°	1217.5	1219.0	1220.6	1222.1	1223.7	1223.8	1222.4	1221.2	1219.8	1218.5	1218.5
167.5°	1238.0	1239.4	1240.8	1242.2	1243.5	1243.5	1242.2	1240.8	1239.4	1238.0	1237.9
170°	1248.4	1250.0	1251.5	1253.2	1254.7	1254.7	1253.2	1251.5	1250.0	1248.4	1248.4
172.5°	1256.5	1258.0	1259.6	1261.1	1262.7	1262.8	1261.5	1260.1	1258.7	1257.3	1257.3
175°	1265.5	1267.0	1268.6	1270.1	1271.7	1271.8	1270.5	1269.1	1267.8	1266.4	1266.4
177.5°	1270.3	1271.5	1272.7	1274.0	1275.2	1275.3	1274.3	1273.2	1272.1	1271.1	1271.1
180°	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0
2.5°	426.8	425.6	424.3	422.1	420.1	417.4	416.6	415.6	412.7	410.2	408.2
5°	452.9	448.1	441.1	434.6	429.5	422.4	418.4	414.2	408.2	402.8	398.4
7.5°	480.2	470.7	459.8	448.1	437.0	426.5	417.9	410.3	401.8	393.9	387.6
10°	501.9	488.2	472.9	456.5	442.5	428.9	417.4	407.4	396.6	387.1	379.3
12.5°	526.6	506.4	485.3	465.4	448.8	429.8	415.9	403.2	390.9	379.6	370.8
15°	555.8	530.1	505.2	477.8	452.5	428.9	412.4	396.3	382.1	370.5	359.2
17.5°	582.5	553.4	520.6	487.2	456.7	428.6	405.6	387.4	369.6	355.4	344.2
20°	597.5	564.5	527.4	492.7	458.9	427.7	402.3	380.7	361.4	346.4	333.8
22.5°	610.5	571.8	533.4	496.3	458.7	425.1	396.4	374.1	353.3	338.5	325.1
25°	624.1	577.6	539.2	495.7	453.7	418.8	386.8	361.4	340.6	323.3	309.5
27.5°	635.6	577.3	531.6	484.7	445.7	410.8	376.5	349.4	327.3	308.5	294.5
30°	643.3	578.1	523.7	477.4	438.1	402.0	368.7	341.4	318.1	299.1	285.9
32.5°	648.1	577.6	516.5	467.1	425.9	393.9	360.2	331.9	308.0	289.3	276.6
35°	650.9	574.0	504.0	445.9	406.2	375.1	346.8	317.5	292.5	275.0	260.5
37.5°	645.2	566.6	489.7	425.4	381.9	351.4	327.5	302.6	278.6	259.4	246.9
40°	636.5	561.8	478.4	411.0	365.2	335.8	315.6	291.0	267.3	249.1	237.5
42.5°	619.6	552.1	466.1	394.9	347.9	318.5	299.8	279.3	256.9	239.8	228.2
45°	578.5	530.7	447.5	370.9	322.4	291.9	275.4	260.5	240.3	223.7	213.6
47.5°	521.4	498.7	420.7	345.5	295.6	266.3	249.2	237.3	222.5	209.0	199.4
50°	481.8	472.3	402.6	328.1	277.8	249.1	232.6	221.9	211.2	197.8	189.0
52.5°	436.1	441.9	381.4	310.2	259.7	231.4	216.0	207.4	197.8	186.7	179.0
55°	371.7	392.7	344.8	280.0	232.6	205.8	191.1	183.6	177.9	169.7	163.1
57.5°	311.4	338.2	305.2	248.9	206.1	183.0	168.9	160.7	157.0	152.7	147.5
60°	275.6	302.0	277.0	228.1	188.4	166.3	153.9	146.8	143.2	140.2	135.8
62.5°	243.7	270.4	249.4	206.9	170.8	150.4	139.6	132.7	129.9	128.4	124.6
65°	199.8	222.8	208.8	173.9	145.9	127.8	118.0	113.1	110.6	109.9	107.5
67.5°	162.6	180.1	170.0	144.2	122.2	106.6	98.2	94.1	92.1	91.9	90.1
70°	138.2	154.6	146.8	123.6	104.5	92.3	85.1	81.5	80.2	80.1	79.0
72.5°	119.2	130.7	124.5	105.1	90.4	79.3	74.0	70.2	68.9	69.1	68.4
75°	88.3	96.9	93.2	79.8	68.0	60.8	56.4	54.0	52.8	53.4	52.5
77.5°	63.5	69.0	65.7	56.4	49.1	43.9	40.6	39.2	38.1	38.1	37.7
80°	48.0	51.1	49.3	43.7	37.7	33.3	30.7	29.7	29.1	28.8	28.7
82.5°	34.2	36.9	34.7	30.9	26.8	24.1	22.6	21.4	20.9	21.0	20.8
85°	17.2	18.3	17.5	15.1	13.4	12.2	11.5	10.8	10.4	10.6	10.2
87.5°	9.6	9.1	8.1	7.0	6.2	5.3	4.8	4.0	4.1	4.6	4.9
90°	18.3	15.3	12.5	9.9	7.7	5.4	3.2	1.0	3.2	5.4	7.7
92.5°	35.1	33.5	31.9	30.2	28.8	27.2	25.7	24.2	25.7	27.2	28.8
95°	70.4	68.7	66.9	65.3	63.7	62.2	60.6	59.1	60.6	62.2	63.7
97.5°	113.3	112.0	110.7	109.4	108.3	107.2	106.0	104.9	106.0	107.2	108.3
100°	144.8	143.7	142.6	141.4	140.1	138.7	137.4	136.0	137.4	138.7	140.1
102.5°	179.3	177.9	176.4	175.3	174.4	173.7	172.9	172.0	172.9	173.7	174.4
105°	232.1	230.1	228.1	226.9	226.4	226.0	225.5	225.1	225.5	226.0	226.4
107.5°	289.9	289.1	288.3	287.7	287.5	287.2	287.0	286.7	287.0	287.2	287.5
110°	328.2	327.8	327.4	326.9	326.5	326.0	325.5	325.1	325.5	326.0	326.5



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	366.5	366.4	366.4	366.2	365.9	365.7	365.4	365.2	365.4	365.7	365.9
115°	427.1	427.5	427.9	427.8	427.1	426.5	425.9	425.2	425.9	426.5	427.1
117.5°	486.1	486.7	487.3	487.3	486.9	486.5	486.0	485.6	486.0	486.5	486.9
120°	526.4	527.5	528.7	528.6	527.2	525.9	524.5	523.2	524.5	525.9	527.2
122.5°	565.3	565.9	566.5	566.4	565.3	564.4	563.4	562.4	563.4	564.4	565.3
125°	624.1	624.6	625.0	624.9	624.2	623.5	622.9	622.2	622.9	623.5	624.2
127.5°	682.6	683.1	683.6	683.1	681.7	680.3	678.9	677.4	678.9	680.3	681.7
130°	720.6	721.3	721.9	721.3	719.6	717.8	716.0	714.3	716.0	717.8	719.6
132.5°	757.9	758.4	758.9	758.2	756.4	754.7	752.9	751.1	752.9	754.7	756.4
135°	812.8	813.0	813.2	812.6	811.3	809.9	808.7	807.3	808.7	809.9	811.3
137.5°	865.7	865.2	864.6	863.8	862.6	861.5	860.4	859.4	860.4	861.5	862.6
140°	900.9	900.7	900.4	899.7	898.7	897.6	896.5	895.4	896.5	897.6	898.7
142.5°	934.2	933.8	933.3	932.6	931.5	930.4	929.3	928.2	929.3	930.4	931.5
145°	983.0	982.4	981.7	981.1	980.7	980.2	979.8	979.4	979.8	980.2	980.7
147.5°	1029.3	1028.7	1028.1	1027.4	1026.6	1025.8	1025.0	1024.2	1025.0	1025.8	1026.6
150°	1058.5	1058.1	1057.7	1057.2	1056.7	1056.3	1055.8	1055.4	1055.8	1056.3	1056.7
152.5°	1084.5	1084.2	1083.9	1083.5	1082.9	1082.3	1081.7	1081.0	1081.7	1082.3	1082.9
155°	1122.0	1121.8	1121.5	1121.5	1121.5	1121.5	1121.5	1121.5	1121.5	1121.5	1121.5
157.5°	1155.1	1154.9	1154.7	1154.8	1155.0	1155.3	1155.5	1155.8	1155.5	1155.3	1155.0
160°	1175.4	1175.4	1175.4	1175.7	1176.1	1176.6	1177.0	1177.4	1177.0	1176.6	1176.1
162.5°	1194.3	1194.1	1193.9	1194.2	1194.8	1195.4	1196.0	1196.6	1196.0	1195.4	1194.8
165°	1218.5	1218.5	1218.5	1218.8	1219.4	1220.1	1220.8	1221.5	1220.8	1220.1	1219.4
167.5°	1237.7	1237.5	1237.3	1237.7	1238.6	1239.5	1240.4	1241.3	1240.4	1239.5	1238.6
170°	1248.4	1248.4	1248.4	1248.9	1249.8	1250.7	1251.5	1252.5	1251.5	1250.7	1249.8
172.5°	1257.3	1257.3	1257.3	1257.7	1258.6	1259.5	1260.4	1261.3	1260.4	1259.5	1258.6
175°	1266.4	1266.4	1266.4	1267.0	1267.8	1268.7	1269.6	1270.5	1269.6	1268.7	1267.8
177.5°	1271.1	1271.1	1271.1	1271.4	1272.1	1272.9	1273.6	1274.3	1273.6	1272.9	1272.1
180°	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0
2.5°	407.1	406.0	404.4	402.0	400.0	397.0	397.0	397.4	397.4	397.4	397.0
5°	394.8	391.8	388.1	383.9	379.5	375.1	374.3	372.6	371.5	370.7	369.7
7.5°	381.7	376.3	371.1	365.2	359.8	355.4	352.3	349.7	348.1	346.3	345.0
10°	372.9	366.3	360.1	353.9	347.0	341.6	338.2	335.8	334.0	332.3	331.6
12.5°	362.5	354.9	348.0	342.1	334.7	329.1	325.8	324.7	322.6	319.2	317.5
15°	347.2	340.2	332.0	323.0	319.3	312.5	308.7	306.9	305.7	303.1	302.3
17.5°	334.2	325.0	315.7	309.0	302.3	296.8	294.6	292.4	290.8	288.7	288.0
20°	323.7	315.6	307.1	299.9	292.8	286.8	285.0	283.4	281.8	280.9	280.0
22.5°	313.1	305.0	297.9	291.2	283.7	279.7	277.8	276.0	274.9	274.2	273.5
25°	298.3	291.0	283.2	277.2	271.2	268.5	267.3	266.4	265.5	264.6	264.3
27.5°	285.0	277.1	270.8	265.1	260.8	258.6	257.4	257.0	257.2	257.5	257.8
30°	275.0	267.8	262.6	257.8	253.7	251.8	251.5	251.5	252.4	252.5	253.0
32.5°	265.9	259.9	254.7	250.0	247.0	245.6	246.4	246.4	247.0	247.5	248.3
35°	252.5	247.3	243.3	239.3	236.7	237.3	237.7	238.1	239.1	240.3	241.1
37.5°	239.8	235.3	231.1	228.0	226.8	227.8	228.9	229.6	230.8	231.8	232.6
40°	230.7	227.2	223.3	220.4	220.8	221.4	222.2	223.3	224.3	224.9	225.7
42.5°	222.1	218.6	215.5	213.2	213.8	214.6	215.0	215.5	216.7	217.8	218.3
45°	209.2	206.4	203.6	202.2	202.6	203.0	203.4	204.0	205.0	205.8	206.0
47.5°	194.7	192.7	190.8	189.4	190.1	189.9	190.5	191.7	192.0	192.5	193.6
50°	185.4	183.6	181.3	180.9	180.9	180.9	181.2	182.7	182.7	183.6	184.3
52.5°	175.0	173.9	172.5	171.8	171.4	171.4	172.3	173.1	173.4	174.5	175.4
55°	159.9	158.7	157.5	156.9	156.4	156.9	158.4	158.9	159.9	160.5	161.1
57.5°	144.0	143.1	142.2	141.8	141.7	142.2	143.1	144.3	144.6	146.5	147.3
60°	133.6	132.2	131.4	131.4	131.0	132.8	132.4	134.4	134.8	136.0	137.4
62.5°	122.9	121.0	120.6	120.6	121.2	121.7	122.3	123.1	124.2	125.7	126.8
65°	105.5	104.5	105.9	105.7	105.3	106.5	106.5	107.5	108.7	110.1	112.4
67.5°	89.1	88.6	88.7	88.7	89.3	90.0	90.6	91.4	92.9	94.4	95.8
70°	78.0	78.6	77.7	78.4	79.0	79.2	79.6	80.8	82.4	83.4	85.1
72.5°	67.2	67.2	67.3	67.7	68.3	68.6	69.1	70.4	72.2	73.0	74.3
75°	51.7	51.6	52.2	52.2	53.1	53.6	54.0	54.6	56.1	57.3	58.4
77.5°	37.8	38.1	37.9	38.6	38.3	38.4	39.6	40.2	40.4	42.8	43.3
80°	28.5	28.8	29.1	29.3	29.4	29.1	30.5	31.1	31.1	32.5	33.5
82.5°	20.5	20.7	21.2	21.4	21.4	21.9	22.0	22.4	22.9	23.5	24.8
85°	10.2	10.8	11.0	10.8	11.0	10.6	11.2	11.5	11.6	11.6	11.6
87.5°	5.2	5.9	6.3	7.0	7.4	8.2	8.4	8.2	8.4	9.0	8.5
90°	9.9	12.5	15.3	18.3	21.1	24.0	24.9	25.8	26.7	27.6	28.2
92.5°	30.2	31.9	33.5	35.1	36.8	38.4	39.1	39.9	40.6	41.2	41.5
95°	65.3	66.9	68.7	70.4	72.2	74.0	74.9	75.8	76.7	77.6	78.0
97.5°	109.4	110.7	112.0	113.3	114.5	115.8	116.8	117.9	118.9	119.9	120.4
100°	141.4	142.6	143.7	144.8	145.9	147.1	147.7	148.4	149.0	149.7	150.2
102.5°	175.3	176.4	177.9	179.3	180.8	182.3	183.0	183.6	184.3	184.9	185.2
105°	226.9	228.1	230.1	232.1	234.1	236.1	236.1	236.1	236.1	236.1	236.3
107.5°	287.7	288.3	289.1	289.9	290.7	291.5	292.2	292.9	293.7	294.4	294.5
110°	326.9	327.4	327.8	328.2	328.6	329.2	330.0	330.9	331.8	332.7	332.9



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	366.2	366.4	366.4	366.5	366.6	366.7	367.8	368.9	370.0	371.0	371.5
115°	427.8	427.9	427.5	427.1	426.6	426.2	426.4	426.6	426.8	427.1	427.1
117.5°	487.3	487.3	486.7	486.1	485.6	485.0	484.9	484.9	484.8	484.8	484.5
120°	528.6	528.7	527.5	526.4	525.3	524.2	524.0	523.7	523.6	523.3	523.0
122.5°	566.4	566.5	565.9	565.3	564.8	564.2	563.6	563.1	562.5	561.9	561.3
125°	624.9	625.0	624.6	624.1	623.7	623.3	622.3	621.5	620.6	619.7	618.8
127.5°	683.1	683.6	683.1	682.6	682.2	681.7	680.4	679.2	678.0	676.7	675.5
130°	721.3	721.9	721.3	720.6	720.0	719.3	718.4	717.5	716.6	715.7	714.5
132.5°	758.2	758.9	758.4	757.9	757.3	756.9	755.8	754.8	753.7	752.6	751.5
135°	812.6	813.2	813.0	812.8	812.5	812.3	811.4	810.5	809.6	808.7	808.0
137.5°	863.8	864.6	865.2	865.7	866.3	866.9	866.0	865.0	864.1	863.2	862.3
140°	899.7	900.4	900.7	900.9	901.1	901.4	901.1	900.9	900.7	900.4	899.6
142.5°	932.6	933.3	933.8	934.2	934.5	935.0	934.7	934.5	934.3	934.1	933.3
145°	981.1	981.7	982.4	983.0	983.7	984.4	984.1	984.0	983.7	983.5	982.9
147.5°	1027.4	1028.1	1028.7	1029.3	1029.9	1030.6	1030.6	1030.6	1030.6	1030.6	1029.9
150°	1057.2	1057.7	1058.1	1058.5	1058.9	1059.4	1059.4	1059.4	1059.4	1059.4	1058.8
152.5°	1083.5	1083.9	1084.2	1084.5	1084.8	1085.0	1085.4	1085.7	1086.1	1086.4	1086.1
155°	1121.5	1121.5	1121.8	1122.0	1122.2	1122.4	1123.3	1124.2	1125.1	1126.0	1125.7
157.5°	1154.8	1154.7	1154.9	1155.1	1155.3	1155.5	1156.4	1157.3	1158.2	1159.2	1159.0
160°	1175.7	1175.4	1175.4	1175.4	1175.4	1175.4	1176.6	1177.7	1178.8	1179.9	1180.0
162.5°	1194.2	1193.9	1194.1	1194.3	1194.5	1194.6	1195.8	1196.9	1198.0	1199.1	1198.9
165°	1218.8	1218.5	1218.5	1218.5	1218.5	1218.5	1219.8	1221.2	1222.4	1223.8	1223.7
167.5°	1237.7	1237.3	1237.5	1237.7	1237.9	1238.0	1239.4	1240.8	1242.2	1243.5	1243.5
170°	1248.9	1248.4	1248.4	1248.4	1248.4	1248.4	1250.0	1251.5	1253.2	1254.7	1254.7
172.5°	1257.7	1257.3	1257.3	1257.3	1257.3	1257.3	1258.7	1260.1	1261.5	1262.8	1262.7
175°	1267.0	1266.4	1266.4	1266.4	1266.4	1266.4	1267.8	1269.1	1270.5	1271.8	1271.7
177.5°	1271.4	1271.1	1271.1	1271.1	1271.1	1271.1	1272.1	1273.2	1274.3	1275.3	1275.2
180°	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0
2.5°	395.9	395.7	396.8	396.1	396.8	395.7	395.9	397.0	397.4	397.4	397.4
5°	368.5	369.1	367.0	367.0	367.0	369.1	368.5	369.7	370.7	371.5	372.6
7.5°	344.1	343.2	343.3	342.2	343.3	343.2	344.1	345.0	346.3	348.1	349.7
10°	329.2	328.0	327.5	327.8	327.5	328.0	329.2	331.6	332.3	334.0	335.8
12.5°	316.8	316.6	313.9	313.9	313.9	316.6	316.8	317.5	319.2	322.6	324.7
15°	302.3	298.5	298.1	299.3	298.1	298.5	302.3	302.3	303.1	305.7	306.9
17.5°	287.7	285.7	285.9	285.2	285.9	285.7	287.7	288.0	288.7	290.8	292.4
20°	280.0	278.8	278.6	277.2	278.6	278.8	280.0	280.0	280.9	281.8	283.4
22.5°	272.9	272.6	272.7	271.1	272.7	272.6	272.9	273.5	274.2	274.9	276.0
25°	264.2	265.2	264.3	264.3	264.3	265.2	264.2	264.3	264.6	265.5	266.4
27.5°	258.2	258.2	257.8	257.8	257.8	258.2	258.2	257.8	257.5	257.2	257.0
30°	253.7	253.6	253.9	253.9	253.9	253.6	253.7	253.0	252.5	252.4	251.5
32.5°	249.3	249.5	249.6	249.8	249.6	249.5	249.3	248.3	247.5	247.0	246.4
35°	242.3	242.5	243.1	242.7	243.1	242.5	242.3	241.1	240.3	239.1	238.1
37.5°	232.9	233.8	233.7	233.9	233.7	233.8	232.9	232.6	231.8	230.8	229.6
40°	225.8	226.4	226.3	226.3	226.3	226.4	225.8	225.7	224.9	224.3	223.3
42.5°	218.6	219.0	218.5	218.3	218.5	219.0	218.6	218.3	217.8	216.7	215.5
45°	206.8	206.4	207.0	206.2	207.0	206.4	206.8	206.0	205.8	205.0	204.0
47.5°	193.6	194.0	194.2	194.8	194.2	194.0	193.6	193.6	192.5	192.0	191.7
50°	184.8	186.0	186.0	185.7	186.0	186.0	184.8	184.3	183.6	182.7	182.7
52.5°	176.1	176.6	177.5	177.4	177.5	176.6	176.1	175.4	174.5	173.4	173.1
55°	162.6	163.1	163.5	163.7	163.5	163.1	162.6	161.1	160.5	159.9	158.9
57.5°	148.8	148.6	149.6	149.9	149.6	148.6	148.8	147.3	146.5	144.6	144.3
60°	139.0	139.0	140.6	141.2	140.6	139.0	139.0	137.4	136.0	134.8	134.4
62.5°	128.5	129.2	130.8	130.0	130.8	129.2	128.5	126.8	125.7	124.2	123.1
65°	113.3	114.9	114.8	115.5	114.8	114.9	113.3	112.4	110.1	108.7	107.5
67.5°	97.4	98.4	99.9	100.0	99.9	98.4	97.4	95.8	94.4	92.9	91.4
70°	86.6	87.6	88.4	89.0	88.4	87.6	86.6	85.1	83.4	82.4	80.8
72.5°	76.2	76.7	78.7	77.8	78.7	76.7	76.2	74.3	73.0	72.2	70.4
75°	59.8	61.2	62.4	61.8	62.4	61.2	59.8	58.4	57.3	56.1	54.6
77.5°	44.2	45.6	46.1	45.6	46.1	45.6	44.2	43.3	42.8	40.4	40.2
80°	34.9	34.7	35.9	35.7	35.9	34.7	34.9	33.5	32.5	31.1	31.1
82.5°	25.6	25.4	25.9	26.1	25.9	25.4	25.6	24.8	23.5	22.9	22.4
85°	12.4	13.0	12.2	12.1	12.2	13.0	12.4	11.6	11.6	11.6	11.5
87.5°	8.6	8.7	8.6	8.6	8.6	8.7	8.6	8.5	9.0	8.4	8.2
90°	28.7	29.1	29.5	30.0	29.5	29.1	28.7	28.2	27.6	26.7	25.8
92.5°	41.2	41.0	40.6	40.4	40.6	41.0	41.2	41.5	41.2	40.6	39.9
95°	78.0	78.0	78.0	78.0	78.0	78.0	78.0	78.0	77.6	76.7	75.8
97.5°	120.3	120.2	120.1	120.0	120.1	120.2	120.3	120.4	119.9	118.9	117.9
100°	150.8	151.2	151.6	152.1	151.6	151.2	150.8	150.2	149.7	149.0	148.4
102.5°	185.1	185.0	184.9	184.9	184.9	185.0	185.1	185.2	184.9	184.3	183.6
105°	236.8	237.2	237.6	238.1	237.6	237.2	236.8	236.3	236.1	236.1	236.1
107.5°	294.3	294.0	293.8	293.5	293.8	294.0	294.3	294.5	294.4	293.7	292.9
110°	332.4	332.0	331.6	331.1	331.6	332.0	332.4	332.9	332.7	331.8	330.9



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	371.4	371.3	371.3	371.2	371.3	371.3	371.4	371.5	371.0	370.0	368.9
115°	426.8	426.6	426.4	426.2	426.4	426.6	426.8	427.1	427.1	426.8	426.6
117.5°	483.9	483.2	482.6	482.0	482.6	483.2	483.9	484.5	484.8	484.8	484.9
120°	522.5	522.1	521.7	521.2	521.7	522.1	522.5	523.0	523.3	523.6	523.7
122.5°	560.7	560.1	559.4	558.8	559.4	560.1	560.7	561.3	561.9	562.5	563.1
125°	617.9	617.0	616.1	615.3	616.1	617.0	617.9	618.8	619.7	620.6	621.5
127.5°	674.5	673.5	672.4	671.5	672.4	673.5	674.5	675.5	676.7	678.0	679.2
130°	712.9	711.4	709.8	708.3	709.8	711.4	712.9	714.5	715.7	716.6	717.5
132.5°	750.3	749.1	747.9	746.7	747.9	749.1	750.3	751.5	752.6	753.7	754.8
135°	807.6	807.2	806.8	806.3	806.8	807.2	807.6	808.0	808.7	809.6	810.5
137.5°	861.4	860.7	859.8	858.9	859.8	860.7	861.4	862.3	863.2	864.1	865.0
140°	898.0	896.5	894.9	893.4	894.9	896.5	898.0	899.6	900.4	900.7	900.9
142.5°	932.1	930.9	929.8	928.6	929.8	930.9	932.1	933.3	934.1	934.3	934.5
145°	982.1	981.1	980.2	979.4	980.2	981.1	982.1	982.9	983.5	983.7	984.0
147.5°	1028.6	1027.3	1025.9	1024.6	1025.9	1027.3	1028.6	1029.9	1030.6	1030.6	1030.6
150°	1057.4	1056.1	1054.7	1053.4	1054.7	1056.1	1057.4	1058.8	1059.4	1059.4	1059.4
152.5°	1084.9	1083.7	1082.5	1081.4	1082.5	1083.7	1084.9	1086.1	1086.4	1086.1	1085.7
155°	1124.1	1122.6	1121.0	1119.4	1121.0	1122.6	1124.1	1125.7	1126.0	1125.1	1124.2
157.5°	1157.8	1156.5	1155.3	1154.0	1155.3	1156.5	1157.8	1159.0	1159.2	1158.2	1157.3
160°	1179.1	1178.2	1177.3	1176.5	1177.3	1178.2	1179.1	1180.0	1179.9	1178.8	1177.7
162.5°	1197.5	1196.1	1194.6	1193.3	1194.6	1196.1	1197.5	1198.9	1199.1	1198.0	1196.9
165°	1222.1	1220.6	1219.0	1217.5	1219.0	1220.6	1222.1	1223.7	1223.8	1222.4	1221.2
167.5°	1242.2	1240.8	1239.4	1238.0	1239.4	1240.8	1242.2	1243.5	1243.5	1242.2	1240.8
170°	1253.2	1251.5	1250.0	1248.4	1250.0	1251.5	1253.2	1254.7	1254.7	1253.2	1251.5
172.5°	1261.1	1259.6	1258.0	1256.5	1258.0	1259.6	1261.1	1262.7	1262.8	1261.5	1260.1
175°	1270.1	1268.6	1267.0	1265.5	1267.0	1268.6	1270.1	1271.7	1271.8	1270.5	1269.1
177.5°	1274.0	1272.7	1271.5	1270.3	1271.5	1272.7	1274.0	1275.2	1275.3	1274.3	1273.2
180°	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0
2.5°	397.0	397.0	400.0	402.0	404.4	406.0	407.1	408.2	410.2	412.7	415.6
5°	374.3	375.1	379.5	383.9	388.1	391.8	394.8	398.4	402.8	408.2	414.2
7.5°	352.3	355.4	359.8	365.2	371.1	376.3	381.7	387.6	393.9	401.8	410.3
10°	338.2	341.6	347.0	353.9	360.1	366.3	372.9	379.3	387.1	396.6	407.4
12.5°	325.8	329.1	334.7	342.1	348.0	354.9	362.5	370.8	379.6	390.9	403.2
15°	308.7	312.5	319.3	323.0	332.0	340.2	347.2	359.2	370.5	382.1	396.3
17.5°	294.6	296.8	302.3	309.0	315.7	325.0	334.2	344.2	355.4	369.6	387.4
20°	285.0	286.8	292.8	299.9	307.1	315.6	323.7	333.8	346.4	361.4	380.7
22.5°	277.8	279.7	283.7	291.2	297.9	305.0	313.1	325.1	338.5	353.3	374.1
25°	267.3	268.5	271.2	277.2	283.2	291.0	298.3	309.5	323.3	340.6	361.4
27.5°	257.4	258.6	260.8	265.1	270.8	277.1	285.0	294.5	308.5	327.3	349.4
30°	251.5	251.8	253.7	257.8	262.6	267.8	275.0	285.9	299.1	318.1	341.4
32.5°	246.4	245.6	247.0	250.0	254.7	259.9	265.9	276.6	289.3	308.0	331.9
35°	237.7	237.3	236.7	239.3	243.3	247.3	252.5	260.5	275.0	292.5	317.5
37.5°	228.9	227.8	226.8	228.0	231.1	235.3	239.8	246.9	259.4	278.6	302.6
40°	222.2	221.4	220.8	220.4	223.3	227.2	230.7	237.5	249.1	267.3	291.0
42.5°	215.0	214.6	213.8	213.2	215.5	218.6	222.1	228.2	239.8	256.9	279.3
45°	203.4	203.0	202.6	202.2	203.6	206.4	209.2	213.6	223.7	240.3	260.5
47.5°	190.5	189.9	190.1	189.4	190.8	192.7	194.7	199.4	209.0	222.5	237.3
50°	181.2	180.9	180.9	180.9	181.3	183.6	185.4	189.0	197.8	211.2	221.9
52.5°	172.3	171.4	171.4	171.8	172.5	173.9	175.0	179.0	186.7	197.8	207.4
55°	158.4	156.9	156.4	156.9	157.5	158.7	159.9	163.1	169.7	177.9	183.6
57.5°	143.1	142.2	141.7	141.8	142.2	143.1	144.0	147.5	152.7	157.0	160.7
60°	132.4	132.8	131.0	131.4	131.4	132.2	133.6	135.8	140.2	143.2	146.8
62.5°	122.3	121.7	121.2	120.6	120.6	121.0	122.9	124.6	128.4	129.9	132.7
65°	106.5	106.5	105.3	105.7	105.9	104.5	105.5	107.5	109.9	110.6	113.1
67.5°	90.6	90.0	89.3	88.7	88.7	88.6	89.1	90.1	91.9	92.1	94.1
70°	79.6	79.2	79.0	78.4	77.7	78.6	78.0	79.0	80.1	80.2	81.5
72.5°	69.1	68.6	68.3	67.7	67.3	67.2	67.2	68.4	69.1	68.9	70.2
75°	54.0	53.6	53.1	52.2	52.2	51.6	51.7	52.5	53.4	52.8	54.0
77.5°	39.6	38.4	38.3	38.6	37.9	38.1	37.8	37.7	38.1	38.1	39.2
80°	30.5	29.1	29.4	29.3	29.1	28.8	28.5	28.7	28.8	29.1	29.7
82.5°	22.0	21.9	21.4	21.4	21.2	20.7	20.5	20.8	21.0	20.9	21.4
85°	11.2	10.6	11.0	10.8	11.0	10.8	10.2	10.2	10.6	10.4	10.8
87.5°	8.4	8.2	7.4	7.0	6.3	5.9	5.2	4.9	4.6	4.1	4.0
90°	24.9	24.0	21.1	18.3	15.3	12.5	9.9	7.7	5.4	3.2	1.0
92.5°	39.1	38.4	36.8	35.1	33.5	31.9	30.2	28.8	27.2	25.7	24.2
95°	74.9	74.0	72.2	70.4	68.7	66.9	65.3	63.7	62.2	60.6	59.1
97.5°	116.8	115.8	114.5	113.3	112.0	110.7	109.4	108.3	107.2	106.0	104.9
100°	147.7	147.1	145.9	144.8	143.7	142.6	141.4	140.1	138.7	137.4	136.0
102.5°	183.0	182.3	180.8	179.3	177.9	176.4	175.3	174.4	173.7	172.9	172.0
105°	236.1	236.1	234.1	232.1	230.1	228.1	226.9	226.4	226.0	225.5	225.1
107.5°	292.2	291.5	290.7	289.9	289.1	288.3	287.7	287.5	287.2	287.0	286.7
110°	330.0	329.2	328.6	328.2	327.8	327.4	326.9	326.5	326.0	325.5	325.1



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	367.8	366.7	366.6	366.5	366.4	366.4	366.2	365.9	365.7	365.4	365.2
115°	426.4	426.2	426.6	427.1	427.5	427.9	427.8	427.1	426.5	425.9	425.2
117.5°	484.9	485.0	485.6	486.1	486.7	487.3	487.3	486.9	486.5	486.0	485.6
120°	524.0	524.2	525.3	526.4	527.5	528.7	528.6	527.2	525.9	524.5	523.2
122.5°	563.6	564.2	564.8	565.3	565.9	566.5	566.4	565.3	564.4	563.4	562.4
125°	622.3	623.3	623.7	624.1	624.6	625.0	624.9	624.2	623.5	622.9	622.2
127.5°	680.4	681.7	682.2	682.6	683.1	683.6	683.1	681.7	680.3	678.9	677.4
130°	718.4	719.3	720.0	720.6	721.3	721.9	721.3	719.6	717.8	716.0	714.3
132.5°	755.8	756.9	757.3	757.9	758.4	758.9	758.2	756.4	754.7	752.9	751.1
135°	811.4	812.3	812.5	812.8	813.0	813.2	812.6	811.3	809.9	808.7	807.3
137.5°	866.0	866.9	866.3	865.7	865.2	864.6	863.8	862.6	861.5	860.4	859.4
140°	901.1	901.4	901.1	900.9	900.7	900.4	899.7	898.7	897.6	896.5	895.4
142.5°	934.7	935.0	934.5	934.2	933.8	933.3	932.6	931.5	930.4	929.3	928.2
145°	984.1	984.4	983.7	983.0	982.4	981.7	981.1	980.7	980.2	979.8	979.4
147.5°	1030.6	1030.6	1029.9	1029.3	1028.7	1028.1	1027.4	1026.6	1025.8	1025.0	1024.2
150°	1059.4	1059.4	1058.9	1058.5	1058.1	1057.7	1057.2	1056.7	1056.3	1055.8	1055.4
152.5°	1085.4	1085.0	1084.8	1084.5	1084.2	1083.9	1083.5	1082.9	1082.3	1081.7	1081.0
155°	1123.3	1122.4	1122.2	1122.0	1121.8	1121.5	1121.5	1121.5	1121.5	1121.5	1121.5
157.5°	1156.4	1155.5	1155.3	1155.1	1154.9	1154.7	1154.8	1155.0	1155.3	1155.5	1155.8
160°	1176.6	1175.4	1175.4	1175.4	1175.4	1175.4	1175.7	1176.1	1176.6	1177.0	1177.4
162.5°	1195.8	1194.6	1194.5	1194.3	1194.1	1193.9	1194.2	1194.8	1195.4	1196.0	1196.6
165°	1219.8	1218.5	1218.5	1218.5	1218.5	1218.5	1218.8	1219.4	1220.1	1220.8	1221.5
167.5°	1239.4	1238.0	1237.9	1237.7	1237.5	1237.3	1237.7	1238.6	1239.5	1240.4	1241.3
170°	1250.0	1248.4	1248.4	1248.4	1248.4	1248.4	1248.9	1249.8	1250.7	1251.5	1252.5
172.5°	1258.7	1257.3	1257.3	1257.3	1257.3	1257.3	1257.7	1258.6	1259.5	1260.4	1261.3
175°	1267.8	1266.4	1266.4	1266.4	1266.4	1266.4	1267.0	1267.8	1268.7	1269.6	1270.5
177.5°	1272.1	1271.1	1271.1	1271.1	1271.1	1271.1	1271.4	1272.1	1272.9	1273.6	1274.3
180°	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0	414.0
2.5°	416.6	417.4	420.1	422.1	424.3	425.6	426.8	427.8	429.1	429.4	434.0
5°	418.4	422.4	429.5	434.6	441.1	448.1	452.9	455.1	461.0	465.7	475.4
7.5°	417.9	426.5	437.0	448.1	459.8	470.7	480.2	491.5	499.4	511.4	523.2
10°	417.4	428.9	442.5	456.5	472.9	488.2	501.9	517.1	529.8	546.4	560.6
12.5°	415.9	429.8	448.8	465.4	485.3	506.4	526.6	546.1	557.3	585.0	598.1
15°	412.4	428.9	452.5	477.8	505.2	530.1	555.8	576.3	609.3	633.6	649.1
17.5°	405.6	428.6	456.7	487.2	520.6	553.4	582.5	613.5	648.6	678.0	709.3
20°	402.3	427.7	458.9	492.7	527.4	564.5	597.5	634.8	673.1	702.1	742.2
22.5°	396.4	425.1	458.7	496.3	533.4	571.8	610.5	648.2	692.4	732.2	770.4
25°	386.8	418.8	453.7	495.7	539.2	577.6	624.1	674.0	720.1	771.3	809.3
27.5°	376.5	410.8	445.7	484.7	531.6	577.3	635.6	692.0	748.4	792.6	820.8
30°	368.7	402.0	438.1	477.4	523.7	578.1	643.3	704.8	759.8	797.7	813.6
32.5°	360.2	393.9	425.9	467.1	516.5	577.6	648.1	712.4	760.4	785.7	782.6
35°	346.8	375.1	406.2	445.9	504.0	574.0	650.9	713.1	742.5	737.1	696.2
37.5°	327.5	351.4	381.9	425.4	489.7	566.6	645.2	691.9	690.0	645.9	586.6
40°	315.6	335.8	365.2	411.0	478.4	561.8	636.5	666.8	641.1	579.5	508.5
42.5°	299.8	318.5	347.9	394.9	466.1	552.1	619.6	628.4	578.2	507.3	442.2
45°	275.4	291.9	322.4	370.9	447.5	530.7	578.5	557.0	489.4	416.2	366.7
47.5°	249.2	266.3	295.6	345.5	420.7	498.7	521.4	475.8	406.4	347.0	301.5
50°	232.6	249.1	277.8	328.1	402.6	472.3	481.8	422.8	359.0	306.9	269.6
52.5°	216.0	231.4	259.7	310.2	381.4	441.9	436.1	376.0	317.4	272.9	243.6
55°	191.1	205.8	232.6	280.0	344.8	392.7	371.7	314.4	265.8	231.3	209.0
57.5°	168.9	183.0	206.1	248.9	305.2	338.2	311.4	263.0	224.5	197.9	181.3
60°	153.9	166.3	188.4	228.1	277.0	302.0	275.6	232.9	200.4	179.1	164.3
62.5°	139.6	150.4	170.8	206.9	249.4	270.4	243.7	207.5	179.9	161.0	148.4
65°	118.0	127.8	145.9	173.9	208.8	222.8	199.8	170.5	149.0	135.0	126.6
67.5°	98.2	106.6	122.2	144.2	170.0	180.1	162.6	139.9	123.7	112.4	105.8
70°	85.1	92.3	104.5	123.6	146.8	154.6	138.2	119.5	107.7	98.7	92.5
72.5°	74.0	79.3	90.4	105.1	124.5	130.7	119.2	102.9	91.9	85.1	80.1
75°	56.4	60.8	68.0	79.8	93.2	96.9	88.3	78.0	70.6	65.8	62.0
77.5°	40.6	43.9	49.1	56.4	65.7	69.0	63.5	56.7	51.2	48.0	45.9
80°	30.7	33.3	37.7	43.7	49.3	51.1	48.0	42.7	38.9	37.1	35.3
82.5°	22.6	24.1	26.8	30.9	34.7	36.9	34.2	31.0	28.9	27.3	26.6
85°	11.5	12.2	13.4	15.1	17.5	18.3	17.2	16.4	15.2	14.2	14.2
87.5°	4.8	5.3	6.2	7.0	8.1	9.1	9.6	9.8	10.2	10.2	10.3
90°	3.2	5.4	7.7	9.9	12.5	15.3	18.3	21.1	24.0	24.9	25.8
92.5°	25.7	27.2	28.8	30.2	31.9	33.5	35.1	36.8	38.4	39.1	39.9
95°	60.6	62.2	63.7	65.3	66.9	68.7	70.4	72.2	74.0	74.9	75.8
97.5°	106.0	107.2	108.3	109.4	110.7	112.0	113.3	114.5	115.8	116.8	117.9
100°	137.4	138.7	140.1	141.4	142.6	143.7	144.8	145.9	147.1	147.7	148.4
102.5°	172.9	173.7	174.4	175.3	176.4	177.9	179.3	180.8	182.3	183.0	183.6
105°	225.5	226.0	226.4	226.9	228.1	230.1	232.1	234.1	236.1	236.1	236.1
107.5°	287.0	287.2	287.5	287.7	288.3	289.1	289.9	290.7	291.5	292.2	292.9
110°	325.5	326.0	326.5	326.9	327.4	327.8	328.2	328.6	329.2	330.0	330.9



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	365.4	365.7	365.9	366.2	366.4	366.4	366.5	366.6	366.7	367.8	368.9
115°	425.9	426.5	427.1	427.8	427.9	427.5	427.1	426.6	426.2	426.4	426.6
117.5°	486.0	486.5	486.9	487.3	487.3	486.7	486.1	485.6	485.0	484.9	484.9
120°	524.5	525.9	527.2	528.6	528.7	527.5	526.4	525.3	524.2	524.0	523.7
122.5°	563.4	564.4	565.3	566.4	566.5	565.9	565.3	564.8	564.2	563.6	563.1
125°	622.9	623.5	624.2	624.9	625.0	624.6	624.1	623.7	623.3	622.3	621.5
127.5°	678.9	680.3	681.7	683.1	683.6	683.1	682.6	682.2	681.7	680.4	679.2
130°	716.0	717.8	719.6	721.3	721.9	721.3	720.6	720.0	719.3	718.4	717.5
132.5°	752.9	754.7	756.4	758.2	758.9	758.4	757.9	757.3	756.9	755.8	754.8
135°	808.7	809.9	811.3	812.6	813.2	813.0	812.8	812.5	812.3	811.4	810.5
137.5°	860.4	861.5	862.6	863.8	864.6	865.2	865.7	866.3	866.9	866.0	865.0
140°	896.5	897.6	898.7	899.7	900.4	900.7	900.9	901.1	901.4	901.1	900.9
142.5°	929.3	930.4	931.5	932.6	933.3	933.8	934.2	934.5	935.0	934.7	934.5
145°	979.8	980.2	980.7	981.1	981.7	982.4	983.0	983.7	984.4	984.1	984.0
147.5°	1025.0	1025.8	1026.6	1027.4	1028.1	1028.7	1029.3	1029.9	1030.6	1030.6	1030.6
150°	1055.8	1056.3	1056.7	1057.2	1057.7	1058.1	1058.5	1058.9	1059.4	1059.4	1059.4
152.5°	1081.7	1082.3	1082.9	1083.5	1083.9	1084.2	1084.5	1084.8	1085.0	1085.4	1085.7
155°	1121.5	1121.5	1121.5	1121.5	1121.5	1121.8	1122.0	1122.2	1122.4	1123.3	1124.2
157.5°	1155.5	1155.3	1155.0	1154.8	1154.7	1154.9	1155.1	1155.3	1155.5	1156.4	1157.3
160°	1177.0	1176.6	1176.1	1175.7	1175.4	1175.4	1175.4	1175.4	1175.4	1176.6	1177.7
162.5°	1196.0	1195.4	1194.8	1194.2	1193.9	1194.1	1194.3	1194.5	1194.6	1195.8	1196.9
165°	1220.8	1220.1	1219.4	1218.8	1218.5	1218.5	1218.5	1218.5	1218.5	1219.8	1221.2
167.5°	1240.4	1239.5	1238.6	1237.7	1237.3	1237.5	1237.7	1237.9	1238.0	1239.4	1240.8
170°	1251.5	1250.7	1249.8	1248.9	1248.4	1248.4	1248.4	1248.4	1248.4	1250.0	1251.5
172.5°	1260.4	1259.5	1258.6	1257.7	1257.3	1257.3	1257.3	1257.3	1257.3	1258.7	1260.1
175°	1269.6	1268.7	1267.8	1267.0	1266.4	1266.4	1266.4	1266.4	1266.4	1267.8	1269.1
177.5°	1273.6	1272.9	1272.1	1271.4	1271.1	1271.1	1271.1	1271.1	1271.1	1272.1	1273.2
180°	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	414.0	414.0	414.0	414.0	414.0	414.0	414.0
2.5°	435.7	435.8	437.6	438.9	438.2	439.0	439.4
5°	476.0	483.2	487.0	489.8	490.0	490.3	491.8
7.5°	533.1	540.9	546.6	555.2	557.7	560.6	559.8
10°	574.9	586.3	596.2	601.3	607.0	615.2	608.6
12.5°	613.9	634.1	649.1	657.2	662.5	664.1	660.9
15°	678.2	704.6	718.8	718.5	736.5	744.3	732.1
17.5°	737.1	761.6	781.2	791.2	806.2	809.5	808.0
20°	773.3	800.0	815.2	832.4	840.2	847.2	848.4
22.5°	804.3	828.4	844.7	859.0	865.6	868.9	870.9
25°	836.5	855.3	865.1	870.1	871.9	871.5	868.9
27.5°	834.2	835.7	824.8	814.2	804.7	794.0	790.3
30°	812.5	795.7	765.6	748.6	723.5	703.6	711.7
32.5°	755.6	722.0	688.3	651.0	620.2	611.4	602.5
35°	644.9	585.9	551.4	511.3	495.2	479.2	468.1
37.5°	521.7	476.1	435.1	409.0	392.9	382.7	377.3
40°	451.1	410.0	376.3	355.0	342.8	331.4	329.8
42.5°	394.8	356.5	331.2	314.3	302.6	297.6	294.1
45°	323.3	296.7	279.7	267.6	259.8	256.8	252.7
47.5°	273.7	254.9	242.0	233.8	227.9	225.7	225.4
50°	245.9	230.2	220.8	214.4	209.8	209.0	205.8
52.5°	225.1	211.5	204.1	198.5	195.2	193.0	192.0
55°	195.4	186.3	179.7	176.5	173.9	171.7	171.7
57.5°	170.9	163.4	159.0	156.3	155.5	153.9	152.9
60°	155.8	149.5	146.0	143.6	142.0	142.2	140.4
62.5°	141.1	136.9	133.6	131.3	129.3	129.4	129.5
65°	120.1	116.9	114.5	113.7	112.5	111.2	111.5
67.5°	101.9	98.8	96.9	95.6	95.1	94.4	95.6
70°	88.7	86.4	85.1	83.9	83.4	83.6	84.6
72.5°	76.6	75.1	74.1	73.6	72.7	72.8	73.4
75°	60.2	59.0	58.2	57.6	57.3	57.3	57.3
77.5°	44.2	43.9	43.6	42.7	42.7	43.0	43.0
80°	34.9	34.3	34.1	33.7	33.1	32.7	33.7
82.5°	26.1	25.5	25.3	25.2	24.3	24.2	25.1
85°	14.0	13.4	13.6	13.4	13.4	13.3	13.3
87.5°	10.3	10.3	10.3	10.6	10.5	10.4	10.8
90°	26.7	27.6	28.2	28.7	29.1	29.5	30.0
92.5°	40.6	41.2	41.5	41.2	41.0	40.6	40.4
95°	76.7	77.6	78.0	78.0	78.0	78.0	78.0
97.5°	118.9	119.9	120.4	120.3	120.2	120.1	120.0
100°	149.0	149.7	150.2	150.8	151.2	151.6	152.1
102.5°	184.3	184.9	185.2	185.1	185.0	184.9	184.9
105°	236.1	236.1	236.3	236.8	237.2	237.6	238.1
107.5°	293.7	294.4	294.5	294.3	294.0	293.8	293.5
110°	331.8	332.7	332.9	332.4	332.0	331.6	331.1



TEST NUMBER: P331902-935

CATALOG NUMBER: S123DIP-S340D1195U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	370.0	371.0	371.5	371.4	371.3	371.3	371.2
115°	426.8	427.1	427.1	426.8	426.6	426.4	426.2
117.5°	484.8	484.8	484.5	483.9	483.2	482.6	482.0
120°	523.6	523.3	523.0	522.5	522.1	521.7	521.2
122.5°	562.5	561.9	561.3	560.7	560.1	559.4	558.8
125°	620.6	619.7	618.8	617.9	617.0	616.1	615.3
127.5°	678.0	676.7	675.5	674.5	673.5	672.4	671.5
130°	716.6	715.7	714.5	712.9	711.4	709.8	708.3
132.5°	753.7	752.6	751.5	750.3	749.1	747.9	746.7
135°	809.6	808.7	808.0	807.6	807.2	806.8	806.3
137.5°	864.1	863.2	862.3	861.4	860.7	859.8	858.9
140°	900.7	900.4	899.6	898.0	896.5	894.9	893.4
142.5°	934.3	934.1	933.3	932.1	930.9	929.8	928.6
145°	983.7	983.5	982.9	982.1	981.1	980.2	979.4
147.5°	1030.6	1030.6	1029.9	1028.6	1027.3	1025.9	1024.6
150°	1059.4	1059.4	1058.8	1057.4	1056.1	1054.7	1053.4
152.5°	1086.1	1086.4	1086.1	1084.9	1083.7	1082.5	1081.4
155°	1125.1	1126.0	1125.7	1124.1	1122.6	1121.0	1119.4
157.5°	1158.2	1159.2	1159.0	1157.8	1156.5	1155.3	1154.0
160°	1178.8	1179.9	1180.0	1179.1	1178.2	1177.3	1176.5
162.5°	1198.0	1199.1	1198.9	1197.5	1196.1	1194.6	1193.3
165°	1222.4	1223.8	1223.7	1222.1	1220.6	1219.0	1217.5
167.5°	1242.2	1243.5	1243.5	1242.2	1240.8	1239.4	1238.0
170°	1253.2	1254.7	1254.7	1253.2	1251.5	1250.0	1248.4
172.5°	1261.5	1262.8	1262.7	1261.1	1259.6	1258.0	1256.5
175°	1270.5	1271.8	1271.7	1270.1	1268.6	1267.0	1265.5
177.5°	1274.3	1275.3	1275.2	1274.0	1272.7	1271.5	1270.3
180°	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5	1273.5

(END OF REPORT)