

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331882-935

Luminaire Tested: **S123DIP-S340D585U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331882-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S340D585U935-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 585 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3041.1 lumens
Efficiency: N/A
Efficacy: 118.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 25.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331882-935

CATALOG NUMBER: S123DIP-S340D585U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

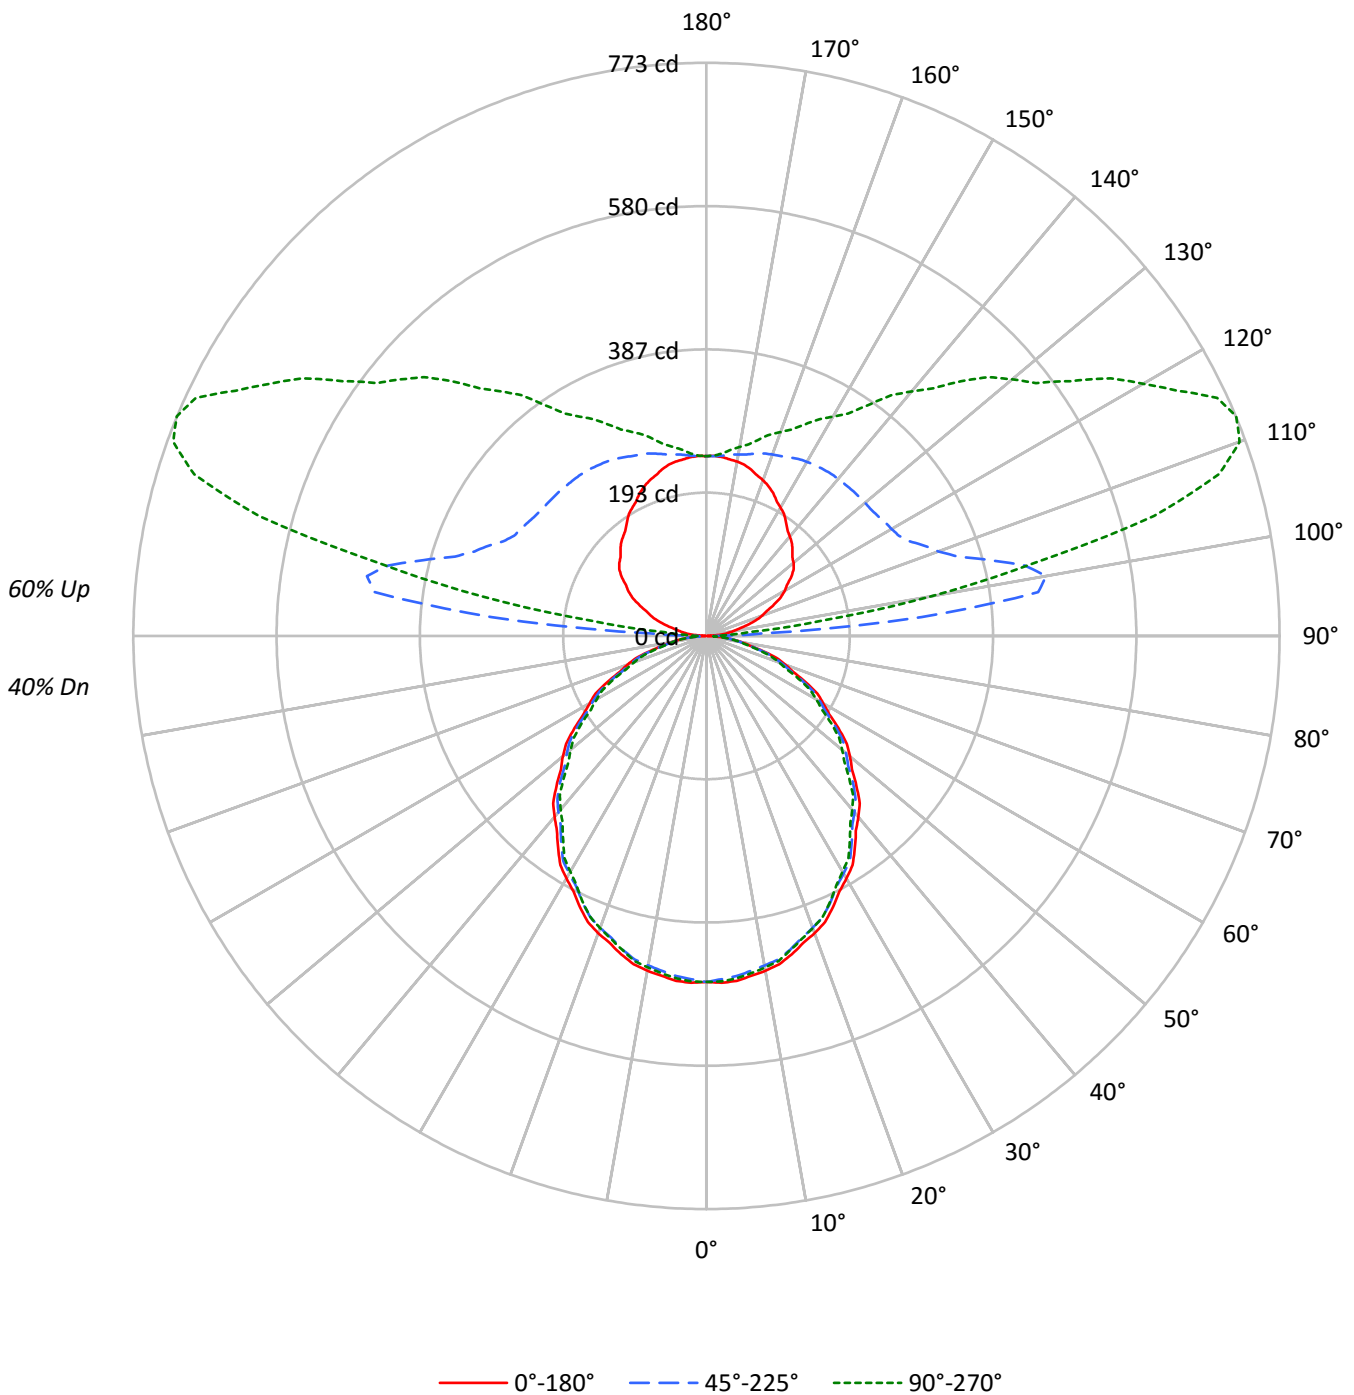



TEST NUMBER: P331882-935

CATALOG NUMBER: S123DIP-S340D585U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	40
1	95	91	87	84	87	83	80	77	68	66	64	54	53	51	41	40	39	34
2	87	80	74	68	79	73	67	63	60	56	53	47	45	43	36	35	33	28
3	79	70	63	57	72	64	58	53	52	48	44	42	39	36	32	30	28	24
4	72	62	54	48	66	57	50	45	47	42	38	37	34	31	29	26	24	20
5	66	55	47	41	60	50	43	38	42	36	32	33	30	27	26	23	21	18
6	61	49	41	36	55	45	38	33	37	32	28	30	26	23	23	21	19	15
7	56	44	37	31	51	41	34	29	34	29	25	27	24	21	21	19	16	14
8	52	40	33	27	48	37	30	26	31	26	22	25	21	18	20	17	15	12
9	49	37	29	24	44	34	27	23	28	23	20	23	19	16	18	15	13	11
10	45	34	26	22	41	31	25	20	26	21	18	21	17	15	17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5022	5022	5022
5°	5046	4976	5010
10°	5012	4933	4964
15°	4953	4878	4886
20°	4885	4798	4802
25°	4793	4703	4694
30°	4692	4598	4561
35°	4586	4486	4428
40°	4477	4363	4295
45°	4354	4250	4147
50°	4232	4113	3997
55°	4074	3969	3847
60°	3914	3800	3679
65°	3769	3617	3505
70°	3559	3408	3257
75°	3256	3136	3003
80°	2938	2814	2783
85°	2569	2482	2384



TEST NUMBER: P331882-935

CATALOG NUMBER: S123DIP-S340D585U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.0	1.4
10°-20°	124.1	4.1
20°-30°	183.3	6.0
30°-40°	214.1	7.0
40°-50°	215.3	7.1
50°-60°	189.1	6.2
60°-70°	140.9	4.6
70°-80°	80.3	2.6
80°-90°	24.9	0.8
90°-100°	135.0	4.4
100°-110°	382.3	12.6
110°-120°	376.1	12.4
120°-130°	300.0	9.9
130°-140°	236.5	7.8
140°-150°	176.5	5.8
150°-160°	123.0	4.0
160°-170°	72.3	2.4
170°-180°	23.5	0.8
0°-30°	351.4	11.6
0°-40°	565.5	18.6
0°-60°	969.9	31.9
0°-90°	1216.0	40.0
90°-120°	893.4	29.4
90°-150°	1606.4	52.8
90°-180°	1825.0	60.0
0°-180°	3041.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	467	467	467	467	467	
5°	467	465	460	464	464	44
15°	444	443	438	441	438	125
25°	404	401	396	396	395	186
35°	349	346	341	339	337	218
45°	286	284	279	275	272	221
55°	217	216	212	207	205	194
65°	148	146	142	139	138	146
75°	78	77	75	73	72	84
85°	21	20	20	19	19	23
90°	1	6	12	14	14	2
95°	17	54	291	85	57	18
105°	57	84	395	690	625	61
115°	101	125	302	662	760	100
125°	140	165	282	511	599	124
135°	164	196	278	421	486	127
145°	187	214	274	345	380	117
155°	213	229	266	302	315	98
165°	232	239	254	270	274	65
175°	242	242	244	248	247	23
180°	243	243	243	243	243	



TEST NUMBER: P331882-935

CATALOG NUMBER: S123DIP-S340D585U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6
2.5°	468.2	467.9	467.6	467.4	467.0	466.5	465.7	464.9	464.2	463.4	464.1
5°	467.0	466.5	466.1	465.6	465.2	464.5	463.5	462.5	461.5	460.5	461.4
7.5°	462.4	461.9	461.5	461.1	460.6	459.9	458.9	457.9	456.8	455.8	456.6
10°	458.6	458.1	457.6	457.2	456.8	456.0	454.8	453.7	452.5	451.3	452.1
12.5°	453.4	453.1	452.6	452.3	451.9	451.2	450.1	449.0	447.9	446.9	447.5
15°	444.5	444.2	443.8	443.4	443.1	442.3	441.2	440.0	438.9	437.7	438.4
17.5°	434.1	433.7	433.3	432.7	432.3	431.5	430.3	429.2	428.0	426.9	427.3
20°	426.5	425.9	425.4	424.8	424.3	423.4	422.3	421.1	420.0	418.9	419.2
22.5°	417.8	417.2	416.7	416.2	415.7	414.8	413.6	412.5	411.3	410.2	410.4
25°	403.6	403.0	402.5	402.0	401.5	400.6	399.4	398.3	397.1	396.0	396.1
27.5°	388.4	387.9	387.4	386.8	386.3	385.5	384.3	383.0	381.8	380.5	380.6
30°	377.5	377.0	376.6	376.2	375.7	374.9	373.7	372.4	371.2	369.9	369.9
32.5°	366.6	366.0	365.4	364.8	364.3	363.4	362.5	361.5	360.6	359.6	359.1
35°	349.0	348.5	347.9	347.4	346.9	346.0	344.9	343.7	342.6	341.4	340.9
37.5°	331.1	330.4	329.7	329.0	328.4	327.4	326.2	325.0	323.9	322.7	322.1
40°	318.6	318.0	317.5	316.9	316.4	315.5	314.3	313.0	311.8	310.5	309.8
42.5°	306.0	305.4	304.8	304.2	303.6	302.6	301.4	300.1	298.9	297.6	297.0
45°	286.0	285.7	285.3	285.0	284.6	283.9	282.7	281.5	280.3	279.2	278.2
47.5°	266.2	265.7	265.2	264.7	264.2	263.4	262.3	261.1	260.1	259.0	258.0
50°	252.7	252.3	251.8	251.4	251.0	250.1	249.0	247.9	246.7	245.6	244.5
52.5°	238.6	238.3	238.0	237.7	237.4	236.6	235.4	234.2	233.0	231.7	230.9
55°	217.1	217.0	216.9	216.8	216.7	216.0	214.9	213.7	212.6	211.5	210.4
57.5°	196.5	196.2	195.9	195.6	195.3	194.7	193.7	192.8	191.9	191.0	190.1
60°	181.8	181.7	181.6	181.5	181.4	180.8	179.7	178.7	177.6	176.5	175.7
62.5°	168.6	168.3	168.2	167.9	167.6	167.0	165.9	164.9	163.8	162.7	162.0
65°	148.0	147.6	147.1	146.7	146.3	145.6	144.7	143.8	142.9	142.0	141.3
67.5°	126.3	125.9	125.5	125.1	124.8	124.2	123.6	122.9	122.2	121.5	120.9
70°	113.1	112.6	112.1	111.5	111.0	110.5	109.9	109.3	108.8	108.3	107.7
72.5°	99.4	98.9	98.6	98.2	97.7	97.3	96.7	96.1	95.5	94.9	94.3
75°	78.3	77.8	77.5	77.1	76.8	76.5	76.2	75.9	75.7	75.4	75.0
77.5°	59.5	59.3	59.2	59.0	58.7	58.5	58.2	57.9	57.5	57.2	56.9
80°	47.4	47.1	46.8	46.6	46.2	46.1	45.9	45.7	45.5	45.4	45.2
82.5°	35.5	35.4	35.4	35.3	35.2	35.2	35.1	35.1	35.1	35.0	34.9
85°	20.8	20.7	20.5	20.3	20.1	20.1	20.1	20.1	20.1	20.1	19.9
87.5°	8.5	8.5	8.5	8.6	8.6	8.6	8.9	9.0	9.3	9.6	9.4
90°	0.9	2.0	2.9	4.4	5.4	6.4	7.8	9.3	10.8	12.3	11.8
92.5°	6.1	9.0	13.2	17.0	21.1	28.4	41.2	62.3	83.1	75.5	57.0
95°	16.7	18.2	23.6	31.9	44.7	63.8	105.6	178.7	259.3	291.2	236.2
97.5°	28.5	29.0	33.2	40.5	53.0	73.8	113.7	196.1	330.4	451.3	482.8
100°	36.3	36.9	40.3	47.2	58.9	78.1	112.4	185.1	314.3	465.0	561.8
102.5°	44.6	45.5	48.6	55.0	65.6	83.2	114.0	175.7	290.8	439.5	565.8
105°	57.0	58.5	61.4	67.2	76.6	91.9	118.4	168.9	261.7	394.9	535.8
107.5°	70.1	71.6	74.5	80.2	89.0	103.1	126.4	168.4	243.3	355.3	483.4
110°	79.6	81.0	83.5	88.9	97.2	111.0	133.1	170.4	236.2	332.9	450.3



TEST NUMBER: P331882-935

CATALOG NUMBER: S123DIP-S340D585U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	88.2	89.7	92.1	97.6	105.9	119.2	139.7	174.4	232.3	318.1	421.6
115°	100.7	102.6	105.6	110.5	118.8	132.1	150.8	180.7	230.8	302.0	387.0
117.5°	113.1	115.4	117.9	122.3	131.7	144.0	162.5	189.2	231.7	292.6	366.1
120°	121.8	123.3	125.7	130.6	140.0	152.2	169.9	195.4	233.2	288.3	355.1
122.5°	129.2	130.7	133.2	138.4	147.4	160.5	177.8	201.4	236.0	285.5	346.0
125°	140.0	140.9	143.9	149.3	158.6	171.9	189.1	210.7	240.1	281.9	334.4
127.5°	148.1	149.6	153.3	158.7	169.0	182.3	198.9	218.3	244.9	280.1	324.3
130°	153.3	154.7	159.1	165.0	175.3	188.6	204.7	223.4	248.0	279.0	318.7
132.5°	157.1	159.0	163.8	170.9	181.2	194.1	209.9	228.2	250.4	278.5	313.6
135°	164.0	166.0	171.4	178.7	189.1	202.3	217.6	234.3	253.9	277.9	306.9
137.5°	170.5	172.5	177.9	185.7	196.0	208.2	222.8	238.8	256.2	276.9	301.2
140°	174.9	177.3	182.2	190.0	199.8	212.2	226.4	241.2	257.8	276.5	297.6
142.5°	179.5	181.6	186.9	194.0	203.8	215.3	229.1	243.5	259.0	275.7	294.5
145°	187.1	188.6	193.0	200.4	208.7	220.0	232.8	246.1	259.8	274.5	290.2
147.5°	194.8	195.6	200.0	206.4	214.4	224.0	235.7	247.6	259.8	272.7	286.1
150°	199.8	200.4	204.3	210.7	217.6	226.4	237.7	248.0	259.8	271.0	283.4
152.5°	205.0	205.1	209.1	214.6	220.7	229.1	238.8	248.8	258.6	269.1	280.3
155°	212.7	212.7	215.6	220.5	225.9	232.8	241.2	249.0	257.4	265.7	275.5
157.5°	218.7	219.1	221.4	225.8	230.4	235.7	242.4	249.5	255.6	262.6	270.2
160°	223.4	223.4	225.4	229.4	232.8	237.7	243.6	249.5	254.9	260.3	266.7
162.5°	227.0	227.0	228.6	231.7	234.7	238.8	244.0	249.1	253.3	258.0	263.1
165°	232.3	231.8	232.8	235.2	237.2	240.6	244.5	248.0	251.0	254.4	258.3
167.5°	236.3	235.7	236.2	238.1	239.4	241.6	244.4	247.2	248.6	250.8	253.7
170°	238.7	237.7	238.2	239.6	240.6	241.6	244.1	246.1	247.0	248.5	251.0
172.5°	240.2	239.6	239.8	240.8	241.4	242.0	244.1	245.6	245.8	246.5	248.2
175°	242.1	241.6	241.2	242.1	242.1	242.6	243.6	244.5	244.1	244.1	245.0
177.5°	243.0	242.6	242.2	242.6	242.6	242.6	243.0	243.7	243.0	242.6	243.0
180°	242.6	242.6	242.6	242.6	242.6	242.6	242.6	242.6	242.6	242.6	242.6



TEST NUMBER: P331882-935

CATALOG NUMBER: S123DIP-S340D585U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	466.6	466.6	466.6	466.6	466.6	466.6	466.6	466.6
2.5°	464.8	465.5	466.2	466.6	466.5	466.4	466.3	466.2
5°	462.4	463.2	464.2	464.5	464.3	464.2	463.9	463.7
7.5°	457.4	458.2	459.0	459.3	459.3	459.2	459.1	458.9
10°	453.0	453.7	454.5	454.9	454.7	454.5	454.3	454.2
12.5°	448.0	448.6	449.2	449.4	449.4	449.2	449.1	449.0
15°	439.1	439.8	440.6	440.7	440.1	439.5	439.0	438.5
17.5°	427.8	428.3	428.9	429.0	428.8	428.6	428.4	428.3
20°	419.6	419.9	420.3	420.3	420.0	419.7	419.5	419.2
22.5°	410.7	411.0	411.3	411.3	411.0	410.6	410.3	409.9
25°	396.1	396.2	396.3	396.2	396.0	395.7	395.5	395.2
27.5°	380.6	380.7	380.7	380.6	380.3	380.0	379.6	379.3
30°	369.9	369.9	369.9	369.5	368.9	368.3	367.7	367.0
32.5°	358.6	358.1	357.7	357.2	356.9	356.5	356.2	355.9
35°	340.4	339.8	339.2	338.8	338.4	337.9	337.4	337.0
37.5°	321.4	320.8	320.1	319.7	319.4	319.1	318.8	318.6
40°	309.1	308.4	307.6	307.1	306.8	306.4	306.1	305.7
42.5°	296.3	295.5	294.8	294.3	293.9	293.6	293.3	292.8
45°	277.1	276.0	274.9	274.2	273.7	273.3	272.9	272.4
47.5°	256.9	255.9	254.8	254.1	253.7	253.3	252.9	252.5
50°	243.6	242.5	241.6	240.8	240.3	239.8	239.3	238.7
52.5°	230.1	229.2	228.3	227.6	227.1	226.6	226.1	225.6
55°	209.5	208.4	207.5	206.8	206.4	205.9	205.4	205.0
57.5°	189.2	188.3	187.4	186.8	186.2	185.7	185.2	184.7
60°	175.0	174.1	173.3	172.7	172.2	171.8	171.3	170.9
62.5°	161.1	160.3	159.5	158.9	158.7	158.3	158.1	157.7
65°	140.6	139.9	139.1	138.7	138.4	138.1	137.8	137.6
67.5°	120.2	119.6	119.0	118.5	118.1	117.7	117.4	117.0
70°	107.1	106.4	105.8	105.3	104.9	104.4	103.9	103.5
72.5°	93.8	93.2	92.6	92.2	92.0	91.8	91.5	91.3
75°	74.6	74.0	73.6	73.3	73.0	72.8	72.5	72.2
77.5°	56.6	56.3	56.0	55.9	55.9	55.9	55.9	55.9
80°	45.1	45.0	44.9	44.9	44.9	44.9	44.9	44.9
82.5°	34.8	34.6	34.4	34.3	34.3	34.2	34.1	34.0
85°	19.7	19.5	19.4	19.3	19.3	19.3	19.3	19.3
87.5°	9.4	9.4	9.4	9.6	9.5	9.6	9.7	9.6
90°	12.3	12.7	13.3	14.2	13.8	14.2	14.7	14.2
92.5°	41.3	32.8	29.0	26.4	25.6	24.0	24.5	23.7
95°	176.8	119.9	93.8	76.1	66.8	62.3	58.9	57.0
97.5°	440.7	353.0	289.6	230.9	194.7	172.5	159.3	155.1
100°	579.0	539.2	481.7	412.0	362.4	326.6	307.5	307.9
102.5°	625.0	623.7	590.2	546.0	507.4	479.0	463.0	451.7
105°	638.4	687.5	696.9	684.1	661.5	642.8	627.2	624.7
107.5°	599.7	679.5	722.5	739.9	740.4	734.1	728.8	724.3
110°	562.7	653.2	715.1	749.4	763.2	767.1	766.1	765.1



TEST NUMBER: P331882-935

CATALOG NUMBER: S123DIP-S340D585U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	526.2	618.5	687.9	732.1	757.2	769.5	773.2	773.4
115°	477.9	563.3	635.5	689.0	725.8	747.4	757.2	759.7
117.5°	442.7	516.5	581.3	635.7	674.1	698.8	713.0	716.3
120°	424.3	490.6	549.5	599.2	637.9	665.5	677.2	680.2
122.5°	409.7	469.8	524.3	570.4	604.9	629.6	642.7	646.4
125°	390.4	443.9	491.1	530.4	561.8	583.4	595.7	599.2
127.5°	373.5	421.3	463.8	499.6	527.5	546.0	557.1	560.3
130°	362.9	407.1	446.9	480.3	506.4	524.0	534.3	538.2
132.5°	353.1	393.7	430.8	462.6	487.1	504.7	513.8	516.6
135°	339.8	374.7	406.7	434.6	458.7	473.4	482.2	485.7
137.5°	327.8	356.4	383.8	408.1	428.3	443.2	450.7	453.0
140°	320.7	345.7	369.3	390.4	409.1	422.8	430.7	430.2
142.5°	314.0	335.5	355.9	374.3	390.2	402.4	409.5	409.0
145°	305.9	322.2	337.9	352.1	364.4	374.7	378.7	379.6
147.5°	299.4	312.2	324.9	335.0	344.3	351.3	355.1	355.4
150°	294.6	305.9	316.2	325.6	332.9	338.4	341.3	341.3
152.5°	290.3	300.1	309.2	316.9	322.7	327.8	329.5	329.5
155°	283.9	291.7	299.1	305.0	309.4	313.3	314.3	314.8
157.5°	277.0	283.5	289.3	293.9	297.7	300.7	301.4	301.4
160°	273.0	278.4	283.4	286.8	290.2	293.2	293.2	292.7
162.5°	268.4	272.9	277.5	280.5	282.8	285.3	285.3	284.8
165°	262.3	265.2	268.6	271.0	273.0	275.0	274.5	274.5
167.5°	256.9	259.2	261.1	262.9	263.8	265.2	264.7	264.7
170°	253.4	254.9	256.8	257.8	258.3	259.3	258.8	258.8
172.5°	250.3	251.3	252.9	253.5	253.6	254.6	253.7	253.3
175°	246.1	246.5	247.5	247.5	247.5	248.0	247.5	247.0
177.5°	243.4	243.7	244.2	244.2	243.7	244.2	243.4	243.4
180°	242.6	242.6	242.6	242.6	242.6	242.6	242.6	242.6

(END OF REPORT)