

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331945-935

Luminaire Tested: **S123DIP-S560D1025U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331945-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S560D1025U935-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5193.4 lumens  
Efficiency: N/A  
Efficacy: 116.7 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331945-935

CATALOG NUMBER: S123DIP-S560D1025U935-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

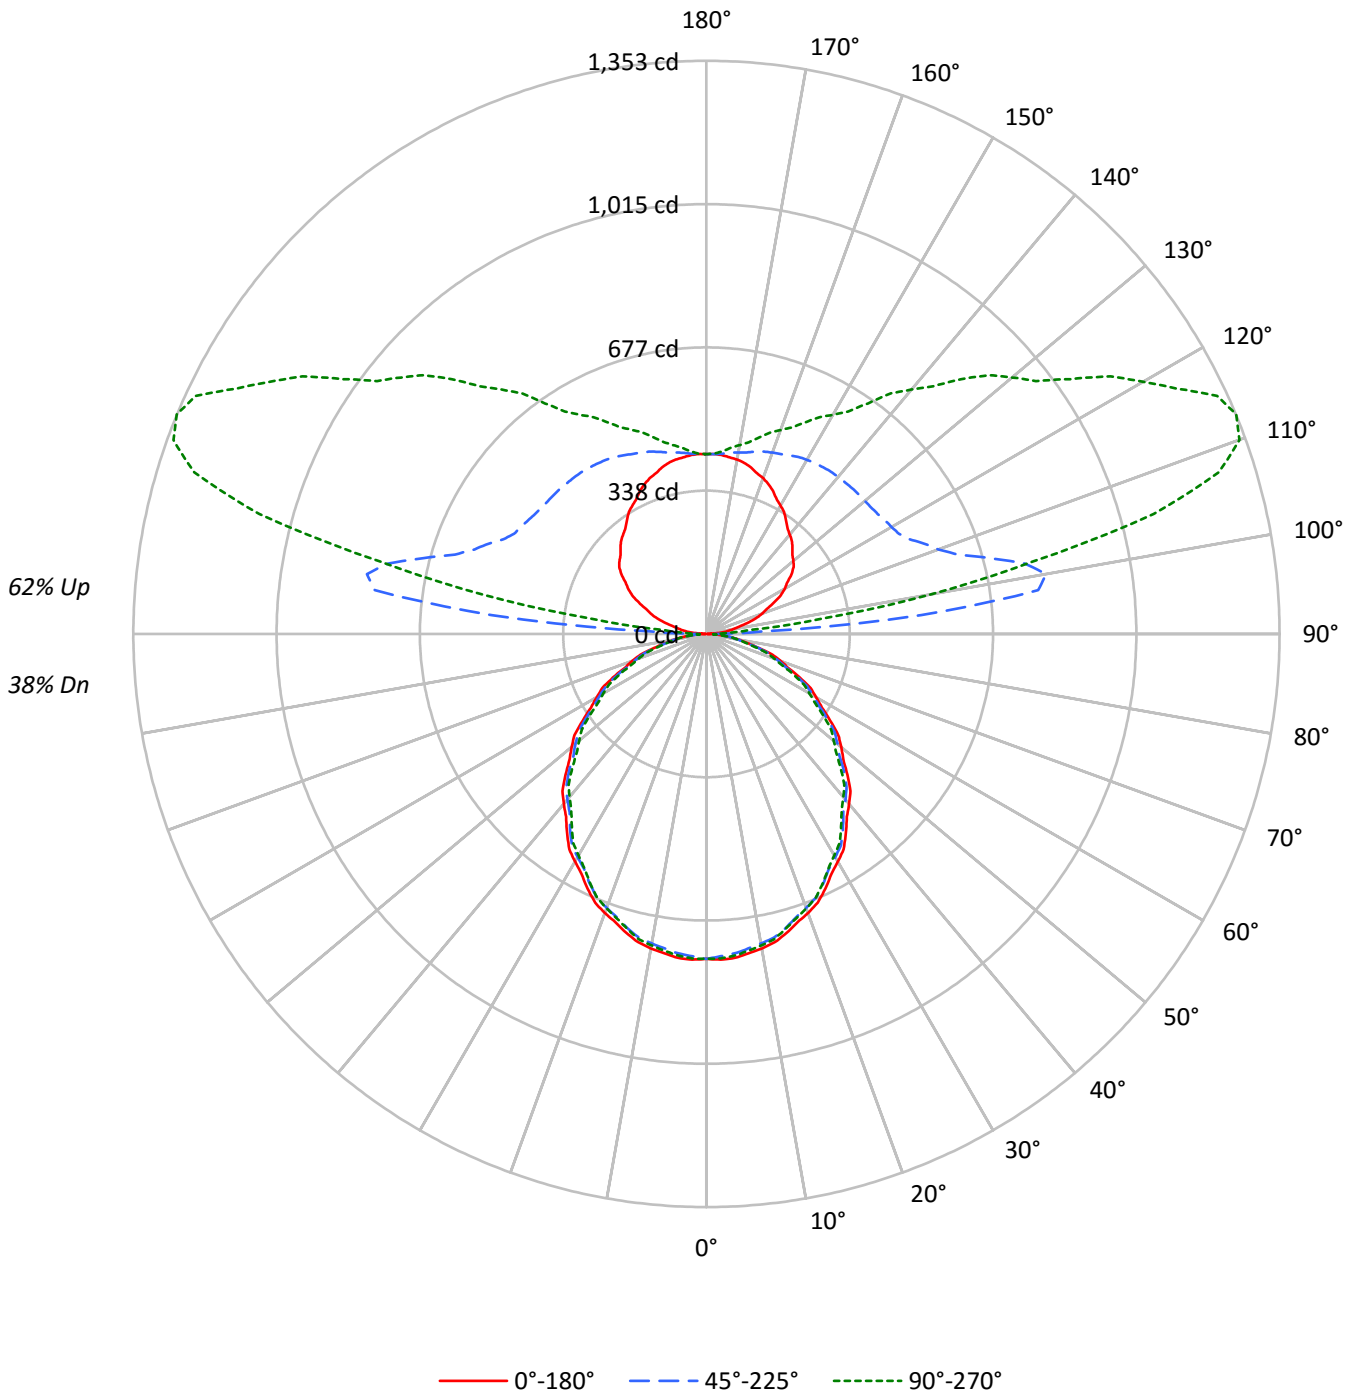



TEST NUMBER: P331945-935

CATALOG NUMBER: S123DIP-S560D1025U935-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	38
1	95	91	87	84	86	83	79	76	67	65	63	53	52	50	40	39	38	32
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32	27
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27	23
4	72	62	54	48	65	56	49	44	46	41	37	37	33	30	28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	20	17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	56	44	36	31	51	40	34	29	33	28	24	27	23	20	21	18	16	13
8	52	40	32	27	47	37	30	25	30	25	22	25	21	18	19	16	14	12
9	48	36	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	14	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8257	8257	8257
5°	8295	8182	8238
10°	8240	8110	8160
15°	8143	8018	8033
20°	8031	7887	7895
25°	7880	7732	7715
30°	7713	7558	7501
35°	7540	7376	7281
40°	7359	7173	7062
45°	7159	6987	6817
50°	6958	6759	6571
55°	6696	6523	6324
60°	6433	6247	6047
65°	6199	5947	5761
70°	5854	5605	5353
75°	5348	5157	4937
80°	4823	4624	4581
85°	4236	4076	3915



TEST NUMBER: P331945-935

CATALOG NUMBER: S123DIP-S560D1025U935-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	72.3	1.4
10°-20°	204.0	3.9
20°-30°	301.4	5.8
30°-40°	352.0	6.8
40°-50°	353.9	6.8
50°-60°	310.9	6.0
60°-70°	231.6	4.5
70°-80°	132.0	2.5
80°-90°	41.2	0.8
90°-100°	236.3	4.5
100°-110°	669.0	12.9
110°-120°	658.1	12.7
120°-130°	525.0	10.1
130°-140°	413.9	8.0
140°-150°	308.9	5.9
150°-160°	215.3	4.1
160°-170°	126.5	2.4
170°-180°	41.2	0.8
0°-30°	577.6	11.1
0°-40°	929.7	17.9
0°-60°	1594.5	30.7
0°-90°	1999.2	38.5
90°-120°	1563.5	30.1
90°-150°	2811.2	54.1
90°-180°	3194.0	61.5
0°-180°	5193.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	767	767	767	767	767	
5°	768	764	757	763	762	73
15°	731	728	720	724	721	206
25°	664	659	651	651	650	305
35°	574	570	561	557	554	359
45°	470	467	459	451	448	363
55°	357	356	348	340	337	319
65°	243	240	234	228	226	240
75°	129	126	124	121	119	138
85°	34	33	33	32	32	38
90°	2	10	22	24	25	4
95°	29	95	510	149	100	32
105°	100	147	691	1208	1093	106
115°	176	220	529	1159	1330	174
125°	245	289	493	894	1048	217
135°	287	342	486	736	850	222
145°	327	375	480	604	664	205
155°	372	401	465	529	551	171
165°	406	418	445	472	480	115
175°	424	424	427	433	432	40
180°	425	425	425	425	425	



TEST NUMBER: P331945-935

CATALOG NUMBER: S123DIP-S560D1025U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1
2.5°	769.6	769.2	768.8	768.3	767.8	766.9	765.6	764.3	763.1	761.8	762.9
5°	767.7	767.0	766.2	765.5	764.7	763.6	762.0	760.3	758.8	757.2	758.6
7.5°	760.2	759.5	758.7	758.0	757.2	756.0	754.4	752.7	751.1	749.4	750.7
10°	753.9	753.1	752.4	751.7	751.0	749.6	747.7	745.8	743.9	742.0	743.3
12.5°	745.5	744.8	744.2	743.6	743.0	741.8	739.9	738.1	736.4	734.6	735.6
15°	730.7	730.2	729.6	729.0	728.4	727.2	725.3	723.4	721.4	719.5	720.7
17.5°	713.8	713.0	712.2	711.4	710.7	709.4	707.5	705.6	703.7	701.7	702.6
20°	701.1	700.3	699.3	698.4	697.6	696.2	694.3	692.4	690.4	688.5	689.1
22.5°	686.8	686.0	685.1	684.2	683.3	681.9	680.0	678.1	676.2	674.3	674.8
25°	663.5	662.6	661.8	660.9	660.0	658.6	656.7	654.8	652.9	651.0	651.1
27.5°	638.6	637.7	636.9	636.0	635.2	633.7	631.6	629.6	627.6	625.5	625.6
30°	620.6	619.9	619.1	618.5	617.7	616.3	614.2	612.2	610.2	608.1	608.1
32.5°	602.7	601.8	600.7	599.8	598.8	597.5	596.0	594.3	592.8	591.2	590.4
35°	573.8	572.9	572.0	571.2	570.3	568.9	567.0	565.1	563.2	561.3	560.4
37.5°	544.2	543.1	542.0	540.9	539.8	538.3	536.3	534.4	532.4	530.5	529.5
40°	523.7	522.8	521.9	521.1	520.1	518.7	516.6	514.6	512.6	510.5	509.3
42.5°	503.1	502.1	501.1	500.1	499.1	497.6	495.5	493.5	491.5	489.4	488.2
45°	470.3	469.7	469.1	468.5	467.9	466.7	464.8	462.9	461.0	459.0	457.3
47.5°	437.6	436.8	436.0	435.1	434.3	432.9	431.2	429.4	427.6	425.8	424.0
50°	415.5	414.7	414.1	413.3	412.6	411.3	409.3	407.4	405.5	403.6	402.0
52.5°	392.3	391.8	391.3	390.8	390.3	389.0	387.0	385.0	383.0	381.0	379.6
55°	356.8	356.6	356.5	356.4	356.2	355.2	353.3	351.4	349.5	347.6	345.9
57.5°	323.0	322.5	322.0	321.6	321.1	320.0	318.5	317.0	315.5	313.9	312.5
60°	298.8	298.6	298.5	298.3	298.2	297.2	295.5	293.7	292.0	290.2	288.9
62.5°	277.2	276.7	276.4	276.0	275.6	274.6	272.8	271.0	269.2	267.5	266.2
65°	243.4	242.6	241.9	241.2	240.5	239.4	237.9	236.4	235.0	233.5	232.3
67.5°	207.6	207.0	206.3	205.7	205.0	204.1	203.0	201.9	200.8	199.8	198.7
70°	186.0	185.1	184.3	183.4	182.4	181.6	180.7	179.9	178.9	178.1	177.0
72.5°	163.3	162.6	162.0	161.4	160.7	159.9	158.9	157.9	156.9	155.9	155.0
75°	128.6	128.0	127.4	126.8	126.3	125.8	125.3	124.8	124.4	124.0	123.3
77.5°	97.9	97.6	97.2	96.9	96.6	96.2	95.7	95.1	94.5	94.0	93.6
80°	77.8	77.4	77.0	76.5	76.0	75.7	75.4	75.1	74.8	74.6	74.4
82.5°	58.3	58.2	58.1	58.0	57.9	57.9	57.9	57.8	57.7	57.7	57.3
85°	34.3	34.0	33.8	33.4	33.1	33.0	33.0	33.0	33.0	33.0	32.7
87.5°	14.0	14.0	14.0	14.2	14.2	14.3	14.7	15.1	15.5	15.9	15.6
90°	1.7	3.4	5.2	7.7	9.5	11.2	13.8	16.4	18.9	21.5	20.7
92.5°	10.7	15.8	23.1	29.7	36.9	49.7	72.2	109.2	145.4	132.2	99.7
95°	29.2	31.8	41.2	55.9	78.2	111.8	184.8	312.8	453.7	509.6	413.4
97.5°	49.9	50.7	58.1	70.8	92.8	129.1	198.9	343.3	578.2	789.8	845.0
100°	63.6	64.5	70.5	82.5	103.1	136.6	196.8	324.0	550.0	813.9	983.2
102.5°	78.0	79.6	84.9	96.3	114.9	145.6	199.6	307.5	508.8	769.2	990.1
105°	99.7	102.3	107.5	117.8	134.1	160.7	207.2	295.7	458.1	691.0	937.6
107.5°	122.7	125.3	130.3	140.4	155.8	180.5	221.2	294.8	425.8	621.9	845.8
110°	139.2	141.8	146.1	155.6	170.1	194.2	232.9	298.3	413.4	582.7	788.1



TEST NUMBER: P331945-935

CATALOG NUMBER: S123DIP-S560D1025U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	154.4	157.0	161.3	170.7	185.3	208.7	244.6	305.1	406.5	556.6	737.9
115°	176.2	179.6	184.8	193.4	208.0	231.2	263.8	316.2	403.9	528.6	677.3
117.5°	198.0	202.0	206.3	214.1	230.5	252.0	284.3	331.1	405.4	512.0	640.6
120°	213.1	215.7	220.0	228.6	245.0	266.4	297.4	342.1	408.2	504.5	621.4
122.5°	226.2	228.8	233.1	242.4	258.0	280.9	311.1	352.4	413.0	499.6	605.5
125°	245.0	246.7	251.8	261.2	277.6	300.8	330.9	368.7	420.3	493.4	585.3
127.5°	259.2	261.7	268.1	277.8	295.8	319.0	348.1	382.1	428.5	490.3	567.4
130°	268.1	270.7	278.4	288.8	306.8	330.0	358.3	391.1	434.0	488.2	557.8
132.5°	275.0	278.3	286.7	299.1	317.1	339.7	367.3	399.3	438.2	487.5	548.8
135°	287.1	290.5	300.0	312.8	330.9	354.0	380.7	409.9	444.4	486.5	537.2
137.5°	298.4	302.0	311.3	325.0	342.9	364.4	390.0	417.8	448.4	484.6	527.0
140°	306.0	310.2	318.8	332.6	349.8	371.3	396.2	422.0	451.2	483.9	520.8
142.5°	314.2	317.8	327.1	339.5	356.6	376.8	401.1	426.1	453.2	482.5	515.3
145°	327.4	330.0	337.8	350.7	365.2	385.0	407.3	430.6	454.6	480.4	507.9
147.5°	340.9	342.4	350.0	361.1	375.2	392.1	412.5	433.3	454.6	477.2	500.7
150°	349.8	350.7	357.5	368.7	380.7	396.2	415.9	434.0	454.6	474.4	495.8
152.5°	358.7	358.9	365.8	375.6	386.2	401.1	418.0	435.4	452.5	471.0	490.4
155°	372.1	372.1	377.3	385.9	395.4	407.3	422.0	435.8	450.3	464.9	482.2
157.5°	382.8	383.5	387.6	395.2	403.2	412.5	424.2	436.6	447.5	459.6	472.9
160°	391.1	391.1	394.5	401.3	407.3	415.9	426.3	436.6	446.1	455.5	466.7
162.5°	397.3	397.3	400.0	405.4	410.8	418.0	427.0	435.9	443.3	451.3	460.5
165°	406.5	405.6	407.3	411.6	415.1	421.1	428.0	434.0	439.2	445.2	452.0
167.5°	413.5	412.5	413.4	416.6	419.0	422.8	427.8	432.7	435.1	439.0	444.0
170°	417.7	415.9	416.8	419.4	421.1	422.8	427.1	430.6	432.3	434.9	439.2
172.5°	420.4	419.4	419.6	421.5	422.5	423.5	427.1	429.9	430.2	431.4	434.4
175°	423.7	422.8	422.0	423.7	423.7	424.6	426.3	428.0	427.1	427.1	428.9
177.5°	425.2	424.6	423.9	424.6	424.6	424.6	425.2	426.6	425.2	424.6	425.2
180°	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6



TEST NUMBER: P331945-935

CATALOG NUMBER: S123DIP-S560D1025U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1
2.5°	764.1	765.3	766.5	767.0	766.9	766.7	766.6	766.5
5°	760.1	761.6	763.0	763.6	763.3	763.0	762.8	762.4
7.5°	752.0	753.3	754.7	755.2	755.0	754.8	754.7	754.5
10°	744.6	746.0	747.3	747.8	747.5	747.2	746.9	746.6
12.5°	736.5	737.5	738.5	738.8	738.7	738.5	738.3	738.1
15°	721.9	723.1	724.3	724.4	723.5	722.6	721.8	720.9
17.5°	703.4	704.2	705.1	705.2	705.0	704.6	704.3	704.0
20°	689.7	690.3	690.9	691.0	690.5	690.1	689.7	689.2
22.5°	675.3	675.7	676.2	676.1	675.6	675.0	674.5	673.9
25°	651.3	651.4	651.5	651.4	651.0	650.6	650.1	649.6
27.5°	625.8	625.9	625.9	625.8	625.2	624.7	624.1	623.5
30°	608.1	608.1	608.1	607.6	606.6	605.5	604.5	603.5
32.5°	589.6	588.8	587.9	587.2	586.7	586.2	585.6	585.0
35°	559.5	558.6	557.8	557.0	556.2	555.5	554.7	554.1
37.5°	528.4	527.4	526.3	525.6	525.1	524.6	524.2	523.7
40°	508.2	507.0	505.8	504.9	504.3	503.8	503.2	502.6
42.5°	487.1	485.9	484.7	483.8	483.2	482.7	482.1	481.5
45°	455.6	453.7	452.0	450.7	450.0	449.3	448.6	447.8
47.5°	422.3	420.6	418.9	417.7	417.1	416.4	415.8	415.1
50°	400.5	398.8	397.2	396.0	395.0	394.2	393.3	392.4
52.5°	378.2	376.9	375.5	374.3	373.4	372.6	371.7	370.8
55°	344.3	342.8	341.1	339.9	339.2	338.5	337.8	337.0
57.5°	311.1	309.6	308.2	307.0	306.2	305.4	304.5	303.7
60°	287.6	286.3	284.9	283.9	283.2	282.4	281.7	280.9
62.5°	264.8	263.6	262.3	261.3	260.8	260.4	259.8	259.3
65°	231.1	230.0	228.8	228.0	227.6	227.1	226.7	226.2
67.5°	197.7	196.7	195.6	194.8	194.2	193.6	193.0	192.3
70°	176.0	175.0	174.0	173.1	172.4	171.6	170.9	170.1
72.5°	154.1	153.2	152.3	151.6	151.3	150.8	150.5	150.1
75°	122.5	121.8	121.1	120.5	120.0	119.6	119.2	118.7
77.5°	93.1	92.6	92.0	91.8	91.8	91.8	91.8	91.8
80°	74.2	74.0	74.0	73.9	73.9	73.9	73.9	73.9
82.5°	57.1	56.8	56.6	56.4	56.3	56.1	56.1	56.0
85°	32.4	32.1	31.8	31.7	31.7	31.7	31.7	31.7
87.5°	15.7	15.8	15.8	16.1	15.9	16.1	16.3	16.1
90°	21.5	22.4	23.2	24.9	24.0	24.9	25.7	24.9
92.5°	72.3	57.4	50.7	46.2	44.7	42.1	43.0	41.4
95°	309.4	209.7	164.2	133.2	116.9	109.2	103.1	99.7
97.5°	771.3	617.8	506.9	404.1	340.7	302.0	278.8	271.4
100°	1013.3	943.7	843.1	721.1	634.3	571.5	538.0	538.9
102.5°	1093.7	1091.5	1032.9	955.5	887.9	838.3	810.3	790.5
105°	1117.2	1203.2	1219.5	1197.2	1157.6	1125.0	1097.5	1093.2
107.5°	1049.6	1189.1	1264.4	1295.0	1295.7	1284.7	1275.4	1267.5
110°	984.9	1143.1	1251.3	1311.5	1335.6	1342.5	1340.7	1339.0





TEST NUMBER: P331945-935

CATALOG NUMBER: S123DIP-S560D1025U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	920.9	1082.5	1203.9	1281.3	1325.3	1346.5	1353.1	1353.4
115°	836.2	985.8	1112.1	1205.7	1270.2	1308.0	1325.3	1329.6
117.5°	774.9	904.0	1017.4	1112.4	1179.7	1223.0	1247.8	1253.5
120°	742.5	858.6	961.7	1048.5	1116.4	1164.5	1185.2	1190.3
122.5°	717.1	822.2	917.7	998.3	1058.7	1102.0	1124.6	1131.2
125°	683.3	777.0	859.5	928.2	983.2	1021.0	1042.5	1048.5
127.5°	653.7	737.2	811.7	874.2	923.2	955.5	974.9	980.4
130°	635.2	712.5	782.0	840.5	886.1	917.1	935.0	941.9
132.5°	617.9	689.1	753.9	809.6	852.4	883.3	899.3	904.1
135°	594.7	655.7	711.6	760.6	802.7	828.5	844.0	850.0
137.5°	573.6	623.6	671.8	714.2	749.6	775.8	788.8	792.7
140°	561.2	605.0	646.3	683.3	715.9	739.9	753.7	752.9
142.5°	549.5	587.2	622.9	655.0	682.9	704.2	716.6	715.7
145°	535.5	563.8	591.2	616.2	637.7	655.7	662.6	664.3
147.5°	523.9	546.4	568.6	586.3	602.6	614.8	621.4	622.1
150°	515.7	535.5	553.5	569.8	582.7	592.1	597.3	597.3
152.5°	508.1	525.1	541.1	554.7	564.8	573.6	576.7	576.7
155°	496.7	510.5	523.4	533.7	541.5	548.3	550.0	550.9
157.5°	484.7	496.2	506.2	514.3	521.0	526.2	527.5	527.4
160°	477.9	487.3	495.8	501.9	507.9	513.1	513.1	512.2
162.5°	469.6	477.7	485.6	490.9	494.9	499.3	499.3	498.4
165°	458.9	464.1	470.1	474.4	477.9	481.3	480.4	480.4
167.5°	449.6	453.6	457.0	460.1	461.7	464.1	463.2	463.2
170°	443.5	446.1	449.4	451.2	452.0	453.7	452.9	452.9
172.5°	438.0	439.9	442.6	443.7	443.8	445.6	444.0	443.3
175°	430.6	431.4	433.2	433.2	433.2	434.0	433.2	432.3
177.5°	425.9	426.6	427.3	427.3	426.6	427.3	425.9	425.9
180°	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6

(END OF REPORT)