

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331926-935

Luminaire Tested: **S123DIP-S560D585U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331926-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S560D585U935-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 585 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3729.9 lumens  
Efficiency: N/A  
Efficacy: 113.7 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 32.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331926-935

CATALOG NUMBER: S123DIP-S560D585U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

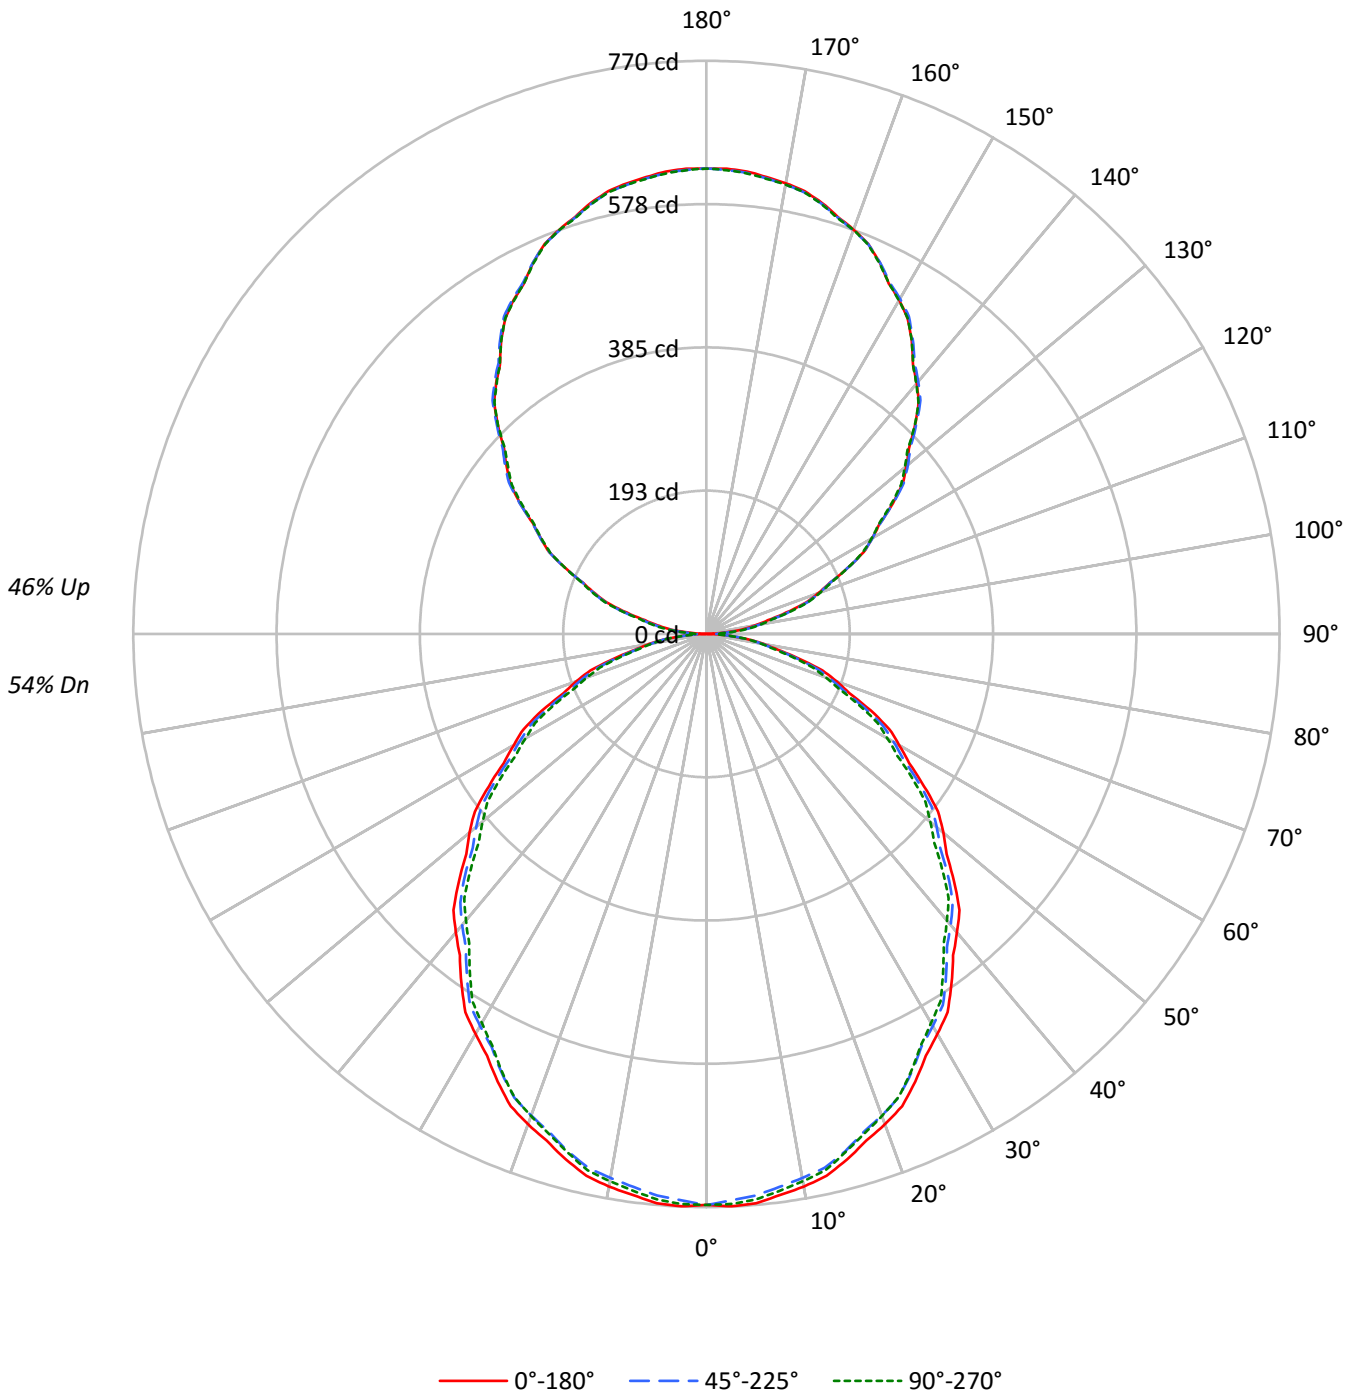



TEST NUMBER: P331926-935

CATALOG NUMBER: S123DIP-S560D585U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	54
1	99	94	90	87	91	87	84	81	75	72	70	63	61	60	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	38
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	44	39	36	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	21
7	59	46	38	32	54	43	36	31	37	32	27	32	28	24	27	24	21	18
8	54	42	34	29	50	39	32	27	34	28	24	29	25	22	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8257	8257	8257
5°	8295	8182	8238
10°	8240	8110	8160
15°	8143	8018	8033
20°	8031	7887	7895
25°	7880	7732	7715
30°	7713	7558	7501
35°	7540	7376	7281
40°	7359	7173	7062
45°	7159	6987	6817
50°	6958	6759	6571
55°	6696	6523	6324
60°	6433	6247	6047
65°	6199	5947	5761
70°	5854	5605	5353
75°	5348	5157	4937
80°	4823	4624	4581
85°	4236	4076	3915



TEST NUMBER: P331926-935

CATALOG NUMBER: S123DIP-S560D585U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	72.3	1.9
10°-20°	204.0	5.5
20°-30°	301.4	8.1
30°-40°	352.0	9.4
40°-50°	353.9	9.5
50°-60°	310.9	8.3
60°-70°	231.6	6.2
70°-80°	132.0	3.5
80°-90°	39.7	1.1
90°-100°	40.7	1.1
100°-110°	121.9	3.3
110°-120°	207.3	5.6
120°-130°	272.7	7.3
130°-140°	306.5	8.2
140°-150°	301.3	8.1
150°-160°	253.7	6.8
160°-170°	168.9	4.5
170°-180°	59.1	1.6
0°-30°	577.6	15.5
0°-40°	929.7	24.9
0°-60°	1594.5	42.7
0°-90°	1997.8	53.6
90°-120°	370.0	9.9
90°-150°	1250.5	33.5
90°-180°	1732.0	46.4
0°-180°	3729.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	767	767	767	767	767	
5°	768	764	757	763	762	73
15°	731	728	720	724	721	206
25°	664	659	651	651	650	305
35°	574	570	561	557	554	359
45°	470	467	459	451	448	363
55°	357	356	348	340	337	319
65°	243	240	234	228	226	240
75°	129	126	124	121	119	138
85°	34	33	33	32	32	38
90°	0	5	12	14	15	4
95°	29	32	36	38	38	33
105°	110	112	116	116	117	118
115°	209	210	209	210	209	206
125°	306	307	306	304	302	272
135°	396	399	399	397	396	305
145°	481	482	483	483	481	300
155°	550	551	551	553	550	253
165°	600	598	598	601	598	169
175°	624	622	622	624	621	59
180°	625	625	625	625	625	



TEST NUMBER: P331926-935

CATALOG NUMBER: S123DIP-S560D585U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1
2.5°	769.6	769.2	768.8	768.3	767.8	766.9	765.6	764.3	763.1	761.8	762.9
5°	767.7	767.0	766.2	765.5	764.7	763.6	762.0	760.3	758.8	757.2	758.6
7.5°	760.2	759.5	758.7	758.0	757.2	756.0	754.4	752.7	751.1	749.4	750.7
10°	753.9	753.1	752.4	751.7	751.0	749.6	747.7	745.8	743.9	742.0	743.3
12.5°	745.5	744.8	744.2	743.6	743.0	741.8	739.9	738.1	736.4	734.6	735.6
15°	730.7	730.2	729.6	729.0	728.4	727.2	725.3	723.4	721.4	719.5	720.7
17.5°	713.8	713.0	712.2	711.4	710.7	709.4	707.5	705.6	703.7	701.7	702.6
20°	701.1	700.3	699.3	698.4	697.6	696.2	694.3	692.4	690.4	688.5	689.1
22.5°	686.8	686.0	685.1	684.2	683.3	681.9	680.0	678.1	676.2	674.3	674.8
25°	663.5	662.6	661.8	660.9	660.0	658.6	656.7	654.8	652.9	651.0	651.1
27.5°	638.6	637.7	636.9	636.0	635.2	633.7	631.6	629.6	627.6	625.5	625.6
30°	620.6	619.9	619.1	618.5	617.7	616.3	614.2	612.2	610.2	608.1	608.1
32.5°	602.7	601.8	600.7	599.8	598.8	597.5	596.0	594.3	592.8	591.2	590.4
35°	573.8	572.9	572.0	571.2	570.3	568.9	567.0	565.1	563.2	561.3	560.4
37.5°	544.2	543.1	542.0	540.9	539.8	538.3	536.3	534.4	532.4	530.5	529.5
40°	523.7	522.8	521.9	521.1	520.1	518.7	516.6	514.6	512.6	510.5	509.3
42.5°	503.1	502.1	501.1	500.1	499.1	497.6	495.5	493.5	491.5	489.4	488.2
45°	470.3	469.7	469.1	468.5	467.9	466.7	464.8	462.9	461.0	459.0	457.3
47.5°	437.6	436.8	436.0	435.1	434.3	432.9	431.2	429.4	427.6	425.8	424.0
50°	415.5	414.7	414.1	413.3	412.6	411.3	409.3	407.4	405.5	403.6	402.0
52.5°	392.3	391.8	391.3	390.8	390.3	389.0	387.0	385.0	383.0	381.0	379.6
55°	356.8	356.6	356.5	356.4	356.2	355.2	353.3	351.4	349.5	347.6	345.9
57.5°	323.0	322.5	322.0	321.6	321.1	320.0	318.5	317.0	315.5	313.9	312.5
60°	298.8	298.6	298.5	298.3	298.2	297.2	295.5	293.7	292.0	290.2	288.9
62.5°	277.2	276.7	276.4	276.0	275.6	274.6	272.8	271.0	269.2	267.5	266.2
65°	243.4	242.6	241.9	241.2	240.5	239.4	237.9	236.4	235.0	233.5	232.3
67.5°	207.6	207.0	206.3	205.7	205.0	204.1	203.0	201.9	200.8	199.8	198.7
70°	186.0	185.1	184.3	183.4	182.4	181.6	180.7	179.9	178.9	178.1	177.0
72.5°	163.3	162.6	162.0	161.4	160.7	159.9	158.9	157.9	156.9	155.9	155.0
75°	128.6	128.0	127.4	126.8	126.3	125.8	125.3	124.8	124.4	124.0	123.3
77.5°	97.9	97.6	97.2	96.9	96.6	96.2	95.7	95.1	94.5	94.0	93.6
80°	77.8	77.4	77.0	76.5	76.0	75.7	75.4	75.1	74.8	74.6	74.4
82.5°	58.3	58.2	58.1	58.0	57.9	57.9	57.9	57.8	57.7	57.7	57.3
85°	34.3	34.0	33.8	33.4	33.1	33.0	33.0	33.0	33.0	33.0	32.7
87.5°	13.8	13.7	13.5	13.4	13.3	13.3	13.4	13.6	13.8	13.9	13.9
90°	0.5	1.5	2.7	3.8	4.8	6.1	7.5	9.0	10.3	11.8	12.2
92.5°	11.9	12.7	13.3	14.1	14.9	15.7	16.4	17.2	18.1	18.9	19.2
95°	29.0	29.7	30.5	31.3	32.0	32.9	33.8	34.6	35.5	36.3	36.8
97.5°	51.5	52.0	52.6	53.2	53.7	54.3	54.9	55.6	56.2	56.9	57.3
100°	66.8	67.4	68.1	68.8	69.4	70.0	70.5	71.1	71.6	72.2	72.5
102.5°	84.5	84.9	85.2	85.7	86.0	86.6	87.3	88.1	88.8	89.5	89.8
105°	110.5	110.7	110.9	111.2	111.4	111.9	113.0	113.9	114.9	115.9	115.9
107.5°	140.8	140.9	141.0	141.1	141.3	141.5	141.9	142.3	142.8	143.1	143.4
110°	159.6	159.8	160.1	160.2	160.5	160.7	160.9	161.2	161.4	161.6	162.0



TEST NUMBER: P331926-935

CATALOG NUMBER: S123DIP-S560D585U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	179.3	179.3	179.5	179.6	179.8	179.9	179.9	179.9	180.0	180.0	180.6
115°	208.7	209.1	209.4	209.7	210.0	210.1	209.8	209.7	209.4	209.2	209.3
117.5°	238.4	238.6	238.8	239.0	239.3	239.2	238.9	238.7	238.4	238.1	238.1
120°	256.8	257.5	258.1	258.8	259.5	259.5	259.0	258.5	257.9	257.4	257.3
122.5°	276.1	276.6	277.1	277.5	278.0	278.1	277.8	277.6	277.2	277.0	276.7
125°	305.5	305.8	306.1	306.4	306.8	306.9	306.6	306.4	306.2	306.0	305.5
127.5°	332.6	333.3	334.0	334.7	335.4	335.6	335.4	335.1	334.8	334.7	334.1
130°	350.7	351.5	352.4	353.3	354.1	354.4	354.1	353.8	353.4	353.1	352.7
132.5°	368.7	369.6	370.5	371.3	372.2	372.6	372.3	372.0	371.8	371.6	371.0
135°	396.3	397.0	397.6	398.3	398.9	399.2	399.1	399.0	398.9	398.8	398.4
137.5°	421.9	422.4	422.9	423.5	424.0	424.5	424.7	425.0	425.3	425.6	425.2
140°	439.5	440.1	440.7	441.2	441.7	442.0	442.1	442.3	442.4	442.5	442.4
142.5°	455.6	456.2	456.8	457.3	457.8	458.2	458.4	458.6	458.8	459.0	458.9
145°	480.8	481.0	481.2	481.5	481.6	481.9	482.2	482.6	482.9	483.3	483.1
147.5°	502.8	503.2	503.6	503.9	504.4	504.7	505.1	505.3	505.7	505.9	505.9
150°	518.1	518.3	518.6	518.8	519.0	519.2	519.4	519.6	519.9	520.0	520.0
152.5°	530.7	531.0	531.3	531.6	531.9	532.1	532.3	532.4	532.5	532.6	532.8
155°	550.5	550.5	550.5	550.5	550.5	550.6	550.7	550.8	551.0	551.0	551.5
157.5°	567.4	567.3	567.1	567.1	566.9	566.9	567.0	567.1	567.1	567.2	567.7
160°	578.0	577.8	577.6	577.4	577.1	577.0	577.0	577.0	577.0	577.0	577.6
162.5°	587.5	587.1	586.9	586.5	586.3	586.2	586.3	586.3	586.4	586.5	587.0
165°	599.6	599.3	599.0	598.7	598.3	598.1	598.1	598.1	598.1	598.1	598.8
167.5°	609.3	608.9	608.5	608.0	607.6	607.4	607.5	607.6	607.7	607.8	608.5
170°	614.8	614.4	614.0	613.5	613.1	612.9	612.9	612.9	612.9	612.9	613.6
172.5°	619.1	618.7	618.3	617.9	617.4	617.3	617.3	617.3	617.3	617.3	617.9
175°	623.7	623.3	622.8	622.4	622.0	621.7	621.7	621.7	621.7	621.7	622.4
177.5°	625.6	625.3	624.9	624.5	624.1	624.0	624.0	624.0	624.0	624.0	624.5
180°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2



TEST NUMBER: P331926-935

CATALOG NUMBER: S123DIP-S560D585U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1
2.5°	764.1	765.3	766.5	767.0	766.9	766.7	766.6	766.5
5°	760.1	761.6	763.0	763.6	763.3	763.0	762.8	762.4
7.5°	752.0	753.3	754.7	755.2	755.0	754.8	754.7	754.5
10°	744.6	746.0	747.3	747.8	747.5	747.2	746.9	746.6
12.5°	736.5	737.5	738.5	738.8	738.7	738.5	738.3	738.1
15°	721.9	723.1	724.3	724.4	723.5	722.6	721.8	720.9
17.5°	703.4	704.2	705.1	705.2	705.0	704.6	704.3	704.0
20°	689.7	690.3	690.9	691.0	690.5	690.1	689.7	689.2
22.5°	675.3	675.7	676.2	676.1	675.6	675.0	674.5	673.9
25°	651.3	651.4	651.5	651.4	651.0	650.6	650.1	649.6
27.5°	625.8	625.9	625.9	625.8	625.2	624.7	624.1	623.5
30°	608.1	608.1	608.1	607.6	606.6	605.5	604.5	603.5
32.5°	589.6	588.8	587.9	587.2	586.7	586.2	585.6	585.0
35°	559.5	558.6	557.8	557.0	556.2	555.5	554.7	554.1
37.5°	528.4	527.4	526.3	525.6	525.1	524.6	524.2	523.7
40°	508.2	507.0	505.8	504.9	504.3	503.8	503.2	502.6
42.5°	487.1	485.9	484.7	483.8	483.2	482.7	482.1	481.5
45°	455.6	453.7	452.0	450.7	450.0	449.3	448.6	447.8
47.5°	422.3	420.6	418.9	417.7	417.1	416.4	415.8	415.1
50°	400.5	398.8	397.2	396.0	395.0	394.2	393.3	392.4
52.5°	378.2	376.9	375.5	374.3	373.4	372.6	371.7	370.8
55°	344.3	342.8	341.1	339.9	339.2	338.5	337.8	337.0
57.5°	311.1	309.6	308.2	307.0	306.2	305.4	304.5	303.7
60°	287.6	286.3	284.9	283.9	283.2	282.4	281.7	280.9
62.5°	264.8	263.6	262.3	261.3	260.8	260.4	259.8	259.3
65°	231.1	230.0	228.8	228.0	227.6	227.1	226.7	226.2
67.5°	197.7	196.7	195.6	194.8	194.2	193.6	193.0	192.3
70°	176.0	175.0	174.0	173.1	172.4	171.6	170.9	170.1
72.5°	154.1	153.2	152.3	151.6	151.3	150.8	150.5	150.1
75°	122.5	121.8	121.1	120.5	120.0	119.6	119.2	118.7
77.5°	93.1	92.6	92.0	91.8	91.8	91.8	91.8	91.8
80°	74.2	74.0	74.0	73.9	73.9	73.9	73.9	73.9
82.5°	57.1	56.8	56.6	56.4	56.3	56.1	56.1	56.0
85°	32.4	32.1	31.8	31.7	31.7	31.7	31.7	31.7
87.5°	13.9	13.9	13.9	13.9	13.9	13.9	13.9	14.0
90°	12.7	13.1	13.5	13.9	14.1	14.3	14.6	14.7
92.5°	19.5	19.9	20.2	20.4	20.2	20.1	20.0	19.8
95°	37.2	37.6	38.1	38.3	38.3	38.3	38.3	38.3
97.5°	57.9	58.4	58.9	59.1	59.1	59.0	59.0	58.9
100°	72.8	73.2	73.5	73.8	74.0	74.2	74.4	74.6
102.5°	90.1	90.5	90.7	90.9	90.9	90.8	90.8	90.7
105°	115.9	115.9	115.9	116.0	116.2	116.4	116.7	116.9
107.5°	143.8	144.1	144.5	144.6	144.5	144.4	144.2	144.1
110°	162.5	162.9	163.3	163.4	163.2	163.0	162.8	162.6





TEST NUMBER: P331926-935

CATALOG NUMBER: S123DIP-S560D585U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	181.1	181.6	182.1	182.4	182.4	182.3	182.3	182.2
115°	209.4	209.6	209.7	209.7	209.6	209.4	209.3	209.2
117.5°	238.1	238.0	238.0	237.8	237.5	237.2	236.9	236.6
120°	257.1	257.0	256.9	256.8	256.5	256.3	256.1	255.9
122.5°	276.4	276.1	275.9	275.5	275.3	274.9	274.7	274.3
125°	305.1	304.6	304.2	303.8	303.3	302.9	302.5	302.0
127.5°	333.4	332.8	332.2	331.7	331.1	330.6	330.1	329.6
130°	352.2	351.8	351.4	350.8	350.0	349.2	348.4	347.7
132.5°	370.5	370.0	369.5	368.9	368.3	367.7	367.1	366.5
135°	397.9	397.4	397.0	396.7	396.5	396.2	396.1	395.8
137.5°	424.6	424.2	423.8	423.4	422.9	422.5	422.1	421.6
140°	442.3	442.1	442.0	441.6	440.8	440.1	439.3	438.6
142.5°	458.7	458.7	458.6	458.2	457.6	457.0	456.4	455.8
145°	483.0	482.9	482.8	482.5	482.1	481.6	481.2	480.8
147.5°	505.9	505.9	505.9	505.6	505.0	504.3	503.7	503.0
150°	520.0	520.0	520.0	519.8	519.1	518.4	517.8	517.1
152.5°	533.0	533.2	533.4	533.1	532.6	532.0	531.5	530.9
155°	551.9	552.3	552.8	552.6	551.8	551.0	550.4	549.6
157.5°	568.2	568.6	569.0	568.9	568.3	567.7	567.1	566.5
160°	578.2	578.7	579.2	579.3	578.9	578.4	578.0	577.6
162.5°	587.5	588.1	588.7	588.6	587.9	587.2	586.5	585.8
165°	599.5	600.1	600.8	600.7	599.9	599.2	598.5	597.7
167.5°	609.2	609.8	610.5	610.5	609.8	609.2	608.5	607.8
170°	614.4	615.2	616.0	616.0	615.2	614.4	613.6	612.9
172.5°	618.5	619.2	619.9	619.9	619.1	618.4	617.6	616.8
175°	623.0	623.7	624.4	624.3	623.5	622.8	622.0	621.2
177.5°	625.1	625.6	626.1	626.0	625.4	624.8	624.2	623.6
180°	625.2	625.2	625.2	625.2	625.2	625.2	625.2	625.2

(END OF REPORT)