

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331935-935

Luminaire Tested: **S123DIP-S560D805U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331935-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D805U935-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4372.8 lumens
Efficiency: N/A
Efficacy: 113.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331935-935
CATALOG NUMBER: S123DIP-S560D805U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

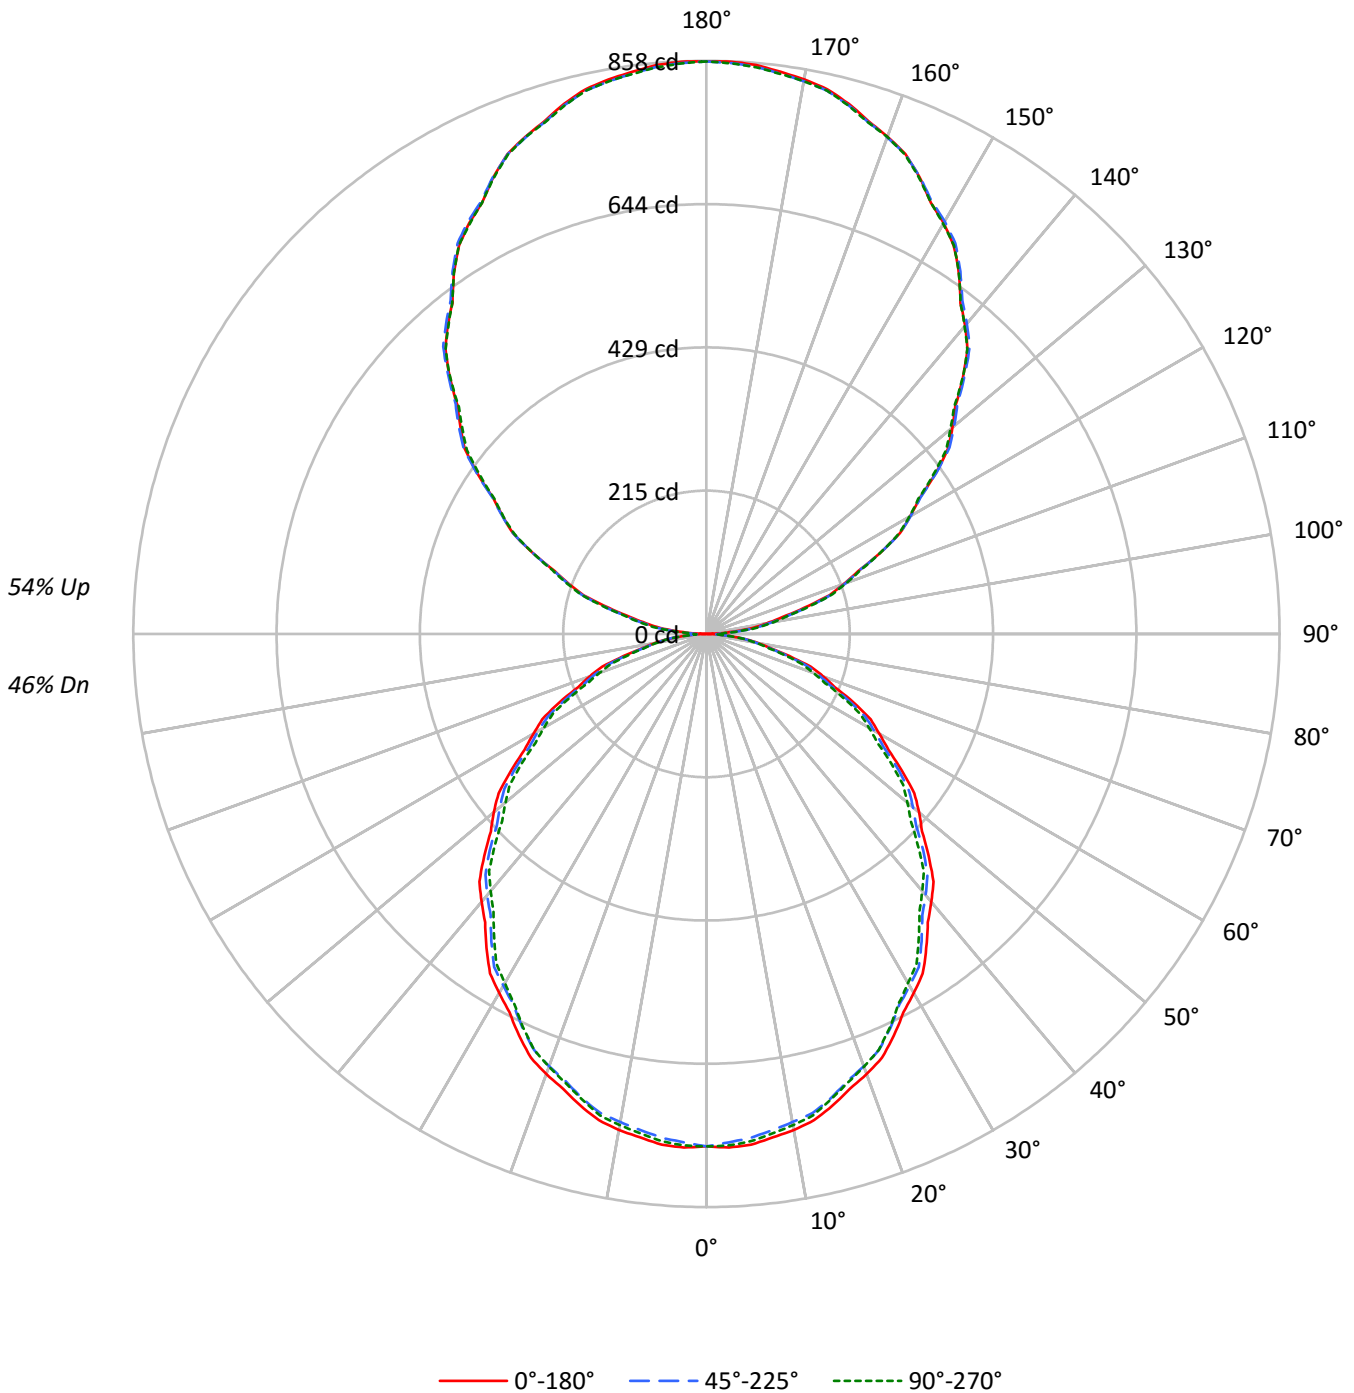



TEST NUMBER: P331935-935

CATALOG NUMBER: S123DIP-S560D805U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46
1	97	92	89	85	89	85	82	79	71	68	66	58	56	55	46	45	44	38
2	88	81	75	69	81	74	69	64	62	58	55	51	48	46	40	39	37	32
3	80	71	64	58	73	65	59	54	55	50	46	45	41	39	36	33	31	27
4	73	63	55	49	67	58	51	46	49	43	39	40	36	33	32	29	27	23
5	67	56	48	42	62	52	44	39	43	38	34	36	32	29	29	26	24	20
6	62	50	42	36	57	46	39	34	39	34	29	32	28	25	26	23	21	18
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	30	24	21	25	21	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8257	8257	8257
5°	8295	8182	8238
10°	8240	8110	8160
15°	8143	8018	8033
20°	8031	7887	7895
25°	7880	7732	7715
30°	7713	7558	7501
35°	7540	7376	7281
40°	7359	7173	7062
45°	7159	6987	6817
50°	6958	6759	6571
55°	6696	6523	6324
60°	6433	6247	6047
65°	6199	5947	5761
70°	5854	5605	5353
75°	5348	5157	4937
80°	4823	4624	4581
85°	4236	4076	3915



TEST NUMBER: P331935-935

CATALOG NUMBER: S123DIP-S560D805U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.3	1.7
10°-20°	204.0	4.7
20°-30°	301.4	6.9
30°-40°	352.0	8.1
40°-50°	353.9	8.1
50°-60°	310.9	7.1
60°-70°	231.6	5.3
70°-80°	132.0	3.0
80°-90°	40.4	0.9
90°-100°	55.8	1.3
100°-110°	167.1	3.8
110°-120°	284.2	6.5
120°-130°	373.8	8.5
130°-140°	420.2	9.6
140°-150°	413.0	9.4
150°-160°	347.7	8.0
160°-170°	231.4	5.3
170°-180°	81.0	1.9
0°-30°	577.6	13.2
0°-40°	929.7	21.3
0°-60°	1594.5	36.5
0°-90°	1998.5	45.7
90°-120°	507.1	11.6
90°-150°	1714.1	39.2
90°-180°	2374.0	54.3
0°-180°	4372.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	767	767	767	767	767	
5°	768	764	757	763	762	73
15°	731	728	720	724	721	206
25°	664	659	651	651	650	305
35°	574	570	561	557	554	359
45°	470	467	459	451	448	363
55°	357	356	348	340	337	319
65°	243	240	234	228	226	240
75°	129	126	124	121	119	138
85°	34	33	33	32	32	38
90°	1	8	16	19	20	4
95°	40	44	50	52	52	45
105°	151	153	159	159	160	162
115°	286	288	287	287	287	283
125°	419	421	419	417	414	373
135°	543	547	547	544	543	418
145°	659	660	662	662	659	411
155°	755	755	755	758	753	347
165°	822	820	820	824	819	232
175°	855	852	852	856	852	81
180°	857	857	857	857	857	



TEST NUMBER: P331935-935

CATALOG NUMBER: S123DIP-S560D805U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1
2.5°	769.6	769.2	768.8	768.3	767.8	766.9	765.6	764.3	763.1	761.8	762.9
5°	767.7	767.0	766.2	765.5	764.7	763.6	762.0	760.3	758.8	757.2	758.6
7.5°	760.2	759.5	758.7	758.0	757.2	756.0	754.4	752.7	751.1	749.4	750.7
10°	753.9	753.1	752.4	751.7	751.0	749.6	747.7	745.8	743.9	742.0	743.3
12.5°	745.5	744.8	744.2	743.6	743.0	741.8	739.9	738.1	736.4	734.6	735.6
15°	730.7	730.2	729.6	729.0	728.4	727.2	725.3	723.4	721.4	719.5	720.7
17.5°	713.8	713.0	712.2	711.4	710.7	709.4	707.5	705.6	703.7	701.7	702.6
20°	701.1	700.3	699.3	698.4	697.6	696.2	694.3	692.4	690.4	688.5	689.1
22.5°	686.8	686.0	685.1	684.2	683.3	681.9	680.0	678.1	676.2	674.3	674.8
25°	663.5	662.6	661.8	660.9	660.0	658.6	656.7	654.8	652.9	651.0	651.1
27.5°	638.6	637.7	636.9	636.0	635.2	633.7	631.6	629.6	627.6	625.5	625.6
30°	620.6	619.9	619.1	618.5	617.7	616.3	614.2	612.2	610.2	608.1	608.1
32.5°	602.7	601.8	600.7	599.8	598.8	597.5	596.0	594.3	592.8	591.2	590.4
35°	573.8	572.9	572.0	571.2	570.3	568.9	567.0	565.1	563.2	561.3	560.4
37.5°	544.2	543.1	542.0	540.9	539.8	538.3	536.3	534.4	532.4	530.5	529.5
40°	523.7	522.8	521.9	521.1	520.1	518.7	516.6	514.6	512.6	510.5	509.3
42.5°	503.1	502.1	501.1	500.1	499.1	497.6	495.5	493.5	491.5	489.4	488.2
45°	470.3	469.7	469.1	468.5	467.9	466.7	464.8	462.9	461.0	459.0	457.3
47.5°	437.6	436.8	436.0	435.1	434.3	432.9	431.2	429.4	427.6	425.8	424.0
50°	415.5	414.7	414.1	413.3	412.6	411.3	409.3	407.4	405.5	403.6	402.0
52.5°	392.3	391.8	391.3	390.8	390.3	389.0	387.0	385.0	383.0	381.0	379.6
55°	356.8	356.6	356.5	356.4	356.2	355.2	353.3	351.4	349.5	347.6	345.9
57.5°	323.0	322.5	322.0	321.6	321.1	320.0	318.5	317.0	315.5	313.9	312.5
60°	298.8	298.6	298.5	298.3	298.2	297.2	295.5	293.7	292.0	290.2	288.9
62.5°	277.2	276.7	276.4	276.0	275.6	274.6	272.8	271.0	269.2	267.5	266.2
65°	243.4	242.6	241.9	241.2	240.5	239.4	237.9	236.4	235.0	233.5	232.3
67.5°	207.6	207.0	206.3	205.7	205.0	204.1	203.0	201.9	200.8	199.8	198.7
70°	186.0	185.1	184.3	183.4	182.4	181.6	180.7	179.9	178.9	178.1	177.0
72.5°	163.3	162.6	162.0	161.4	160.7	159.9	158.9	157.9	156.9	155.9	155.0
75°	128.6	128.0	127.4	126.8	126.3	125.8	125.3	124.8	124.4	124.0	123.3
77.5°	97.9	97.6	97.2	96.9	96.6	96.2	95.7	95.1	94.5	94.0	93.6
80°	77.8	77.4	77.0	76.5	76.0	75.7	75.4	75.1	74.8	74.6	74.4
82.5°	58.3	58.2	58.1	58.0	57.9	57.9	57.9	57.8	57.7	57.7	57.3
85°	34.3	34.0	33.8	33.4	33.1	33.0	33.0	33.0	33.0	33.0	32.7
87.5°	13.9	13.8	13.8	13.7	13.6	13.8	14.0	14.3	14.6	14.8	14.8
90°	0.7	2.2	3.7	5.2	6.6	8.4	10.3	12.2	14.2	16.2	16.8
92.5°	16.3	17.3	18.3	19.4	20.3	21.4	22.6	23.7	24.7	25.8	26.3
95°	39.7	40.7	41.8	42.9	43.9	45.0	46.2	47.4	48.6	49.9	50.5
97.5°	70.5	71.3	72.1	72.8	73.7	74.5	75.3	76.2	77.1	77.9	78.6
100°	91.5	92.5	93.3	94.3	95.1	96.0	96.7	97.5	98.2	98.9	99.4
102.5°	115.8	116.3	116.8	117.4	118.0	118.7	119.7	120.7	121.7	122.7	123.1
105°	151.4	151.8	152.1	152.4	152.7	153.5	154.8	156.2	157.6	158.9	158.9
107.5°	193.0	193.1	193.3	193.5	193.6	194.0	194.6	195.1	195.6	196.1	196.7
110°	218.8	219.0	219.4	219.6	220.0	220.2	220.6	220.8	221.2	221.4	222.1



TEST NUMBER: P331935-935

CATALOG NUMBER: S123DIP-S560D805U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	245.7	245.9	246.1	246.2	246.4	246.5	246.6	246.7	246.8	246.8	247.5
115°	286.1	286.5	287.0	287.4	287.9	288.0	287.7	287.4	287.1	286.8	286.9
117.5°	326.7	327.1	327.4	327.6	328.0	327.9	327.5	327.1	326.7	326.3	326.3
120°	352.1	352.9	353.9	354.7	355.7	355.8	355.0	354.2	353.5	352.8	352.6
122.5°	378.5	379.1	379.8	380.4	381.1	381.3	380.8	380.5	380.0	379.7	379.3
125°	418.7	419.1	419.6	420.1	420.5	420.6	420.3	420.0	419.7	419.4	418.8
127.5°	455.9	456.8	457.8	458.7	459.7	460.0	459.7	459.3	459.0	458.7	457.9
130°	480.6	481.8	483.0	484.2	485.4	485.8	485.3	484.9	484.5	484.0	483.4
132.5°	505.4	506.6	507.8	509.0	510.2	510.7	510.3	510.0	509.6	509.3	508.6
135°	543.2	544.2	545.0	546.0	546.8	547.3	547.1	546.9	546.7	546.6	546.0
137.5°	578.2	579.0	579.7	580.5	581.3	581.8	582.2	582.6	583.0	583.3	582.7
140°	602.4	603.2	604.0	604.8	605.5	605.9	606.1	606.2	606.4	606.5	606.4
142.5°	624.6	625.3	626.0	626.8	627.6	628.1	628.4	628.6	628.9	629.1	629.0
145°	659.0	659.4	659.6	660.0	660.2	660.6	661.1	661.5	661.9	662.4	662.3
147.5°	689.2	689.7	690.3	690.8	691.4	691.8	692.2	692.7	693.1	693.5	693.5
150°	710.2	710.5	710.8	711.1	711.4	711.7	712.0	712.3	712.6	712.9	712.9
152.5°	727.5	727.8	728.2	728.7	729.1	729.4	729.6	729.8	730.0	730.1	730.4
155°	754.6	754.6	754.6	754.6	754.6	754.7	754.8	755.0	755.2	755.3	755.9
157.5°	777.7	777.6	777.4	777.2	777.1	777.1	777.1	777.3	777.4	777.5	778.2
160°	792.3	792.0	791.7	791.4	791.1	791.0	791.0	791.0	791.0	791.0	791.7
162.5°	805.2	804.9	804.4	804.0	803.6	803.4	803.6	803.7	803.7	803.9	804.6
165°	821.9	821.5	821.0	820.6	820.1	819.9	819.9	819.9	819.9	819.9	820.8
167.5°	835.3	834.7	834.1	833.4	832.8	832.7	832.8	832.8	833.0	833.1	834.1
170°	842.8	842.2	841.6	841.0	840.4	840.1	840.1	840.1	840.1	840.1	841.2
172.5°	848.7	848.2	847.6	847.0	846.4	846.0	846.0	846.0	846.0	846.0	847.0
175°	854.9	854.3	853.8	853.2	852.6	852.2	852.2	852.2	852.2	852.2	853.2
177.5°	857.5	857.0	856.5	856.0	855.6	855.3	855.3	855.3	855.3	855.3	856.0
180°	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0



TEST NUMBER: P331935-935

CATALOG NUMBER: S123DIP-S560D805U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	767.1	767.1	767.1	767.1	767.1	767.1	767.1	767.1
2.5°	764.1	765.3	766.5	767.0	766.9	766.7	766.6	766.5
5°	760.1	761.6	763.0	763.6	763.3	763.0	762.8	762.4
7.5°	752.0	753.3	754.7	755.2	755.0	754.8	754.7	754.5
10°	744.6	746.0	747.3	747.8	747.5	747.2	746.9	746.6
12.5°	736.5	737.5	738.5	738.8	738.7	738.5	738.3	738.1
15°	721.9	723.1	724.3	724.4	723.5	722.6	721.8	720.9
17.5°	703.4	704.2	705.1	705.2	705.0	704.6	704.3	704.0
20°	689.7	690.3	690.9	691.0	690.5	690.1	689.7	689.2
22.5°	675.3	675.7	676.2	676.1	675.6	675.0	674.5	673.9
25°	651.3	651.4	651.5	651.4	651.0	650.6	650.1	649.6
27.5°	625.8	625.9	625.9	625.8	625.2	624.7	624.1	623.5
30°	608.1	608.1	608.1	607.6	606.6	605.5	604.5	603.5
32.5°	589.6	588.8	587.9	587.2	586.7	586.2	585.6	585.0
35°	559.5	558.6	557.8	557.0	556.2	555.5	554.7	554.1
37.5°	528.4	527.4	526.3	525.6	525.1	524.6	524.2	523.7
40°	508.2	507.0	505.8	504.9	504.3	503.8	503.2	502.6
42.5°	487.1	485.9	484.7	483.8	483.2	482.7	482.1	481.5
45°	455.6	453.7	452.0	450.7	450.0	449.3	448.6	447.8
47.5°	422.3	420.6	418.9	417.7	417.1	416.4	415.8	415.1
50°	400.5	398.8	397.2	396.0	395.0	394.2	393.3	392.4
52.5°	378.2	376.9	375.5	374.3	373.4	372.6	371.7	370.8
55°	344.3	342.8	341.1	339.9	339.2	338.5	337.8	337.0
57.5°	311.1	309.6	308.2	307.0	306.2	305.4	304.5	303.7
60°	287.6	286.3	284.9	283.9	283.2	282.4	281.7	280.9
62.5°	264.8	263.6	262.3	261.3	260.8	260.4	259.8	259.3
65°	231.1	230.0	228.8	228.0	227.6	227.1	226.7	226.2
67.5°	197.7	196.7	195.6	194.8	194.2	193.6	193.0	192.3
70°	176.0	175.0	174.0	173.1	172.4	171.6	170.9	170.1
72.5°	154.1	153.2	152.3	151.6	151.3	150.8	150.5	150.1
75°	122.5	121.8	121.1	120.5	120.0	119.6	119.2	118.7
77.5°	93.1	92.6	92.0	91.8	91.8	91.8	91.8	91.8
80°	74.2	74.0	74.0	73.9	73.9	73.9	73.9	73.9
82.5°	57.1	56.8	56.6	56.4	56.3	56.1	56.1	56.0
85°	32.4	32.1	31.8	31.7	31.7	31.7	31.7	31.7
87.5°	14.8	14.8	14.8	14.9	15.0	15.0	15.1	15.2
90°	17.4	17.9	18.5	19.0	19.3	19.6	19.9	20.2
92.5°	26.8	27.3	27.7	27.9	27.7	27.6	27.4	27.2
95°	51.0	51.6	52.2	52.5	52.5	52.5	52.5	52.5
97.5°	79.3	80.0	80.7	81.0	80.9	80.9	80.8	80.8
100°	99.9	100.3	100.7	101.2	101.4	101.7	102.0	102.3
102.5°	123.6	124.0	124.4	124.7	124.6	124.5	124.5	124.4
105°	158.9	158.9	158.9	159.0	159.3	159.6	159.9	160.2
107.5°	197.1	197.6	198.1	198.2	198.0	197.9	197.7	197.5
110°	222.7	223.3	223.9	224.0	223.7	223.4	223.1	222.8



TEST NUMBER: P331935-935

CATALOG NUMBER: S123DIP-S560D805U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	248.2	248.9	249.7	249.9	249.9	249.9	249.8	249.8
115°	287.1	287.2	287.4	287.4	287.2	287.1	286.9	286.8
117.5°	326.3	326.2	326.2	326.0	325.6	325.2	324.8	324.3
120°	352.4	352.3	352.1	351.9	351.6	351.3	351.0	350.7
122.5°	378.9	378.5	378.2	377.7	377.3	376.9	376.4	376.0
125°	418.2	417.6	417.0	416.4	415.8	415.2	414.6	414.0
127.5°	457.0	456.2	455.4	454.6	453.9	453.2	452.5	451.9
130°	482.8	482.2	481.6	480.8	479.7	478.7	477.7	476.6
132.5°	507.9	507.1	506.4	505.7	504.9	504.0	503.3	502.5
135°	545.4	544.8	544.2	543.8	543.5	543.2	542.9	542.6
137.5°	582.1	581.5	580.8	580.2	579.7	579.1	578.6	578.0
140°	606.2	606.1	605.9	605.4	604.2	603.2	602.2	601.2
142.5°	628.9	628.7	628.5	628.1	627.2	626.5	625.6	624.8
145°	662.1	661.9	661.8	661.4	660.8	660.2	659.6	659.0
147.5°	693.5	693.5	693.5	693.0	692.2	691.2	690.3	689.5
150°	712.9	712.9	712.9	712.5	711.5	710.7	709.7	708.9
152.5°	730.6	730.8	731.1	730.8	730.0	729.3	728.5	727.7
155°	756.5	757.1	757.7	757.4	756.4	755.4	754.3	753.3
157.5°	778.8	779.4	780.0	779.9	779.1	778.3	777.4	776.5
160°	792.5	793.2	793.9	794.0	793.4	792.8	792.2	791.6
162.5°	805.4	806.2	806.9	806.8	805.8	804.9	803.9	803.0
165°	821.7	822.6	823.5	823.5	822.4	821.3	820.3	819.2
167.5°	835.0	835.9	836.8	836.8	835.9	835.0	834.1	833.1
170°	842.2	843.3	844.3	844.3	843.3	842.2	841.2	840.1
172.5°	847.9	848.9	849.7	849.7	848.6	847.6	846.5	845.5
175°	854.0	854.9	855.8	855.7	854.7	853.7	852.6	851.5
177.5°	856.8	857.5	858.2	858.2	857.3	856.4	855.7	854.8
180°	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0

(END OF REPORT)