

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331999-935

Luminaire Tested: **S123DIP-S775D1195U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331999-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D1195U935-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1195 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6450.0 lumens
Efficiency: N/A
Efficacy: 113.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331999-935

CATALOG NUMBER: S123DIP-S775D1195U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

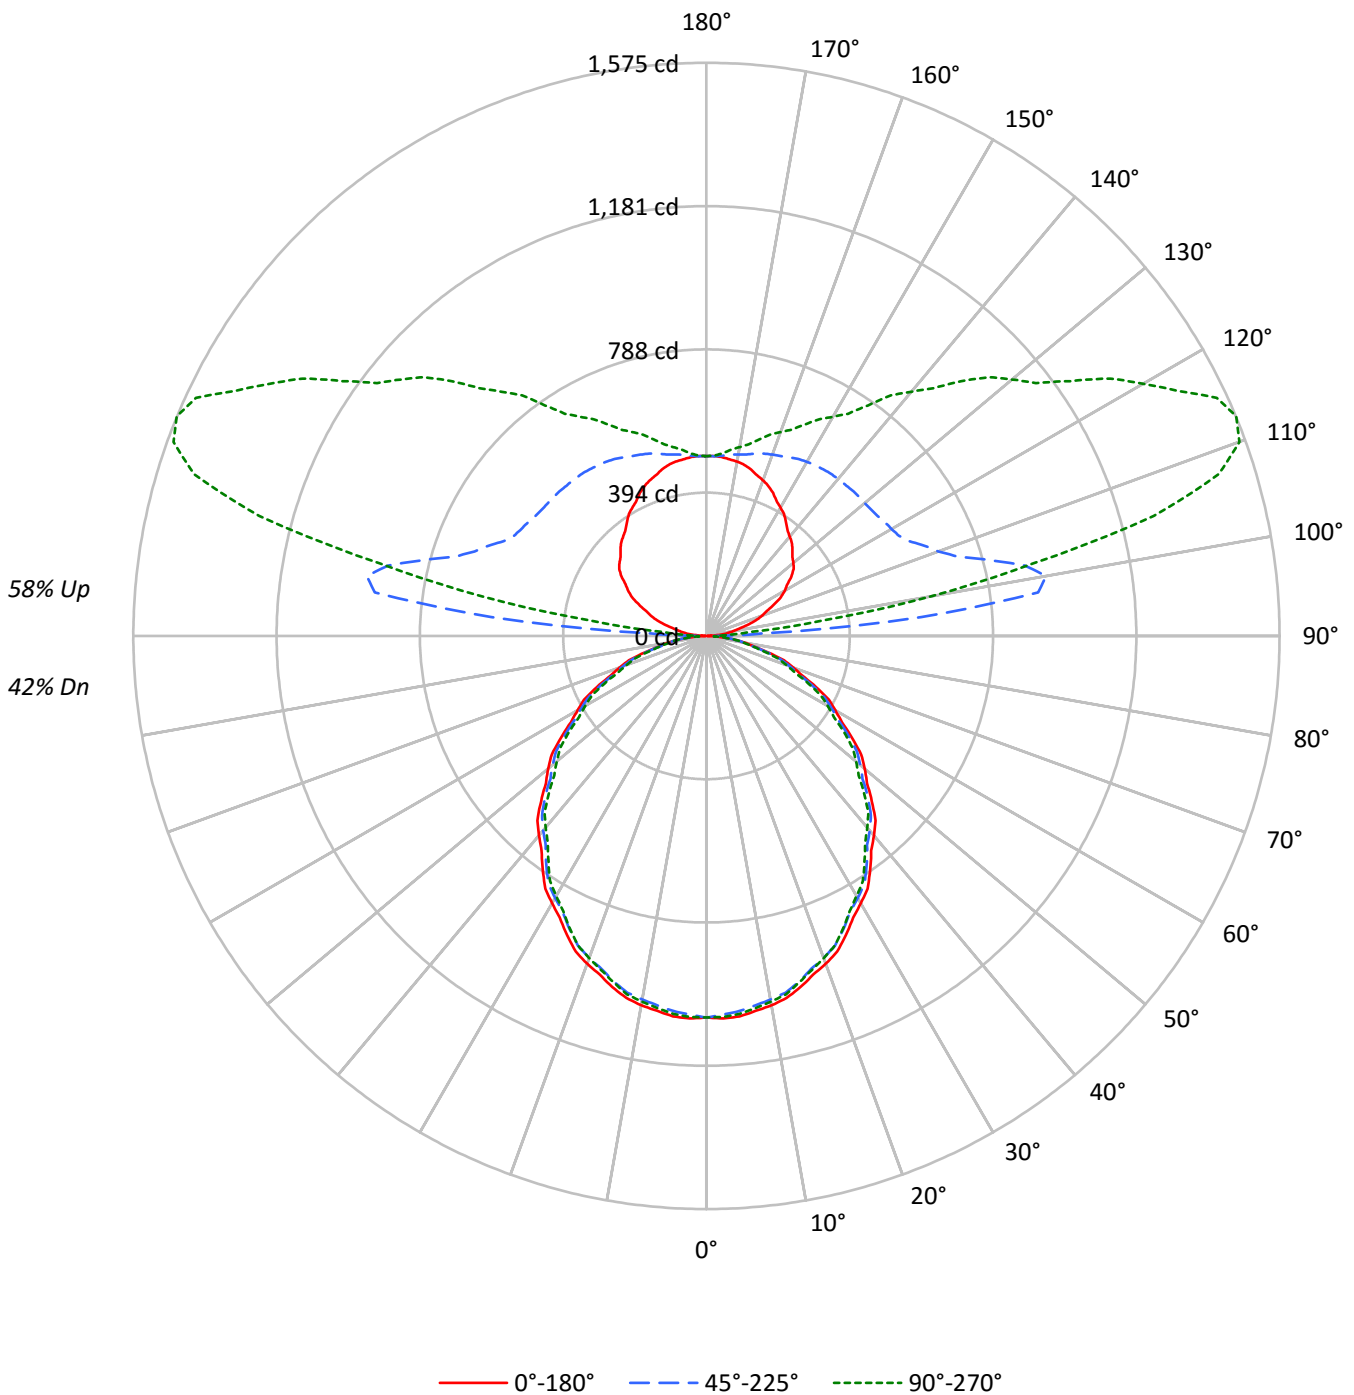



TEST NUMBER: P331999-935

CATALOG NUMBER: S123DIP-S775D1195U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	96	92	88	84	88	84	81	78	69	67	65	56	54	53	43	42	41	36
2	87	80	74	69	80	73	68	64	61	57	54	49	46	44	38	36	35	30
3	80	70	63	57	72	64	58	53	53	49	45	43	40	37	34	31	30	25
4	73	62	54	48	66	57	50	45	47	42	38	38	35	32	30	28	25	22
5	67	55	47	41	61	51	44	38	42	37	33	34	31	27	27	24	22	19
6	62	50	42	36	56	46	39	33	38	33	29	31	27	24	25	22	19	16
7	57	45	37	31	52	41	34	29	35	29	25	28	24	21	22	19	17	15
8	53	41	33	28	48	37	31	26	31	26	22	26	22	19	21	18	15	13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11286	11286	11286
5°	11339	11182	11261
10°	11262	11086	11154
15°	11131	10961	10981
20°	10977	10781	10791
25°	10772	10568	10546
30°	10544	10331	10253
35°	10307	10081	9950
40°	10058	9805	9653
45°	9785	9552	9319
50°	9512	9239	8982
55°	9154	8916	8646
60°	8792	8540	8269
65°	8474	8130	7875
70°	8003	7660	7320
75°	7311	7049	6750
80°	6595	6316	6261
85°	5780	5570	5348



TEST NUMBER: P331999-935

CATALOG NUMBER: S123DIP-S775D1195U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.8	1.5
10°-20°	278.9	4.3
20°-30°	411.9	6.4
30°-40°	481.2	7.5
40°-50°	483.8	7.5
50°-60°	425.0	6.6
60°-70°	316.6	4.9
70°-80°	180.4	2.8
80°-90°	55.6	0.9
90°-100°	275.0	4.3
100°-110°	778.7	12.1
110°-120°	766.1	11.9
120°-130°	611.0	9.5
130°-140°	481.8	7.5
140°-150°	359.6	5.6
150°-160°	250.6	3.9
160°-170°	147.2	2.3
170°-180°	47.9	0.7
0°-30°	789.6	12.2
0°-40°	1270.8	19.7
0°-60°	2179.5	33.8
0°-90°	2732.1	42.4
90°-120°	1819.8	28.2
90°-150°	3272.2	50.7
90°-180°	3718.0	57.6
0°-180°	6450.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1048	1048	1048	1048	1048	
5°	1049	1045	1035	1043	1042	99
15°	999	995	984	990	985	281
25°	907	901	890	890	888	418
35°	784	779	767	762	757	490
45°	643	639	628	617	612	496
55°	488	486	475	466	461	437
65°	333	328	319	312	309	328
75°	176	172	170	165	162	188
85°	47	45	45	43	43	51
90°	2	12	25	28	29	5
95°	34	110	593	173	116	37
105°	116	172	804	1406	1272	123
115°	205	256	615	1349	1548	203
125°	285	337	574	1040	1220	253
135°	334	399	566	857	989	258
145°	381	437	559	703	773	239
155°	433	467	541	615	641	199
165°	473	487	518	550	559	133
175°	493	494	497	504	503	47
180°	494	494	494	494	494	



TEST NUMBER: P331999-935

CATALOG NUMBER: S123DIP-S775D1195U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5
2.5°	1052.1	1051.5	1050.9	1050.2	1049.6	1048.4	1046.5	1044.8	1043.0	1041.3	1042.8
5°	1049.4	1048.4	1047.4	1046.4	1045.3	1043.8	1041.6	1039.4	1037.2	1034.9	1037.0
7.5°	1039.1	1038.1	1037.1	1036.1	1035.1	1033.5	1031.1	1028.9	1026.6	1024.3	1026.1
10°	1030.4	1029.4	1028.5	1027.4	1026.5	1024.7	1022.0	1019.4	1016.8	1014.3	1016.1
12.5°	1018.9	1018.0	1017.3	1016.4	1015.5	1013.9	1011.5	1009.0	1006.6	1004.1	1005.5
15°	998.9	998.1	997.3	996.5	995.7	994.0	991.4	988.8	986.2	983.6	985.2
17.5°	975.6	974.6	973.5	972.5	971.5	969.7	967.1	964.4	961.8	959.2	960.4
20°	958.3	957.1	956.0	954.8	953.6	951.6	949.0	946.4	943.8	941.2	942.0
22.5°	938.8	937.6	936.4	935.2	934.0	932.1	929.5	927.0	924.4	921.7	922.4
25°	907.0	905.8	904.6	903.4	902.2	900.3	897.6	895.0	892.4	889.8	890.0
27.5°	872.9	871.7	870.6	869.4	868.2	866.3	863.4	860.7	857.8	855.0	855.1
30°	848.3	847.3	846.4	845.3	844.3	842.4	839.6	836.8	834.1	831.2	831.2
32.5°	823.8	822.5	821.1	819.8	818.6	816.8	814.6	812.4	810.3	808.1	807.0
35°	784.4	783.2	782.0	780.8	779.5	777.7	775.0	772.4	769.8	767.2	766.0
37.5°	743.9	742.4	740.9	739.3	737.9	735.8	733.1	730.5	727.8	725.2	723.8
40°	715.8	714.6	713.4	712.2	711.0	709.0	706.2	703.4	700.6	697.8	696.2
42.5°	687.7	686.3	684.9	683.6	682.3	680.2	677.3	674.5	671.8	668.9	667.4
45°	642.8	642.0	641.2	640.4	639.6	637.9	635.2	632.7	630.1	627.5	625.1
47.5°	598.2	597.1	595.9	594.8	593.6	591.8	589.4	586.9	584.4	582.0	579.6
50°	568.0	567.0	565.9	565.0	564.0	562.1	559.6	557.0	554.3	551.7	549.6
52.5°	536.2	535.5	534.9	534.2	533.5	531.8	529.0	526.2	523.5	520.7	518.8
55°	487.8	487.5	487.3	487.2	486.9	485.5	482.9	480.4	477.7	475.1	472.9
57.5°	441.6	440.9	440.2	439.5	438.9	437.5	435.4	433.3	431.2	429.1	427.1
60°	408.4	408.2	408.0	407.8	407.6	406.3	403.9	401.5	399.1	396.7	394.9
62.5°	378.8	378.3	377.8	377.3	376.8	375.3	372.9	370.5	368.1	365.7	363.9
65°	332.7	331.7	330.6	329.7	328.6	327.2	325.1	323.1	321.2	319.2	317.5
67.5°	283.8	282.9	282.1	281.1	280.3	279.1	277.6	276.0	274.5	273.0	271.6
70°	254.3	253.0	251.8	250.6	249.4	248.2	247.0	245.8	244.6	243.4	242.0
72.5°	223.3	222.3	221.4	220.6	219.7	218.6	217.2	215.9	214.5	213.1	211.9
75°	175.8	175.0	174.2	173.4	172.6	171.9	171.3	170.7	170.0	169.5	168.5
77.5°	133.8	133.4	132.9	132.5	132.0	131.5	130.7	130.0	129.3	128.5	127.9
80°	106.4	105.8	105.2	104.6	104.0	103.5	103.1	102.7	102.3	101.9	101.7
82.5°	79.7	79.6	79.5	79.3	79.2	79.1	79.0	79.0	78.9	78.8	78.4
85°	46.8	46.5	46.1	45.7	45.3	45.1	45.1	45.1	45.1	45.1	44.7
87.5°	19.1	19.1	19.0	19.1	19.0	19.1	19.5	20.0	20.4	20.8	20.5
90°	2.0	4.0	6.0	9.0	11.0	13.0	16.0	19.0	22.0	25.0	24.0
92.5°	12.4	18.4	26.8	34.6	43.0	57.9	84.0	127.1	169.3	153.9	116.1
95°	34.0	37.0	48.0	65.0	91.0	130.0	215.1	364.1	528.2	593.2	481.1
97.5°	58.0	59.0	67.6	82.4	108.1	150.2	231.5	399.5	673.0	919.3	983.5
100°	74.0	75.0	82.1	96.0	120.0	159.0	229.1	377.1	640.2	947.4	1144.4
102.5°	90.8	92.6	98.8	112.0	133.6	169.4	232.3	357.9	592.2	895.4	1152.4
105°	116.1	119.1	125.0	137.1	156.0	187.1	241.1	344.1	533.2	804.3	1091.4
107.5°	142.8	145.9	151.6	163.4	181.2	210.1	257.5	343.1	495.6	723.8	984.6
110°	162.0	165.1	170.0	181.1	198.0	226.1	271.1	347.2	481.1	678.2	917.3



TEST NUMBER: P331999-935

CATALOG NUMBER: S123DIP-S775D1195U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	179.7	182.7	187.7	198.6	215.7	242.9	284.7	355.2	473.2	647.8	858.9
115°	205.1	209.1	215.1	225.1	242.1	269.1	307.1	368.2	470.2	615.2	788.2
117.5°	230.5	235.1	240.0	249.3	268.3	293.3	330.9	385.3	472.0	596.0	745.6
120°	248.1	251.1	256.1	266.1	285.1	310.1	346.1	398.1	475.2	587.2	723.2
122.5°	263.3	266.3	271.3	282.1	300.3	326.9	362.1	410.2	480.8	581.6	704.8
125°	285.1	287.1	293.1	304.1	323.1	350.1	385.1	429.1	489.1	574.2	681.2
127.5°	301.7	304.7	312.1	323.3	344.3	371.3	405.1	444.8	498.8	570.6	660.5
130°	312.1	315.1	324.1	336.1	357.1	384.1	417.2	455.1	505.1	568.2	649.2
132.5°	320.1	323.9	333.7	348.1	369.1	395.4	427.6	464.8	510.0	567.4	638.9
135°	334.2	338.1	349.1	364.1	385.1	412.2	443.2	477.2	517.2	566.2	625.3
137.5°	347.3	351.5	362.3	378.3	399.2	424.1	453.9	486.4	522.0	564.0	613.4
140°	356.1	361.1	371.1	387.1	407.2	432.1	461.2	491.2	525.2	563.2	606.2
142.5°	365.8	370.0	380.7	395.1	415.2	438.6	466.7	495.9	527.6	561.6	599.8
145°	381.2	384.1	393.1	408.1	425.2	448.2	474.2	501.2	529.2	559.2	591.2
147.5°	396.7	398.6	407.3	420.3	436.8	456.3	480.2	504.4	529.2	555.4	582.8
150°	407.2	408.1	416.1	429.1	443.2	461.2	484.1	505.1	529.2	552.2	577.2
152.5°	417.6	417.8	425.8	437.1	449.5	466.7	486.6	506.8	526.8	548.2	570.8
155°	433.2	433.2	439.2	449.2	460.1	474.2	491.2	507.2	524.2	541.2	561.2
157.5°	445.6	446.3	451.2	459.9	469.3	480.2	493.8	508.2	520.8	535.0	550.4
160°	455.1	455.1	459.2	467.2	474.2	484.1	496.2	508.2	519.2	530.2	543.2
162.5°	462.4	462.4	465.5	472.0	478.2	486.6	497.0	507.4	516.0	525.4	536.0
165°	473.2	472.2	474.2	479.1	483.2	490.2	498.2	505.1	511.2	518.1	526.2
167.5°	481.4	480.2	481.1	485.0	487.8	492.1	498.0	503.6	506.4	511.0	516.8
170°	486.2	484.1	485.2	488.2	490.2	492.1	497.1	501.2	503.2	506.2	511.2
172.5°	489.4	488.2	488.4	490.6	491.8	493.0	497.1	500.4	500.8	502.1	505.6
175°	493.2	492.1	491.2	493.2	493.2	494.2	496.2	498.2	497.1	497.1	499.2
177.5°	495.0	494.2	493.4	494.2	494.2	494.2	495.0	496.5	495.0	494.2	495.0
180°	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2



TEST NUMBER: P331999-935

CATALOG NUMBER: S123DIP-S775D1195U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5	1048.5
2.5°	1044.5	1046.1	1047.7	1048.4	1048.3	1048.1	1047.9	1047.8
5°	1039.0	1040.9	1043.0	1043.8	1043.4	1043.0	1042.6	1042.2
7.5°	1027.9	1029.8	1031.6	1032.3	1032.1	1031.8	1031.6	1031.4
10°	1017.9	1019.6	1021.4	1022.2	1021.7	1021.3	1021.0	1020.5
12.5°	1006.8	1008.1	1009.4	1010.0	1009.7	1009.4	1009.3	1009.0
15°	986.8	988.3	990.0	990.2	988.9	987.7	986.6	985.4
17.5°	961.5	962.6	963.7	964.1	963.6	963.2	962.8	962.3
20°	942.8	943.6	944.4	944.5	943.9	943.3	942.7	942.1
22.5°	923.0	923.7	924.3	924.2	923.5	922.7	922.0	921.2
25°	890.2	890.4	890.6	890.4	889.8	889.2	888.6	888.0
27.5°	855.3	855.5	855.7	855.3	854.6	853.9	853.1	852.3
30°	831.2	831.2	831.2	830.5	829.1	827.7	826.3	824.9
32.5°	805.9	804.8	803.7	802.7	801.9	801.2	800.4	799.7
35°	764.8	763.6	762.4	761.3	760.3	759.3	758.3	757.2
37.5°	722.3	720.8	719.5	718.4	717.7	717.1	716.4	715.8
40°	694.6	693.0	691.4	690.2	689.4	688.5	687.8	687.0
42.5°	665.7	664.1	662.5	661.3	660.6	659.7	658.9	658.1
45°	622.7	620.3	617.9	616.1	615.2	614.2	613.1	612.2
47.5°	577.3	575.0	572.6	570.9	570.1	569.2	568.3	567.4
50°	547.3	545.1	542.9	541.2	540.0	538.8	537.6	536.4
52.5°	516.9	515.1	513.2	511.7	510.5	509.3	508.1	506.9
55°	470.7	468.5	466.3	464.7	463.6	462.7	461.7	460.7
57.5°	425.2	423.3	421.3	419.7	418.5	417.4	416.2	415.1
60°	393.0	391.2	389.4	388.1	387.0	386.1	385.0	384.1
62.5°	362.1	360.2	358.4	357.2	356.5	355.9	355.2	354.5
65°	315.9	314.4	312.7	311.6	311.0	310.4	309.8	309.2
67.5°	270.2	268.8	267.3	266.2	265.4	264.6	263.7	262.9
70°	240.6	239.2	237.8	236.6	235.6	234.6	233.6	232.6
72.5°	210.6	209.4	208.2	207.2	206.7	206.2	205.7	205.2
75°	167.5	166.5	165.5	164.7	164.1	163.5	162.9	162.3
77.5°	127.2	126.5	125.8	125.5	125.5	125.5	125.5	125.5
80°	101.5	101.3	101.1	101.0	101.0	101.0	101.0	101.0
82.5°	78.1	77.7	77.3	77.1	77.0	76.8	76.6	76.5
85°	44.3	43.9	43.5	43.3	43.3	43.3	43.3	43.3
87.5°	20.6	20.6	20.7	20.9	20.8	20.9	21.2	20.9
90°	25.0	26.0	27.0	29.0	28.0	29.0	30.0	29.0
92.5°	84.2	66.8	59.0	53.8	52.0	49.0	50.0	48.2
95°	360.2	244.1	191.1	155.1	136.0	127.1	120.0	116.1
97.5°	897.7	719.0	590.0	470.4	396.6	351.5	324.5	315.9
100°	1179.4	1098.4	981.4	839.3	738.2	665.2	626.2	627.2
102.5°	1273.1	1270.4	1202.2	1112.2	1033.5	975.8	943.1	920.2
105°	1300.5	1400.5	1419.5	1393.5	1347.5	1309.5	1277.5	1272.5
107.5°	1221.6	1384.1	1471.7	1507.4	1508.1	1495.3	1484.5	1475.3
110°	1146.4	1330.5	1456.6	1526.6	1554.5	1562.5	1560.6	1558.6



TEST NUMBER: P331999-935

CATALOG NUMBER: S123DIP-S775D1195U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1071.9	1260.1	1401.3	1491.3	1542.6	1567.4	1574.9	1575.4
115°	973.4	1147.4	1294.4	1403.5	1478.5	1522.5	1542.6	1547.6
117.5°	901.9	1052.1	1184.2	1294.9	1373.1	1423.5	1452.3	1459.1
120°	864.3	999.4	1119.4	1220.5	1299.4	1355.5	1379.5	1385.5
122.5°	834.7	956.9	1068.2	1162.0	1232.3	1282.6	1309.1	1316.6
125°	795.3	904.3	1000.3	1080.4	1144.4	1188.4	1213.4	1220.5
127.5°	760.9	858.1	944.7	1017.5	1074.6	1112.2	1134.8	1141.2
130°	739.3	829.3	910.3	978.4	1031.4	1067.4	1088.4	1096.4
132.5°	719.3	802.1	877.5	942.4	992.1	1028.1	1046.8	1052.4
135°	692.2	763.3	828.3	885.3	934.4	964.3	982.3	989.4
137.5°	667.6	725.8	781.9	831.3	872.5	902.9	918.1	922.7
140°	653.2	704.2	752.3	795.3	833.3	861.3	877.3	876.3
142.5°	639.6	683.5	725.0	762.5	794.9	819.7	834.1	833.1
145°	623.2	656.3	688.3	717.2	742.3	763.3	771.3	773.3
147.5°	609.8	636.0	661.9	682.4	701.5	715.7	723.2	724.0
150°	600.2	623.2	644.2	663.2	678.2	689.2	695.3	695.3
152.5°	591.4	611.2	629.8	645.7	657.5	667.6	671.2	671.2
155°	578.2	594.2	609.2	621.2	630.3	638.3	640.2	641.2
157.5°	564.2	577.6	589.2	598.6	606.4	612.4	614.0	613.8
160°	556.2	567.2	577.2	584.2	591.2	597.2	597.2	596.2
162.5°	546.6	556.0	565.2	571.4	576.0	581.2	581.2	580.2
165°	534.2	540.2	547.2	552.2	556.2	560.2	559.2	559.2
167.5°	523.4	528.0	532.0	535.6	537.4	540.2	539.2	539.2
170°	516.2	519.2	523.1	525.2	526.2	528.2	527.2	527.2
172.5°	509.8	512.0	515.2	516.3	516.6	518.6	516.8	516.0
175°	501.2	502.1	504.2	504.2	504.2	505.1	504.2	503.2
177.5°	495.8	496.5	497.4	497.4	496.5	497.4	495.8	495.8
180°	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2

(END OF REPORT)