

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831659

Luminaire Tested: S123DIP-S775D365U935-4F0-1E-UDD-G4

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831659
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-17)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D365U935-4F0-1E-UDD-G4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4185.2 lumens
Efficiency: N/A
Efficacy: 116.6 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 35.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831659
CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

Luminous Intensity Polar Plot

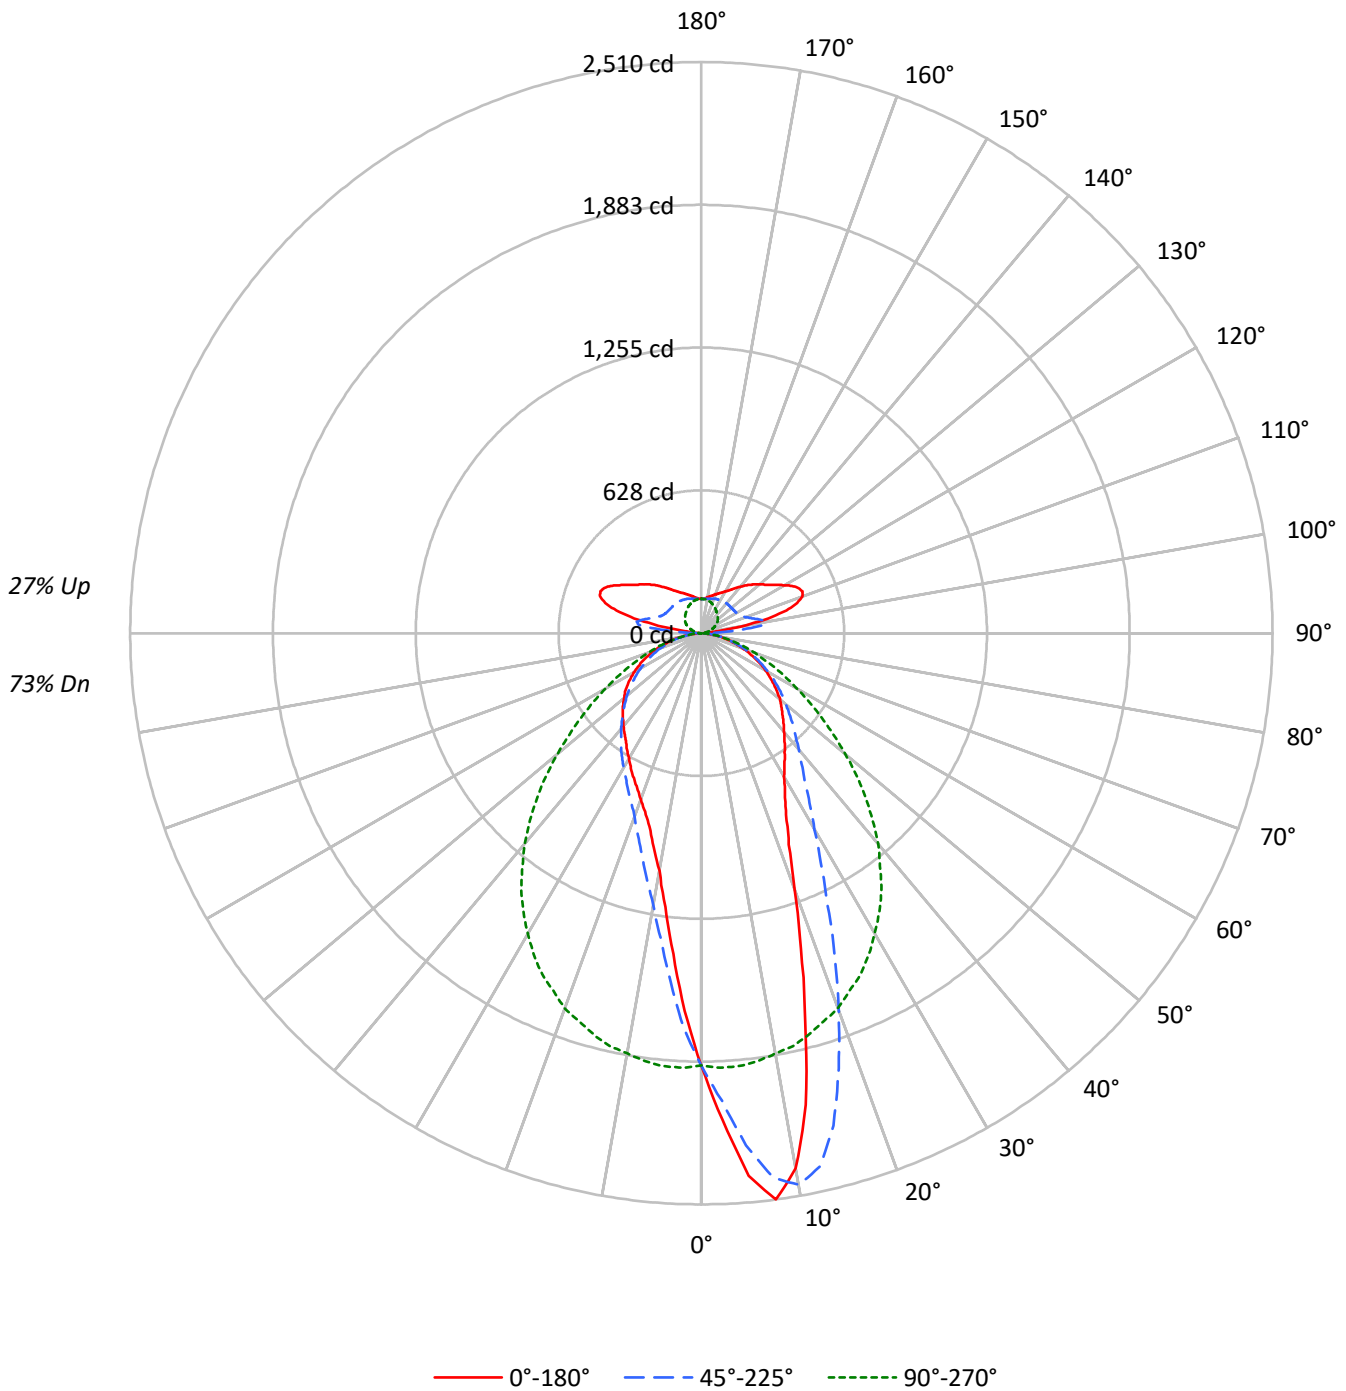



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	113	113	113	113	107	107	107	107	96	96	96	86	86	86	77	77	77	77	77	77	73	
1	104	99	96	92	98	95	91	88	86	83	81	77	75	73	69	68	67	67	67	67	63	
2	95	88	82	77	90	84	78	74	76	72	68	69	66	63	62	60	57	57	57	57	54	
3	87	78	71	65	83	75	68	63	68	63	58	62	58	54	56	53	50	50	50	50	47	
4	81	70	62	56	76	67	60	54	61	55	51	56	51	47	51	47	44	44	44	44	41	
5	74	63	55	49	71	60	53	48	55	49	45	51	46	42	46	42	39	39	39	39	36	
6	69	57	49	43	66	55	48	42	50	44	40	46	41	37	42	38	35	35	35	35	33	
7	64	52	44	39	61	50	43	38	46	40	36	43	38	34	39	35	32	32	32	32	29	
8	60	48	40	35	57	46	39	34	43	37	32	39	34	31	36	32	29	29	29	29	27	
9	56	44	37	32	54	43	36	31	40	34	29	37	32	28	34	30	27	27	27	27	25	
10	53	41	34	29	50	40	33	28	37	31	27	34	29	26	32	27	24	24	24	24	23	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	20448	20448	20448	20448	20448
5°	25860	24407	20631	16626	15278
10°	26111	26901	20494	13253	11581
15°	19666	24976	20354	11223	9794
20°	13702	20211	20094	9814	8896
25°	10449	15542	19651	9030	8345
30°	9040	12348	18943	8475	7900
35°	8386	10426	18128	8073	7587
40°	7940	9351	16982	7692	7481
45°	7675	8655	15525	7394	7435
50°	7544	8105	13802	7122	7395
55°	7263	7700	12110	6865	7428
60°	7003	7268	10437	6622	7307
65°	6579	6859	9004	6365	7162
70°	6077	6338	7657	5936	6741
75°	5498	5681	6563	5519	6159
80°	4537	4971	5188	4810	5188
85°	3594	4026	3816	4088	4137

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 17727 cd/sqm



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.6	4.3
10°-20°	446.8	10.7
20°-30°	529.0	12.6
30°-40°	531.9	12.7
40°-50°	488.0	11.7
50°-60°	402.8	9.6
60°-70°	284.9	6.8
70°-80°	152.1	3.6
80°-90°	39.4	0.9
90°-100°	81.6	1.9
100°-110°	238.8	5.7
110°-120°	233.2	5.6
120°-130°	185.7	4.4
130°-140°	146.5	3.5
140°-150°	109.3	2.6
150°-160°	76.2	1.8
160°-170°	44.8	1.1
170°-180°	14.6	0.3
0°-30°	1155.4	27.6
0°-40°	1687.3	40.3
0°-60°	2578.1	61.6
0°-90°	3054.6	73.0
90°-120°	553.5	13.2
90°-150°	995.1	23.8
90°-180°	1131.0	27.0
0°-180°	4185.2	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	1900	1900	1900	1900	1900	
5°	2393	2259	1909	1539	1414	228
15°	1765	2241	1826	1007	879	488
25°	880	1309	1655	760	703	415
35°	638	793	1380	614	577	401
45°	504	569	1020	486	488	390
55°	387	410	645	366	396	346
65°	258	269	354	250	281	257
75°	132	137	158	133	148	139
85°	29	33	31	33	34	32
90°	9	8	1	8	9	7
95°	35	180	10	180	35	57
105°	387	245	35	245	387	386
115°	471	187	62	187	471	459
125°	371	175	87	175	371	336
135°	301	172	102	172	301	233
145°	235	170	116	170	235	149
155°	195	165	132	165	195	91
165°	170	158	144	158	170	49
175°	153	151	150	151	153	15
180°	150	150	150	150	150	



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7
2.5°	2141.2	2139.0	2136.8	2125.8	2114.8	2109.5	2104.2	2088.3	2072.4	2054.8	2037.2
5°	2393.3	2399.5	2405.7	2398.6	2391.6	2370.0	2348.4	2319.7	2291.1	2258.9	2226.7
7.5°	2509.7	2513.2	2516.7	2512.3	2507.9	2502.2	2496.5	2470.9	2445.3	2412.3	2379.2
10°	2388.9	2396.8	2404.8	2422.0	2439.2	2458.5	2477.9	2474.4	2470.9	2461.2	2451.5
12.5°	2123.6	2133.3	2143.0	2177.3	2211.7	2255.8	2299.9	2337.8	2375.7	2402.1	2428.6
15°	1764.8	1791.7	1818.6	1849.9	1881.2	1945.9	2010.7	2090.5	2170.3	2241.3	2312.2
17.5°	1453.6	1463.8	1473.9	1507.4	1540.9	1622.4	1704.0	1796.1	1888.2	2005.9	2123.6
20°	1196.2	1205.5	1214.7	1258.8	1302.9	1366.8	1430.7	1534.3	1637.9	1764.4	1890.9
22.5°	1004.9	1019.5	1034.0	1058.7	1083.4	1144.6	1205.9	1298.0	1390.1	1529.9	1669.6
25°	879.8	890.3	900.9	915.9	930.9	979.8	1028.7	1104.5	1180.3	1308.6	1436.9
27.5°	794.2	798.7	803.1	818.0	833.0	864.8	896.5	961.7	1027.0	1135.8	1244.7
30°	727.3	730.3	733.4	746.6	759.9	781.5	803.1	850.2	897.4	993.5	1089.6
32.5°	680.5	682.7	684.9	695.1	705.2	720.6	736.1	770.4	804.8	884.2	963.5
35°	638.2	639.5	640.9	648.4	655.8	667.3	678.8	704.8	730.8	793.4	856.0
37.5°	601.2	603.0	604.7	609.1	613.5	623.7	633.8	654.5	675.2	723.3	771.3
40°	565.1	568.1	571.2	574.3	577.4	585.8	594.1	610.0	625.9	665.5	705.2
42.5°	534.2	537.3	540.4	541.7	543.0	547.9	552.7	567.3	581.8	611.3	640.9
45°	504.2	505.5	506.9	508.2	509.5	513.5	517.4	530.2	543.0	568.6	594.1
47.5°	476.9	476.9	476.9	477.8	478.7	482.2	485.7	495.0	504.2	524.1	543.9
50°	450.5	450.5	450.5	449.1	447.8	450.0	452.2	459.3	466.3	484.0	501.6
52.5°	418.7	418.7	418.7	419.2	419.6	419.6	419.6	425.8	431.9	447.8	463.7
55°	387.0	388.7	390.5	389.2	387.9	388.7	389.6	393.6	397.6	410.3	423.1
57.5°	355.3	356.1	357.0	356.6	356.1	356.6	357.0	360.5	364.1	373.8	383.5
60°	325.3	325.3	325.3	324.4	323.5	324.4	325.3	327.0	328.8	337.6	346.4
62.5°	291.8	292.2	292.7	293.1	293.5	292.7	291.8	294.0	296.2	302.8	309.4
65°	258.3	258.7	259.2	260.5	261.8	260.9	260.0	262.3	264.5	269.3	274.2
67.5°	228.3	227.4	226.5	227.0	227.4	228.8	230.1	230.5	231.0	236.2	241.5
70°	193.1	193.9	194.8	194.4	193.9	194.4	194.8	196.1	197.5	201.4	205.4
72.5°	161.3	161.8	162.2	162.2	162.2	163.1	164.0	165.3	166.6	168.8	171.0
75°	132.2	132.2	132.2	133.1	134.0	134.4	134.9	134.9	134.9	136.6	138.4
77.5°	100.5	102.7	104.9	104.5	104.0	104.9	105.8	107.1	108.4	109.3	110.2
80°	73.2	73.2	73.2	73.6	74.0	75.4	76.7	77.6	78.5	80.2	82.0
82.5°	46.7	47.2	47.6	48.9	50.2	51.1	52.0	53.3	54.7	54.7	54.7
85°	29.1	28.2	27.3	28.2	29.1	30.0	30.9	31.3	31.7	32.6	33.5
87.5°	14.1	14.1	14.1	14.1	14.1	14.5	15.0	15.0	15.0	15.0	15.0
90°	8.8	9.1	8.8	8.5	8.8	8.2	7.9	7.6	7.3	7.6	6.7
92.5°	16.1	16.7	16.4	17.6	18.3	20.4	23.4	30.1	42.3	56.6	62.7
95°	35.3	36.5	38.6	41.4	47.2	58.1	74.2	109.5	146.3	180.4	160.6
97.5°	72.4	75.8	83.1	94.6	115.0	149.7	189.9	251.6	286.9	277.5	207.2
100°	190.8	190.5	202.3	224.5	255.3	298.5	334.1	358.7	348.1	288.1	194.7
102.5°	302.1	311.0	320.4	336.8	359.0	382.5	399.5	394.3	351.1	268.4	176.5
105°	387.0	388.5	398.3	409.8	423.8	431.7	426.0	395.5	331.9	244.6	162.2
107.5°	442.4	445.7	449.7	455.2	457.0	448.8	425.1	377.3	304.6	223.6	151.8
110°	474.0	474.6	475.3	472.8	464.3	443.0	404.7	348.7	279.0	206.3	146.3



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	480.4	480.1	477.1	468.3	450.9	422.0	377.9	320.4	256.8	194.7	143.3
115°	470.7	469.2	463.1	449.7	426.9	393.7	349.0	296.0	239.8	187.1	143.0
117.5°	449.4	447.3	438.1	423.2	399.5	365.1	324.0	277.2	228.5	181.9	143.3
120°	421.4	419.6	412.3	395.2	371.2	340.5	304.0	262.9	220.0	178.6	144.5
122.5°	395.2	392.8	384.6	369.7	349.0	321.0	287.8	251.6	213.0	176.5	146.7
125°	371.2	369.1	361.5	348.1	328.6	304.3	275.1	241.9	207.2	174.6	148.8
127.5°	350.5	348.7	341.7	330.1	312.5	290.0	263.2	233.1	201.7	173.7	151.2
130°	333.5	331.0	324.6	313.7	297.6	276.9	252.2	224.8	197.5	172.8	153.7
132.5°	316.7	315.2	309.7	298.8	283.9	264.4	241.9	217.2	193.5	172.5	155.5
135°	300.9	298.8	293.3	284.2	269.3	251.9	232.2	210.5	190.2	172.2	157.3
137.5°	284.2	282.4	277.8	268.4	255.6	240.1	222.4	204.2	187.1	171.6	158.5
140°	266.5	266.8	262.0	253.4	241.9	228.8	214.2	198.7	184.4	171.3	159.7
142.5°	250.1	250.4	246.1	238.8	229.4	218.5	206.3	193.5	181.9	170.7	160.6
145°	235.2	234.6	232.2	225.8	218.2	209.3	199.6	189.6	179.8	170.1	161.0
147.5°	222.4	222.1	219.7	215.1	209.0	202.6	194.4	186.2	177.7	169.2	161.0
150°	211.5	211.5	209.6	206.3	201.7	195.9	189.6	182.6	175.6	168.0	161.0
152.5°	202.3	202.3	201.4	198.4	195.0	190.5	185.0	179.2	173.1	166.4	160.0
155°	195.0	194.7	194.1	191.7	188.9	185.3	180.7	175.9	170.7	164.6	159.4
157.5°	188.0	188.0	187.4	185.6	183.2	180.1	176.5	172.2	168.0	163.1	158.5
160°	181.3	181.6	181.6	179.8	177.7	175.6	172.5	169.2	165.2	161.3	157.9
162.5°	175.3	175.6	175.6	174.0	172.8	171.0	168.3	165.5	162.5	159.4	156.7
165°	170.1	170.1	170.4	169.2	168.0	166.4	164.3	162.5	160.0	157.6	155.5
167.5°	164.9	164.9	165.2	164.3	163.7	162.5	161.3	159.7	157.6	155.8	154.3
170°	160.3	160.3	160.6	160.0	159.7	159.1	157.9	157.0	155.5	154.0	153.0
172.5°	156.1	156.4	157.0	156.4	156.4	156.1	155.2	154.6	153.3	152.4	152.1
175°	153.0	153.3	153.7	153.3	153.3	153.3	152.7	152.4	151.8	151.2	151.2
177.5°	150.9	150.9	151.5	151.2	151.5	151.5	151.2	150.9	150.6	150.3	150.6
180°	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7
2.5°	2031.9	2026.6	2007.2	1987.8	1965.8	1943.7	1927.4	1911.1	1886.9	1862.6	1842.8
5°	2202.0	2177.3	2136.4	2095.4	2039.8	1984.3	1946.8	1909.4	1859.1	1808.9	1768.8
7.5°	2336.9	2294.6	2237.3	2180.0	2107.3	2034.5	1965.8	1897.0	1820.3	1743.6	1681.0
10°	2422.8	2394.2	2328.1	2262.0	2164.6	2067.2	1971.1	1875.0	1776.3	1677.5	1594.7
12.5°	2431.2	2433.9	2373.0	2312.2	2202.0	2091.8	1975.0	1858.2	1733.9	1609.6	1513.1
15°	2357.6	2403.0	2369.5	2336.0	2224.9	2113.9	1970.2	1826.5	1683.3	1540.0	1428.5
17.5°	2221.0	2318.4	2323.2	2328.1	2217.0	2105.9	1946.8	1787.7	1625.5	1463.3	1346.1
20°	2034.5	2178.2	2227.6	2277.0	2186.6	2096.2	1925.2	1754.2	1572.6	1391.0	1268.1
22.5°	1844.1	2018.7	2109.0	2199.4	2132.4	2065.4	1883.4	1701.3	1509.6	1317.9	1193.1
25°	1627.3	1817.7	1956.5	2095.4	2054.4	2013.4	1834.0	1654.6	1450.5	1246.5	1119.1
27.5°	1438.2	1631.7	1799.2	1966.7	1957.8	1949.0	1771.0	1592.9	1384.0	1175.1	1052.1
30°	1269.8	1450.1	1637.4	1824.7	1846.3	1867.9	1696.0	1524.1	1314.8	1105.4	986.9
32.5°	1120.8	1278.2	1479.2	1680.2	1722.5	1764.8	1609.6	1454.5	1247.3	1040.2	926.0
35°	998.8	1141.6	1342.5	1543.5	1596.4	1649.3	1514.4	1379.6	1177.7	975.8	867.0
37.5°	890.8	1010.2	1206.4	1402.5	1467.3	1532.1	1411.3	1290.5	1101.5	912.4	812.3
40°	801.3	897.4	1077.7	1257.9	1332.9	1407.8	1308.2	1208.6	1029.2	849.8	757.7
42.5°	726.4	811.9	975.4	1138.9	1210.8	1282.6	1198.4	1114.2	954.7	795.1	710.9
45°	662.5	730.8	879.3	1027.8	1096.2	1164.5	1092.2	1019.9	879.3	738.7	660.3
47.5°	602.5	661.1	788.1	915.0	975.8	1036.7	980.2	923.8	804.8	685.8	614.9
50°	548.7	595.9	707.0	818.0	870.9	923.8	874.0	824.2	726.4	628.5	566.8
52.5°	502.0	540.4	633.4	726.4	771.8	817.2	774.4	731.7	654.1	576.5	522.7
55°	455.7	488.4	569.0	649.7	680.5	711.4	678.3	645.3	582.7	520.1	474.7
57.5°	412.5	441.6	507.8	573.9	597.7	621.5	591.5	561.5	514.4	467.2	429.3
60°	370.2	394.0	449.1	504.2	518.8	533.3	509.1	484.8	451.8	418.7	384.8
62.5°	331.0	352.6	393.6	434.6	444.3	454.0	435.5	417.0	391.8	366.7	340.3
65°	290.5	306.8	340.3	373.8	379.9	386.1	369.8	353.5	334.5	315.6	296.2
67.5°	253.0	264.5	291.8	319.1	319.5	320.0	306.8	293.5	283.0	272.4	257.0
70°	216.4	227.4	245.5	263.6	264.0	264.5	253.9	243.3	235.4	227.4	216.0
72.5°	178.9	186.9	200.5	214.2	213.3	212.4	205.8	199.2	193.1	186.9	178.5
75°	145.0	151.6	160.9	170.1	167.5	164.8	161.3	157.8	152.5	147.2	141.9
77.5°	114.2	118.1	123.4	128.7	126.9	125.2	122.1	119.0	115.0	111.1	108.9
80°	83.7	85.5	89.0	92.6	91.7	90.8	87.3	83.7	82.9	82.0	78.9
82.5°	56.9	59.1	59.9	60.8	60.4	59.9	57.3	54.7	53.8	52.9	52.5
85°	33.9	34.4	34.8	35.3	33.9	32.6	31.7	30.9	30.9	30.9	30.4
87.5°	15.4	15.9	15.9	15.9	15.4	15.0	14.1	13.2	13.7	14.1	14.1
90°	5.8	4.9	4.0	3.3	2.7	1.8	1.2	0.6	1.2	1.8	2.7
92.5°	46.9	30.7	21.0	15.5	12.5	9.7	6.7	4.6	6.7	9.7	12.5
95°	110.8	65.4	39.6	27.7	19.8	14.6	11.3	10.3	11.3	14.6	19.8
97.5°	123.2	70.6	45.0	31.9	24.0	19.5	16.7	16.4	16.7	19.5	24.0
100°	114.7	69.7	48.4	36.5	29.2	24.9	22.8	22.5	22.8	24.9	29.2
102.5°	107.4	70.9	52.3	41.7	35.3	31.3	29.5	28.9	29.5	31.3	35.3
105°	104.7	73.3	56.9	47.5	41.7	38.0	36.2	35.3	36.2	38.0	41.7
107.5°	104.1	77.3	62.7	53.9	48.4	44.7	42.9	42.0	42.9	44.7	48.4
110°	105.6	82.5	68.8	60.2	55.1	51.7	50.2	49.3	50.2	51.7	55.1



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	108.6	87.6	75.2	66.9	61.8	58.4	56.9	56.0	56.9	58.4	61.8
115°	112.0	93.4	81.8	73.6	68.5	65.4	63.6	62.4	63.6	65.4	68.5
117.5°	116.2	99.5	87.9	80.3	74.5	71.8	70.3	68.8	70.3	71.8	74.5
120°	121.1	105.3	94.3	86.7	80.9	77.9	76.4	75.5	76.4	77.9	80.9
122.5°	125.7	111.4	100.7	92.5	87.0	83.7	82.2	81.2	82.2	83.7	87.0
125°	130.5	117.1	106.5	98.3	92.5	89.1	87.3	86.7	87.3	89.1	92.5
127.5°	134.5	122.3	112.0	103.8	97.4	94.0	91.9	91.0	91.9	94.0	97.4
130°	138.4	126.9	116.8	108.6	102.2	98.6	95.8	94.9	95.8	98.6	102.2
132.5°	142.1	130.8	121.1	113.2	106.8	102.2	99.2	98.0	99.2	102.2	106.8
135°	145.1	134.8	125.4	117.1	110.8	106.2	102.8	101.6	102.8	106.2	110.8
137.5°	147.6	137.5	128.4	120.8	114.4	109.5	106.2	105.0	106.2	109.5	114.4
140°	149.4	140.3	131.4	123.8	117.7	112.9	109.8	108.3	109.8	112.9	117.7
142.5°	151.2	142.4	133.9	126.9	120.8	116.5	113.2	112.0	113.2	116.5	120.8
145°	152.4	144.2	136.3	129.3	124.1	119.6	116.8	115.9	116.8	119.6	124.1
147.5°	153.3	145.7	138.4	132.4	127.2	123.2	120.5	119.9	120.5	123.2	127.2
150°	153.7	147.3	140.3	134.8	130.5	126.6	124.1	123.8	124.1	126.6	130.5
152.5°	154.3	148.2	142.4	137.2	133.6	130.2	127.8	127.8	127.8	130.2	133.6
155°	154.3	149.4	144.2	140.0	136.6	133.6	131.7	131.7	131.7	133.6	136.6
157.5°	154.6	150.0	145.7	142.4	139.4	136.6	135.1	134.8	135.1	136.6	139.4
160°	154.6	150.9	147.3	144.2	142.1	139.7	138.4	138.4	138.4	139.7	142.1
162.5°	154.3	151.2	148.2	145.7	143.9	142.1	141.2	141.2	141.2	142.1	143.9
165°	153.7	151.5	149.1	147.0	145.7	144.2	143.6	143.9	143.6	144.2	145.7
167.5°	153.3	151.5	149.7	148.2	147.3	146.0	145.7	146.0	145.7	146.0	147.3
170°	152.4	151.2	149.7	149.1	148.5	147.6	147.3	147.9	147.3	147.6	148.5
172.5°	152.1	151.2	150.0	149.7	149.4	148.8	148.8	149.1	148.8	148.8	149.4
175°	151.5	150.9	150.3	150.0	150.0	149.4	149.7	150.0	149.7	149.4	150.0
177.5°	151.2	150.6	150.3	150.3	150.3	150.0	150.3	150.6	150.3	150.0	150.3
180°	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7	1899.7
2.5°	1823.0	1805.8	1788.6	1775.4	1762.1	1739.7	1717.2	1711.9	1706.6	1699.1	1691.6
5°	1728.7	1686.3	1644.0	1606.1	1568.2	1538.7	1509.2	1489.8	1470.4	1456.3	1442.2
7.5°	1618.5	1555.0	1491.5	1446.6	1401.6	1358.9	1316.1	1302.4	1288.8	1270.3	1251.8
10°	1511.8	1441.7	1371.6	1313.0	1254.4	1212.5	1170.7	1153.9	1137.2	1113.8	1090.4
12.5°	1416.6	1339.9	1263.2	1204.1	1145.1	1104.5	1064.0	1039.7	1015.5	1002.3	989.1
15°	1317.0	1235.0	1153.0	1098.4	1043.7	1007.1	970.5	949.4	928.2	915.5	902.7
17.5°	1228.8	1147.7	1066.6	1014.2	961.7	928.2	894.7	876.2	857.7	848.0	838.3
20°	1145.1	1065.8	986.4	935.3	884.2	856.8	829.5	817.6	805.7	797.8	789.8
22.5°	1068.4	990.4	912.4	868.7	825.1	803.1	781.0	772.6	764.3	757.7	751.1
25°	991.7	922.1	852.4	815.4	778.4	760.3	742.2	733.9	725.5	718.9	712.3
27.5°	929.1	862.6	796.0	764.3	732.5	718.4	704.3	697.7	691.1	684.9	678.8
30°	868.3	808.8	749.3	722.0	694.6	681.9	669.1	662.5	655.8	650.1	644.4
32.5°	811.9	760.7	709.6	684.5	659.4	648.8	638.2	630.3	622.3	617.9	613.5
35°	758.1	712.3	666.4	645.7	625.0	614.4	603.8	597.2	590.6	587.1	583.6
37.5°	712.3	671.3	630.3	610.4	590.6	580.5	570.3	564.6	558.9	557.6	556.2
40°	665.5	630.3	595.0	575.6	556.2	547.4	538.6	535.1	531.6	530.7	529.8
42.5°	626.8	592.4	558.0	540.4	522.7	515.2	507.8	506.0	504.2	505.5	506.9
45°	581.8	553.2	524.5	508.2	491.9	485.7	479.5	478.2	476.9	479.5	482.2
47.5°	543.9	517.4	491.0	475.6	460.2	455.7	451.3	450.9	450.5	454.0	457.5
50°	505.1	479.5	454.0	441.6	429.3	425.3	421.4	422.7	424.0	429.7	435.5
52.5°	469.0	445.2	421.4	409.9	398.4	395.8	393.2	396.2	399.3	405.5	411.7
55°	429.3	407.7	386.1	377.3	368.5	365.8	363.2	369.4	375.5	381.3	387.0
57.5°	391.4	372.4	353.5	345.6	337.6	337.2	336.7	342.5	348.2	354.4	360.5
60°	350.8	335.0	319.1	312.9	306.8	307.6	308.5	315.1	321.8	326.6	331.4
62.5°	313.8	300.6	287.4	281.6	275.9	278.1	280.3	286.9	293.5	299.3	305.0
65°	276.8	265.8	254.8	250.8	246.8	249.9	253.0	258.7	264.5	268.4	272.4
67.5°	241.5	232.3	223.0	219.9	216.9	219.9	223.0	228.8	234.5	238.4	242.4
70°	204.5	197.0	189.5	187.3	185.1	188.6	192.2	197.0	201.9	205.8	209.8
72.5°	170.1	164.4	158.7	158.2	157.8	160.9	164.0	168.8	173.7	176.3	178.9
75°	136.6	133.5	130.5	130.0	129.6	132.7	135.8	138.4	141.0	143.2	145.5
77.5°	106.7	104.0	101.4	101.8	102.3	104.5	106.7	109.3	112.0	113.3	114.6
80°	75.8	74.9	74.0	74.9	75.8	77.6	79.3	81.1	82.9	83.7	84.6
82.5°	52.0	51.1	50.2	51.6	52.9	54.2	55.5	56.9	58.2	58.6	59.1
85°	30.0	31.3	32.6	32.6	32.6	33.1	33.5	33.9	34.4	33.9	33.5
87.5°	14.1	14.5	15.0	15.0	15.0	15.4	15.9	15.9	15.9	15.4	15.0
90°	3.3	4.0	4.9	5.8	6.7	7.6	7.3	7.6	7.9	8.2	8.8
92.5°	15.5	21.0	30.7	46.9	62.7	56.6	42.3	30.1	23.4	20.4	18.3
95°	27.7	39.6	65.4	110.8	160.6	180.4	146.3	109.5	74.2	58.1	47.2
97.5°	31.9	45.0	70.6	123.2	207.2	277.5	286.9	251.6	189.9	149.7	115.0
100°	36.5	48.4	69.7	114.7	194.7	288.1	348.1	358.7	334.1	298.5	255.3
102.5°	41.7	52.3	70.9	107.4	176.5	268.4	351.1	394.3	399.5	382.5	359.0
105°	47.5	56.9	73.3	104.7	162.2	244.6	331.9	395.5	426.0	431.7	423.8
107.5°	53.9	62.7	77.3	104.1	151.8	223.6	304.6	377.3	425.1	448.8	457.0
110°	60.2	68.8	82.5	105.6	146.3	206.3	279.0	348.7	404.7	443.0	464.3



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	66.9	75.2	87.6	108.6	143.3	194.7	256.8	320.4	377.9	422.0	450.9
115°	73.6	81.8	93.4	112.0	143.0	187.1	239.8	296.0	349.0	393.7	426.9
117.5°	80.3	87.9	99.5	116.2	143.3	181.9	228.5	277.2	324.0	365.1	399.5
120°	86.7	94.3	105.3	121.1	144.5	178.6	220.0	262.9	304.0	340.5	371.2
122.5°	92.5	100.7	111.4	125.7	146.7	176.5	213.0	251.6	287.8	321.0	349.0
125°	98.3	106.5	117.1	130.5	148.8	174.6	207.2	241.9	275.1	304.3	328.6
127.5°	103.8	112.0	122.3	134.5	151.2	173.7	201.7	233.1	263.2	290.0	312.5
130°	108.6	116.8	126.9	138.4	153.7	172.8	197.5	224.8	252.2	276.9	297.6
132.5°	113.2	121.1	130.8	142.1	155.5	172.5	193.5	217.2	241.9	264.4	283.9
135°	117.1	125.4	134.8	145.1	157.3	172.2	190.2	210.5	232.2	251.9	269.3
137.5°	120.8	128.4	137.5	147.6	158.5	171.6	187.1	204.2	222.4	240.1	255.6
140°	123.8	131.4	140.3	149.4	159.7	171.3	184.4	198.7	214.2	228.8	241.9
142.5°	126.9	133.9	142.4	151.2	160.6	170.7	181.9	193.5	206.3	218.5	229.4
145°	129.3	136.3	144.2	152.4	161.0	170.1	179.8	189.6	199.6	209.3	218.2
147.5°	132.4	138.4	145.7	153.3	161.0	169.2	177.7	186.2	194.4	202.6	209.0
150°	134.8	140.3	147.3	153.7	161.0	168.0	175.6	182.6	189.6	195.9	201.7
152.5°	137.2	142.4	148.2	154.3	160.0	166.4	173.1	179.2	185.0	190.5	195.0
155°	140.0	144.2	149.4	154.3	159.4	164.6	170.7	175.9	180.7	185.3	188.9
157.5°	142.4	145.7	150.0	154.6	158.5	163.1	168.0	172.2	176.5	180.1	183.2
160°	144.2	147.3	150.9	154.6	157.9	161.3	165.2	169.2	172.5	175.6	177.7
162.5°	145.7	148.2	151.2	154.3	156.7	159.4	162.5	165.5	168.3	171.0	172.8
165°	147.0	149.1	151.5	153.7	155.5	157.6	160.0	162.5	164.3	166.4	168.0
167.5°	148.2	149.7	151.5	153.3	154.3	155.8	157.6	159.7	161.3	162.5	163.7
170°	149.1	149.7	151.2	152.4	153.0	154.0	155.5	157.0	157.9	159.1	159.7
172.5°	149.7	150.0	151.2	152.1	152.1	152.4	153.3	154.6	155.2	156.1	156.4
175°	150.0	150.3	150.9	151.5	151.2	151.2	151.8	152.4	152.7	153.3	153.3
177.5°	150.3	150.3	150.6	151.2	150.6	150.3	150.6	150.9	151.2	151.5	151.5
180°	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3	150.3



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	1899.7	1899.7	1899.7	1899.7
2.5°	1688.5	1685.5	1673.1	1660.8
5°	1431.6	1421.0	1417.5	1414.0
7.5°	1250.9	1250.0	1231.5	1213.0
10°	1091.8	1093.1	1076.3	1059.6
12.5°	978.0	967.0	965.7	964.4
15°	892.5	882.4	880.6	878.9
17.5°	832.2	826.0	824.2	822.5
20°	786.3	782.8	779.7	776.6
22.5°	746.6	742.2	739.6	736.9
25°	708.3	704.3	703.4	702.6
27.5°	673.9	669.1	669.1	669.1
30°	641.3	638.2	636.9	635.6
32.5°	610.9	608.2	608.2	608.2
35°	582.2	580.9	579.2	577.4
37.5°	556.2	556.2	555.4	554.5
40°	531.1	532.4	532.4	532.4
42.5°	508.2	509.5	509.5	509.5
45°	484.4	486.6	487.5	488.4
47.5°	461.0	464.6	465.4	466.3
50°	438.1	440.8	441.2	441.6
52.5°	414.8	417.8	420.0	422.2
55°	390.1	393.2	394.5	395.8
57.5°	363.6	366.7	367.2	367.6
60°	334.5	337.6	338.5	339.4
62.5°	306.8	308.5	309.4	310.3
65°	275.0	277.7	279.4	281.2
67.5°	244.6	246.8	246.8	246.8
70°	210.7	211.6	212.9	214.2
72.5°	179.4	179.8	179.8	179.8
75°	146.3	147.2	147.7	148.1
77.5°	115.0	115.5	115.5	115.5
80°	84.2	83.7	83.7	83.7
82.5°	57.7	56.4	56.4	56.4
85°	33.1	32.6	33.1	33.5
87.5°	15.0	15.0	15.0	15.0
90°	8.5	8.8	9.1	8.8
92.5°	17.6	16.4	16.7	16.1
95°	41.4	38.6	36.5	35.3
97.5°	94.6	83.1	75.8	72.4
100°	224.5	202.3	190.5	190.8
102.5°	336.8	320.4	311.0	302.1
105°	409.8	398.3	388.5	387.0
107.5°	455.2	449.7	445.7	442.4
110°	472.8	475.3	474.6	474.0



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	468.3	477.1	480.1	480.4
115°	449.7	463.1	469.2	470.7
117.5°	423.2	438.1	447.3	449.4
120°	395.2	412.3	419.6	421.4
122.5°	369.7	384.6	392.8	395.2
125°	348.1	361.5	369.1	371.2
127.5°	330.1	341.7	348.7	350.5
130°	313.7	324.6	331.0	333.5
132.5°	298.8	309.7	315.2	316.7
135°	284.2	293.3	298.8	300.9
137.5°	268.4	277.8	282.4	284.2
140°	253.4	262.0	266.8	266.5
142.5°	238.8	246.1	250.4	250.1
145°	225.8	232.2	234.6	235.2
147.5°	215.1	219.7	222.1	222.4
150°	206.3	209.6	211.5	211.5
152.5°	198.4	201.4	202.3	202.3
155°	191.7	194.1	194.7	195.0
157.5°	185.6	187.4	188.0	188.0
160°	179.8	181.6	181.6	181.3
162.5°	174.0	175.6	175.6	175.3
165°	169.2	170.4	170.1	170.1
167.5°	164.3	165.2	164.9	164.9
170°	160.0	160.6	160.3	160.3
172.5°	156.4	157.0	156.4	156.1
175°	153.3	153.7	153.3	153.0
177.5°	151.2	151.5	150.9	150.9
180°	150.3	150.3	150.3	150.3



TEST NUMBER: P831659

CATALOG NUMBER: S123DIP-S775D365U935-4F0-1E-UDD-G4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	15.98	17.03	16.72	17.79	18.69	18.22	19.27	18.96	20.02	20.93
	3H	17.64	18.59	18.39	19.35	20.28	19.65	20.60	20.41	21.36	22.30
	4H	18.23	19.12	19.00	19.89	20.84	20.11	21.00	20.88	21.78	22.72
	6H	18.61	19.43	19.39	20.21	21.17	20.40	21.22	21.18	22.00	22.96
	8H	18.71	19.49	19.50	20.29	21.25	20.47	21.25	21.26	22.05	23.01
	12H	18.76	19.50	19.56	20.30	21.29	20.49	21.24	21.29	22.03	23.02
4H	2H	16.58	17.47	17.35	18.24	19.19	18.40	19.29	19.18	20.07	21.01
	3H	18.42	19.16	19.21	19.97	20.93	20.04	20.78	20.82	21.59	22.55
	4H	19.13	19.80	19.93	20.61	21.60	20.63	21.30	21.43	22.11	23.10
	6H	19.61	20.19	20.43	21.03	22.03	21.04	21.62	21.86	22.46	23.46
	8H	19.75	20.30	20.58	21.12	22.13	21.16	21.70	21.98	22.53	23.54
	12H	19.83	20.32	20.67	21.17	22.18	21.21	21.70	22.05	22.55	23.56
8H	4H	19.41	19.95	20.23	20.78	21.79	20.75	21.29	21.57	22.12	23.13
	6H	20.00	20.45	20.85	21.32	22.33	21.26	21.70	22.11	22.58	23.59
	8H	20.21	20.61	21.07	21.48	22.50	21.44	21.83	22.30	22.70	23.73
	12H	20.34	20.69	21.21	21.55	22.63	21.55	21.90	22.41	22.76	23.84
12H	4H	19.42	19.90	20.26	20.75	21.77	20.73	21.22	21.57	22.07	23.08
	6H	20.05	20.45	20.92	21.32	22.35	21.27	21.67	22.13	22.54	23.56
	8H	20.30	20.65	21.16	21.51	22.59	21.48	21.83	22.34	22.69	23.77