

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332347-935

Luminaire Tested: **S123RDIP-S1000D805U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332347-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D805U935-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5768.6 lumens
Efficiency: N/A
Efficacy: 106.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332347-935
CATALOG NUMBER: S123RDIP-S1000D805U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

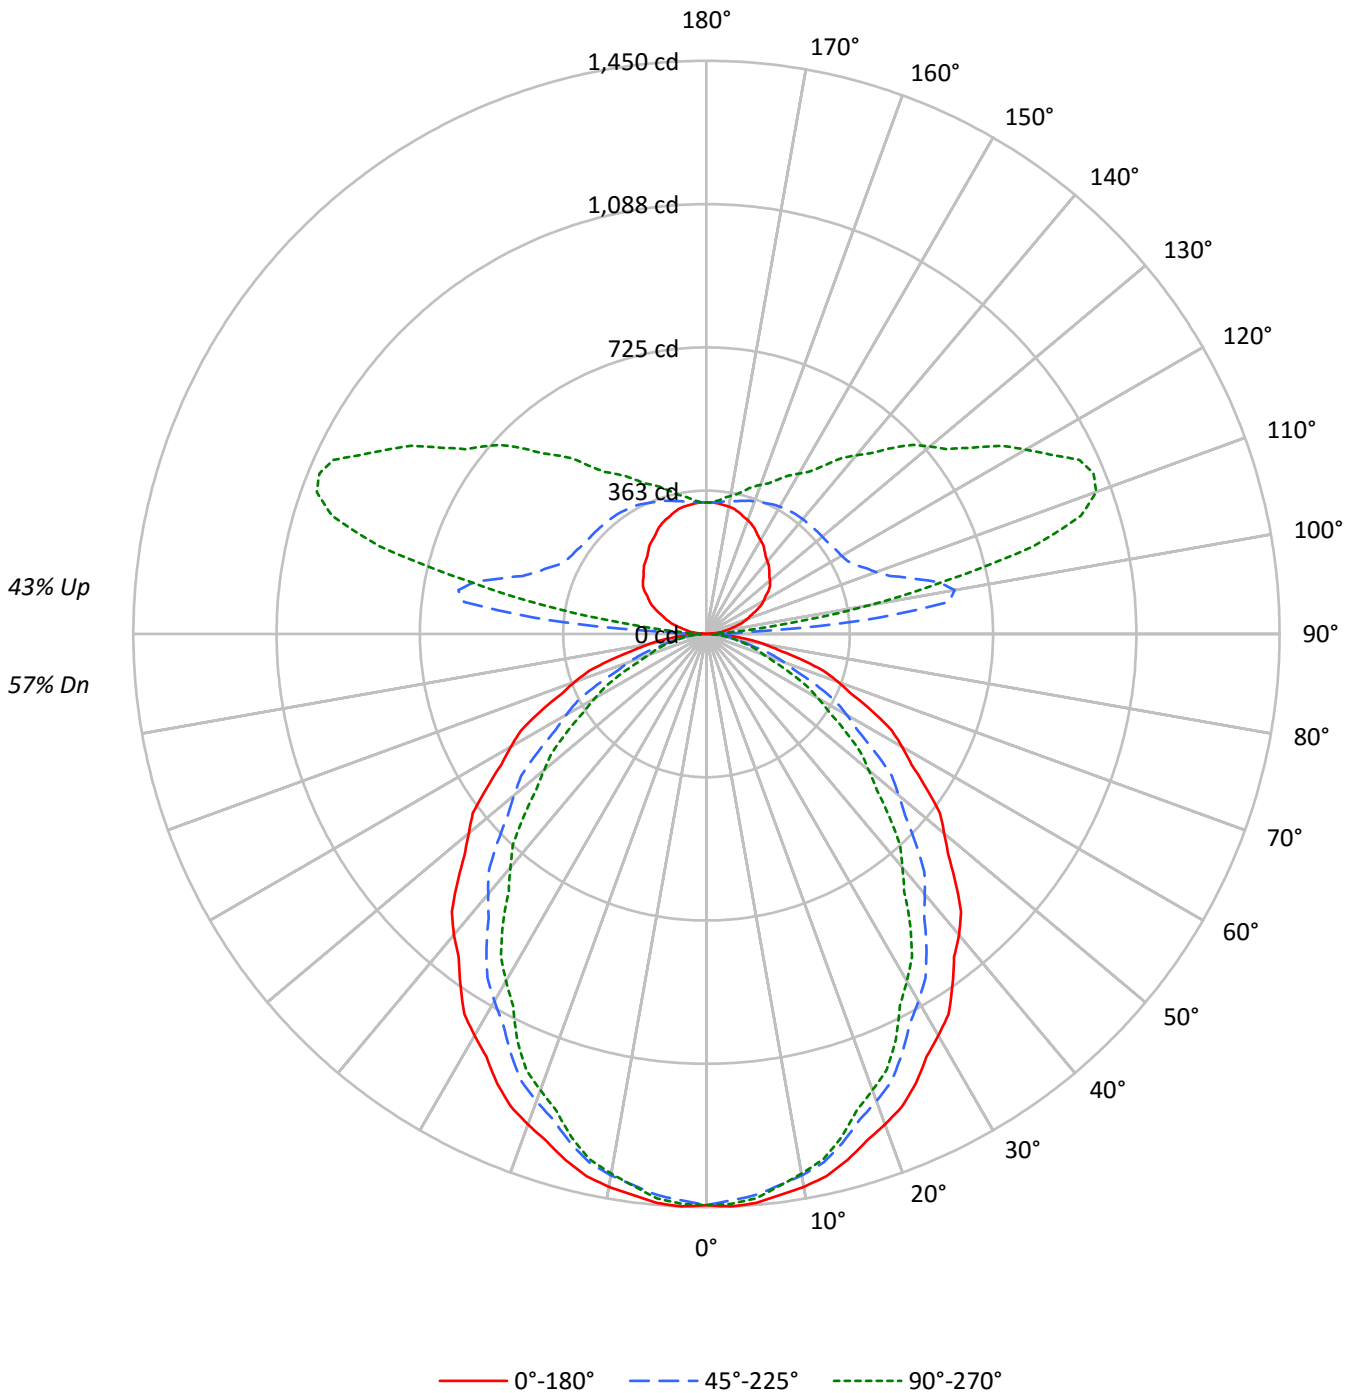



TEST NUMBER: P332347-935

CATALOG NUMBER: S123RDIP-S1000D805U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	109	109	109	109	101	101	101	101	87	87	87		74	74	74		62	62	62	57
1	100	95	92	88	93	89	86	83	77	74	72		66	64	62		56	54	53	48
2	91	84	78	73	84	78	73	68	68	64	60		58	55	53		49	47	45	41
3	83	74	67	61	77	69	63	58	60	55	51		52	48	45		44	41	39	35
4	76	66	58	52	71	62	55	49	54	48	44		46	42	39		40	36	34	31
5	70	59	51	45	65	55	48	43	48	43	38		42	37	34		36	32	30	27
6	65	53	45	39	60	50	42	37	44	38	33		38	33	30		33	29	26	24
7	60	48	40	34	56	45	38	33	40	34	30		35	30	27		30	26	24	21
8	56	44	36	31	52	41	34	29	36	31	26		32	27	24		27	24	21	19
9	52	40	32	27	48	38	31	26	33	28	24		29	25	22		25	22	19	17
10	49	37	29	25	45	35	28	24	31	25	22		27	23	20		24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15553	15553	15553
5°	15612	15397	15486
10°	15524	15204	15152
15°	15357	14848	14692
20°	15128	14403	14068
25°	14892	13904	13459
30°	14579	13328	12599
35°	14259	12750	11811
40°	13964	12069	10835
45°	13575	11399	9954
50°	13147	10637	8967
55°	12710	9764	8049
60°	12312	8831	7037
65°	11790	7819	6029
70°	11138	6565	4869
75°	10189	5165	4579
80°	9081	4575	4209
85°	7669	4051	3767



TEST NUMBER: P332347-935

CATALOG NUMBER: S123RDIP-S1000D805U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	135.7	2.4
10°-20°	377.5	6.5
20°-30°	543.6	9.4
30°-40°	612.3	10.6
40°-50°	585.8	10.2
50°-60°	479.7	8.3
60°-70°	323.7	5.6
70°-80°	162.8	2.8
80°-90°	45.7	0.8
90°-100°	185.1	3.2
100°-110°	524.0	9.1
110°-120°	515.5	8.9
120°-130°	411.2	7.1
130°-140°	324.2	5.6
140°-150°	242.0	4.2
150°-160°	168.6	2.9
160°-170°	99.1	1.7
170°-180°	32.2	0.6
0°-30°	1056.8	18.3
0°-40°	1669.1	28.9
0°-60°	2734.6	47.4
0°-90°	3266.7	56.6
90°-120°	1224.6	21.2
90°-150°	2201.9	38.2
90°-180°	2502.0	43.4
0°-180°	5768.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1445	1445	1445	1445	1445	
5°	1445	1439	1425	1435	1433	137
15°	1378	1364	1332	1326	1318	388
25°	1254	1223	1171	1147	1133	576
35°	1085	1041	970	922	899	679
45°	892	837	749	684	654	688
55°	677	618	520	455	429	607
65°	463	397	307	252	237	458
75°	245	188	124	113	110	261
85°	62	38	33	31	30	70
90°	1	8	17	19	20	5
95°	23	74	399	116	78	25
105°	78	115	541	946	856	83
115°	138	172	414	908	1041	137
125°	192	226	386	700	821	170
135°	225	268	381	576	666	174
145°	256	294	376	473	520	161
155°	291	314	364	414	431	134
165°	318	327	349	370	376	90
175°	332	332	335	339	339	32
180°	332	332	332	332	332	



TEST NUMBER: P332347-935

CATALOG NUMBER: S123RDIP-S1000D805U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9
2.5°	1449.6	1448.7	1447.9	1447.1	1446.2	1444.6	1442.1	1439.6	1437.1	1434.6	1436.8
5°	1444.9	1443.6	1442.3	1441.0	1439.7	1437.4	1434.3	1431.2	1428.1	1425.0	1427.3
7.5°	1431.5	1430.1	1428.7	1427.3	1425.9	1423.1	1419.1	1415.1	1411.0	1407.0	1408.3
10°	1420.3	1418.5	1416.6	1414.8	1413.0	1409.7	1405.1	1400.3	1395.7	1391.0	1391.3
12.5°	1404.4	1402.3	1400.3	1398.3	1396.2	1392.3	1386.6	1380.9	1375.2	1369.4	1369.2
15°	1378.1	1375.3	1372.3	1369.5	1366.7	1361.6	1354.3	1346.9	1339.7	1332.4	1331.1
17.5°	1345.1	1341.7	1338.4	1335.1	1331.7	1325.4	1316.1	1306.9	1297.6	1288.3	1285.6
20°	1320.7	1316.6	1312.3	1308.2	1304.0	1297.0	1287.1	1277.2	1267.3	1257.4	1254.0
22.5°	1293.5	1288.7	1283.9	1279.1	1274.4	1266.7	1256.1	1245.6	1235.1	1224.6	1220.4
25°	1253.9	1247.4	1240.9	1234.3	1227.9	1218.6	1206.6	1194.6	1182.7	1170.7	1165.2
27.5°	1205.8	1198.7	1191.5	1184.3	1177.1	1166.8	1153.5	1140.1	1126.8	1113.5	1105.9
30°	1173.0	1165.2	1157.4	1149.6	1141.8	1130.6	1116.0	1101.4	1086.8	1072.3	1063.4
32.5°	1140.2	1131.4	1122.5	1113.6	1104.8	1092.7	1077.3	1061.9	1046.4	1031.0	1021.3
35°	1085.1	1075.7	1066.3	1057.0	1047.7	1034.8	1018.7	1002.5	986.4	970.3	959.1
37.5°	1029.3	1018.9	1008.5	998.1	987.7	973.9	956.7	939.4	922.1	904.9	892.2
40°	993.8	982.3	970.8	959.3	947.9	932.9	914.5	896.0	877.4	858.9	845.4
42.5°	953.4	941.9	930.5	919.0	907.6	892.3	873.2	854.1	835.0	815.9	801.1
45°	891.8	880.0	868.3	856.6	844.9	829.1	809.0	788.9	768.9	748.8	734.0
47.5°	830.2	817.3	804.4	791.5	778.7	762.2	742.2	722.1	702.1	682.0	665.9
50°	785.1	772.9	760.7	748.5	736.2	719.5	698.4	677.3	656.3	635.2	619.0
52.5°	744.9	731.6	718.2	705.0	691.7	674.6	653.8	632.8	612.0	591.1	574.3
55°	677.3	664.6	651.8	639.0	626.3	608.8	586.7	564.6	542.4	520.3	505.2
57.5°	615.0	601.1	587.2	573.3	559.4	541.3	519.0	496.8	474.6	452.4	438.1
60°	571.9	557.6	543.2	528.9	514.5	496.6	475.0	453.4	431.8	410.2	396.1
62.5°	528.7	514.4	500.1	485.8	471.5	453.5	431.9	410.3	388.7	367.0	353.8
65°	462.9	448.6	434.2	419.9	405.6	388.3	368.0	347.7	327.4	307.0	294.3
67.5°	397.0	382.5	368.1	353.6	339.1	322.1	302.6	283.2	263.7	244.2	234.7
70°	353.9	339.8	325.8	311.7	297.6	281.5	263.3	245.0	226.8	208.6	199.5
72.5°	310.7	297.0	283.1	269.2	255.4	240.1	223.6	207.1	190.5	173.9	166.4
75°	245.0	232.4	219.9	207.4	194.9	181.5	167.2	152.8	138.5	124.2	121.6
77.5°	184.9	173.6	162.3	151.0	139.7	129.4	120.2	111.0	101.8	92.6	91.2
80°	146.5	135.8	125.1	114.4	103.8	95.7	90.2	84.7	79.3	73.8	73.0
82.5°	109.9	100.7	91.5	82.2	73.0	67.2	64.6	62.1	59.5	56.9	56.1
85°	62.1	56.4	50.6	44.9	39.2	35.9	35.1	34.4	33.6	32.8	32.3
87.5°	22.7	20.8	18.7	16.9	14.8	13.9	14.4	14.7	15.2	15.6	15.2
90°	1.4	2.7	4.0	6.0	7.4	8.8	10.8	12.8	14.8	16.8	16.2
92.5°	8.4	12.4	18.1	23.3	28.9	38.9	56.6	85.5	113.9	103.5	78.1
95°	22.9	24.9	32.3	43.7	61.2	87.5	144.7	245.0	355.4	399.2	323.8
97.5°	39.0	39.7	45.5	55.4	72.7	101.1	155.8	268.9	452.9	618.6	661.9
100°	49.9	50.5	55.2	64.7	80.8	107.0	154.1	253.7	430.8	637.5	770.1
102.5°	61.1	62.3	66.5	75.4	90.0	114.0	156.3	240.8	398.5	602.4	775.5
105°	78.1	80.1	84.1	92.2	105.0	125.9	162.2	231.5	358.8	541.2	734.4
107.5°	96.1	98.2	102.0	109.9	122.0	141.4	173.2	230.9	333.5	487.1	662.5
110°	109.1	111.1	114.4	121.8	133.3	152.1	182.4	233.6	323.8	456.4	617.3



TEST NUMBER: P332347-935

CATALOG NUMBER: S123RDIP-S1000D805U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	120.9	123.0	126.3	133.7	145.2	163.4	191.6	238.9	318.4	435.9	578.0
115°	138.0	140.7	144.7	151.4	162.9	181.1	206.6	247.7	316.4	414.0	530.5
117.5°	155.1	158.2	161.5	167.7	180.6	197.3	222.7	259.3	317.6	401.1	501.8
120°	166.9	168.9	172.3	179.1	191.8	208.7	232.9	267.9	319.8	395.1	486.7
122.5°	177.2	179.2	182.5	189.9	202.1	220.0	243.7	276.0	323.5	391.4	474.3
125°	191.8	193.2	197.3	204.7	217.4	235.6	259.2	288.8	329.2	386.4	458.4
127.5°	203.0	205.0	210.0	217.6	231.7	249.9	272.6	299.3	335.6	384.0	444.4
130°	210.0	212.1	218.1	226.2	240.3	258.5	280.7	306.3	339.9	382.4	436.9
132.5°	215.4	218.0	224.5	234.3	248.4	266.0	287.7	312.7	343.2	381.8	429.9
135°	224.8	227.6	235.0	245.0	259.2	277.3	298.2	321.1	348.0	381.0	420.7
137.5°	233.7	236.5	243.8	254.6	268.5	285.4	305.5	327.3	351.3	379.5	412.8
140°	239.6	243.0	249.8	260.5	274.0	290.8	310.3	330.5	353.4	379.0	407.9
142.5°	246.1	248.9	256.2	265.9	279.4	295.1	314.1	333.7	355.0	377.9	403.6
145°	256.5	258.5	264.6	274.7	286.1	301.6	319.1	337.3	356.1	376.3	397.9
147.5°	267.0	268.2	274.1	282.8	293.9	307.1	323.1	339.4	356.1	373.8	392.2
150°	274.0	274.7	280.0	288.8	298.2	310.3	325.8	339.9	356.1	371.6	388.4
152.5°	280.9	281.1	286.5	294.2	302.5	314.1	327.4	341.0	354.5	368.9	384.1
155°	291.4	291.4	295.5	302.2	309.6	319.1	330.5	341.3	352.8	364.2	377.6
157.5°	299.8	300.3	303.6	309.5	315.8	323.1	332.3	342.0	350.4	360.0	370.4
160°	306.3	306.3	309.0	314.4	319.1	325.8	333.9	342.0	349.4	356.8	365.5
162.5°	311.2	311.2	313.3	317.6	321.8	327.4	334.4	341.4	347.2	353.5	360.7
165°	318.4	317.7	319.1	322.4	325.1	329.8	335.2	339.9	344.0	348.7	354.0
167.5°	323.9	323.1	323.8	326.3	328.2	331.2	335.1	338.9	340.8	343.9	347.8
170°	327.2	325.8	326.5	328.5	329.8	331.2	334.6	337.3	338.6	340.6	344.0
172.5°	329.3	328.5	328.6	330.1	330.9	331.7	334.6	336.7	337.0	337.9	340.2
175°	331.8	331.2	330.5	331.8	331.8	332.5	333.9	335.2	334.6	334.6	335.9
177.5°	333.0	332.5	332.0	332.5	332.5	332.5	333.0	334.2	333.0	332.5	333.0
180°	332.5	332.5	332.5	332.5	332.5	332.5	332.5	332.5	332.5	332.5	332.5



TEST NUMBER: P332347-935

CATALOG NUMBER: S123RDIP-S1000D805U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9	1444.9
2.5°	1439.2	1441.5	1443.7	1444.7	1444.2	1443.9	1443.5	1443.0
5°	1429.7	1432.0	1434.3	1435.3	1434.8	1434.3	1433.7	1433.2
7.5°	1409.5	1410.8	1412.1	1412.4	1411.4	1410.6	1409.7	1408.8
10°	1391.5	1391.8	1392.1	1391.5	1390.2	1388.9	1387.6	1386.3
12.5°	1369.1	1369.0	1368.8	1368.0	1366.5	1364.9	1363.5	1361.9
15°	1329.8	1328.5	1327.2	1325.6	1323.8	1322.0	1320.2	1318.4
17.5°	1282.8	1280.0	1277.3	1274.5	1271.9	1269.1	1266.4	1263.7
20°	1250.6	1247.2	1243.9	1240.6	1237.5	1234.3	1231.2	1228.1
22.5°	1216.2	1211.9	1207.7	1204.1	1201.3	1198.3	1195.4	1192.5
25°	1159.8	1154.3	1148.8	1144.6	1141.8	1138.9	1136.1	1133.2
27.5°	1098.3	1090.7	1083.1	1077.1	1072.7	1068.3	1063.9	1059.6
30°	1054.6	1045.7	1036.8	1030.4	1026.1	1022.0	1017.8	1013.7
32.5°	1011.6	1001.9	992.2	985.2	980.9	976.5	972.1	967.7
35°	947.9	936.7	925.5	917.6	912.9	908.2	903.5	898.8
37.5°	879.5	866.8	854.1	844.8	839.0	833.3	827.5	821.7
40°	831.9	818.4	804.8	795.0	789.0	783.1	777.1	771.1
42.5°	786.3	771.5	756.6	746.6	741.2	735.9	730.5	725.1
45°	719.1	704.3	689.4	678.9	672.6	666.4	660.1	653.9
47.5°	649.7	633.6	617.4	606.6	601.0	595.5	589.9	584.3
50°	602.9	586.7	570.6	559.5	553.5	547.5	541.6	535.5
52.5°	557.6	540.8	524.0	512.9	507.6	502.2	496.9	491.5
55°	490.1	475.0	459.9	449.7	444.5	439.3	434.1	428.9
57.5°	423.8	409.5	395.3	385.9	381.5	377.0	372.6	368.2
60°	382.0	368.0	353.9	344.7	340.3	335.8	331.4	326.9
62.5°	340.5	327.4	314.1	305.1	300.6	295.9	291.3	286.6
65°	281.5	268.7	256.0	248.1	245.3	242.5	239.6	236.7
67.5°	225.2	215.6	206.1	199.8	196.7	193.6	190.5	187.5
70°	190.4	181.2	172.1	166.2	163.2	160.4	157.6	154.7
72.5°	159.0	151.5	144.1	139.8	138.6	137.4	136.2	135.0
75°	119.0	116.4	113.8	112.3	111.8	111.2	110.6	110.1
77.5°	89.8	88.3	87.0	86.0	85.5	85.0	84.5	83.9
80°	72.2	71.5	70.7	70.1	69.6	69.1	68.4	67.9
82.5°	55.4	54.6	53.8	53.4	53.3	53.2	53.0	53.0
85°	31.8	31.3	30.7	30.5	30.5	30.5	30.5	30.5
87.5°	15.2	15.1	15.0	15.1	14.7	14.6	14.6	14.2
90°	16.8	17.5	18.2	19.5	18.9	19.5	20.2	19.5
92.5°	56.7	44.9	39.7	36.2	35.0	33.0	33.7	32.5
95°	242.4	164.3	128.5	104.4	91.5	85.5	80.8	78.1
97.5°	604.1	483.9	397.0	316.5	266.8	236.5	218.3	212.6
100°	793.7	739.1	660.4	564.7	496.8	447.6	421.4	422.1
102.5°	856.6	854.9	809.0	748.4	695.5	656.6	634.6	619.1
105°	875.1	942.4	955.2	937.7	906.7	881.1	859.6	856.3
107.5°	822.1	931.3	990.3	1014.3	1014.9	1006.3	998.9	992.7
110°	771.5	895.3	980.1	1027.3	1046.0	1051.5	1050.1	1048.8



TEST NUMBER: P332347-935

CATALOG NUMBER: S123RDIP-S1000D805U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	721.3	847.9	943.0	1003.5	1038.0	1054.7	1059.8	1060.1
115°	655.0	772.1	871.1	944.4	994.9	1024.5	1038.0	1041.4
117.5°	606.9	708.0	796.9	871.3	923.9	957.9	977.2	981.9
120°	581.6	672.4	753.3	821.2	874.4	912.1	928.2	932.3
122.5°	561.7	643.9	718.8	782.0	829.1	863.1	880.9	886.0
125°	535.1	608.6	673.1	727.0	770.1	799.7	816.5	821.2
127.5°	512.0	577.4	635.8	684.8	723.1	748.4	763.6	767.9
130°	497.5	558.0	612.6	658.3	694.1	718.2	732.4	737.8
132.5°	484.0	539.8	590.5	634.1	667.6	691.9	704.4	708.2
135°	465.8	513.6	557.3	595.7	628.7	648.9	661.0	665.7
137.5°	449.3	488.4	526.2	559.4	587.1	607.6	617.9	621.0
140°	439.5	473.9	506.2	535.1	560.8	579.5	590.4	589.7
142.5°	430.4	459.9	487.9	513.1	534.9	551.6	561.3	560.6
145°	419.4	441.6	463.1	482.7	499.5	513.6	519.0	520.3
147.5°	410.4	428.0	445.4	459.3	472.0	481.6	486.7	487.2
150°	403.9	419.4	433.5	446.3	456.4	463.8	467.9	467.9
152.5°	398.0	411.3	423.8	434.5	442.4	449.3	451.7	451.7
155°	389.1	399.8	409.9	418.0	424.0	429.5	430.8	431.4
157.5°	379.6	388.7	396.5	402.8	408.0	412.1	413.2	413.0
160°	374.3	381.7	388.4	393.1	397.9	401.8	401.8	401.2
162.5°	367.8	374.1	380.3	384.5	387.6	391.1	391.1	390.5
165°	359.5	363.5	368.2	371.6	374.3	376.9	376.3	376.3
167.5°	352.1	355.2	358.0	360.4	361.6	363.5	362.8	362.8
170°	347.3	349.4	352.1	353.4	354.0	355.4	354.7	354.7
172.5°	343.0	344.5	346.6	347.5	347.6	349.0	347.8	347.2
175°	337.3	337.9	339.2	339.2	339.2	339.9	339.2	338.6
177.5°	333.6	334.2	334.7	334.7	334.2	334.7	333.6	333.6
180°	332.5	332.5	332.5	332.5	332.5	332.5	332.5	332.5

(END OF REPORT)