

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831945

Luminaire Tested: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

Issue Date: 05/03/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P831945  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S1165D1195U935-4F0-1E-UDD-G  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 1195 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8385.5 lumens  
Efficiency: N/A  
Efficacy: 114.6 lumens/watt  
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 73.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831945  
CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

### Luminous Intensity Polar Plot

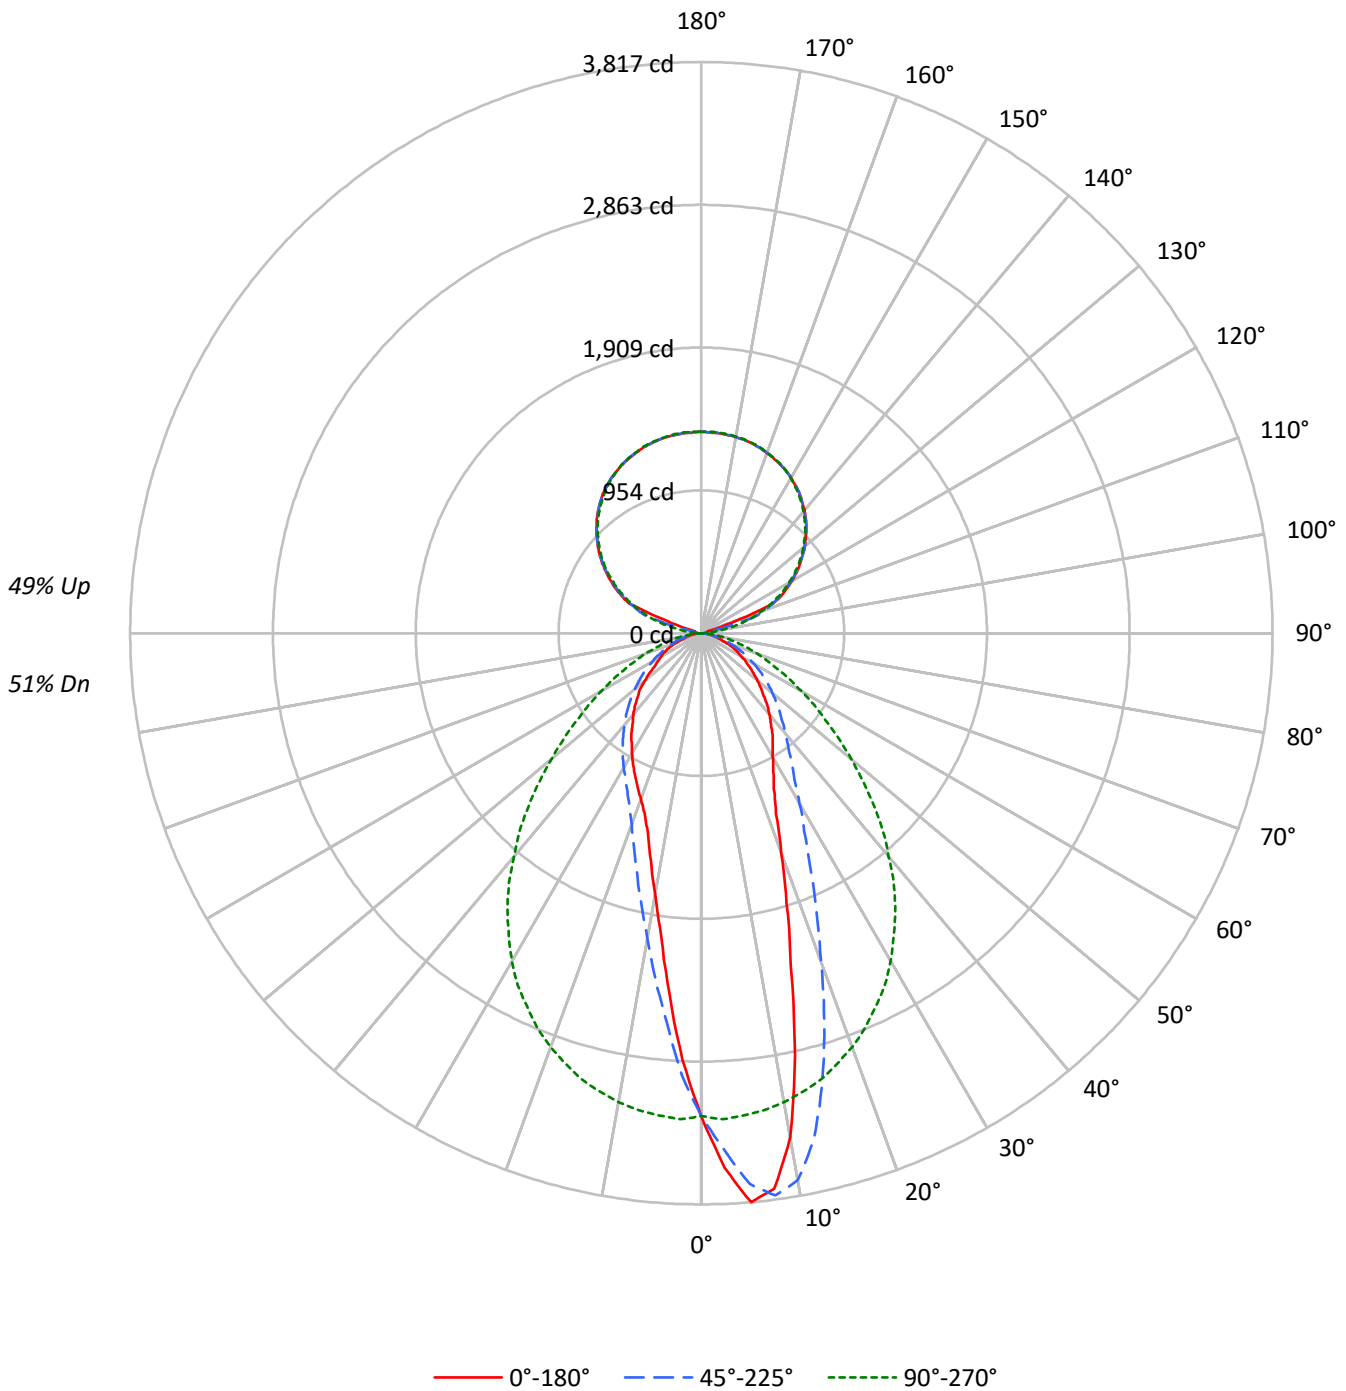



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51				51
1	99	95	91	88	91	88	85	82	75	73	71	63	61	60	52	51	50	45				45
2	91	84	78	73	84	78	73	69	67	63	60	56	54	51	47	45	43	39				39
3	83	74	68	62	77	69	63	59	60	55	51	50	47	45	42	40	38	34				34
4	77	67	59	53	71	62	56	51	54	49	45	46	42	39	38	36	34	30				30
5	71	60	52	47	65	56	49	44	48	43	39	42	38	35	35	32	30	27				27
6	66	54	47	41	61	51	44	39	44	39	35	38	34	31	32	29	27	24				24
7	61	49	42	37	57	46	40	35	40	35	31	35	31	28	30	27	24	22				22
8	57	45	38	33	53	42	36	31	37	32	28	32	28	25	28	25	22	20				20
9	53	42	34	30	49	39	33	28	34	29	26	30	26	23	26	23	21	18				18
10	50	38	31	27	46	36	30	26	32	27	23	28	24	21	24	21	19	17				17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	34733	34733	34733	34733	34733
5°	41242	39927	34952	28254	26231
10°	37366	40555	34777	22638	19420
15°	25727	34771	34410	18503	15363
20°	17898	26771	33719	15601	13503
25°	13639	20403	32714	13867	12444
30°	11872	16312	31457	12875	11527
35°	10900	13761	29676	12039	10692
40°	9946	12288	27347	11219	9927
45°	8983	11237	24832	10443	9164
50°	8153	10369	21867	9682	8219
55°	7373	9522	19018	8938	7051
60°	6607	8658	16518	8118	6665
65°	6100	7682	14220	7294	6301
70°	4954	6641	12409	6600	5120
75°	4346	5282	10509	5473	4512
80°	3936	4469	8610	4593	4265
85°	3594	3927	6533	4162	3927

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 26201 cd/sqm



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	294.1	3.5
10°-20°	680.6	8.1
20°-30°	780.9	9.3
30°-40°	769.7	9.2
40°-50°	678.8	8.1
50°-60°	522.2	6.2
60°-70°	343.3	4.1
70°-80°	166.7	2.0
80°-90°	44.7	0.5
90°-100°	47.5	0.6
100°-110°	229.5	2.7
110°-120°	562.5	6.7
120°-130°	714.1	8.5
130°-140°	762.9	9.1
140°-150°	713.4	8.5
150°-160°	575.4	6.9
160°-170°	371.3	4.4
170°-180°	128.0	1.5
0°-30°	1755.6	20.9
0°-40°	2525.3	30.1
0°-60°	3726.2	44.4
0°-90°	4281.0	51.1
90°-120°	839.4	10.0
90°-150°	3029.8	36.1
90°-180°	4105.0	49.0
0°-180°	8385.5	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	3227	3227	3227	3227	3227	
5°	3817	3695	3235	2615	2428	349
15°	2309	3120	3088	1660	1379	652
25°	1148	1718	2754	1168	1048	542
35°	830	1047	2258	916	814	517
45°	590	738	1631	686	602	458
55°	393	507	1013	476	376	352
65°	240	302	558	286	247	235
75°	104	127	253	132	108	112
85°	29	32	53	34	32	31
90°	30	24	1	24	30	15
95°	38	31	61	31	38	32
105°	44	219	298	219	44	92
115°	588	574	559	574	588	553
125°	804	800	788	800	804	719
135°	991	991	981	991	991	765
145°	1143	1141	1132	1141	1143	714
155°	1245	1246	1247	1246	1245	574
165°	1312	1311	1315	1311	1312	371
175°	1341	1342	1346	1342	1341	128
180°	1346	1346	1346	1346	1346	



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8
2.5°	3576.1	3564.9	3553.6	3550.3	3547.0	3536.4	3525.8	3502.0	3478.2	3453.7	3429.3
5°	3816.9	3818.2	3819.5	3816.2	3812.9	3799.0	3785.1	3756.0	3726.9	3695.2	3663.4
7.5°	3742.8	3764.0	3785.1	3789.1	3793.1	3803.7	3814.2	3807.6	3801.0	3789.1	3777.2
10°	3418.7	3417.3	3416.0	3439.8	3463.6	3534.4	3605.2	3641.6	3678.0	3710.4	3742.8
12.5°	2889.5	2891.4	2893.4	2971.5	3049.5	3116.4	3183.2	3275.8	3368.4	3468.3	3568.2
15°	2308.7	2341.1	2373.5	2442.9	2512.4	2613.0	2713.5	2837.9	2962.2	3120.3	3278.4
17.5°	1895.9	1909.8	1923.7	1990.5	2057.3	2152.5	2247.8	2388.7	2529.6	2733.3	2937.1
20°	1562.5	1575.0	1587.6	1635.9	1684.2	1775.5	1866.8	2001.1	2135.3	2337.1	2538.9
22.5°	1304.5	1329.0	1353.4	1385.9	1418.3	1484.4	1550.6	1687.5	1824.4	2008.3	2192.2
25°	1148.4	1159.6	1170.9	1198.6	1226.4	1289.9	1353.4	1444.1	1534.7	1717.9	1901.2
27.5°	1042.5	1045.8	1049.1	1069.7	1090.2	1131.2	1172.2	1256.2	1340.2	1491.0	1641.9
30°	955.2	961.2	967.1	983.0	998.9	1028.6	1058.4	1117.9	1177.5	1312.4	1447.4
32.5°	887.7	891.0	894.4	907.6	920.8	942.6	964.5	1011.4	1058.4	1161.6	1264.8
35°	829.5	830.2	830.9	840.8	850.7	871.9	893.0	932.1	971.1	1047.2	1123.2
37.5°	763.4	768.0	772.6	779.9	787.2	805.7	824.2	856.0	887.7	950.6	1013.4
40°	707.8	711.8	715.8	724.3	732.9	747.5	762.1	791.2	820.3	874.5	928.8
42.5°	652.2	654.9	657.5	666.1	674.7	692.6	710.5	733.6	756.8	801.7	846.7
45°	590.1	596.7	603.3	612.6	621.8	637.0	652.2	676.1	699.9	738.2	776.6
47.5°	538.5	541.8	545.1	553.0	561.0	579.5	598.0	619.2	640.3	676.1	711.8
50°	486.9	488.2	489.5	496.8	504.1	520.6	537.1	561.6	586.1	619.2	652.2
52.5°	437.9	441.2	444.5	451.8	459.1	470.3	481.6	506.7	531.9	564.3	596.7
55°	392.9	394.9	396.9	402.2	407.5	420.7	433.9	455.8	477.6	507.4	537.1
57.5°	350.6	353.2	355.9	359.9	363.8	375.7	387.6	406.8	426.0	455.8	485.5
60°	306.9	310.2	313.6	318.2	322.8	332.1	341.3	358.5	375.7	402.2	428.7
62.5°	275.2	275.8	276.5	280.5	284.4	291.1	297.7	311.6	325.5	351.9	378.4
65°	239.5	241.4	243.4	245.4	247.4	252.7	258.0	269.9	281.8	301.6	321.5
67.5°	202.4	204.4	206.4	209.7	213.0	217.6	222.3	230.2	238.1	256.7	275.2
70°	157.4	157.4	157.4	162.7	168.0	176.0	183.9	189.9	195.8	211.0	226.2
72.5°	128.3	129.0	129.7	130.3	131.0	135.6	140.2	150.2	160.1	169.3	178.6
75°	104.5	105.2	105.8	106.5	107.2	108.5	109.8	113.1	116.4	127.0	137.6
77.5°	83.3	84.0	84.7	85.3	86.0	87.3	88.6	90.0	91.3	95.3	99.2
80°	63.5	64.2	64.8	65.5	66.2	66.8	67.5	68.8	70.1	72.1	74.1
82.5°	46.3	46.3	46.3	46.3	46.3	47.6	49.0	49.0	49.0	50.3	51.6
85°	29.1	29.1	29.1	29.8	30.4	30.4	30.4	31.1	31.8	31.8	31.8
87.5°	13.2	12.6	11.9	12.6	13.2	13.2	13.2	13.9	14.6	14.6	14.6
90°	30.0	29.6	29.1	28.7	28.2	27.6	26.7	25.8	24.9	24.0	21.1
92.5°	34.0	33.8	33.6	33.3	33.1	32.2	30.7	29.1	27.6	26.0	24.0
95°	38.0	38.0	38.0	38.0	38.0	37.2	35.7	34.1	32.6	31.0	28.6
97.5°	41.0	40.8	40.6	40.3	40.1	39.1	37.3	35.6	33.8	32.0	43.3
100°	42.0	41.8	41.6	41.3	41.1	40.1	38.3	36.6	34.8	33.0	67.7
102.5°	43.0	42.6	42.1	41.7	41.2	44.7	52.0	59.4	66.7	74.0	112.7
105°	44.0	43.6	43.1	42.7	42.2	61.7	101.0	140.4	179.7	219.1	239.1
107.5°	104.0	133.2	162.3	191.4	220.5	252.2	286.4	320.7	354.9	389.1	385.8
110°	275.1	306.9	338.7	370.5	402.2	421.8	429.1	436.5	443.8	451.1	448.7



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	521.2	521.6	522.1	522.5	522.9	522.2	520.2	518.2	516.2	514.2	511.7
115°	588.2	587.3	586.4	585.5	584.6	583.1	580.9	578.6	576.4	574.2	572.2
117.5°	642.2	642.0	641.8	641.5	641.3	640.3	638.5	636.8	635.0	633.2	632.1
120°	698.2	698.2	698.2	698.2	698.2	697.3	695.6	693.8	692.0	690.2	689.6
122.5°	753.2	753.0	752.8	752.6	752.3	751.7	750.6	749.5	748.3	747.2	746.3
125°	804.3	803.8	803.4	802.9	802.5	802.0	801.6	801.1	800.7	800.3	799.4
127.5°	854.3	854.7	855.2	855.6	856.0	855.9	855.3	854.6	853.9	853.3	852.2
130°	902.3	902.7	903.2	903.6	904.1	903.8	903.0	902.1	901.2	900.3	899.4
132.5°	946.3	947.0	947.6	948.3	949.0	948.9	948.0	947.1	946.2	945.3	944.6
135°	991.3	992.0	992.6	993.3	994.0	994.0	993.3	992.6	992.0	991.3	990.4
137.5°	1034.3	1034.8	1035.2	1035.7	1036.1	1035.8	1034.7	1033.5	1032.4	1031.3	1030.9
140°	1072.3	1072.8	1073.2	1073.7	1074.1	1073.9	1073.0	1072.1	1071.2	1070.3	1069.7
142.5°	1107.3	1108.0	1108.7	1109.4	1110.0	1110.0	1109.4	1108.7	1108.0	1107.3	1106.7
145°	1143.4	1143.4	1143.4	1143.4	1143.4	1143.1	1142.7	1142.2	1141.8	1141.4	1140.9
147.5°	1169.4	1170.5	1171.6	1172.7	1173.8	1174.1	1173.7	1173.3	1172.8	1172.4	1171.9
150°	1199.4	1200.0	1200.7	1201.4	1202.0	1202.2	1201.7	1201.3	1200.8	1200.4	1199.9
152.5°	1223.4	1224.5	1225.6	1226.7	1227.8	1227.9	1227.1	1226.2	1225.3	1224.4	1224.2
155°	1245.4	1246.7	1248.1	1249.4	1250.7	1250.8	1249.7	1248.6	1247.5	1246.4	1246.2
157.5°	1264.4	1266.2	1268.0	1269.7	1271.5	1271.7	1270.4	1269.1	1267.7	1266.4	1266.6
160°	1282.4	1284.0	1285.5	1287.1	1288.6	1288.7	1287.4	1286.1	1284.7	1283.4	1283.6
162.5°	1299.4	1300.7	1302.1	1303.4	1304.7	1304.6	1303.1	1301.5	1300.0	1298.4	1298.6
165°	1312.4	1314.0	1315.5	1317.1	1318.6	1318.5	1316.7	1315.0	1313.2	1311.4	1311.6
167.5°	1322.4	1324.2	1326.0	1327.8	1329.5	1329.5	1327.8	1326.0	1324.2	1322.4	1322.4
170°	1331.4	1333.2	1335.0	1336.8	1338.5	1338.5	1336.8	1335.0	1333.2	1331.4	1331.4
172.5°	1336.4	1338.4	1340.4	1342.4	1344.4	1344.5	1342.8	1341.0	1339.2	1337.4	1337.2
175°	1341.4	1343.2	1345.0	1346.8	1348.5	1348.6	1347.1	1345.5	1344.0	1342.4	1342.2
177.5°	1342.4	1344.6	1346.9	1349.1	1351.3	1351.5	1349.8	1348.0	1346.2	1344.4	1344.2
180°	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8
2.5°	3425.9	3422.6	3390.9	3359.1	3328.0	3296.9	3273.8	3250.6	3211.6	3172.6	3148.1
5°	3638.3	3613.1	3562.9	3512.6	3437.2	3361.8	3298.3	3234.8	3154.1	3073.4	3005.9
7.5°	3756.7	3736.2	3675.3	3614.5	3514.6	3414.7	3315.5	3216.2	3097.2	2978.1	2876.2
10°	3760.0	3777.2	3726.9	3676.7	3564.2	3451.7	3316.8	3181.8	3021.8	2861.7	2730.0
12.5°	3642.3	3716.3	3705.8	3695.2	3580.7	3466.3	3302.2	3138.2	2941.7	2745.3	2580.5
15°	3422.0	3565.5	3607.9	3650.2	3555.6	3461.0	3274.5	3087.9	2857.0	2626.2	2437.0
17.5°	3138.2	3339.3	3451.1	3562.9	3494.1	3425.3	3220.9	3016.5	2756.5	2496.5	2290.8
20°	2802.1	3065.4	3240.7	3416.0	3390.9	3365.7	3154.7	2943.7	2663.2	2382.7	2159.8
22.5°	2470.1	2747.9	2990.0	3232.1	3257.9	3283.7	3070.7	2857.7	2550.8	2243.8	2016.9
25°	2183.6	2466.1	2754.5	3042.9	3101.1	3159.4	2956.9	2754.5	2436.3	2118.1	1892.6
27.5°	1910.4	2179.0	2496.5	2814.0	2919.9	3025.7	2840.5	2655.3	2323.9	1992.5	1767.5
30°	1687.5	1927.6	2251.8	2575.9	2723.4	2870.9	2700.9	2530.9	2202.2	1873.4	1653.1
32.5°	1479.8	1694.8	2020.2	2345.7	2517.0	2688.4	2541.5	2394.7	2078.5	1762.3	1544.6
35°	1315.7	1508.2	1811.9	2115.5	2307.3	2499.2	2378.8	2258.4	1949.5	1640.5	1434.8
37.5°	1174.8	1336.2	1621.4	1906.5	2110.2	2314.0	2213.4	2112.9	1822.5	1532.0	1337.6
40°	1058.4	1188.1	1453.3	1718.6	1918.4	2118.1	2032.1	1946.2	1686.2	1426.2	1244.3
42.5°	958.5	1070.3	1308.5	1546.6	1729.8	1913.1	1856.2	1799.3	1563.8	1328.3	1159.6
45°	870.5	964.5	1174.2	1383.9	1552.6	1721.2	1676.3	1631.3	1428.2	1225.1	1070.3
47.5°	792.5	873.2	1060.4	1247.6	1399.1	1550.6	1508.9	1467.2	1299.2	1131.2	990.3
50°	721.0	789.8	946.0	1102.1	1238.3	1374.6	1340.2	1305.8	1166.9	1028.0	906.3
52.5°	653.6	710.5	850.7	990.9	1100.7	1210.6	1184.1	1157.6	1050.5	943.3	832.8
55°	589.4	641.7	760.1	878.5	972.4	1066.3	1039.9	1013.4	930.1	846.7	749.5
57.5°	531.2	576.8	672.8	768.7	843.4	918.2	905.6	893.0	823.6	754.1	674.1
60°	469.7	510.7	593.4	676.1	736.3	796.5	781.9	767.3	717.7	668.1	599.3
62.5°	414.8	451.1	517.3	583.4	632.4	681.4	670.8	660.2	622.5	584.8	527.9
65°	357.2	392.9	446.5	500.1	538.5	576.8	567.6	558.3	529.9	501.4	455.8
67.5°	305.0	334.7	381.0	427.3	453.1	478.9	473.6	468.3	446.5	424.7	389.0
70°	252.0	277.8	316.2	354.6	372.4	390.3	392.3	394.3	374.4	354.6	328.1
72.5°	199.1	219.6	255.3	291.1	305.0	318.8	318.2	317.5	305.6	293.7	269.9
75°	152.8	168.0	195.8	223.6	235.5	247.4	250.0	252.7	241.4	230.2	217.0
77.5°	109.8	120.4	141.6	162.7	176.0	189.2	190.5	191.8	186.5	181.3	168.7
80°	77.4	80.7	93.9	107.2	121.1	134.9	136.9	138.9	133.6	128.3	120.4
82.5°	53.6	55.6	60.2	64.8	76.1	87.3	90.0	92.6	90.0	87.3	78.7
85°	32.4	33.1	35.1	37.0	42.3	47.6	50.3	52.9	51.6	50.3	45.6
87.5°	14.6	14.6	15.2	15.9	17.2	18.5	21.8	25.1	23.2	21.2	19.2
90°	18.2	15.3	12.4	9.9	7.7	5.4	3.2	1.0	3.2	5.4	7.7
92.5°	22.0	20.0	18.0	17.7	19.0	20.3	21.7	23.0	21.7	20.3	19.0
95°	26.1	23.7	21.2	24.6	33.7	42.8	51.9	61.0	51.9	42.8	33.7
97.5°	54.7	66.0	77.4	86.1	92.4	98.6	104.8	111.0	104.8	98.6	92.4
100°	102.4	137.0	171.7	186.8	182.4	177.9	173.5	169.1	173.5	177.9	182.4
102.5°	151.4	190.1	228.7	246.6	243.7	240.9	238.0	235.1	238.0	240.9	243.7
105°	259.1	279.1	299.1	307.9	305.4	303.0	300.5	298.1	300.5	303.0	305.4
107.5°	382.5	379.1	375.8	373.1	371.1	369.1	367.1	365.1	367.1	369.1	371.1
110°	446.3	443.8	441.4	439.2	437.5	435.7	433.9	432.1	433.9	435.7	437.5





TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	509.3	506.8	504.4	502.4	500.8	499.3	497.7	496.2	497.7	499.3	500.8
115°	570.2	568.2	566.2	564.5	563.2	561.8	560.5	559.2	560.5	561.8	563.2
117.5°	631.0	629.9	628.8	627.4	625.9	624.3	622.8	621.2	622.8	624.3	625.9
120°	688.9	688.2	687.6	686.2	684.2	682.2	680.2	678.2	680.2	682.2	684.2
122.5°	745.5	744.6	743.7	742.5	740.9	739.3	737.8	736.2	737.8	739.3	740.9
125°	798.5	797.6	796.7	795.4	793.6	791.8	790.0	788.2	790.0	791.8	793.6
127.5°	851.0	849.9	848.8	847.4	845.6	843.8	842.0	840.3	842.0	843.8	845.6
130°	898.5	897.6	896.7	895.4	893.6	891.8	890.1	888.3	890.1	891.8	893.6
132.5°	944.0	943.3	942.6	941.4	939.6	937.9	936.1	934.3	936.1	937.9	939.6
135°	989.5	988.6	987.8	986.6	985.3	984.0	982.6	981.3	982.6	984.0	985.3
137.5°	1030.4	1030.0	1029.5	1028.4	1026.7	1024.9	1023.1	1021.3	1023.1	1024.9	1026.7
140°	1069.0	1068.3	1067.7	1066.7	1065.3	1064.0	1062.7	1061.3	1062.7	1064.0	1065.3
142.5°	1106.0	1105.3	1104.7	1103.7	1102.3	1101.0	1099.7	1098.3	1099.7	1101.0	1102.3
145°	1140.5	1140.0	1139.6	1138.6	1137.0	1135.5	1133.9	1132.4	1133.9	1135.5	1137.0
147.5°	1171.5	1171.0	1170.6	1169.8	1168.7	1167.6	1166.5	1165.4	1166.5	1167.6	1168.7
150°	1199.5	1199.0	1198.6	1198.0	1197.4	1196.7	1196.0	1195.4	1196.0	1196.7	1197.4
152.5°	1223.9	1223.7	1223.5	1223.3	1223.1	1222.8	1222.6	1222.4	1222.6	1222.8	1223.1
155°	1245.9	1245.7	1245.5	1245.6	1246.1	1246.5	1246.9	1247.4	1246.9	1246.5	1246.1
157.5°	1266.8	1267.1	1267.3	1267.4	1267.4	1267.4	1267.4	1267.4	1267.4	1267.4	1267.4
160°	1283.8	1284.1	1284.3	1284.5	1284.7	1285.0	1285.2	1285.4	1285.2	1285.0	1284.7
162.5°	1298.9	1299.1	1299.3	1299.7	1300.4	1301.1	1301.7	1302.4	1301.7	1301.1	1300.4
165°	1311.9	1312.1	1312.3	1312.7	1313.4	1314.1	1314.7	1315.4	1314.7	1314.1	1313.4
167.5°	1322.4	1322.4	1322.4	1322.9	1323.8	1324.6	1325.5	1326.4	1325.5	1324.6	1323.8
170°	1331.4	1331.4	1331.4	1331.9	1332.8	1333.6	1334.5	1335.4	1334.5	1333.6	1332.8
172.5°	1337.0	1336.8	1336.5	1337.0	1338.1	1339.2	1340.3	1341.4	1340.3	1339.2	1338.1
175°	1342.0	1341.8	1341.5	1342.0	1343.1	1344.2	1345.3	1346.4	1345.3	1344.2	1343.1
177.5°	1344.0	1343.8	1343.5	1344.0	1345.1	1346.2	1347.3	1348.4	1347.3	1346.2	1345.1
180°	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8	3226.8
2.5°	3123.6	3085.9	3048.2	3021.1	2994.0	2960.2	2926.5	2925.2	2923.9	2898.7	2873.6
5°	2938.4	2872.9	2807.4	2743.3	2679.1	2614.9	2550.8	2536.2	2521.7	2499.8	2478.0
7.5°	2774.4	2669.8	2565.3	2483.3	2401.3	2337.1	2272.9	2229.3	2185.6	2151.9	2118.1
10°	2598.4	2468.7	2339.1	2239.9	2140.6	2071.2	2001.7	1951.4	1901.2	1877.4	1853.5
12.5°	2415.8	2274.9	2134.0	2036.8	1939.5	1856.2	1772.8	1727.2	1681.5	1648.5	1615.4
15°	2247.8	2096.3	1944.8	1841.6	1738.4	1660.4	1582.3	1536.7	1491.0	1458.0	1424.9
17.5°	2085.1	1932.3	1779.5	1674.9	1570.4	1499.6	1428.9	1384.5	1340.2	1319.7	1299.2
20°	1936.9	1782.8	1628.6	1530.1	1431.5	1362.0	1292.6	1268.8	1245.0	1225.8	1206.6
22.5°	1790.0	1641.9	1493.7	1399.1	1304.5	1254.2	1203.9	1184.8	1165.6	1151.0	1136.5
25°	1667.0	1519.5	1372.0	1289.3	1206.6	1167.6	1128.5	1116.0	1103.4	1088.8	1074.3
27.5°	1542.6	1402.4	1262.2	1196.0	1129.9	1098.1	1066.3	1050.5	1034.6	1022.7	1010.8
30°	1432.8	1303.2	1173.5	1118.6	1063.7	1035.9	1008.1	990.9	973.7	962.5	951.2
32.5°	1327.0	1211.9	1096.8	1049.8	1002.8	975.7	948.6	932.1	915.5	902.3	889.1
35°	1229.1	1129.2	1029.3	986.3	943.3	916.2	889.1	872.5	856.0	842.8	829.5
37.5°	1143.1	1052.5	961.8	921.5	881.1	857.3	833.5	816.3	799.1	785.2	771.3
40°	1062.4	982.3	902.3	863.3	824.2	798.4	772.6	757.4	742.2	729.6	717.1
42.5°	990.9	917.5	844.1	805.7	767.3	742.9	718.4	700.5	682.7	675.4	668.1
45°	915.5	850.7	785.9	748.8	711.8	686.0	660.2	645.0	629.8	623.1	616.5
47.5°	849.4	789.2	729.0	692.6	656.2	633.1	609.9	598.0	586.1	576.8	567.6
50°	784.5	726.3	668.1	633.1	598.0	578.2	558.3	543.8	529.2	522.6	516.0
52.5°	722.4	669.4	616.5	580.8	545.1	525.9	506.7	494.1	481.6	467.7	453.8
55°	652.2	605.9	559.6	527.9	496.1	476.3	456.4	441.9	427.3	412.8	398.2
57.5°	594.0	548.4	502.7	474.3	445.9	426.7	407.5	391.6	375.7	363.8	351.9
60°	530.5	490.8	451.1	423.4	395.6	377.1	358.5	343.3	328.1	322.2	316.2
62.5°	471.0	433.9	396.9	372.4	348.0	330.1	312.2	302.3	292.4	288.4	284.4
65°	410.1	378.4	346.6	324.1	301.6	286.4	271.2	266.6	262.0	258.6	255.3
67.5°	353.2	326.1	299.0	279.2	259.3	248.7	238.1	232.9	227.6	223.6	219.6
70°	301.6	277.8	254.0	236.8	219.6	209.7	199.8	195.1	190.5	183.2	176.0
72.5°	246.1	227.6	209.0	195.8	182.6	174.0	165.4	156.1	146.9	140.2	133.6
75°	203.7	185.2	166.7	154.1	141.6	131.6	121.7	118.4	115.1	113.1	111.1
77.5°	156.1	140.2	124.4	114.4	104.5	99.9	95.3	93.3	91.3	90.6	90.0
80°	112.5	99.2	86.0	80.7	75.4	74.1	72.8	71.4	70.1	69.5	68.8
82.5°	70.1	63.5	56.9	55.6	54.2	53.6	52.9	52.3	51.6	50.9	50.3
85°	41.0	38.4	35.7	35.1	34.4	33.7	33.1	33.1	33.1	33.1	33.1
87.5°	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	17.2	16.5	15.9
90°	9.9	12.4	15.3	18.2	21.1	24.0	24.9	25.8	26.7	27.6	28.2
92.5°	17.7	18.0	20.0	22.0	24.0	26.0	27.6	29.1	30.7	32.2	33.1
95°	24.6	21.2	23.7	26.1	28.6	31.0	32.6	34.1	35.7	37.2	38.0
97.5°	86.1	77.4	66.0	54.7	43.3	32.0	33.8	35.6	37.3	39.1	40.1
100°	186.8	171.7	137.0	102.4	67.7	33.0	34.8	36.6	38.3	40.1	41.1
102.5°	246.6	228.7	190.1	151.4	112.7	74.0	66.7	59.4	52.0	44.7	41.2
105°	307.9	299.1	279.1	259.1	239.1	219.1	179.7	140.4	101.0	61.7	42.2
107.5°	373.1	375.8	379.1	382.5	385.8	389.1	354.9	320.7	286.4	252.2	220.5
110°	439.2	441.4	443.8	446.3	448.7	451.1	443.8	436.5	429.1	421.8	402.2



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	502.4	504.4	506.8	509.3	511.7	514.2	516.2	518.2	520.2	522.2	522.9
115°	564.5	566.2	568.2	570.2	572.2	574.2	576.4	578.6	580.9	583.1	584.6
117.5°	627.4	628.8	629.9	631.0	632.1	633.2	635.0	636.8	638.5	640.3	641.3
120°	686.2	687.6	688.2	688.9	689.6	690.2	692.0	693.8	695.6	697.3	698.2
122.5°	742.5	743.7	744.6	745.5	746.3	747.2	748.3	749.5	750.6	751.7	752.3
125°	795.4	796.7	797.6	798.5	799.4	800.3	800.7	801.1	801.6	802.0	802.5
127.5°	847.4	848.8	849.9	851.0	852.2	853.3	853.9	854.6	855.3	855.9	856.0
130°	895.4	896.7	897.6	898.5	899.4	900.3	901.2	902.1	903.0	903.8	904.1
132.5°	941.4	942.6	943.3	944.0	944.6	945.3	946.2	947.1	948.0	948.9	949.0
135°	986.6	987.8	988.6	989.5	990.4	991.3	992.0	992.6	993.3	994.0	994.0
137.5°	1028.4	1029.5	1030.0	1030.4	1030.9	1031.3	1032.4	1033.5	1034.7	1035.8	1036.1
140°	1066.7	1067.7	1068.3	1069.0	1069.7	1070.3	1071.2	1072.1	1073.0	1073.9	1074.1
142.5°	1103.7	1104.7	1105.3	1106.0	1106.7	1107.3	1108.0	1108.7	1109.4	1110.0	1110.0
145°	1138.6	1139.6	1140.0	1140.5	1140.9	1141.4	1141.8	1142.2	1142.7	1143.1	1143.4
147.5°	1169.8	1170.6	1171.0	1171.5	1171.9	1172.4	1172.8	1173.3	1173.7	1174.1	1173.8
150°	1198.0	1198.6	1199.0	1199.5	1199.9	1200.4	1200.8	1201.3	1201.7	1202.2	1202.0
152.5°	1223.3	1223.5	1223.7	1223.9	1224.2	1224.4	1225.3	1226.2	1227.1	1227.9	1227.8
155°	1245.6	1245.5	1245.7	1245.9	1246.2	1246.4	1247.5	1248.6	1249.7	1250.8	1250.7
157.5°	1267.4	1267.3	1267.1	1266.8	1266.6	1266.4	1267.7	1269.1	1270.4	1271.7	1271.5
160°	1284.5	1284.3	1284.1	1283.8	1283.6	1283.4	1284.7	1286.1	1287.4	1288.7	1288.6
162.5°	1299.7	1299.3	1299.1	1298.9	1298.6	1298.4	1300.0	1301.5	1303.1	1304.6	1304.7
165°	1312.7	1312.3	1312.1	1311.9	1311.6	1311.4	1313.2	1315.0	1316.7	1318.5	1318.6
167.5°	1322.9	1322.4	1322.4	1322.4	1322.4	1322.4	1324.2	1326.0	1327.8	1329.5	1329.5
170°	1331.9	1331.4	1331.4	1331.4	1331.4	1331.4	1333.2	1335.0	1336.8	1338.5	1338.5
172.5°	1337.0	1336.5	1336.8	1337.0	1337.2	1337.4	1339.2	1341.0	1342.8	1344.5	1344.4
175°	1342.0	1341.5	1341.8	1342.0	1342.2	1342.4	1344.0	1345.5	1347.1	1348.6	1348.5
177.5°	1344.0	1343.5	1343.8	1344.0	1344.2	1344.4	1346.2	1348.0	1349.8	1351.5	1351.3
180°	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	3226.8	3226.8	3226.8	3226.8
2.5°	2867.0	2860.4	2857.7	2855.1
5°	2457.5	2437.0	2432.4	2427.7
7.5°	2109.5	2100.9	2072.5	2044.1
10°	1827.1	1800.6	1788.7	1776.8
12.5°	1590.9	1566.4	1562.5	1558.5
15°	1407.7	1390.5	1384.5	1378.6
17.5°	1287.3	1275.4	1268.1	1260.8
20°	1198.0	1189.4	1184.1	1178.8
22.5°	1129.9	1123.2	1119.3	1115.3
25°	1064.4	1054.4	1051.1	1047.8
27.5°	1002.2	993.6	990.3	987.0
30°	944.0	936.7	932.1	927.4
32.5°	880.5	871.9	869.2	866.6
35°	824.2	818.9	816.3	813.7
37.5°	764.7	758.1	754.1	750.1
40°	713.8	710.5	708.5	706.5
42.5°	662.2	656.2	655.6	654.9
45°	610.6	604.6	603.3	602.0
47.5°	562.3	557.0	556.3	555.7
50°	508.7	501.4	496.1	490.8
52.5°	447.2	440.6	435.9	431.3
55°	391.0	383.7	379.7	375.7
57.5°	348.6	345.3	343.3	341.3
60°	314.2	312.2	310.9	309.6
62.5°	282.5	280.5	280.5	280.5
65°	253.4	251.4	249.4	247.4
67.5°	215.7	211.7	211.0	210.4
70°	170.0	164.1	163.4	162.7
72.5°	133.0	132.3	131.0	129.7
75°	109.8	108.5	108.5	108.5
77.5°	88.6	87.3	87.3	87.3
80°	68.1	67.5	68.1	68.8
82.5°	50.3	50.3	49.6	49.0
85°	32.4	31.8	31.8	31.8
87.5°	15.9	15.9	15.9	15.9
90°	28.7	29.1	29.6	30.0
92.5°	33.3	33.6	33.8	34.0
95°	38.0	38.0	38.0	38.0
97.5°	40.3	40.6	40.8	41.0
100°	41.3	41.6	41.8	42.0
102.5°	41.7	42.1	42.6	43.0
105°	42.7	43.1	43.6	44.0
107.5°	191.4	162.3	133.2	104.0
110°	370.5	338.7	306.9	275.1



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	522.5	522.1	521.6	521.2
115°	585.5	586.4	587.3	588.2
117.5°	641.5	641.8	642.0	642.2
120°	698.2	698.2	698.2	698.2
122.5°	752.6	752.8	753.0	753.2
125°	802.9	803.4	803.8	804.3
127.5°	855.6	855.2	854.7	854.3
130°	903.6	903.2	902.7	902.3
132.5°	948.3	947.6	947.0	946.3
135°	993.3	992.6	992.0	991.3
137.5°	1035.7	1035.2	1034.8	1034.3
140°	1073.7	1073.2	1072.8	1072.3
142.5°	1109.4	1108.7	1108.0	1107.3
145°	1143.4	1143.4	1143.4	1143.4
147.5°	1172.7	1171.6	1170.5	1169.4
150°	1201.4	1200.7	1200.0	1199.4
152.5°	1226.7	1225.6	1224.5	1223.4
155°	1249.4	1248.1	1246.7	1245.4
157.5°	1269.7	1268.0	1266.2	1264.4
160°	1287.1	1285.5	1284.0	1282.4
162.5°	1303.4	1302.1	1300.7	1299.4
165°	1317.1	1315.5	1314.0	1312.4
167.5°	1327.8	1326.0	1324.2	1322.4
170°	1336.8	1335.0	1333.2	1331.4
172.5°	1342.4	1340.4	1338.4	1336.4
175°	1346.8	1345.0	1343.2	1341.4
177.5°	1349.1	1346.9	1344.6	1342.4
180°	1346.4	1346.4	1346.4	1346.4



TEST NUMBER: P831945

CATALOG NUMBER: S123RDIP-S1165D1195U935-4F0-1E-UDD-G

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.17	13.99	14.13	14.95	16.21	17.83	18.65	18.79	19.62	20.88
	3H	14.39	15.12	15.36	16.10	17.38	19.33	20.06	20.30	21.04	22.32
	4H	14.77	15.46	15.76	16.44	17.73	19.82	20.51	20.81	21.49	22.78
	6H	15.05	15.69	16.05	16.67	17.97	20.13	20.77	21.13	21.75	23.06
	8H	15.14	15.74	16.14	16.74	18.04	20.21	20.81	21.21	21.82	23.12
	12H	15.19	15.76	16.20	16.76	18.08	20.24	20.82	21.25	21.81	23.13
4H	2H	13.89	14.58	14.88	15.56	16.85	17.83	18.52	18.82	19.50	20.79
	3H	15.26	15.83	16.26	16.84	18.15	19.48	20.06	20.48	21.07	22.37
	4H	15.71	16.24	16.72	17.24	18.57	20.09	20.61	21.10	21.62	22.94
	6H	16.08	16.53	17.10	17.56	18.88	20.53	20.98	21.55	22.00	23.33
	8H	16.21	16.62	17.23	17.64	18.98	20.66	21.08	21.68	22.10	23.44
	12H	16.28	16.66	17.32	17.69	19.04	20.72	21.10	21.76	22.13	23.48
8H	4H	16.03	16.45	17.05	17.46	18.80	20.06	20.48	21.08	21.49	22.83
	6H	16.49	16.84	17.53	17.90	19.23	20.55	20.90	21.60	21.96	23.30
	8H	16.68	16.99	17.74	18.03	19.39	20.74	21.04	21.79	22.09	23.45
	12H	16.82	17.09	17.88	18.13	19.53	20.85	21.12	21.91	22.16	23.56
12H	4H	16.04	16.41	17.07	17.45	18.79	20.01	20.38	21.04	21.42	22.76
	6H	16.55	16.85	17.60	17.90	19.26	20.53	20.83	21.58	21.88	23.23
	8H	16.77	17.03	17.82	18.07	19.48	20.72	20.99	21.77	22.03	23.43